

Lawrence Berkeley National Laboratory

Lawrence Berkeley National Laboratory

Title

The Cost of Transmission for Wind Energy in the United States: A Review of Transmission Planning Studies.

Permalink

<https://escholarship.org/uc/item/1tk2f2mc>

Author

Wiser, Ryan

Publication Date

2012-01-02

DOI

10.1016/j.rser.2011.07.131

Peer reviewed

Disclaimer

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof, or The Regents of the University of California. Ernest Orlando Lawrence Berkeley National Laboratory is an equal opportunity employer.

1
2
3
4 The Cost of Transmission for Wind Energy in the United States: A Review of
5
6
7 Transmission Planning Studies
8
9

10
11 Andrew Mills,^{1*} Ryan Wiser,¹ and Kevin Porter²
12
13
14

15
16 ¹ Ernest Orlando Lawrence Berkeley National Laboratory
17

18 ² Exeter Associates
19
20
21
22

23
24 **Abstract**
25
26
27

28
29 Rapid development of wind capacity in the United States has been coupled with a
30
31 concern that increasing wind capacity will require substantial transmission infrastructure.
32
33 This report summarizes the implied transmission cost per kW of wind from a sample of
34
35 40 transmission studies. This sample of studies, completed from 2001-2008, covers a
36
37 broad geographic area across the U.S. The primary goal in the review is to develop a
38
39 better understanding of the transmission costs needed to access increasing quantities of
40
41 wind generation. A secondary goal is to gain a better appreciation of the differences in
42
43 transmission planning approaches, in order to identify those methodologies that seem
44
45 most able to estimate the incremental transmission costs associated with wind
46
47 development. The total range in transmission costs per kW of wind implicit in the study
48
49 sample is vast – ranging from \$0/kW to over \$1,500/kW. The median cost of
50
51 transmission from all scenarios in the sample is \$300/kW, roughly 15 – 20% of the cost
52
53
54
55
56
57

58
59 _____
60 * Corresponding author: 1 Cyclotron Road, MS 90R4000; Berkeley CA 94720-8136; +1 (510) 486-4059;
61 ADMills@lbl.gov
62

1
2
3
4 of building a wind project. The median cost of transmission is near the upper end of the
5
6 range implied by two higher-level assessments of transmission required to provide 20%
7
8 wind electricity in the U.S. by 2030.
9

10 11 12 13 14 **Keywords**

15
16 Wind energy, Transmission cost, Meta-analysis
17
18
19
20

21 **1. Introduction**

22
23 Wind power capacity additions are growing at a rapid pace in the United States (see, e.g.,
24
25 [1]). These additions are driven by federal tax incentives, state-level renewables portfolio
26
27 standards, the rising cost of fossil-fuel generation, concerns about energy security and
28
29 price volatility, and growing interest in reducing carbon dioxide emissions.
30
31

32
33 This rapid development, however, has been coupled with a growing concern that
34
35 maintaining or increasing wind capacity additions will require substantial additions to the
36
37 nation's transmission infrastructure (see, e.g., [2-5]).¹ A variety of barriers exist to new
38
39 transmission development, and many studies have expressed concern that transmission
40
41 investments in the United States are not keeping up with the need for those investments
42
43 [2, 8-13].
44
45
46
47
48
49
50
51
52

53 Transmission is particularly important for wind power due to the unique characteristics of
54
55 the wind resource and wind power projects [14-15]. Specifically, wind energy depends on
56
57

58 ¹ Concern about the transmission needs associated with higher levels of wind penetration are not limited to
59 the U.S. In fact, in addition to more-incremental transmission upgrades, very long-distance transmission
60 solutions have been discussed in both Europe [6] and China [7].
61
62
63
64
65

1
2
3
4 wind resources that are sometimes located far from load centers, and wind development
5
6 is therefore expected to increasingly rely on access to the bulk transmission system in
7
8 order to move power from resource areas to load centers [3,16]. Moreover, the total
9
10 developable wind resource in an area to be served by new transmission is almost always
11
12 larger than the size of an individual wind power project. As such, economies of scale in
13
14 transmission investments dictate that it is more efficient to proactively build larger
15
16 transmission ahead of wind generation rather than make smaller transmission investments
17
18 for individual projects [17-19]. Additionally, individual wind projects can be developed
19
20 in a relatively short time period of two to three years, whereas large transmission
21
22 facilities can take a decade to plan, permit, and construct. Finally, wind power projects
23
24 rely on a variable resource and typically operate at capacity factors that range from 30%
25
26 to over 40%, ensuring that any transmission dedicated solely to wind generation will not
27
28 be fully utilized for large portions of the year.
29
30
31
32
33
34
35
36
37

38 Various initiatives are underway to address the barriers that new transmission investment
39
40 poses to renewable energy development specifically, and to address constraints to
41
42 transmission expansion more broadly. The Federal Energy Regulatory Commission
43
44 (FERC), for example, is currently working with transmission operators and stakeholders
45
46 to reform the process for generators to interconnect with the bulk transmission system
47
48 and to require proactive participation in regional transmission planning processes for
49
50 economic transmission development [20-21]. In addition, under authority granted by the
51
52 Energy Policy Act of 2005, the U.S. Department of Energy now has the ability to
53
54 designate transmission constrained areas and FERC – under certain circumstances – has
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4 the ability to support transmission investment in those areas. More generally, a growing
5
6 number of state and regional entities are establishing policies and processes to proactively
7
8 tackle the transmission barrier for renewable energy, through designation of renewable
9
10 energy zones, creation of transmission infrastructure authorities, and other means [1, 22].
11
12
13
14

15
16 Though it is clear that institutional issues related to transmission planning, siting, and
17
18 cost allocation will pose major obstacles to accelerated wind power deployment, also of
19
20 concern is the potential cost of this infrastructure build out. Though it may be general
21
22 knowledge that new transmission will be required for accelerated development of wind
23
24 energy and that the initiatives noted above will reduce impediments to that transmission
25
26 development, there is lesser understanding of how much that transmission will cost.
27
28

29
30 Consequently, there is also little consensus on whether or not the cost of developing
31
32 transmission will be a major barrier to the continued development of wind energy, or
33
34 whether the institutional barriers to transmission expansion are likely to be of more
35
36 immediate concern.²
37
38
39
40
41
42

43 Broadly, there are two ways to estimate the cost of transmission for wind power: top-
44
45 down and bottom-up. A top-down approach is used in high-level studies like those that
46
47 rely on the Energy Information Administration's (EIA) National Energy Modeling
48
49 System (NEMS) and those that use the National Renewable Energy Laboratory's (NREL)
50
51 Wind Deployment System (WinDS) model. Conceptual analyses are also sometimes
52
53
54
55
56

57 ² Our focus on the cost of transmission for wind energy does not address the issue of the *allocation* of
58 transmission costs to particular wind projects. The allocation of costs may also be a barrier to continued
59 development of wind energy but we group the allocation of costs into the institutional barriers and do not
60 address the issue further in this article.
61
62

1
2
3
4 included in more-academic studies of the feasibility of long-distance transmission for
5
6 wind (see, e.g., [23-25]). Though there are numerous advantages to these approaches,
7
8 they do not incorporate detailed physical modeling of the transmission system, and
9
10 therefore generate only coarse approximations for the transmission costs associated with
11
12 increased wind power development. Alternatively, bottom-up transmission studies often
13
14 include detailed physical modeling of the grid, and therefore will arguably produce more
15
16 accurate estimates of the cost of transmission expansion if conducted appropriately.
17
18

19
20 Recently, a number of bottom up transmission studies, ranging from very detailed to
21
22 more conceptual, have included large amounts of new wind development. In comparison
23
24 to a top-down model, these bottom-up studies examine specific transmission line paths
25
26 and facility ratings. Detailed physical modeling of the transmission system, in the
27
28 bottom-up studies that use it, also allows complex relationships between load, generation
29
30 dispatch, power flows over parallel transmission paths, and reliability requirements to be
31
32 incorporated into the analysis of transmission expansion requirements and costs.
33
34
35
36
37
38
39
40

41 In this article, based on selected results from a larger study by Mills et al. [26], we review
42
43 a sample of 40 bottom-up transmission studies that have included wind power.³ These
44
45 studies cover a broad geographic area, and were completed from 2001-2008. Our
46
47 primary goal in reviewing these studies is to develop a better understanding of the
48
49

50
51 ³ In so doing, we broadly follow the approach used by other studies in Europe. Auer et al. [27] and EWEA
52 [28] summarized transmission cost studies from Europe, and concluded that the additional transmission
53 expenditure for wind was likely to cost less than \$6/MWh for up to 30% wind penetration. Wind
54 transmission costs in the several European national case studies reviewed as part of IEA Task 25 range
55 from 3-13% of the bus-bar cost of wind for up to 60% penetration on an energy basis for particular
56 counties. The countries differ in how far from demand centers the future wind resources are located. There
57 are also differences in national studies on how the costs are allocated to wind power – part of the
58 reinforcements are usually made also for other reasons than wind power [29]. Additional work on the grid
59 connection costs associated with renewable energy in Europe has been summarized in Swider et al. [30],
60 focusing on just interconnection costs.
61
62
63
64
65

1
2
3
4 transmission costs needed to access growing quantities of wind generation (we do not
5
6 address the institutional barriers to transmission investment). In so doing, we present
7
8 information that allows a deeper appreciation of the nature and magnitude of the
9
10 transmission cost barrier for wind energy. A secondary goal is to better understand
11
12 differences in transmission planning approaches in order to identify those methodologies
13
14 that seem most able to estimate the incremental transmission costs associated with wind
15
16 development. Finally, in addition to providing some insight to policymakers and others
17
18 on the magnitude of the transmission barrier and to transmission planners conducting
19
20 bottom-up transmission assessments for wind, we hope that the resulting dataset and
21
22 discussion might be used to inform the assumptions, methods, and results of top-down
23
24 assessment models. In achieving all of these objectives, however, we are cognizant that
25
26 the methodologies employed by the studies in our sample are diverse, and that
27
28 comparisons among the studies are more illustrative than definitive.
29
30
31
32
33
34
35
36
37

38 The remainder of the article is structured as follows. We begin in Section 2 by
39
40 identifying the transmission plans in our sample and highlighting differences among
41
42 those studies. In Section 3, we discuss our methodology for estimating the unit cost of
43
44 transmission for wind from each of the studies in our sample, the inherent assumptions in
45
46 our simplified methodology, and the resulting caveats on the use and interpretation of our
47
48 results. Section 4 presents pertinent statistics for each study in our sample, and the key
49
50 results of our meta-analysis on the unit cost of transmission for wind across all studies.
51
52 In Section 5 we compare the results of the bottom-up studies in our sample to pertinent
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4 results from a sample of relevant top-down models that include transmission estimates for
5
6 wind. Conclusions are offered in Section 6.
7
8
9

10 11 2. Description of Transmission Studies

12 13 14 2.1 Study Sample


15
16 The 40 transmission studies included in our sample all analyze proposed transmission
17
18 upgrades that are expected to accommodate increased wind power generation. In our
19
20 collection of studies, we largely selected only those that evaluate transmission
21
22 requirements for multiple new wind plants with a combined capacity greater than 300
23
24 MW; we therefore excluded from our sample individual generator interconnection
25
26 studies. In a few cases, we included studies where wind resource maps and wind
27
28 developer interest shows significant potential for new wind generation, even when those
29
30 studies did not explicitly and separately evaluate wind.
31
32
33
34
35
36
37

38 The general location of the studies included in our sample is illustrated in Figure 1, while
39
40 the study region, author, title, date, and brief description of the scenarios from which we
41
42 collect statistics are presented in Table 1 (more information on the content of the studies
43
44 is presented in Table 2, later). The 40 studies in our sample cover a broad geographic
45
46 area, were completed from 2001-2008,⁴ and for those study-scenarios that specifically
47
48 analyze wind power capacity, do so with wind additions that range from as little as 63
49
50 MW⁵ to as much as 236 GW.
51
52
53
54
55
56

57 ⁴ No studies completed after December 2008 were included in our sample.

58 ⁵ The scenario with only 63 MW of wind is from one of the eight scenarios in the SCE transmission
59 ranking cost report. The scenario with the next smallest amount of wind is 329 MW in the same SCE
60 report.
61
62

1
2
3
4
5
6
7 The remainder of this section explores the many variations among the studies in our
8 sample, focusing on: the degree to which the study focuses on wind; the type of
9 organization authoring the study and geographic scope of study; the framework for
10 evaluating necessary transmission upgrades; the degree of network interconnectivity; and
11 the level of study detail. In our description of these issues, we focus on those studies that
12 are considerably different from one another; the majority of studies fall between
13 extremes, and we do not attempt to categorize all studies along all dimensions.
14
15
16
17
18
19
20
21
22
23
24
25

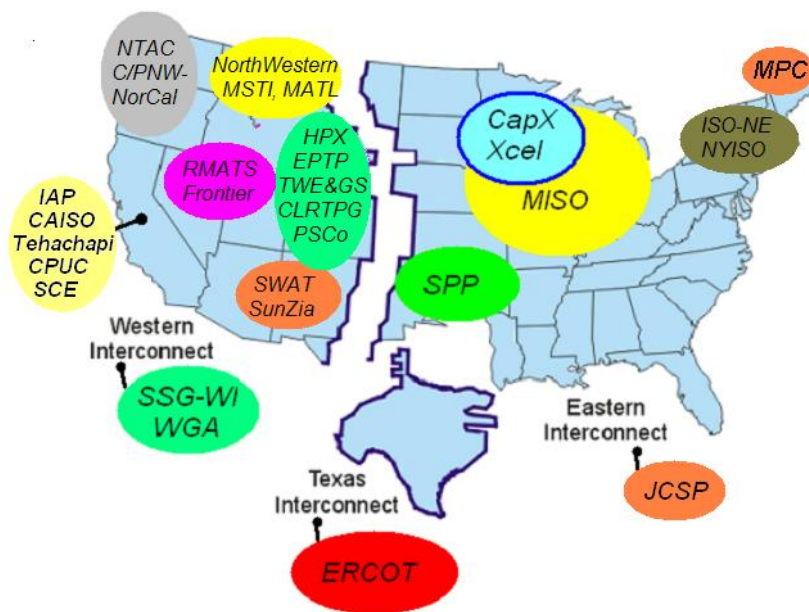

48 Figure 1. General Geographic Location of Transmission Studies in Sample
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Table 1. Description of Studies Evaluated in Analysis

Region	Principal Author	Date	Title of Study	Study Abbreviation	Scenario Description
California	California ISO (CAISO)	August 2008	Report on Preliminary Renewable Transmission Plans	CAISO - A1	New 500 kV substation into Southwest Powerlink Line
				CAISO - A2	Expand Midpoint Substation and construct third Midpoint-Devers and new Devers - Mira Loma (or Valley) 500 kV line
				CAISO - A4	Central California Clean Energy Transmission Project (C3ETP) connection of renewable resources in the Kern County area
				CAISO - A6	Construct a new 500 kV location constrained resource interconnection facility (LCRIF) to Kramer Jct. and Lugo Substation
	Intermittency Analysis Project Team	July 2007	Intermittency Analysis Project: Final Report	IAP - 2010T	2010 20% RPS target with 3 GW of new wind at Tehachapi
				IAP - 2020	2020 33% RPS target
	California ISO (CAISO)	December 2006	CAISO South Regional Transmission Plan for 2006: Tehachapi Transmission Project	Tehachapi	4.4 GW of new generation at Tehachapi Region
	Southern California Edison (SCE)	September 2007	SCE Conceptual Transmission Requirements and Costs for Integrating Renewable Resources	SCE - LA/Kern	Los Angeles and Kern Counties (including Tehachapi)
				SCE - ISM - P	Inyo, San Bernardino, and Mono Counties, Pisgah
				SCE - ISM - EDM	Inyo, San Bernardino, and Mono Counties, El Dorado/Mohave
				SCE - ISM - MP	Inyo, San Bernardino, and Mono Counties, Mountain Pass
				SCE - ISM - V	Inyo, San Bernardino, and Mono Counties, Victorville
				SCE - ISM - K	Inyo, San Bernardino, and Mono Counties, Kramer
				SCE - ISM - I	Inyo, San Bernardino, and Mono Counties, Inyokern
	California Public Utility Commission (CPUC) Energy Division	December 2003	Electric Transmission Plan for Renewable Resources in California	SCE - IR	Imperial and Riverside Counties, Clusters 9 and 10
CPUC - 2017				20% Renewables by 2017 as in original SB 1078 schedule	
CPUC - 2010				20% renewables by 2010 as proposed in Accelerated Energy Action Plan	
Eastern Interconnection	Midwest ISO	December 2008	Joint System Coordinated Plan (JCSP): Economic Assessment, Wrap-up Stakeholder Meeting	JCSP	20% Wind Energy Scenario

Table 1. Description of Studies Evaluated in Analysis (Continued)

Region	Principal Author	Date	Title of Study	Study Abbreviation	Scenario Description
Midwest	CRA International	September 2008	First Two Loops of SPP EHV Overlay Transmission Expansion	SPP-CRA	First two loops of SPP EHV Overlay including Prairie Wind and Tall Grass transmission projects (high cost estimate)
				SPP - OK - 2010N	2010 Nominal Wind
	Southwest Power Pool (SPP)	March 2008	Oklahoma Electric Power Transmission Task Force (OEPTTF) Study	SPP - OK - 2020N	2020 Nominal Wind
				SPP - OK - 2010H	2010 High Wind
				SPP - OK - 2020H	2020 High Wind
	Quanta Technology, LLC	March 2008	Southwest Power Pool (SPP) Updated EHV Overlay Study	SPP - EHV	Midpoint Design 2: 765 kV EHV Overlay with Ozarks
	Midwest ISO (MISO)	February 2007	Midwest ISO Transmission Expansion Plan (MTEP) 2006: Vision Exploratory Study (Section 7.4)	MISO '06	765 kV Network Overlay from Dakotas to Eastern Seaboard
	CapX Utilities	January 2007	Community Based Energy Development Transmission Study: West Central (MN) Transmission Planning Zone	CapX - CBED	Transmission needs in Central West Minnesota for Community Energy Projects
	Xcel Energy	June 2005	Buffalo Ridge Incremental Generation Outlet Electric Transmission Study	Xcel - BRIGO	Option 31A is the preferred plan for additional generation capacity at Buffalo Ridge
	CapX Utilities	May 2005	CapX 2020 Technical Update	CapX - 1	Minnesota-bias Generation Scenario
				CapX - 2	North/West bias Generation Scenario
	Southwest Power Pool (SPP)	May 2005	Kansas/Panhandle Sub-Regional Transmission Study	SPP - X	X-Plan or Plan A
	Midwest ISO (MISO)	June 2003	MISO MTEP 2003	MISO '03 - 1	Iowa and S. Minnesota 345 kV and Dakotas 500 kV
				MISO '03 - 2	Northwest 345 kV Expansion and Dakotas 500 kV
Xcel Energy	December 2001	Application for Certificates of Need for Transmission Lines to Support the Development of Wind Powered Generation in Southwestern Minnesota	Xcel - BR - Proj	Option 1 to obtain 825MW of transmission capacity from Buffalo Ridge - Projected	
			Xcel - BR - Actual	Actual Transmission Cost in 2008 (SEC 2008)	
Northeast	Maine Public Service and Central Maine Power Company	July 2008	Request for Certificate of Public Convenience and Necessity to Construct the Maine Power Connection ("MPC") to Enable Interconnection of Aroostook Wind Energy Project.	MPC	Proposed Route from Northern to Southern Maine
	ISO New England (ISO-NE)	August 2007	New England Electricity Scenario Analysis: Exploring the economic, reliability, and environmental impacts of various resource outcomes for meeting the region's future electricity needs	ISO-NE - High	Renewables scenario, high transmission cost estimate
				ISO-NE - Low	Renewables scenario, low transmission cost estimate
GE Power Systems Energy Consulting	February 2004	The Effects of Integrating Wind Power on Transmission System Planning, Reliability, and Operations: Report on Phase 1	NYISO	Incremental wind additions that are possible without new transmission	

Table 1. Description of Studies Evaluated in Analysis (Continued)

Region	Principal Author	Date	Title of Study	Study Abbreviation	Scenario Description
				ERCOT - TOS - 1A	5.2 GW of new wind in 5 CREZs - least cost but less expandable
				ERCOT - TOS - 1B	5.2 GW of new wind in 5 CREZs - easily expandable to Scenario 2
	Electric Reliability Council of Texas (ERCOT)	April 2008	Competitive Renewable Energy Zones Transmission Optimization Study	ERCOT - TOS - 2	11.6 GW of new wind in 5 CREZs - Scenario 2 selected for development by PUCT
				ERCOT - TOS - 3	18.0 GW of new wind in 5 CREZs
				ERCOT - TOS - 4	17.5 GW of new wind in 4 CREZs (None in Panhandle B)
Texas	Southwest Power Pool (SPP)	April 2007	SPP Transmission Expansion Supplement to Support Development of Texas Panhandle Competitive Renewable Energy Zones	SPP - 2	4.5 GW of new wind from Texas CREZ
	Southwest Power Pool (SPP)	December 2006	Southwest Power Pool Inc's Analysis of Transmission Alternatives for Competitive Renewable Energy Zones in Texas	SPP - 1	1.5 GW of new wind from Texas CREZ
				ERCOT - C3	3 GW of new wind in the Coast region
				ERCOT - CW3	3.8 GW of new wind in the Central Western Texas region
				ERCOT - M2	3.8 GW of new wind in the McCamey region
	Electric Reliability Council of Texas (ERCOT)	December 2006	Analysis of Transmission Alternatives for CREZs in Texas	ERCOT - P4	4.6 GW of new wind in the Panhandle region
				ERCOT - Cb1	3.3 GW of new wind in the Central and McCamey regions
				ERCOT - Cb2	4 GW of new wind in the Central and McCamey regions
				ERCOT - Cb3	5.3 GW of new wind in the Central, McCamey, and Coast regions

Table 1. Description of Studies Evaluated in Analysis (Continued)

Region	Principal Author	Date	Title of Study	Study Abbreviation	Scenario Description
	HPX Participants	June 2008	High Plains Express Transmission Project: Feasibility Study Report	HPX	Renewables only (Wind with 10% overbuild and 500 MW of solar)
	K. R. Saline & Assoc. (for WestConnect)	January 2008	Western-RMR Transmission Plan 2008-2017: Eastern Plains Transmission Project in 2007 WestConnect Transmission Plan	EPTP - 2	Holcomb Station to Green Valley Station
	K. R. Saline & Assoc. (for WestConnect)	January 2008	SunZia Transmission Plan 2008-2017 in 2007 WestConnect Transmission Plan	SunZia	500 kV line from New Mexico to Arizona
	SWAT Renewable Energy Task Force	January 2008	Southwest Area Transmission (SWAT) Oversight Committee-Arizona Renewable Transmission Task Force	SWAT	Transmission to access renewable resource zones in Arizona
	NorthWestern Energy Electric Transmission Planning	January 2008	Mountain States Transmission Intertie (MSTI) Phase 1 Comprehensive Progress Report (Draft) and Open Season Update Meeting	MSTI	500 kV Midpoint to Townsend line
	Arizona Public Service, PacifiCorp, National Grid, Wyoming Infrastructure Authority	January 2008	TransWest Express and Gateway South Stakeholder Presentation January 23,2008	TWE and GS	Reference Case
	Technical Analysis Committee (PG&E Chair)	November 2007	WECC Regional Planning Review Canada/Pacific Northwest - Northern California Transmission Line Project	C/PNW-NorCal	Hybrid AC in the Northwest and DC to N. California with high renewables (Case A)
	Western Regional Transmission Expansion Partnership (WRTEP)	April 2007	Western Regional Transmission Expansion Partnership: Benefit-Cost Analysis of Frontier Line Possibilities	Frontier - A Frontier - B	3.6 GW of new wind with transmission alternative 7b (500 kV AC line from WY to So. CA) 2.6 GW of new wind and 1 GW of coal with transmission alternative 7b
	Montana Alberta Tie Ltd. (MATL)	August 2006	Montana-Alberta Tie 230 kV Transmission Line: Transmission Development Facilities Application Volume One	MATL	New 230 kV line between Montana and Alberta
West	Colorado Long Range Transmission Planning Group (CLRTPG)	July 2006	Colorado Long Range Transmission Planning Study 2005-2015	CLRTPG - N1	Northern Resource Scenario - Alternative 1
				NTAC - 1	Submarine DC Cable: Prince Rupert to San Francisco
	Northwest Transmission Assessment Committee (NTAC)	May 2006	Canada-Northwest-California Transmission Options Study	NTAC - 2A' NTAC - 2A NTAC - 2B	AC lines from Vancouver Island to WA/OR border AC lines from Vancouver Island to Northern California AC lines from Vancouver Island to Northern California with submarine DC from WA/OR border to San Francisco
	Xcel Energy Transmission Planning	April 2006	Wind Integration Study Report Of Existing and Potential 2003 Least Cost Resource Plan Wind Generation	PSCo	Transmission impact of 775 MW of new wind in Colorado
	Tri-state Generation and Transmission and Western Area Power Administration	March 2006	Preliminary Report: Eastern Plains Transmission Project 500 kV and 345 kV Comparison	EPTP - 1	South Cases 500 kV Scenario 1800 MW
	Clean and Diversified Energy Advisory Committee (CDEAC) Transmission Task Force	March 2006	Report of the Transmission Task Force to the Western Governors Association (WGA)	CDEAC	High Renewables Case
	NorthWestern Energy Electric Transmission Planning	May 2005	Montana - Idaho Path Open Season Study Report	NorthWestern	System improvements to move 700 MW from Eastern area, 800 MW from Great Falls area, and a total of 1500 MW moved to Idaho
	RMATS	September 2004	Rocky Mountain Area Transmission Study (RMATS)	RMATS - 1 RMATS - 2	Regional 345kV expansion with 3 GW of new wind Regional 345 kV expansion and long 500 kV lines from WY to CA with 5 GW of new wind
	Seams Steering Group of the Western Interconnect (SSG-WI)	October 2003	Framework for Expansion of the Western Interconnection Transmission System	SSG - WI	High renewables case for 2013

2.2 Degree of Focus on Wind Energy

A key distinguishing feature among the studies in our sample is the degree to which those studies focus on wind power in their analysis. On one extreme, a number of the studies

1
2
3
4 were carried out with the express objective of determining the transmission investments
5
6 and associated costs of accommodating increasing wind development. The Electric
7
8 Reliability Council of Texas (ERCOT) and Southwest Power Pool (SPP) evaluations of
9
10 competitive renewable energy zones (CREZs), for instance, estimated the cost of
11
12 accommodating particular levels of incremental wind development in specific resource
13
14 zones in Texas.
15
16
17
18
19
20

21 In contrast, a number of the studies in our sample include relatively small amounts of
22
23 wind capacity compared to other forms of incremental generation capacity. As one
24
25 example, the Midwest ISO (MISO) 2003 Transmission Expansion Plan based its assumed
26
27 mix of incremental generation capacity on trends in the transmission interconnection
28
29 queue at that time, and therefore included significant amounts of incremental gas and coal
30
31 generation. Another particular aspect of this MISO study (as well as others) is that the
32
33 various proposed transmission solutions were evaluated in the context of different
34
35 projections for generation development, but the transmission evaluated in each scenario is
36
37 by no means optimized for a particular amount of incremental wind development.
38
39
40
41
42
43
44

45 Finally, in a number of the studies covering the Western U.S., the focus is not so much on
46
47 determining the specific transmission investments required to accommodating projected
48
49 generation development, but instead on studying specific transmission lines that would
50
51 add transfer capacity across otherwise-constrained paths. The Frontier, High Plains
52
53 Express, Transwest Express and Gateway South, SunZia, Montana-Alberta Tie Line,
54
55 Mountain States Transmission Intertie, and the Canada/Pacific Northwest-Northern
56
57
58
59
60
61
62
63
64
65

1
2
3
4 California line studies are all examples of studies that focus primarily on particular
5
6 transmission lines rather than on wind generation per se.⁶
7
8
9

10 11 2.3 Study Authorship and Geographic Scope 12

13
14 Many of the larger regional studies in our sample were performed as part of the
15
16 transmission planning process of Independent System Operators (ISOs) and Regional
17
18 Transmission Organizations (RTOs). The Joint Coordinated System Plan (JCSP), a large
19
20 regional transmission planning study covering the majority of the Eastern
21
22 Interconnection, was performed by multiple ISOs and RTOs. A number of large regional
23
24 transmission planning studies have also been conducted in the Western U.S. The SSG-WI
25
26 and CDEAC studies, for example, cover the entire Western Interconnection. Outside of
27
28 California, there are no ISOs or RTOs in the West, and in these instances large regional
29
30 transmission planning studies have often been performed by state-led organizations or
31
32 voluntary utility/transmission organizations. Finally, a number of studies in our sample
33
34 were performed for state energy planning or regulatory bodies or regulated investor
35
36 owned utilities (IOUs).
37
38
39
40
41
42
43
44

45 2.4 General Framework: Congestion vs. Deliverability 46

47
48 Another important difference among the studies is the general framework used to
49
50 evaluate transmission investments. These frameworks can be classified into two loose
51
52 categories:
53
54
55
56

57 ⁶ Another way to phrase this issue is that some studies ask the question: What transmission improvements
58 are required if we add new generation to the transmission system? Other studies, however, ask the
59 question: How much transfer capacity will be added between regions if we build a particular transmission
60 line?
61
62
63
64
65

- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
- Congestion focused:⁷ Transmission investments are made to economically reduce congestion (or system redispatch) costs that would be incurred with the addition of new generation.
 - Deliverability focused: Transmission investments are made to increase the transmission capacity between generators and load under particular system conditions.

Though individual studies sometimes fall between these two categories, the primary difference between the two approaches is that one focuses on decreasing congestion while the other focuses on increasing transmission transfer capacity. As an extreme example, consider an existing transmission line that is fully utilized by a remote fossil-fuel power plant that is \$1/MWh cheaper than a local fossil-fuel plant. In the deliverability focused approach, a new wind generator located near the remote fossil-fuel plant will require new transmission infrastructure with a transfer capability equivalent to the nameplate capacity of the wind project. In contrast, the congestion focused approach will allow the output of the wind generator to displace the power of the remote fossil-fuel generator, and new transmission might not be built unless the cost of expanding the transmission system is lower than the savings gained by accessing cheaper, remote fossil resources (\$1/MWh). As per this simple example, a deliverability focused approach can yield greater transmission expenditures than a congestion focused effort.

⁷ Congestion in this article is generally meant to refer to the increase in production costs that occurs when generators are dispatched out-of-merit order due to security constraints. Lesieutre and Eto [31] indicate that this definition of congestion cost is also commonly referred to as the system redispatch cost.

1
2
3
4
5
6
7 ERCOT performed an evaluation of several CREZs using a congestion focus. In the
8
9 study they proposed transmission that would relieve binding constraints that would
10
11 otherwise force wind to be curtailed to an unacceptable level (curtailment for greater than
12
13 2% of the year). The analysis involved a security constrained economic dispatch model of
14
15 the entire system, using location-specific hourly wind data for existing and planned wind
16
17 plants. The transmission solutions were evaluated in an iterative manner such that the
18
19 least cost solutions were selected to reach the target level of wind development in a
20
21 region.
22
23
24
25
26
27

28
29 In contrast, deliverability focused studies tend to center on developing lines that can
30
31 increase the transfer capability between specific new generators (or areas) and specific
32
33 load centers, without necessarily taking congestion costs (and therefore redispatch
34
35 opportunities) into account. Planners using this framework will typically evaluate in
36
37 great detail one or more transmission power flow cases that include both the new
38
39 generation and proposed transmission during particular loading conditions (generally
40
41 during a peak load case). The planner will then ensure that all constraints are met during
42
43 normal system operation and during plausible contingences. The Technical Analysis
44
45 Committee of the Canada/ Pacific Northwest – Northern California Transmission Line
46
47 Project, for example, performed an analysis of transmission options using a deliverability
48
49 focus by focusing on post transient power flow contingency analysis during a heavy
50
51 summer peak case.
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4 The motivation for deliverability focused studies is often not to determine the least-cost
5
6 transmission investments required to economically access a certain amount of new
7
8 generation, but instead to document the transmission investments necessary to add new
9
10 transfer capacity over a path that lacks available capacity. In this respect, in a
11
12 deliverability focused study the transmission investments may be the same regardless of
13
14 the type of generation that ultimately uses the new transmission facilities.⁸
15
16
17
18
19
20

21 In deliverability focused studies that specifically include wind capacity additions, study
22
23 authors generally assume that those wind facilities require transmission transfer capacity
24
25 equivalent to the name-plate rating of the wind projects (e.g., 3,000 MW of new wind
26
27 will require 3,000 MW of new transmission capacity) or evaluate a limited number of
28
29 snapshot powerflow cases in which all wind is assumed to be producing at its full
30
31 nameplate capacity. A minority of studies, however, assume that it is possible to
32
33 ‘overbuild’ wind generation by adding, for instance, 3,600 MW of wind capacity and
34
35 only 3,000 MW of transfer capacity on a new transmission path. Though such a strategy
36
37 may entail some curtailment of wind output, the cost of that curtailment may be lower
38
39 than the cost of fully building transmission to meet peak wind conditions during peak
40
41 transmission usage periods, and the magnitude of curtailment may be small if projects are
42
43 geographically dispersed (due to the benefits of geographic diversity in wind production)
44
45 [33]. A congestion focused study can inherently accommodate a similar strategy by
46
47
48
49
50
51

52
53 ⁸ Strbac et al. [32] present a detailed analysis of the difference in transmission costs for wind and
54 conventional resources in the U.K. They find that it is not efficient to invest in transmission in order to be
55 able to accommodate the simultaneous peak outputs from both conventional and wind generation. They
56 also conclude that wind generation tends to drive less transmission investment than conventional
57 generation, particularly when there are opportunities for the sharing of transmission assets between
58 different generation technologies. Sharing transmission between different generating technologies enables
59 economic redispatch opportunities when the transmission capacity is a binding limit or wind to utilize a
60 portion of a transmission line that is unused by the other generation technologies while the wind is blowing.
61
62
63
64
65

1
2
3
4 allowing wind power to be dispatched down or curtailed if transmission limits are
5
6 binding in a security constrained economic dispatch.
7
8
9

10
11 A final potential difference between a congestion focused study and a deliverability
12 focused study is that authors of a deliverability focused study pick the load center to
13
14 which the new generation will be delivered. Transmission solutions will then be
15
16 evaluated to enable the specified transaction. A congestion study, however, need not
17
18 specify the destination of a particular amount of new generation. Instead, a security
19
20 constrained economic dispatch model will optimize the dispatch of all generation in a
21
22 region subject to the constraint that all loads must be met, without specifying required
23
24 transactions between particular generators and loads.
25
26
27
28
29
30
31

32 33 2.5 Degree of Transmission Network Interconnectivity 34

35
36 A number of the studies in our sample evaluate transmission upgrades as part of a highly
37
38 connected electrical network. The transmission element that is upgraded or replaced may
39
40 allow some amount of additional flow over that element, but by relieving a binding
41
42 constraint, may also allow significantly more power to flow over other, parallel paths. In
43
44 these situations, the additional generation that can be accommodated behind a now
45
46 relieved transmission constraint may be greater than the transmission capacity of the
47
48 element added in the upgrade.
49
50
51
52
53
54

55
56 In contrast, many new proposed transmission lines in the West are between regions that
57
58 have little existing transmission transfer capacity. The proposed lines may be connected
59
60
61
62
63
64
65

1
2
3
4 at various points to the existing network, but resemble long radial lines rather than
5
6 upgrades to specific network elements. These situations are typically modeled with a
7
8 deliverability focus.
9

10 11 12 13 14 2.6 Level of Detail

15
16 All of the studies are conceptual to some degree in that they require forecasts of future
17
18 system conditions to estimate the loading of the transmission system and future
19
20 generation development. The level of detail used in the evaluation of transmission and
21
22 resources, however, varies considerably. Transmission projects that are very close to
23
24 construction, such as the CAISO study of the Tehachapi expansion and the Xcel BRIGO
25
26 study will incorporate power-flow, contingency, and stability analyses to evaluate
27
28 transmission lines. This more-detailed approach is also used in a number of studies to
29
30 evaluate large, but conceptual, transmission lines such as the C/PNW-NorCal study by
31
32 PG&E. On the other hand, other studies of similar large, very conceptual transmission
33
34 lines that resemble radial paths (e.g., the Frontier line study) often rely on less-detailed
35
36 engineering judgment rather than on detailed electrical system modeling.
37
38
39
40
41
42
43
44

45 46 3. Methodology

47
48 Our comparison of the studies focuses primarily on the unit cost of transmission required
49
50 to access wind resources. Here we describe our simple methodology for estimating this
51
52 cost, and some of the limitations of that methodology. These limitations are due to the
53
54 fact that the data available from many of the transmission planning studies in our sample
55
56 do not allow for a direct estimation of the actual transmission cost attributable to
57
58
59
60
61
62
63
64
65

1
2
3
4 increasing wind generation. To elucidate this point, we begin by briefly describing what
5
6 data would be needed for a direct and accurate determination of the transmission costs
7
8 imposed by increased wind power development.
9

10 11 12 13 14 3.1 An “Ideal” Study

15
16 Ideally, studies would provide the total cost of transmission that is due solely to the
17
18 addition of a specified amount of wind generation, above and beyond any transmission
19
20 expenditures required in the event that that wind generation did not exist and that other
21
22 generation resources were used to meet load. In such an ideal study, the amount of
23
24 congestion and the level of electricity reliability would also be equivalent between the
25
26 two scenarios, allowing for a precise and fair comparison of transmission expenditures.
27
28 In this instance, one could readily and accurately estimate the additional unit cost of
29
30 transmission for wind by dividing the total cost of incremental transmission in the high
31
32 wind scenario by the incremental amount of wind added in that scenario.
33
34
35
36
37
38
39

40
41 The transmission studies in our sample rarely meet these idealized requirements, in part
42
43 because the purpose of these studies is not to uniquely estimate the incremental
44
45 transmission costs associated with wind. In particular, with few exceptions, these studies
46
47 do not estimate the cost of transmission that is exactly due to a particular amount of
48
49 incremental generation added to the system, while keeping projected electricity reliability
50
51 and congestion equal to what they would have been if the new generation and associated
52
53 transmission were not added to the system. The Joint Coordinated System Plan (JCSP) in
54
55 the Eastern Interconnection and the ERCOT CREZ analyses are rare examples of studies
56
57
58
59
60
61
62
63
64
65

1
2
3
4 that come close to replicating an ideal study for determining the cost of transmission
5
6 specifically for new wind. In many other studies, however, transmission is built to offset
7
8 pending reliability concerns, relieve pre-existing congestion, or is sized so that other
9
10 generation can be added to the network aside from just wind. In these instances, it is not
11
12 possible to precisely estimate the incremental costs uniquely associated with new wind
13
14 power additions.
15
16
17
18
19
20

21 3.2 Simplified Approach 22

23 At the risk of over-simplification, but with the benefit of analytic simplicity, we largely
24
25 ignore these complexities in our comparison of the studies (though we do come back to
26
27 some of these issues in the subsequent discussion of our results). Our approach is to
28
29 collect statistics on the aggregate cost of the proposed transmission upgrades evaluated in
30
31 the study, as well as the nameplate capacity of incremental generator additions accessed
32
33 by those transmission investments (as identified in the study itself). Where multiple
34
35 scenarios are evaluated, we focus on those with higher levels of wind penetration. If
36
37 readily and publicly available, we also collect information on the mileage and voltage of
38
39 transmission lines added in the study, as well as the assumed cost per mile of different
40
41 transmission configurations. The transmission plans in our sample often do not clearly
42
43 state all of the various statistics sought for the present article, however, requiring in many
44
45 instances a degree of judgment to gather relevant statistics. The exact values presented in
46
47 this article should therefore be taken with all due caution.
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4 To loosely compare the studies based on the estimated unit cost of transmission for wind
5 while also ignoring the many complexities associated with such simple comparisons, we
6 use two units, one based on the nameplate rating of wind generation (\$/kW-wind) and the
7 other based on projected wind-generated electricity (\$/MWh-wind). In those
8 transmission studies in which wind is the only incremental generation added, we
9 calculate the unit cost of transmission for wind in \$/kW-wind terms by simply dividing
10 the aggregate cost of the proposed transmission upgrades evaluated by the study by the
11 nameplate capacity of the incremental wind. We then calculate the unit cost in \$/MWh-
12 wind terms by levelizing the transmission cost and dividing that figure by the amount of
13 annual energy production expected from the new wind additions. For this article, the
14 levelizing factor was assumed to be a constant 15% per year for all transmission lines and
15 the capacity factor of wind was assumed to be 35% for all wind plants. The dollar value
16 varies widely across studies. Many studies do not clearly state whether the results are in
17 nominal or constant dollars and if in constant dollars, for which year. As such, for this
18 study we simply assume that all cost figures are reported in nominal, non-discounted
19 dollars and report the data as provided by the study authors. Further discussion of these
20 assumptions is available in the full report.
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47

48 These metrics are more difficult to calculate when a transmission study evaluates not just
49 wind additions, but the addition of multiple generation types (e.g., wind, solar, gas, and
50 coal). In these cases, it is typically impossible to specifically isolate the transmission
51 costs uniquely associated with wind. Instead, we must simply assign a share of the
52 additional transmission costs to all of the incremental generation. We do so based on a
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4 capacity weighting. On a capacity-weighted basis, the unit cost of transmission for wind
5
6 in \$/kW-wind terms is estimated by simply dividing the total transmission cost in a study
7
8 by the total amount of incremental generation capacity (wind and non-wind) modeled in
9
10 that study. In so doing, this metric assumes that within any individual study all
11
12 incremental generation capacity imposes transmission costs in proportion to its nameplate
13
14 capacity rating. Capacity weighting also reflects the fact that firm reservations on
15
16 transmission lines are typically based on capacity, and that a new power plant will often
17
18 reserve its full nameplate capacity on a transmission path over which it plans to move
19
20 power. We calculate the capacity-weighted unit cost of transmission for wind in \$/MWh-
21
22 wind terms in the same way as described previously.
23
24
25
26
27
28
29
30

31 Because our methodology, and the studies themselves, differ from the ideal scenario
32
33 described earlier, our estimates of the unit cost of transmission for wind are imprecise,
34
35 and comparability among studies is imperfect. In addition those limitations mentioned
36
37 earlier, there are four additional important limitations that are discussed in detail in the
38
39 next section.⁹ These four are that our methodology implicitly assumes that (1) new
40
41 generation shares responsibility for the new transmission lines, (2) incremental
42
43 generation is the only beneficiary of new transmission, (3) transmission is sized exactly
44
45 to accommodate the generation added in the scenario, and (4) the reference future
46
47 requires no new transmission.
48
49
50
51
52
53
54
55
56
57

58 ⁹ Again, our study does not address the issue of cost *allocation*, and the unit cost of transmission for wind
59 reported in this study does not imply that new wind generation projects will actually be responsible for
60 paying these full costs.
61
62
63
64
65

1
2
3
4 Because of these limitations our methodology best captures the additional cost of
5
6 transmission attributable to wind when faced with radial lines to remote regions to access
7
8 generation resources that are co-located. Our methodology is not as well suited to cases
9
10 where new transmission is part of a well connected network that provides congestion
11
12 relief, reliability benefits, and access to a wide variety of resources, not all of which
13
14 require new transmission. The results of our analysis should therefore be interpreted and
15
16 used with care. Despite the important limitations noted here, however, we do believe that
17
18 the overall comparisons made in this article can improve our understanding of the range
19
20 of transmission costs needed to access greater quantities of wind, and to highlight some
21
22 of the drivers of those costs.
23
24
25
26
27
28
29
30

31 4. Results

32 4.1 Overview

33
34 Key data collected from each of the 40 transmission planning studies, and where
35
36 appropriate their multiple study scenarios, are summarized in Table 2. In particular, the
37
38 amount of incremental wind power capacity (and total capacity) analyzed in the study is
39
40 listed, along with the total cost of the associated transmission upgrades. A few studies do
41
42 not specify what fraction of aggregate generation additions come from wind; these are
43
44 indicated by blank cells in the “Incremental Wind Analyzed” column. The table also lists
45
46 the primary voltages and total length of new transmission investments built in the specific
47
48 study scenario, where those data are available.
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Table 2. Summary of New Generation Capacity and Cost in Each Transmission Planning Study¹⁰

Region	Principal Author	Study Abbreviation	Incremental Wind Analyzed (GW)	Total Incremental Generation Analyzed (GW)	Total Transmission Cost (\$ Billion)	Length of New Transmission (mi)	Primary Voltage of New Transmission Lines (AC Unless Noted)
California	California ISO (CAISO)	CAISO - A1	1.1	1.1	\$0.30	Not Applicable	500 kV
		CAISO - A2	0.5	2.9	\$1.50	180	500 kV
		CAISO - A4	1.3	1.3	\$1.60	-	500 kV
		CAISO - A6	1.2	1.2	\$0.65	-	500 kV
	Intermittency Analysis Project Team	IAP - 2010T	5.4	10.9	\$1.36	300	500 and 230 kV
		IAP - 2020	10.6	26.1	\$6.36	1,470	500 and 230 kV
	California ISO (CAISO)	Tehachapi	3.6	4.3	\$1.80	249	500 kV initially operated at 230 kV
	SCE- LA/Kern	5.4	7.7	\$2.61	352	500 and 230 kV	
	SCE - ISM - P	0.6	6.5	\$1.55	195	500 kV	
	Southern California Edison (SCE)	SCE - ISM - EDM	1.9	4.9	\$1.90	235	500 kV
		SCE - ISM - MP	0.1	1.2	\$0.11	52	230 kV
		SCE - ISM - V	0.3	0.3	\$0.07	11	230 kV
		SCE - ISM - K	0.9	4.7	\$0.75	-	500 and 230 kV
		SCE - ISM - I	0.8	0.8	\$0.25	-	230 kV
	SCE - IR	2.6	8.8	\$2.67	300	500 and 230 kV	
	California Public Utility Commission (CPUC) Energy Division	CPUC - 2017	6.4	8.0	\$1.80	1,500	500 and 230 kV
CPUC - 2010		6.4	8.0	\$1.91	1,926	500 and 230 kV	
Eastern Interconnection	Midwest ISO	JCSP	236.0	403.1	\$78.58	14,937	765 kV and 800 kV HVDC

¹⁰ Note: Total transmission cost is reported in nominal dollars from various years

Table 2. Summary of New Generation Capacity and Cost in Each Transmission Planning Study (Continued)

Region	Principal Author	Study Abbreviation	Incremental Wind Analyzed (GW)	Total Incremental Generation Analyzed (GW)	Total Transmission Cost (\$ Billion)	Length of New Transmission (mi)	Primary Voltage of New Transmission Lines (AC Unless Noted)
Midwest	CRA International	SPP-CRA	14.0	18.5	\$3.40	1,200	765 kV
	Southwest Power Pool (SPP)	SPP - OK - 2010N	3.5	3.5	\$2.08	-	345 kV
		SPP - OK - 2020N	7.0	7.0	\$3.17	-	345 kV
		SPP - OK - 2010H	4.5	4.5	\$2.50	-	345 kV
		SPP - OK - 2020H	11.0	11.0	\$4.54	-	345 kV
	Quanta Technology, LLC	SPP - EHV	20.7	23.0	\$7.89	4,073	765, 500, and 345 kV
	Midwest ISO (MISO)	MISO '06	16.0	16.0	\$31.00	5,725	765 kV
	CapX Utilities	CapX - CBED	3.5	3.5	\$0.38	799	345 kV, 230 kV, and 115 kV
	Xcel Energy	Xcel - BRIGO	0.5	0.5	\$0.03	101	115 kV
	CapX Utilities	CapX - 1	2.3	6.3	\$1.41	1,885	345 kV
		CapX - 2	2.3	6.3	\$1.51	2,007	345 kV
	Southwest Power Pool (SPP)	SPP - X	2.5	3.1	\$0.46	834	345 kV
	Midwest ISO (MISO)	MISO '03 - 1	10.0	48.3	\$0.66	1,053	500 and 345 kV
		MISO '03 - 2	10.0	48.3	\$1.89	2,420	500 and 345 kV
	Xcel Energy	Xcel - BR - Proj	0.8	0.8	\$0.16	384	345 and 115 kV
		Xcel - BR - Actual	0.8	0.8	\$0.23	-	345 and 115 kV
	Maine Public Service and Central Maine Power Company	MPC	0.8	0.8	\$0.63	199	345 kV
Northeast	ISO New England (ISO-NE)	ISO-NE - High	6.8	6.8	\$3.90	-	-
		ISO-NE - Low	6.8	6.8	\$0.58	-	-
	GE Power Systems Energy Consulting	NYISO	4.9	4.9	\$0.00	Not Applicable	-

Table 2. Summary of New Generation Capacity and Cost in Each Transmission Planning Study (Continued)

Region	Principal Author	Study Abbreviation	Incremental Wind Analyzed (GW)	Total Incremental Generation Analyzed (GW)	Total Transmission Cost (\$ Billion)	Length of New Transmission (mi)	Primary Voltage of New Transmission Lines (AC Unless Noted)
Texas	Electric Reliability Council of Texas (ERCOT)	ERCOT - TOS - 1A	5.2	5.2	\$2.95	1,638	138 and 345 kV
		ERCOT - TOS - 1B	5.2	5.2	\$3.78	1,831	345 kV
		ERCOT - TOS - 2	11.6	11.6	\$4.93	2,376	345 kV
		ERCOT - TOS - 3	18.0	18.0	\$6.38	3,036	345 kV and HVDC
		ERCOT - TOS - 4	17.5	17.5	\$5.75	2,489	345 kV and HVDC
	Southwest Power Pool (SPP)	SPP - 2	4.5	4.5	\$1.13	625	345 kV
	Southwest Power Pool (SPP)	SPP - 1	1.5	1.5	\$0.19	170	345 kV
	ERCOT - C3	3.0	3.0	\$0.32	230	345 kV	
	ERCOT - CW3	3.8	3.8	\$0.96	862	345 kV	
	ERCOT - M2	3.8	3.8	\$0.86	650	345 kV	
	Electric Reliability Council of Texas (ERCOT)	ERCOT - P4	4.6	4.6	\$1.52	770	345 kV
	ERCOT - Cb1	3.3	3.3	\$0.86	-	345 kV	
	ERCOT - Cb2	4.0	4.0	\$1.16	-	345 kV	
	ERCOT - Cb3	5.3	5.3	\$0.94	-	345 kV	

Table 2. Summary of New Generation Capacity and Cost in Each Transmission Planning Study (Continued)

Region	Principal Author	Study Abbreviation	Incremental Wind Analyzed (GW)	Total Incremental Generation Analyzed (GW)	Total Transmission Cost (\$ Billion)	Length of New Transmission (mi)	Primary Voltage of New Transmission Lines (AC Unless Noted)
West	HPX Participants	HPX	3.3	3.8	\$5.13	2,560	500 kV
	K. R. Saline & Assoc. (for WestConnect)	EPTP - 2	-	2.4	\$1.50	987	500 and 230 kV
	K. R. Saline & Assoc. (for WestConnect)	SunZia	-	1.5	\$0.80	350	500 kV
	SWAT Renewable Energy Task Force	SWAT	3.1	7.8	\$1.67	-	500 and 230 kV
	NorthWestern Energy Electric Transmission Planning	MSTI	-	1.5	\$0.72	460	500 kV
	Arizona Public Service, PacifiCorp, National Grid, Wyoming Infrastructure Authority	TWE and GS	2.3	6.0	\$5.97	2,125	500 kV and HVDC
	Technical Analysis Committee (PG&E Chair)	C/PNW-NorCal	3.6	3.6	\$5.00	950	500 kV and HVDC
	Western Regional Transmission Expansion Partnership (WRTEP)	Frontier - A	3.6	3.6	\$4.30	1,092	500 kV
		Frontier - B	2.6	3.6	\$4.30	1,092	500 kV
	Montana Alberta Tie Ltd. (MATL)	MATL	-	0.6	\$0.12	216	230 kV
	Colorado Long Range Transmission Planning Group (CLRTPG)	CLRTPG - N1	0.7	3.6	\$1.47	-	345 and 230 kV
	Northwest Transmission Assessment Committee (NTAC)	NTAC - 1	3.2	4.0	\$6.43	1,849	500 kV (Submarine HVDC)
		NTAC - 2A'	1.1	1.8	\$0.86	600	230 kV
		NTAC - 2A	1.1	2.2	\$2.21	1,269	500 and 230 kV
		NTAC - 2B	1.1	2.3	\$2.58	1,255	500 (includes Submarine HVDC) and 230 kV
	Xcel Energy Transmission Planning	PSCo	0.8	0.8	\$0.00	Not Applicable	-
	Tri-state Generation and Transmission and Western Area Power Administration	EPTP - 1	-	1.8	\$0.79	820	500 and 230 kV
	Clean and Diversified Energy Advisory Committee (CDEAC) Transmission Task Force	CDEAC	25.5	42.8	\$6.79	3,578	500 kV
	NorthWestern Energy Electric Transmission Planning	NorthWestern	-	1.5	\$1.03	513	500 and 230 kV
	RMATS	RMATS - 1	3.0	6.3	\$0.97	971	345 kV
RMATS - 2		5.0	11.8	\$4.27	3,834	500 kV	
Seams Steering Group of the Western Interconnect (SSG-WI)	SSG - WI	18.5	34.3	\$6.71	3,360	500 kV	

4.2 Implied Unit Cost of Transmission for Wind

Using the data presented in Table 2, the implied unit cost of transmission for wind can be calculated as described in earlier in Section 3. The resulting unit cost of transmission for wind, in \$/kW-wind and \$/MWh-wind terms, for our sample of studies is shown in Figure 2, sorted by increasing unit costs.¹¹ The total amount of incremental wind

¹¹ The MISO '06 study is not included in this or later graphics nor in the calculation of the median unit cost, for reasons discussed later in this section.

capacity analyzed by each study scenario (“wind analyzed”), or the total incremental capacity in cases when it is not clear what portion of the new capacity is wind (“total analyzed”), is illustrated on the top axis of the figure.

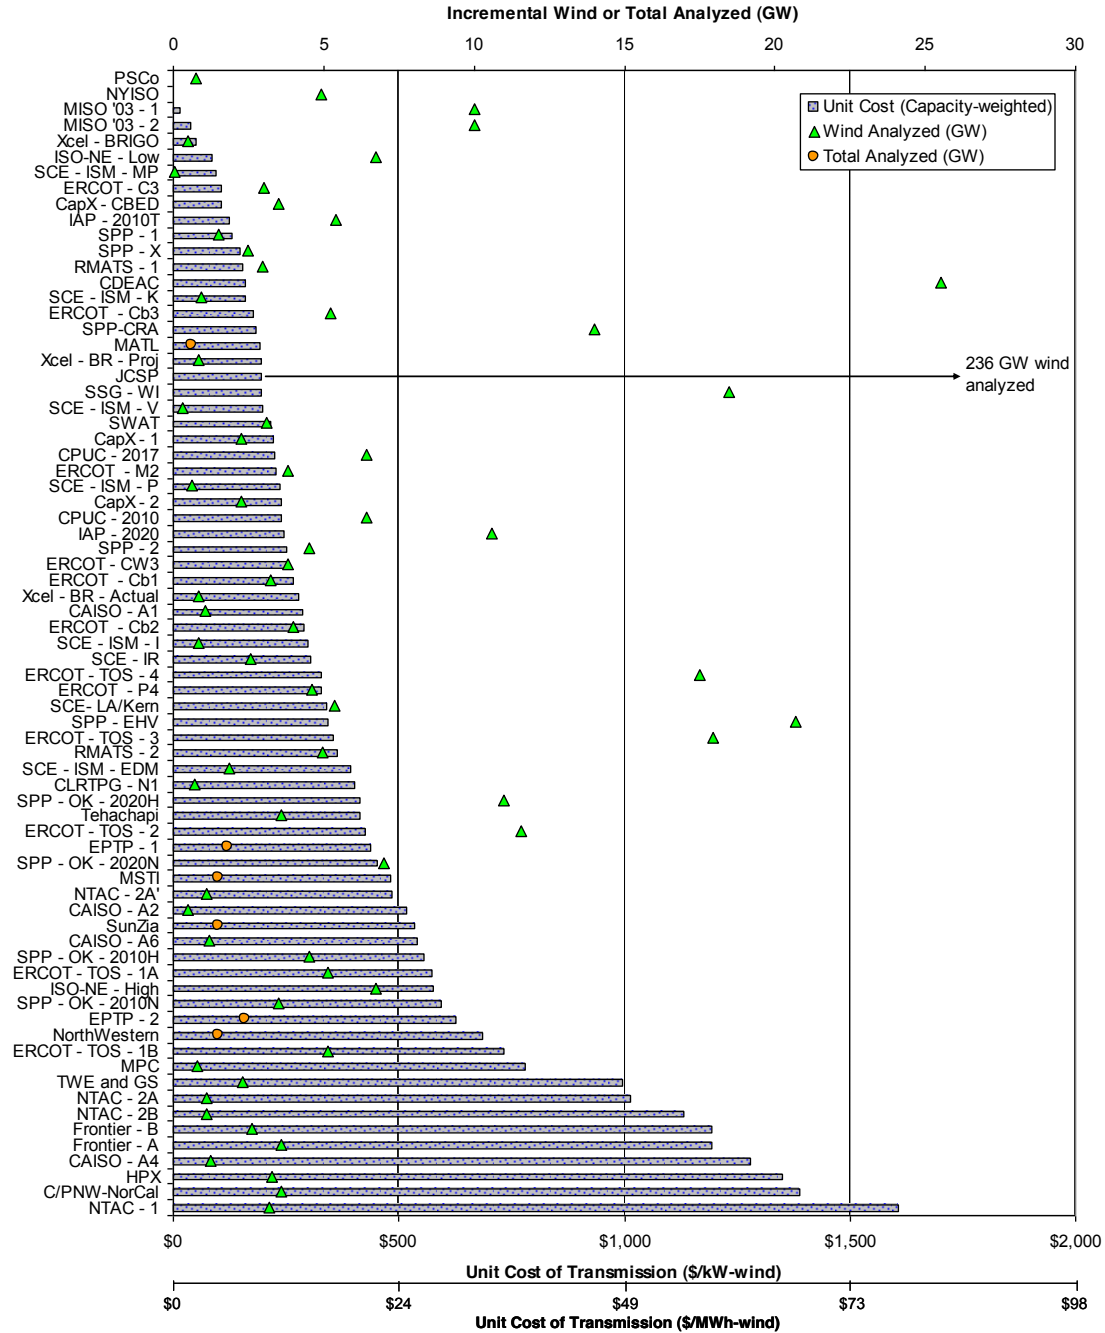


Figure 2. Unit Cost of Transmission for Wind in \$/kW-wind and \$/MWh-wind terms¹²

¹² Note: (1) Unit cost of transmission in nominal dollars from various years

1
2
3
4
5
6
7 Though the limitations of our approach to calculating these costs should not be ignored, it
8
9 is evident that the total range in unit transmission costs for wind implicit in these studies
10
11 is vast – ranging from \$0/kW to over \$1,500/kW, based on our methodology. The
12
13 majority of studies, however, have a unit cost of transmission that is below \$500/kW, or
14
15 roughly 25% of the current \$2,000/kW cost of building a new wind project. The median
16
17 unit cost of transmission for wind (capacity-weighted) from all scenarios in our sample is
18
19 \$300/kW, roughly 15% of the current cost of building a new wind project.¹³
20
21
22
23
24
25

26 As shown in Figure 2, the unit cost of transmission for wind in \$/MWh terms is below
27
28 \$25/MWh in the majority of study scenarios. The median cost of transmission (capacity-
29
30 weighted) from all scenarios is \$15/MWh. These figures compare to recent busbar wind
31
32 power prices that range from \$35/MWh to as high as \$65/MWh with an average of
33
34 \$45/MWh [34].¹⁴ As such, the median unit cost of transmission, as estimated here,
35
36 represents a cost adder of roughly 33% to the busbar price of wind, in most instances.
37
38
39
40 The overall range in the unit transmission cost of wind is again vast, however, with a
41
42 range of \$0/MWh to as high as \$79/MWh.
43
44
45
46
47
48
49
50

51 (2) Transmission cost in \$/MWh-wind terms is levelized using 15% per year levelizing factor

52 (3) Unit cost in \$/MWh-wind terms assuming wind plants have 35% capacity factor for all scenarios

53 ¹³ In the early 2000s, the average cost of wind projects was roughly \$1300/kW. Using this average wind
54 project cost for the denominator, the \$300/kW median unit cost of transmission cost equates to 23% of the
55 average wind project cost.

56 ¹⁴ The wind power price is the capacity-weighted average sale price for wind projects built in 2007. Prices
57 include the production tax credit (PTC). If the federal PTC was not available the range would increase to
58 between approximately \$50/MWh and \$85/MWh with an average of roughly \$65/MWh. If the average
59 wind price without the PTC were used in the denominator, then the median transmission cost would be
60 approximately 23% of the average wind price.
61
62

4.3 Effect of Methodological Limitations

Our estimates of the cost of transmission for wind, based on our sample, are complicated by the limitations of our methodology. These limitations ensure that, for any individual study, our estimate of the implied unit cost of transmission for wind may be either biased upwards or downwards. Here we provide specific examples of how these limitations might impact our results, and suggest that these limitations as a whole likely lead us to overstate the unit cost of transmission for wind.

4.3.1 Shared Responsibility for New Transmission Lines

If a study adds, for example, new coal plants and new wind plants that are co-located, meaning that the same transmission facilities can be used by both generator types, our methodology should provide an upper bound for the cost that is attributable to wind. On the other hand, if a transmission study adds wind in remote areas and new gas plants near load centers, but does not separate the responsibility for transmission investments between wind and gas, then our methodology will incorrectly assume that both generator types are equally-responsible for the incremental transmission costs. In so doing, we will understate the cost of transmission attributable to wind.

In the full report we identify seven scenarios for which this particular limitation in the methodology may understate the cost attributable to wind. In the extreme, if one assumes that new natural gas plants in these 7 scenarios impose no added transmission costs, but that all other resource types (e.g., wind, coal, and small hydro) are equally responsible on a capacity-weighted basis, then the implied unit cost of transmission for wind would

1
2
3
4 increase for these 7 scenarios as indicated in Table 3. As shown, with this extreme
5
6 assumption, the implied unit cost of transmission for wind in a given scenario increases
7
8 by 22% to 265%. The median unit cost of transmission for wind across all studies,
9
10 previously reported at \$300/kW, increases to \$330/kW if one uses the revised figures for
11
12 the seven scenarios shown in Table 3. Based on these calculations, at least, it seems that
13
14 this particular limitation to our methodology has little effect on the overall results
15
16 presented here, though it does impact the results of several individual scenarios.
17
18
19
20
21
22
23

24 Table 3. Impact of Assumption of Shared Responsibility on the Unit Cost of Transmission

25
26

Scenario	Unit Cost of Transmission (\$/kW, capacity-weighted)		Potential Percent Increase in Unit Transmission Cost
	Assuming Shared Responsibility	Assuming No Responsibility for Natural Gas Plants	
MISO '03 - 1	\$14	\$50	265%
MISO '03 - 2	\$39	\$143	265%
SSG - WI	\$196	\$271	38%
CapX - 1	\$222	\$430	93%
CapX - 2	\$238	\$460	93%
NTAC - 2A	\$1,014	\$1,242	22%
NTAC - 2B	\$1,132	\$1,449	28%
Median Across All Studies	\$300	\$330	10%

27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49

50
51 4.3.2 Incremental Generation as Only Beneficiary of New Transmission

52
53
54 Our methodology assigns all additional transmission costs to new electricity generators,
55
56 and thereby effectively assumes that the only beneficiaries of the new transmission
57
58 investments are those generators. In reality, however, studies frequently point to the
59
60
61
62
63
64
65

1
2
3
4 additional reliability benefits and congestion relief that new transmission will provide. In
5
6 these cases, our methodology overstates the transmission costs that are attributable
7
8 specifically to wind.
9

10
11
12
13
14 As one example, in the Tehachapi study, the total cost of transmission to connect 4.4 GW
15
16 of incremental generation was estimated at \$1.8 billion. Our methodology implicitly
17
18 assumes that this cost is solely attributable to the new incremental generation. The study,
19
20 however, indicates that the transmission upgrades will allow the deferment of otherwise
21
22 planned reliability upgrades, leading to a clear overstatement of the unit cost of
23
24 transmission for wind using our methods.
25
26
27
28
29
30

31 4.3.3 Transmission Exactly Sized to Meet Generation Additions 32

33
34 Another implicit assumption in our methodology is that new transmission is sized to
35
36 exactly the size required by the incremental generation added in a particular scenario. In
37
38 reality, this is not always the case. Lumpiness and economies of scale in transmission
39
40 investments suggest that it is better to oversize lines than to try to size them exactly for
41
42 forecasted needs [19]. A number of studies appear to present scenarios in which
43
44 transmission capacity exceeds what is necessary to accommodate the new generation
45
46 contemplated by the study's authors. In one of the ERCOT scenarios (ERCOT-TOS-1B),
47
48 for example, the proposed transmission is designed so that it can not only accommodate
49
50 the specified amount of wind additions, but also so that the system can be further
51
52 expanded in the future to accommodate more wind at less cost than might otherwise be
53
54 the case.
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7 A more extreme example of transmission not being sized to the amount of incremental
8 generation additions is a study called the “Vision Exploratory Study” that was part of the
9 MISO transmission expansion plan for 2006. In that assessment, a 765 kV network
10 overlay between the Dakotas and the Eastern Seaboard was proposed along with 16 GW
11 of incremental wind capacity. Further analysis of the details behind this study, however,
12 revealed that the transmission proposed in the scenario was substantially oversized for the
13 amount of added generation. As a result, this scenario is excluded from the graphics
14 presented earlier and the calculation of the median unit cost of transmission. We discuss
15 the approach and results of the study in the full report.
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

31 Among our study sample as a whole, it is not entirely clear how sizable an effect the
32 mismatch of transmission size and incremental generation might have. Nonetheless, by
33 assigning the full cost of new transmission to the new generators specified by such
34 studies, our methodology will tend to overstate the unit cost of transmission uniquely
35 attributable to wind.
36
37
38
39
40
41
42
43
44

45 4.3.4 Reference Future Requires No Transmission

46
47

48 Our methodology also effectively assumes that the transmission investments analyzed by
49 each study do not displace transmission that would need to be built in a reference future
50 without the new wind. In reality, some additional transmission expansion is likely to be
51 needed to accommodate load growth and the addition of other (non-wind) electricity
52 generators.
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7 We present the results from the SSG-WI high renewables scenario, for example, but
8
9 SSG-WI also evaluated transmission needs in a scenario in which projected load growth
10
11 is met primarily with gas and in another scenario with increased coal additions. The
12
13 study found that new transmission would be needed in all three scenarios. In fact, the
14
15 study found that the high coal scenario required the most transmission investment.
16
17
18
19
20

21 By assuming that these costs are not “avoidable” by the specified wind additions, and by
22
23 instead attributing the full cost of new transmission in the SSG-WI high renewable
24
25 scenario to the new generation in that scenario, we overstate the incremental social cost
26
27 of transmission attributable to wind. In fact, because this limitation is prevalent among
28
29 the studies in our sample, the estimates for the unit cost of transmission for wind
30
31 summarized here should not be considered incremental costs, considered in isolation.
32
33
34 Instead, they would ideally be compared to similar estimates for the unit cost of
35
36 transmission association with other generation technologies.
37
38
39
40
41
42
43

44 5. Comparison to Top-Down Transmission Cost Estimates

45
46
47
48 Though the studies in our sample use different methodologies and varying levels of
49
50 detail, they all provide a bottom-up approach to transmission planning on a regional
51
52 basis, based on the specific characteristics and modeling of the electric power grid. In
53
54 contrast, certain top-down studies are often conducted on a national basis, and are unable
55
56 to incorporate detailed physical modeling of the transmission system. Such studies must
57
58
59
60
61
62
63
64
65

1
2
3
4 use cruder approaches to estimating the transmission requirements associated with wind
5
6 deployment.
7
8
9

10
11 In this section, we specifically compare the implied unit cost of transmission across the
12 detailed, bottom-up studies in our sample to the results of three, more-conceptual top-
13 down studies. Two of these top-down studies were conducted in the context of the U.S.
14 DOE’s analysis of the technical and economic feasibility of achieving 20% wind
15 electricity penetration in the U.S. The third top-down approach considered here is the
16 EIA’s National Energy Modeling System (NEMS), which is used (among other things) to
17 produce the EIA’s Annual Energy Outlook.
18
19
20
21
22
23
24
25
26
27
28
29
30

31 As shown in the text that follows, the unit cost of transmission in two of the three top-
32 down studies broadly agree with the mid- to lower-end of the range from the bottom-up
33 studies. The unit cost implied in the third top-down study is 50% greater than the median
34 cost of the studies in our sample. As discussed earlier, the bottom-up estimates likely
35 overstate actual transmission expenditures for wind, perhaps further reinforcing the
36 results of the two lower cost top-down studies. The top-down studies often evaluate
37 much higher levels of wind penetration than assumed in the bottom-up studies, however,
38 making comparisons somewhat inappropriate.¹⁵ Therefore, perhaps the most that can be
39
40
41
42
43
44
45
46
47
48
49
50

51
52 ¹⁵ As described earlier, however, the unit cost of transmission for wind is unlikely to increase as
53 dramatically as one might initially expect as deployment increases. Additionally, the bottom-up studies,
54 because they are conducted on a regional basis, imply a greater national penetration of wind than might
55 otherwise be expected. As a result, it is not entirely inappropriate to compare the bottom-up, regional
56 transmission plans in our sample to top-down studies that evaluate high levels of national wind power
57 deployment. The JCSP study and many of the studies that add more than 10 GW of new generation are
58 particularly appropriate for comparison and the implied unit costs of transmission in these scenarios are
59 relatively close to the three top-down studies.
60
61
62
63
64
65

1
2
3
4 concluded is that the top-down studies discussed below do not generate results that are
5
6 wildly out of line with the more-detailed bottom-up assessments summarized in this
7
8 article.
9

10 11 12 13 14 5.1 20% Wind Energy: AEP 765 kV Overlay

15
16 American Electric Power (AEP) developed a conceptual design for a 765 kV
17
18 transmission network overlay across the U.S. that could facilitate the wind power
19
20 additions needed to achieve 20% wind electricity by 2030 [35], as specified in the U.S.
21
22 DOE's 20% Wind Energy analysis [3]. AEP owns and operates 765 kV lines in the
23
24 Eastern U.S.
25
26
27
28
29
30

31
32 The 765 kV network overlay was developed by connecting 765 kV lines between load
33
34 centers and areas of high wind potential, using (wherever possible) routes identified in
35
36 previous regional transmission proposals. Fifty-five wind connection points were
37
38 identified in the network. The amount of wind installed at each wind connection point
39
40 was assumed to be equivalent to the transfer capacity of a single 765 kV line. The 765
41
42 kV network was designed so that each wind connection point is connected to the 765 kV
43
44 network overlay through at least two 765 kV lines. The network is therefore designed so
45
46 that the system would remain within operating limits during contingencies. As specified
47
48 by AEP, the proposed network included 19,000 miles of 765 kV line and could
49
50 accommodate 200 - 400 GW of wind capacity. The cost of the transmission system was
51
52 estimated to be \$60 billion.
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4 The AEP proposal was meant for discussion purposes, and did not involve detailed
5
6 modeling of the electric power system. AEP's engineering judgment, however, does hold
7
8 some authority due to the company's experience with developing and building 765 kV
9
10 lines. Based on our simplified methodology, the unit cost of transmission implied by the
11
12 AEP 765 kV Overlay is \$150 - \$300/kW-wind. The low estimate of the unit cost of
13
14 transmission is 50% of the median value among the studies in our sample (\$300/kW-
15
16 wind) and the high estimate is nearly equivalent to the median value in our sample.
17
18
19
20
21
22

23 5.2 20% Wind Energy: Wind Deployment System (WinDS)

24 The National Renewable Energy Laboratory used the Wind Deployment System
25
26 (WinDS) model to evaluate a scenario in which wind provides 20% of the nation's
27
28 energy by 2030, requiring more than 290 GW of additional wind capacity. AEP, as
29
30 discussed above, provided a companion proposal for the same 20% wind scenario.
31
32
33
34
35
36
37

38 Though WinDS does incorporate a detailed geographic representation of the transmission
39
40 system and addresses NERC reliability requirements through model constraints, it is
41
42 based on a transport model rather than a powerflow model. The WinDS model, as
43
44 employed in U.S. DOE [3], simply assumed that 10% of existing transmission capacity
45
46 was available for wind energy. As wind deployment increases beyond this 10% limit on
47
48 existing lines, the model adds new transmission capacity. As a result, for the 20%
49
50 scenario, WinDS predicts that 71 GW of new wind will use pre-existing transmission
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4 capacity, and that the remainder requires some incremental transmission capacity.¹⁶ The
5
6 cost for the new transmission is estimated to be \$60.8 billion.
7
8
9

10
11 Based on our simplified methodology, the unit cost of transmission implied by this study
12 is \$207/kW-wind [3]. Clearly, the transmission cost estimates from the WinDS model
13 suggest that vast quantities of wind can be developed in the U.S. without requiring
14 extremely high unit costs of transmission. The \$207/kW-wind figure is 69% of the
15 median value among the studies in our sample (\$300/kW-wind), is below the implied unit
16 cost of transmission for 70% of the study scenarios in our sample, and is consistent with
17 the JCSP study and many of the studies that evaluate greater than 10 GW of new
18 generation additions.
19
20
21
22
23
24
25
26
27
28
29
30
31

32 33 5.3 NEMS Long-Term (LT) Multipliers

34 The National Energy Modeling System (NEMS) is used by the EIA in its Annual Energy
35 Outlook (AEO), as well as to prepare topical reports for the U.S. Congress and others.
36
37 The treatment of wind in general, and transmission in particular, has changed somewhat
38 over time. Currently, the transmission cost for wind has been incorporated as a base
39 transmission cost, which is consistent among all generation capacity and includes
40 transmission costs related to load growth, and a wind-specific capital cost multiplier.
41
42
43
44
45
46
47
48
49
50
51
52
53

54 ¹⁶ This assumption may be a bit aggressive based on indications that new transmission must be built in
55 many regions to accommodate a substantial increase in wind energy. Two studies in our sample (NYISO
56 and PSCo) did, however, show that a certain amount of new wind generation can be added to the grid
57 before transmission would need to be upgraded. Most studies did not have the objective of answering the
58 question of how much new wind can be added to the system before transmission upgrades will be required.
59 We therefore cannot use the results from our sample to directly evaluate the merits of this assumption in
60 U.S. DOE [3].
61
62
63
64
65

1
2
3
4 In particular, the average base transmission cost adder that is applied to wind capacity by
5 NEMS is \$316/kW.¹⁷ In addition to this base transmission cost adder the cost of wind is
6
7 assumed to further increase as wind is added in a region, due to a variety of factors,
8
9 including resource degradation, increasingly challenging terrain for developing projects,
10
11 and additional transmission upgrades above the base transmission cost. The long-term
12
13 capital cost multiplier in NEMS ranges from one to three times the overnight capital cost
14
15 of wind additions. For AEO 2008, for example, these multipliers add an additional cost of
16
17 approximately \$0 to \$3,370/kW¹⁸ to wind, depending on the level of wind deployment in
18
19 a region [36]. The multiplier that applies to each level of deployment in a region (the
20
21 “step size” of the multipliers) is largely based on analysis from the NREL WinDS model,
22
23 however several adjustments were applied to the WinDS output to generate the multiplier
24
25 step sizes actually used in NEMS [37].
26
27
28
29
30
31
32
33
34
35

36 Because the level of the EIA NEMS multiplier has such a large range, and because the
37
38 multiplier intends to address multiple issues, of which transmission is only one, it is very
39
40 difficult to compare the NEMS results with those in our transmission study sample.
41
42 Nonetheless, the amount of potential wind capacity impacted by these multipliers, by
43
44 region, is presented in Figure 3. The figure also shows the amount of regional wind
45
46 capacity added by 2030 from the AEO 2008 reference case, and therefore depicts the
47
48 degree to which these estimated capacity additions are affected by the EIA’s cost
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

¹⁷ The base transmission cost adder varies by region from \$220 to \$580/kW (\$2006). For wind deployed in 2030 in AEO 2008 the average wind base transmission cost was \$316/kW.

¹⁸ The high-cost adder corresponds to the 3X long-term multiplier of the capital cost, which in the Annual Energy Outlook 2008 was assumed to be \$1,683/kW (\$2006) for 2030 [38].

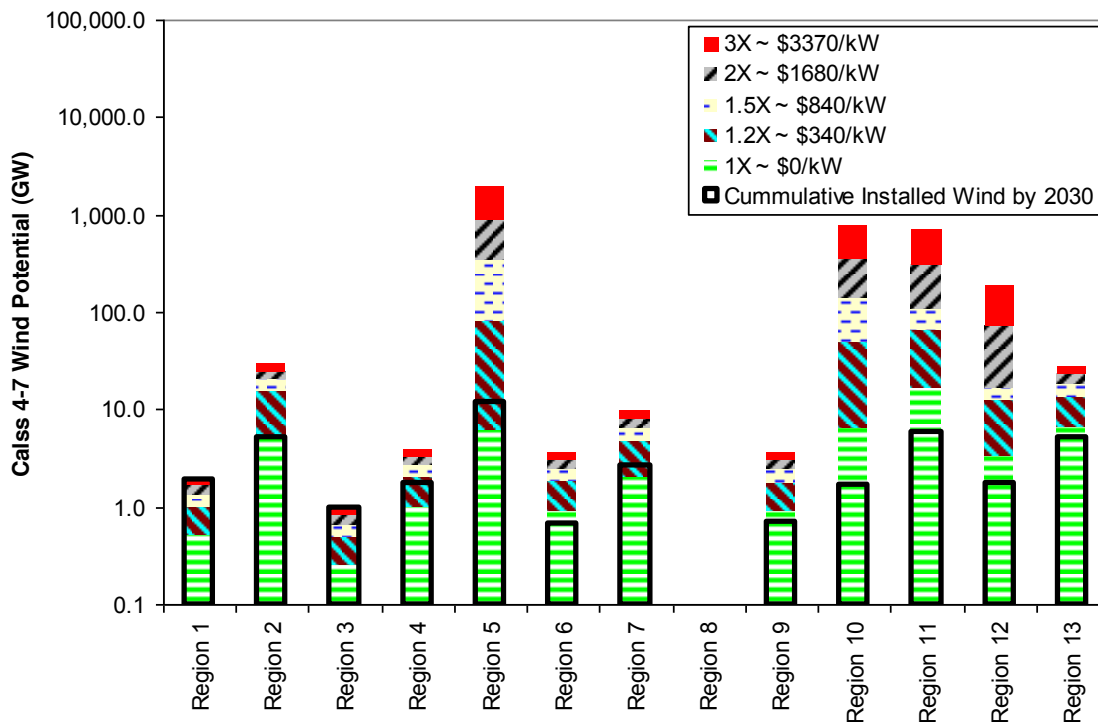


Figure 3. NEMS Long-Term Multiplier Step Sizes and Cumulative Amount of Wind Developed in Each Region by 2030, for AEO 2008 Reference Case¹⁹

In aggregate, AEO 2008 forecasts 40 GW of new wind capacity by 2030. On average, the multiplier for these wind additions was 1.08X, roughly an additional \$132/kW-wind. Recognizing that the NEMS multiplier is meant to reflect more than just transmission costs, adding the base transmission cost and the long-term multipliers for wind in 2030

¹⁹ Regions are defined as follows: East Central Area Reliability Coordination Agreement – 01; Electric Reliability Council of Texas – 02; Mid-Atlantic Area Council – 03; Mid-America Interconnected Network – 04; Mid-Continent Area Power Pool – 05; Northeast Power Coordinating Council / New York – 06; Northeast Power Coordinating Council / New England – 07; Florida Reliability Coordinating Council – 08; Southeastern Electric Reliability Council – 09; Southwest Power Pool – 10; Western Electricity Coordinating Council / Northwest Power Pool Area – 11; Western Electricity Coordinating Council / Rocky Mountain Power Area and Arizona-New Mexico-Southern Nevada Power Area – 12; Western Electricity Coordinating Council / California - 13

1
2
3
4 leads to a total cost adder of \$450/kW or 50% greater than the median unit cost in our
5
6 sample (\$300/kW).
7
8
9

10
11 On a regional basis, the realized NEMS multipliers vary considerably. Regions 1 and 3
12 (East Central Area and Mid-Atlantic Area), for example, both reach the highest 3X
13 multiplier by 2030, adding \$3,370/kW to the capital and base transmission cost of
14 incremental wind capacity in those regions. The transmission studies in our sample do
15 not support multipliers at this level, but again, the EIA multipliers intend to capture
16 effects other than transmission. The remaining regions reach only the 1.2X multiplier
17 (around \$340/kW additional cost) or remain in the 1X multiplier step (no additional
18 beyond the base transmission cost) by 2030 in AEO 2008. Many of the bottom-up
19 transmission studies in our sample, as well as the AEP and WinDS results, have an
20 implied unit cost of transmission that is similar to the cost represented by the base
21 transmission cost adder in NEMS (\$300/kW median for our sample versus a \$316 base
22 transmission cost for wind in NEMS).
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7 6. Conclusions
8

9 Recent growth in wind power development in the United States has been coupled with a
10 growing concern that this development will require substantial additions to the nation's
11 transmission infrastructure. It is clear that institutional issues related to transmission
12 planning, siting, and cost allocation will pose major obstacles to accelerated wind power
13 deployment, but also of concern is the potential cost of this transmission infrastructure
14 build out.
15
16
17
18
19
20
21
22
23
24
25

26 In this article, we have reviewed a sample of 40 regional transmission studies that have
27 included wind power. These studies vary considerably in scope, authorship, objectives,
28 and methodology, making comparisons difficult. Regardless, our analysis of these
29 studies reveals considerable differences in the implied unit cost of transmission for wind.
30
31 In particular, the total range in unit transmission costs for wind implicit in these studies is
32 from \$0/kW to over \$1,500/kW, though some of this range is surely the result of flaws in
33 our methodological approach.
34
35
36
37
38
39
40
41
42
43
44

45 The majority of studies in our sample, however, have a unit cost of transmission that is
46 below \$500/kW, or roughly 25% of the current \$2,000/kW capital cost of building a wind
47 project. The median cost of transmission across all scenarios in our sample is \$300/kW,
48 on a capacity-weighted basis; roughly 15% of the current cost of building a wind project
49 or 23% of the cost of building a wind project in the early 2000s. In terms of cost per
50 megawatt-hour of wind power generation, the median cost is \$15/MWh on a capacity-
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4 weighted basis, and most studies fall below \$25/MWh. Two highly-conceptual, top-
5
6 down studies of 20% wind power penetration in the U.S. electricity system have implied
7
8 unit costs of transmission below or nearly equivalent to the median cost of our sample of
9
10 40 bottom up transmission planning studies.
11
12
13
14

15
16 These mid-range costs, though not insignificant, are also not overwhelming. Additionally,
17
18 the limitations of our methodology likely err towards an over-statement of the unit cost of
19
20 transmission for wind. The need for transmission expansion, for example, is not unique
21
22 to wind: other generation sources will also require transmission expenditures.
23
24

25
26 Transmission expansion also typically serves multiple purposes, and our approach to
27
28 assigning the full costs of that expansion to generation capacity additions effectively
29
30 ignores those other benefits. And, in at least some of the studies in our sample,
31
32 transmission is oversized, leading to an over-estimate of the transmission costs uniquely
33
34 associated with wind additions. Finally, in taking a deliverability (rather than congestion)
35
36 focus, a number of the studies in our sample reflect existing contractual limits that, if
37
38 overcome, could increase the efficiency of grid operations and lower the unit cost of
39
40 transmission for wind; further work on this specific issue is merited.
41
42
43
44
45
46
47

48 Because the range of transmission costs surveyed here is broad, however, with a number
49
50 of high-cost scenarios, it is also important to understand how differences in study
51
52 objectives, methodologies, and assumptions can impact the resulting cost estimates. Our
53
54 work has only begun that process, and far more comparative work is needed. We find
55
56 little evidence that higher levels of wind penetration require dramatically increased unit
57
58
59
60
61
62
63
64
65

1
2
3
4 transmission costs, relative to more-moderate levels of wind deployment. This seems to
5
6 be confirmed by two top down scenarios of 20% wind energy in the U.S., the JCSP study
7
8 of 20% wind energy in the Eastern Interconnection, and by a number of bottom up study
9
10 scenarios that add greater than 10 GW of new generation. It therefore appears that the
11
12 unit cost of transmission for wind need not increase dramatically at higher levels of wind
13
14 penetration.
15
16
17
18
19
20

21 Acknowledgements

22
23
24
25
26 The work described in this article was funded by the Office of Energy Efficiency and
27
28 Renewable Energy (Wind & Hydropower Technologies Program) and by the Office of
29
30 Electricity Delivery and Energy Reliability (Permitting, Siting and Analysis Division) of
31
32 the U.S. Department of Energy under Contract No. DE-AC02-05CH11231. We would
33
34 particularly like to thank Steve Lindenberg, Larry Mansueti, and Patrick Gilman of the
35
36 U.S. Department of Energy, and Brian Parsons of the National Renewable Energy
37
38 Laboratory, for their support of this work. We thank numerous reviewers and colleagues
39
40
41 for their help throughout this project.
42
43
44
45
46
47

48 References

49
50 [1] Wisner, R. & Bolinger, M., 2009. *2008 Wind Technologies Market Report*. DOE/GO-102009-2868.

51
52 Golden, CO: U.S. Department of Energy.

53
54 <http://www1.eere.energy.gov/windandhydro/pdfs/46026.pdf>
55
56
57
58
59
60
61
62
63
64
65

- 1
2
3
4 [2] U.S. Department of Energy (DOE). 2006. *National Electric Transmission Congestion Study*. U.S.
5 Department of Energy, August. http://nietc.anl.gov/documents/docs/Congestion_Study_2006-9MB.pdf.
6
7
8
9
10 [3] U.S. Department of Energy (DOE). 2008. *20% Wind Energy by 2030: Increasing Wind Energy's*
11 *Contribution to U.S. Electricity Supply*. Washington, D.C.: U.S. Department of Energy.
12
13 http://www.20percentwind.org/20percent_wind_energy_report_05-11-08_wk.pdf
14
15
16 [4] Jacobs, M.B. 2007. Transmission Recommendations for High Wind Penetration. In *Power Engineering*
17 *Society General Meeting, 2007. IEEE*, 1-6.
18
19
20
21 [5] Clean and Diversified Energy Advisory Committee (CDEAC) Transmission Task Force. 2006. *Report*
22 *of the Transmission Task Force to the Western Governors Association*. March.
23
24 <http://www.westgov.org/wga/initiatives/cdeac/TransmissionReport-final.pdf>
25
26
27
28
29 [6] Czisch, G. and G. Giebel. 2000. "A Comparison of Intra- and Extraeuropean Options for an Energy
30 Supply with Wind Power," Conference on *Wind Power for the 21st Century*, Kassel, Germany.
31
32 September
33
34
35
36 [7] Lew, D., R. H. Williams, S. Xie, and S. Zhang. 1998. Large-scale baseload wind power in China.
37 *Natural Resources Forum* 22(3), 165-184.
38
39
40
41 [8] Hirst, E. 2004. U.S. Transmission Capacity: A Review of Transmission Plans. *The Electricity*
42 *Journal*, 17 (7): 65-79.
43
44
45 [9] Hirst, E, and B. Kirby. 2001b. *Transmission Planning for a Restructuring U.S. Electricity Industry*.
46 Washington, D.C.: Edison Electric Institute.
47
48 http://www.eei.org/industry_issues/energy_infrastructure/transmission/transmission_hirst.pdf
49
50
51 [10] North American Electric Reliability Corporation (NERC). 2008. *Long Term Reliability Assessment:*
52 *2008-2017*. Princeton, NJ, October. <http://www.nerc.com/files/LTRA2008.pdf>
53
54
55
56 [11] Joskow, P.L. 2005a. Transmission Policy in the United States. *Utilities Policy* 13 (2005) 95-115
57
58
59
60
61
62
63
64
65

- 1
2
3
4 [12] Joskow, P.L. 2005b. *Patterns of Transmission Investment*. MIT CEEPR WP-2005-004, March.
5
6 <http://web.mit.edu/ceepr/www/2005-012.pdf>
7
8
9
10 [13] U.S. Department of Energy (DOE). 2002. *National Transmission Grid Study*. Washington, D.C.: U.S.
11 Department of Energy, May. <http://eetd.lbl.gov/certs/ntgs/main-print.pdf>
12
13 [14] WIRES and CRA International. 2008. *Integrating Locationally-constrained Resources into*
14 *Transmission: A Survey of US Practices*. October.
15
16 http://www.wiresgroup.com/resources/industry_reports/WIRES_Report_LCR.pdf
17
18 [15] National Grid. 2006. *Transmission and Wind Energy: Capturing the Prevailing Winds for the Benefit*
19 *of Customers*. September. http://www.nationalgridus.com/non_html/c3-3_NG_wind_policy.pdf
20
21 [16] Vajjhala, S., A. Paul, R. Sweeney, and K. Palmer. 2008. *Green Corridors: Linking Interregional*
22 *Transmission Expansion and Renewable Energy Policies*. Discussion Paper. Washington, D.C.:
23 Resources for the Future, March. [http://www.rff.org/focus_areas/features/Documents/RFF-DP-08-](http://www.rff.org/focus_areas/features/Documents/RFF-DP-08-06.pdf)
24 [06.pdf](http://www.rff.org/focus_areas/features/Documents/RFF-DP-08-06.pdf)
25
26 [17] Olsen, D. 2007. “Renewables-First Generation/Transmission Projects.” *Windpower 2007 Conference*.
27 Los Angeles, CA, June 6. http://www.interwest.org/documents/documents/2007-06-06_olsen.pdf.
28
29 [18] California ISO (CAISO). 2006. *Proposal to Remove Barriers to Efficient Transmission Investment*.
30 <http://www.caiso.com/188d/188d7ee0ae42.pdf>
31
32 [19] Hirst, E, and B. Kirby. 2001a. Key Transmission Planning Issues. *The Electricity Journal*, 14 (8): 59-
33 70.
34
35 [20] Federal Energy Regulatory Commission (FERC). 2008. “Order on Technical Conference. Docket
36 No. AD08-2-000.” March 20, 2008. Washington, D.C.: Federal Energy Regulatory Commission.
37 <http://www.ferc.gov/whats-new/comm-meet/2008/032008/E-27.pdf>
38
39 [21] Federal Energy Regulatory Commission (FERC). 2007. “Preventing Undue Discrimination and
40 Preference in Transmission Service.” Washington, D.C.: Federal Energy Regulatory Commission.
41 <http://www.ferc.gov/whats-new/comm-meet/2007/021507/E-1.pdf>
42
43 [22] Porter, K. and S. Fink. 2008. *State Transmission Infrastructure Authorities: The Story So Far*.
44 National Renewable Energy Laboratory. NREL/ SR-500-43146. May.
45 <http://www.nrel.gov/docs/fy08osti/43146.pdf>
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

- 1
2
3
4 [23] Cavallo, A. 2007. Controllable and affordable utility-scale electricity from intermittent wind resources
5 and compressed air energy storage (CAES). *Energy* 32, no. 2 (February): 120-127.
6
7
8 [24] DeCarolis, J. F., and D. W. Keith. 2006. The economics of large-scale wind power in a carbon
9 constrained world. *Energy Policy* 34, no. 4 (March): 395-410.
10
11 [25] Greenblatt, J. B., S. Succar, D. C. Denkenberger, R. H. Williams, and R. H. Socolow. 2007. Baseload
12 wind energy: modeling the competition between gas turbines and compressed air energy storage
13 for supplemental generation. *Energy Policy* 35, no. 3 (March): 1474-1492.
14
15 [26] Mills, A., Wiser, R. and Porter, K., 2009. *The Cost of Transmission for Wind Energy: A Review of*
16 *Transmission Planning Studies*. LBNL-1417E. Berkeley, CA: Lawrence Berkeley National
17 Laboratory. <http://eetd.lbl.gov/ea/EMS/reports/lbnl-1471e.pdf>
18
19 [27] Auer, H., M. Stadler, G. Resch, C. Huber, T. Schuster, H. Taus, L.H. Neilsen, J. Twidell, and D. J.
20 Swider. 2004. *Cost and Technical Constraints of RES-E Grid Integration: Work Package 2*.
21 GreenNet: Pushing a Least Cost Integration of Green Electricity into the European Grid. August.
22 http://www.risoe.dk/rispubl/SYS/syspdf/wp2_greenet.pdf.
23
24 [28] European Wind Energy Association (EWEA). 2005. *Large Scale Integration of Wind Energy in the*
25 *European Power Supply: Analysis, Issues, and Recommendations*. Prepared by the European
26 Wind Energy Association.
27 [http://www.ewea.org/fileadmin/ewea_documents/documents/publications/grid/051215_Grid_repo](http://www.ewea.org/fileadmin/ewea_documents/documents/publications/grid/051215_Grid_report.pdf)
28 [rt.pdf](http://www.ewea.org/fileadmin/ewea_documents/documents/publications/grid/051215_Grid_report.pdf)
29
30 [29] Holttinen, H., P. Meibom, A. Orths, F. van Hulle, B. Lange, A. Tiedemann, M. O'Malley, J. Pierik, B.
31 Ummels, J. Olav Tande, A. Estanqueiro, M. Matos, E. Gomez, L. Söder, G. Strbac, A. Shakoor, J.
32 C. Smith, M. Milligan, E. Ela, 2009. *Design and operation of power systems with large amounts*
33 *of wind power*. IEA Task 25 Final report, Phase one 2006-08. VTT Tiedotteita - Research Notes
34
35 [30] Swider, D. J., L. Beurskens, S. Davidson, J. Twidell, J. Pyrko, W. Prügler, H. Auer, K. Vertin, R.
36 Skema. 2008. Conditions and costs for renewables electricity grid connection: Examples in
37 Europe. *Renewable Energy* 33, no. 8 (August): 1832-1842.
38
39 [31] Lesieutre, B. C., and J. H. Eto. 2004. When a Rose Is Not a Rose: A Review of Recent Estimates of
40 Congestion Costs. *The Electricity Journal* 17, no. 4 (May): 59-73.
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

- 1
2
3
4 [32] Strbac, G., D. Pudjianto, M. Castro, P. Djapic, B. Stojkovska, C. Ramsay, R. Allan. 2007.
5
6 *Transmission Investment, Access and Pricing in Systems with Wind Generation*. DTI Centre for
7
8 Distributed Generation and Sustainable Electrical Energy, February. <http://www.sedg.ac.uk/>
9
- 10 [33] Denholm, P. and Sioshansi, R.. 2009. The value of compressed air energy storage with wind in
11
12 transmission-constrained electric power systems. *Energy Policy*, 37(8), 3149-3158.
13
- 14 [34] Wiser, R., and M. Bolinger. 2008. *Annual Report on U.S. Wind Power Installation, Cost, and*
15
16 *Performance Trends: 2007*. LBNL-275-E. Berkeley, California: Lawrence Berkeley National
17
18 Laboratory. <http://eetd.lbl.gov/EA/EMS/reports/lbnl-275e.pdf>
19
- 20 [35] American Electric Power (AEP). 2007. *Interstate Transmission Vision for Wind Integration*. White
21
22 Paper. October.
23
24 <http://www.aep.com/about/i765project/docs/WindTransmissionVisionWhitePaper.pdf>
25
- 26 [36] Energy Information Administration (EIA). 2008a. *Model Documentation Renewable Fuels Module of*
27
28 *the National Energy Modeling System*. Washington, D.C.: Energy Information Administration.
29
30 [http://tonto.eia.doe.gov/ftproot/modeldoc/m069\(2008\).pdf](http://tonto.eia.doe.gov/ftproot/modeldoc/m069(2008).pdf)
31
- 32 [37] Princeton Energy Resources International (PERI). 2007. *Revising the Long Term Multipliers in NEMS:*
33
34 *Quantifying the Incremental Transmission Costs Due to Wind Power*. Rockville, MD, May 23.
35
36 <http://www.perihq.com>
37
- 38 [38] Energy Information Administration (EIA). 2008b. *Assumptions to the Annual Energy Outlook 2008*.
39
40 Washington, D.C.: Energy Information Administration.
41
42 [http://www.eia.doe.gov/oiaf/aeo/assumption/pdf/0554\(2008\).pdf](http://www.eia.doe.gov/oiaf/aeo/assumption/pdf/0554(2008).pdf)
43
44

46 Appendix A: Transmission Reports

- 47
48
49 Arizona Public Service (APS), PacifiCorp, National Grid, Wyoming Infrastructure Authority. 2008.
50
51 *Transwest Express and Gateway South, Regional Stakeholder Meeting*. January.
52
53 https://transwest.azpsocis.com/docs/2008_01_23_TWE_GS_Regional_Stakeholder_Meeting.pdf
54
55
56
57 California ISO (CAISO). 2008. *Report on Preliminary Renewable Transmission Plans*. California
58
59 Independent System Operator, August 6. <http://www.caiso.com/2007/2007d75567610.pdf>
60
61
62
63
64
65

1
2
3
4 California ISO (CAISO). 2006. *CAISO South Regional Transmission Plan for 2006 (CSRTP-2006) Part II:*
5
6 *Findings and Recommendations on the Tehachapi Transmission Project.* Regional Transmission –
7
8 South Planning and Infrastructure Development California ISO. December.

9
10 <http://www.caiso.com/18db/18dbaedf2cca0.pdf>
11

12
13 California Public Utilities Commission (CPUC) Energy Division. 2003. *Electric Transmission Plan for*
14
15 *Renewable Resources in California: Report to the Legislature.* California Public Utilities
16
17 Commission. http://docs.cpuc.ca.gov/word_pdf/REPORT/32197.pdf
18

19
20
21 CapX 2020. 2005. *CapX 2020 Technical Update: Identifying Minnesota's Electric Transmission*
22
23 *Infrastructure Needs.* May. <http://www.capx2020.com/documents.html>
24

25
26 CapX 2020. 2007. *Community Based Energy Development Transmission Study: West Central (Minnesota)*
27
28 *Transmission Planning Zone.* January. <http://www.capx2020.com/documents.html>
29

30
31 Clean and Diversified Energy Advisory Committee (CDEAC) Transmission Task Force. 2006. *Report of*
32
33 *the Transmission Task Force to the Western Governors Association.* March. Available at:
34
35 <http://www.westgov.org/wga/initiatives/cdeac/TransmissionReport-final.pdf>
36

37
38
39 Colorado Long Range Transmission Planning Group (CLRTPG). 2006. *Colorado Long Range*
40
41 *Transmission Planning Study: 2005 - 2015.*
42
43 http://www.oatioasis.com/TSGT/TSGTdocs/CLRTP_G2015ReportJuly06.pdf
44

45
46
47 CRA International. 2008. *First Two Loops of SPP EHV Overlay Transmission Expansion: Analysis of*
48
49 *Benefits and Costs.* September 28.
50
51 [http://www.crai.com/uploadedFiles/RELATING_MATERIALS/Publications/BC/Energy_and_En](http://www.crai.com/uploadedFiles/RELATING_MATERIALS/Publications/BC/Energy_and_Environment/files/Southwest%20Power%20Pool%20Extra-High-Voltage%20Transmission%20Study.pdf)
52
53 [vironment/files/Southwest%20Power%20Pool%20Extra-High-](http://www.crai.com/uploadedFiles/RELATING_MATERIALS/Publications/BC/Energy_and_Environment/files/Southwest%20Power%20Pool%20Extra-High-Voltage%20Transmission%20Study.pdf)
54
55 [Voltage%20Transmission%20Study.pdf](http://www.crai.com/uploadedFiles/RELATING_MATERIALS/Publications/BC/Energy_and_Environment/files/Southwest%20Power%20Pool%20Extra-High-Voltage%20Transmission%20Study.pdf)
56
57
58
59
60
61
62
63
64
65

1
2
3
4 Electric Reliability Council of Texas (ERCOT). 2008. *Competitive Renewable Energy Zones Transmission*
5
6 *Optimization Study*. ERCOT System Planning, April. <http://www.ercot.com/news/presentations/>
7

8
9
10 Electric Reliability Council of Texas (ERCOT). 2006. *Analysis of Transmission Alternatives for*
11
12 *Competitive Renewable Energy Zones in Texas*.
13
14 http://www.ercot.com/news/presentations/2006/ATTCH_A_CREZ_Analysis_Report.pdf
15

16
17
18 GE Power Systems Energy Consulting. 2004. *The Effects of Integrating Wind Power on Transmission*
19
20 *System Planning, Reliability, and Operations: Report on Phase 1*. Albany, NY: New York State
21
22 Energy Research and Development Authority (NYSERDA), February.
23
24 http://www.uwig.org/phase%201_feb_02_04.pdf
25

26
27
28 HPX Participants. 2008. *High Plains Express Transmission Project: Feasibility Study Report*. June.
29
30 [http://www.rmao.com/wtpp/HPX/HighPlainsExpress%20First%20Stage%20Feasibility%20Repor](http://www.rmao.com/wtpp/HPX/HighPlainsExpress%20First%20Stage%20Feasibility%20Report%2006_08.pdf)
31
32 [t%2006_08.pdf](http://www.rmao.com/wtpp/HPX/HighPlainsExpress%20First%20Stage%20Feasibility%20Report%2006_08.pdf)
33

34
35
36 ISO New England Inc. 2007. *New England Electricity Scenario Analysis: Exploring the economic,*
37
38 *reliability, and environmental impacts of various resource outcomes for meeting the region's*
39
40 *future electricity needs*. ISO New England Inc., August. <http://www.iso->
41
42 [ne.com/committees/comm_wkgrps/otr/sas/mtrls/elec_report/scenario_analysis_final.pdf](http://www.iso-ne.com/committees/comm_wkgrps/otr/sas/mtrls/elec_report/scenario_analysis_final.pdf)
43

44
45
46 Krzykos, P. 2008. *Southwest Area Transmission (SWAT) Oversight Committee-Arizona Renewable*
47
48 *Transmission Task Force: Presentation*.
49
50 http://www.westconnect.com/documents_detail.php?fileid=477
51

52
53
54 K.R. Saline & Assoc. 2008. *2007 WestConnect Transmission Plan: A Report Detailing the Electrical*
55
56 *Transmission System Expansion Plan Within the WestConnect Planning Area During the 2008-*
57
58
59
60
61
62
63
64
65

1
2
3
4 2017 Timeframe. WestConnect, January 5.

5
6 http://www.westconnect.com/filestorage/WestConnect_Transmission_Plan_FINAL.pdf
7
8
9

10 Maine Public Service and Central Maine Power Company. 2008. *Request for Certificate of Public*
11 *Convenience and Necessity to Construct the Maine Power Connection ("MPC") to Enable*
12 *Interconnection of Aroostook Wind Energy Project*. State of Maine Public Utilities Commission,
13
14 July 1. http://mpuc.informe.org/easyfile/cache/easyfile_doc207274.pdf
15
16
17
18
19

20 Midwest ISO (MISO). 2008. *Joint Coordinated System Plan: Economic Assessment Wrap-up Stakeholder*
21 *Meeting*. December 10, Dallas, TX. <http://www.jcspstudy.org/>
22
23
24

25 Midwest ISO (MISO). 2007. *Midwest Transmission Expansion Plan 2006*. February.
26
27 <http://www.midwestiso.org/page/Expansion+Planning>
28
29
30

31 Midwest ISO (MISO). 2003. *Midwest Transmission Expansion Plan 2003*. June.
32
33 <http://www.midwestiso.org/page/Expansion+Planning>
34
35

36 Montana-Alberta Tie Line LTD. (MATL). 2006. *Montana-Alberta Tie 230 kV Transmission Line:*
37 *Transmission Development Facilities Application, Volume One*. Alberta Energy and Utilities
38 Board (EUB). <http://www.ercb.ca/docs/applications/submissions/1458443/Ex%20002-02.pdf>
39
40
41
42
43

44 NorthWestern Energy. 2008. *Mountain States Transmission Intertie ("MSTI"): Phase 1 Comprehensive*
45 *Progress Report*. <http://www.oatioasis.com/NWMT/>
46
47
48
49

50 NorthWestern Energy. 2007. *Mountain States Transmission Intertie (MSTI) Open Season Update Meeting*.
51
52 www.oatioasis.com/NWMT/NWMTdocs/MSTI_Open_Season_Update_Mtg_Dec_5_2007.ppt
53
54
55

56 NorthWestern Energy. 2005. *Montana - Idaho Path Open Season Study Report*.
57
58 <http://www.oatioasis.com/NWMT/NWMTdocs/OpenSeasonStudyReport-Final.pdf>
59
60
61
62
63
64
65

- 1
2
3
4 NW Transmission Assessment Committee (NTAC), Canada-NW-Cal Study Group. 2006. *Canada-*
5
6 *Northwest-California Transmission Options Study*. May.
7
8 <http://209.221.152.82/ntac/publications.html>
9
- 10
11 PG&E. 2007a. *WECC Regional Planning Review: Canada/Pacific Northwest – Northern California*
12
13 *Transmission Line Project, Technical Analysis Committee Report*.
14
15 [http://www.pge.com/includes/docs/pdfs/mybusiness/customerservice/nonpgeutility/electrictransmi](http://www.pge.com/includes/docs/pdfs/mybusiness/customerservice/nonpgeutility/electrictransmission/weccplanning/finaltareport.pdf)
16
17 [ssion/weccplanning/finaltareport.pdf](http://www.pge.com/includes/docs/pdfs/mybusiness/customerservice/nonpgeutility/electrictransmission/weccplanning/finaltareport.pdf)
18
19
- 20
21 PG&E. 2007b. *Canada/Pacific Northwest to Northern California Electric: WECC Regional Planning*
22
23 *Project, Economic Analysis Committee*.
24
25 [http://www.pge.com/includes/docs/pdfs/mybusiness/customerservice/nonpgeutility/electrictransmi](http://www.pge.com/includes/docs/pdfs/mybusiness/customerservice/nonpgeutility/electrictransmission/weccplanning/finaleareport.pdf)
26
27 [ssion/weccplanning/finaleareport.pdf](http://www.pge.com/includes/docs/pdfs/mybusiness/customerservice/nonpgeutility/electrictransmission/weccplanning/finaleareport.pdf)
28
29
- 30
31 Porter, K. and Intermittency Analysis Project Team. 2007. *Intermittency Analysis Project: Summary of*
32
33 *Final Results*. California Energy Commission, PIER Research Development & Demonstration
34
35 Program. CEC-500-2007-081. [http://www.energy.ca.gov/pier/final_project_reports/CEC-500-](http://www.energy.ca.gov/pier/final_project_reports/CEC-500-2007-081.html)
36
37 [2007-081.html](http://www.energy.ca.gov/pier/final_project_reports/CEC-500-2007-081.html)
38
39
- 40
41 Rocky Mountain Area Transmission Study (RMATS). 2004. *Rocky Mountain Area Transmission Study*.
42
43 September 2004. <http://psc.state.wy.us/htdocs/subregional/Reports.htm>
44
- 45
46 Quanta Technology, LLC. 2008. *Final Report on the Southwest Power Pool (SPP) Updated EHV Overlay*
47
48 *Study*. March.
49
50 [http://www.spp.org/publications/Quanta_Technology_March_2_2008_Update_to_the_EHV_Stud](http://www.spp.org/publications/Quanta_Technology_March_2_2008_Update_to_the_EHV_Study_Final_Report.pdf)
51
52 [y_Final_Report.pdf](http://www.spp.org/publications/Quanta_Technology_March_2_2008_Update_to_the_EHV_Study_Final_Report.pdf)
53
- 54
55 Seams Steering Group-Western Interconnection (SSG-WI). 2003. *Framework for Expansion of the Western*
56
57 *Connection Transmission System*. October.
58
59
60
61
62
63
64
65

1
2
3
4 Securities Exchange Commission (SEC). 2008. *Form 10-K: Xcel Energy Inc.*
5
6 <http://www.sec.gov/Archives/edgar/data/72903/000104746908001516/a2182843z10->
7
8 [k.htm#toc_de73301_7](http://www.sec.gov/Archives/edgar/data/72903/000104746908001516/a2182843z10-k.htm#toc_de73301_7) (Actual cost of transmission proposed in Xcel Energy 2001).
9
10
11 Southern California Edison Company (SCE). 2007. *SCE 2008 Conceptual Transmission Requirements and*
12 *Costs for Integrating Renewable Resources*. September.
13
14
15
16
17 Southwest Power Pool (SPP). 2008. Oklahoma Electric Power Transmission Task Force (OEPTTF) Study.
18
19 SPP Engineering Department, Planning Section, March.
20
21 http://www.spp.org/publications/OEPTTF%20Report_FINAL_4_22_08_updated.pdf.
22
23
24 Southwest Power Pool (SPP), Engineering Staff. 2007. *SPP Transmission Expansion Supplement to*
25 *Support Development of Competitive Renewable Energy Zones*. Submitted to the Public Utility
26 Commission of Texas, Docket No. 33672. April.
27
28
29 http://spooasis.spp.org/documents/swpp/transmission/CREZ_April_07.pdf
30
31
32
33 Southwest Power Pool (SPP), Engineering Staff. 2006. *Southwest Power Pool Inc. Analysis of*
34 *Transmission Alternatives for Competitive Renewable Energy Zones in Texas*. Submitted to the
35 Public Utility Commission of Texas, Docket No. 33672. December.
36
37
38 <http://spooasis.spp.org/documents/swpp/transmission/SPP%20CREZ%20Study%20FINAL%2012>
39 [2906.pdf](http://spooasis.spp.org/documents/swpp/transmission/SPP%20CREZ%20Study%20FINAL%2012)
40
41
42
43
44 Southwest Power Pool (SPP). 2005. *Kansas/Panhandle Sub-Regional Transmission Study*. May.
45
46 http://www.spp.org/publications/Kansas_Panhandle_Study.pdf
47
48
49
50 Tri-state Generation and Transmission, and Western Area Power Administration. 2006. *Preliminary*
51 *Report: Eastern Plains Transmission Project 500 kV and 345 kV Comparison*. March 31.
52
53 http://www.oatioasis.com/TSGT/TSGTdocs/EPTP_VoltageOptions_033106.pdf
54
55
56
57 Western Regional Transmission Expansion Partnership (WRTEP), Economic Analysis Subcommittee.
58
59 2007. *Benefit-Cost Analysis of Frontier Line Possibilities*. April. <http://www.floutreach.com>
60
61
62
63
64
65

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Xcel Energy Transmission Planning (Xcel). 2006. *Wind Integration Study Report Of Existing and Potential 2003 Least Cost Resource Plan Wind Generation*. Xcel Energy
http://www.rmao.com/wtpp/Misc_Info/2008%20Wind%20Integration%20Study.pdf

Xcel Energy, Transmission Reliability & Assessment. 2005. *Buffalo Ridge Incremental Generation Outlet Electric Transmission Study*. May. http://www.rmao.com/xfpp/nsp_meeting_materials/20050517-MoBasinSPG-BufferoRidgeStudy-Meeting-NSP-doc3-BRIGO%20Study%20Report.pdf

Xcel Energy. 2001. *Application for Certificates of Need for Transmission Lines to Support the Development of Wind Powered Generation in Southwestern Minnesota*. Certificate of Need. Minneapolis, Minnesota: Minnesota Public Utilities Commission, December 28.