

# Lawrence Berkeley National Laboratory

## Lawrence Berkeley National Laboratory

### **Title**

RECIPROCAL PASSIVE MODE-LOCKING OF A RHODAMINE 6G DYE LASER AND THE Ar<sup>+</sup> PUMP LASER

### **Permalink**

<https://escholarship.org/uc/item/2x47h3pd>

### **Author**

Yasa, Zafer A.

### **Publication Date**

1980-10-01



# Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

## ENERGY & ENVIRONMENT DIVISION

Submitted to Optics Letters


RECIPROCAL PASSIVE MODE-LOCKING OF A RHODAMINE  
6G DYE LASER AND THE  $Ar^+$  PUMP LASER

Zafer A. Yasa and Nabil M. Amer

October 1980

### TWO-WEEK LOAN COPY

*This is a Library Circulating Copy  
which may be borrowed for two weeks.  
For a personal retention copy, call  
Tech. Info. Division, Ext. 6782.*

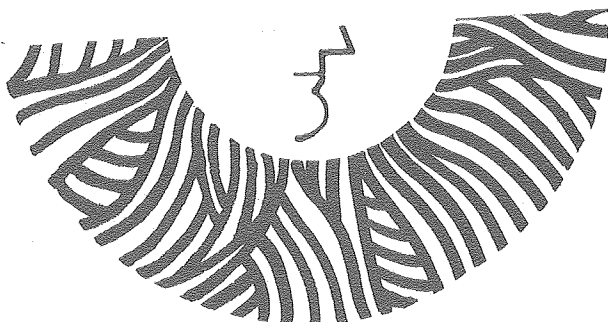

RECEIVED  
LAWRENCE  
BERKELEY LABORATORY

FEB 17 1981

LIBRARY AND  
DOCUMENTS SECTION

LBL-11788 c.2

## DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

RECIPROCAL PASSIVE MODE-LOCKING  
OF A RHODAMINE 6G DYE LASER  
AND THE Ar<sup>+</sup> PUMP LASER

Zafer A. Yasa and Nabil M. Amer

Applied Physics & Laser Spectroscopy Group  
Lawrence Berkeley Laboratory  
University of California  
Berkeley, California 94720

October 1980

RECIPROCAL PASSIVE MODE-LOCKING OF A RHODAMINE 6G  
DYE LASER AND THE  $\text{Ar}^+$  PUMP LASER

ABSTRACT

A rhodamine 6G dye laser, internally pumped within the extended cavity of an  $\text{Ar}^+$  ion laser, is mode-locked when its cavity length is matched to half that of the pump laser: the  $5145 \text{ \AA}$  argon laser line is passively mode-locked by the combination of the saturable absorption and the lasing action of the dye which is in turn synchronously pumped and mode-locked. Tunable ( $5650 \text{ \AA}$  to  $5950 \text{ \AA}$ )  $\sim 10$  pSec pulses are generated, and the average output power is  $\sim 80$  mW.

## Introduction

cw generation of picosecond pulses from dye lasers which are synchronously pumped by actively mode-locked noble gas ion lasers has received considerable attention in the past few years.<sup>(1-7)</sup> In such a scheme, an acousto-optically mode-locked cw ion laser (pulse width of  $\sim 100$  pSec) externally pumps a dye laser whose cavity length is matched to (or one-half<sup>(6)</sup>) the cavity length of the pump laser. When the lengths of the two cavities are optimally matched (to within a few  $\mu\text{m}$ ), picosecond pulses are generated. Such pulses have considerably higher average power and wider tuning range than those obtained from cw-pumped passively mode-locked dye laser systems.<sup>(8)</sup>

In this letter we present preliminary results of the reciprocal passive mode-locking, by an intracavity Rhodamine 6G (R6G) dye laser, of the  $5145 \text{ \AA}$  line of an  $\text{Ar}^+$  laser. This mode-locked line, in turn, synchronously mode-locks the dye laser generating tunable ultrashort pulses of duration and average power comparable to those obtained from synchronously mode-locked systems. Our approach, therefore, eliminates the need for actively mode-locking the pump laser with an acousto-optic modulator driven by the amplified output of a stable oscillator. Furthermore, we observe that the pulse width appears not to be too critically dependent on the mismatch of the two cavities.

## The Reciprocal Mode-Locking Scheme

Fig. (1) shows a schematic of our mode-locking arrangement. The  $\text{Ar}^+$  laser cavity is extended, in a folded configuration, to include the broadband high reflecting mirrors  $M_1$  and  $M_2$  (10 cm radius of curvature  $R$ ) at the focus of which the dye jet stream is placed at

Brewster's angle. The cavity is completed through prism P and a flat high reflecting mirror  $M_3$ . The dye laser beam, which has  $M_1$ ,  $M_2$  and P in common with the argon beam, is dispersed by the prism P and propagates to a partially transmitting end mirror  $M_5$  ( $R = \infty$ , transmission  $T=3\%$ ).

The initial alignment of the combined laser cavities is achieved through the following procedure: With the output coupler  $M_6$  in place and  $M_3$  replaced by the wavelength selector, the  $Ar^+$  laser is made to oscillate on the  $5145 \overset{\circ}{\text{Å}}$  line.  $M_1$  and  $M_2$  are then aligned such that the  $5145 \overset{\circ}{\text{Å}}$  spot reflected from the  $Ar^+$  laser optics is coincident with the initial spot on  $M_2$ .  $M_5$  of the dye laser is then adjusted such that the R6G laser oscillates on its fundamental mode (readjusting  $M_1$  and  $M_2$  may be necessary to obtain a good first order mode). The  $Ar^+$  laser wavelength selector is then replaced by the broadband high reflector  $M_3$ . Due to the prism P, only the  $5145 \overset{\circ}{\text{Å}}$  line is sharply focussed to pump the dye jet under these conditions. At this point, the dye concentration is significantly reduced by the addition of ethylene glycol, and the  $Ar^+$  output coupler is removed. With a slight adjustment of  $M_3$  and/or  $M_2$ , the  $5145 \overset{\circ}{\text{Å}}$  line oscillates with a good  $TEM_{\infty}$  mode structure. Upon increasing the dye concentration and the  $Ar^+$  plasma current, R6G lases readily.

In this intracavity pumped configuration R6G acts as a saturable absorber of the  $5145 \overset{\circ}{\text{Å}}$  line. However, its relaxation time ( $\sim 6$  n Sec) is not short enough to induce mode-locking. When  $M_5$  is misaligned such that R6G is not lasing, it is observed that the  $Ar^+$  intracavity intensity is strongly modulated but not completely mode-locked. On the other hand, when  $M_5$  is aligned to allow R6G to lase, short-pulsed operation of the  $5145 \overset{\circ}{\text{Å}}$  line is obtained as coarsely monitored with

a fast photodiode and a sampling oscilloscope. This occurs when the cavity length of the dye laser is optimally adjusted (by the translation of  $M_5$  with a differential micrometer) to a position approximately equal to (or one-half) the cavity length of the  $Ar^+$  laser. The passive mode-locking of the  $Ar^+$  laser is the result of the effective shortening of the relaxation time of the saturated dye absorption as caused by the formation of a dye laser pulse, at the trailing edge of the  $Ar^+$  laser pulse, which stimulates a rapid depletion of the excited  $S_1$  state of the dye. The dye laser pulses, in turn, will also be ultrashort being synchronously pumped by the mode-locked  $Ar^+$  laser pulses (see Fig. 2). This is similar to the previously reported double mode-locked operation. (9, 10)

We employed a Spectra-Physics Model 171  $Ar^+$  laser to pump a R6G dye laser. The pump laser output at  $5145 \text{ \AA}$  was 2.6 W at a current  $I_{Ar} = 40$  amperes. The  $Ar^+$  laser cavity length  $L_{Ar}$  and that of the dye laser  $L_D$  were matched such that  $L_D \simeq 1/2 L_{Ar}$ , where  $L_D$  corresponds to a cavity round-trip time of  $\simeq 10$  nSec. (100 MHz repetition rate), as can be seen in Fig. 2. Then, a single  $Ar^+$  laser pulse travels in the extended cavity and pumps the dye once every two transits of the dye laser pulse. A dye concentration of  $3.8 \times 10^{-4}$  molar in ethylene glycol resulted in an  $Ar^+$  laser threshold current  $I_{Ar}^{th}$  of  $\simeq 40$  Amperes.

The pulse width of the dye laser output was measured by the conventional technique of collinear phase-matched second harmonic generation using a 0.1 mm thick KDP crystal (Quantum Technology, Inc.).



## Results and Discussion

A typical autocorrelation trace of pulses at  $\lambda = 5700 \text{ \AA}$  is shown in Fig. (3). Assuming a  $\text{sech}^2$  pulse shape, the measured pulse-width is 11 pSec. Similar pulses were observed over a wavelength range of  $5650 \text{ \AA} - 5950 \text{ \AA}$ , with a typical average power output of  $\sim 80 \text{ mW}$ . In general, the pulses have amplitude substructure as evidenced by the 3 : 2 : 1 contrast ratio. The typical FWHM bandwidth of such pulses was  $\sim 4 \text{ \AA}$ . Shorter pulses, without substructure, were also observed (3 : 1 contrast ratio) but not easily reproduced, even after the introduction of an iris in the dye laser cavity.

Stable pulses of shortest duration were generally observed near threshold operation of the  $\text{Ar}^+$  laser, and when the two focused beams were somewhat noncollinear in the dye jet (as deduced from the relative displacement of the two spots on  $M_2$ ). We also note that the pulses tended to shorten as the dye concentration and  $I_{\text{Ar}}$  were increased.

A  $T = 10\%$  partial transmitter was also used but yielded considerably longer pulses ( $\gtrsim 50 \text{ pSec}$ ). Even though, as in the case of synchronously-pumped mode-locked dye lasers<sup>(5)</sup>, it might be expected that higher linear losses would force the dye laser pulses to shorten, in our configuration this effect is counterbalanced by the strong interdependence of the  $\text{Ar}^+$  and the dye laser pulses : The higher the intracavity dye laser pulse energy (smaller linear losses) the better mode locked are the  $\text{Ar}^+$  pulses (and correspondingly the dye pulses).

The dependence of the pulse width on the cavity mismatch parameter  $\Delta \equiv L_D - L_D^{\text{opt}}$  where  $L_D^{\text{opt}}$  is the optimum dye laser cavity length which is  $\sim 1/2 L_{\text{Ar}}$ , is shown in Fig. 4. It can be seen that the dependence of the pulse width on  $\Delta$  is not as critical<sup>(11)</sup> as in the case of

synchronously-pumped mode-locked systems.<sup>(12,13)</sup> This can be qualitatively explained as follows. In either method, the optimum dye laser pulse forms at the trailing edge of the  $\text{Ar}^+$  laser pulse. At each cavity round-trip, the overall nonlinear gain experienced by the dye laser pulse, as a function of its local time, forces it to move forward in time. This must be compensated for by a relative delay with respect to the  $\text{Ar}^+$  laser repetition time such that the pulse shape is conserved every round-trip. When  $L_D = L_D^{\text{opt}}$ , this delay is optimum, and the shortest stable pulses are generated. For  $\Delta < 0$ , the dye laser pulse will tend to overlap with  $\text{Ar}^+$  pulse, hence it rapidly increases in duration as a function of decreasing  $\Delta$ . Clearly, since the net gain in the cavity is not high, the forward displacement of the pulse per round-trip can only be a small fraction of the pulse width, and conversely, the pulse width must be considerably larger than  $\Delta/c$ . Therefore, for  $\Delta > 0$ , the pulse width must increase to conserve the pulse shape at each cavity round-trip. While in synchronously-pumped mode-locked systems the  $\text{Ar}^+$  laser repetition rate is fixed, in the present method the  $\text{Ar}^+$  and dye pulses are locked in time in the sense that a net delay of the dye laser pulse causes a similar displacement of the  $\text{Ar}^+$  pulse. Consequently, relatively large displacements of a short pulse per round-trip can be dynamically compensated for, with the pulse shape and stability being maintained over a wide range of the cavity mismatch parameter  $\Delta$ .<sup>(14)</sup>

A smaller  $\text{Ar}^+$  laser (Spectra-Physics Model 165), with  $\sim 1.8$  W from the  $5145 \text{ \AA}$  line was also used in the same configuration described above. For  $L_D = L_{\text{Ar}}$ , the shortest pulses obtained were  $\sim 35$  pSec in duration. Under optimal matching conditions, near  $L_D = 1/2 L_{\text{Ar}}$ ,

double-pulsed operation was observed.  $L_D$  corresponded to a cavity round-trip time of  $\sim 7.2$  nSec. and the delay between the two pulses was  $\sim 5.5$  nsec. This second pulse was caused by the presence of a secondary  $\text{Ar}^+$  pulse 5.5 nSec. after the main one. In this case, the individual dye pulses had no substructure. The measured shortest pulse width was 5 pSec. assuming  $\text{sech}^2$  pulse shape (Fig. 5). The average power and tuning range were similar to those described above. However, the peak power was lower due to the higher repetition rate.

### Conclusions

The reciprocal synchronous passive mode-locking of an  $\text{Ar}^+$  laser and a R6G dye laser is reported. Even though the presently generated pulse widths are somewhat longer than those obtained from conventional synchronously-pumped mode-locked dye lasers, our approach has several advantages. First, the active mode-locking of the pump laser is eliminated. Second, our preliminary results indicate that the optimum pulse duration may not be critically dependent on the cavity mismatch parameter. Finally, since mode-locking was achieved at small values of linear cavity losses, cavity dumping techniques can be readily incorporated into this system.

In principle, further band width limiting by an additional prism (or by tuning with a Lyot filter) may eliminate the amplitude substructure. This may also result in shorter pulses. Further work along these directions, and to extend the tuning range, is in progress.

This research was performed under the auspices of the U. S. Department of Energy under contract # W-7405-ENG-48.

References

1. C. K. Chan and S. O. Sari, Appl. Phys. Lett. 25, 403 (1974).
2. H. Mahr and M. D. Hirsch, Opt. Commun. 13, 96 (1975).
3. J. M. Harris, R. W. Chrisman, and F. E. Lytle, Appl. Phys. Lett. 26, 16 (1975).
4. N. J. Frigo, T. Daly, and H. Mahr, IEEE J. Quantum Electron. QE-13, 101 (1977).
5. R. K. Jain and J. P. Heritage, Appl. Phys. Lett. 32, 41 (1978).
6. A. I. Ferguson, J. N. Eckstein, and T. W. Hänsch, J. Appl. Phys. 49, 5389 (1978).
7. J. Kuhl, H. Klingenberg, and D. von der Linde, Appl. Phys. 18, 279 (1979).
8. J. P. Ryan, L. S. Goldberg and D. J. Bradley, Opt. Commun. 27, 127 (1978).
9. P. K. Runge, Opt. Commun. 4, 195 (1971).
10. Z. A. Yasa, A. Dienes, and J. R. Whinnery, Appl. Phys. Lett. 30, 24 (1977), and references therein.
11. This observation is not yet quite conclusive since the minimum pulse widths presently reported are longer than those obtained by synchronous pumping. However, it seems to be supported by Ref. 13.
12. C. P. Ausschnitt, R. K. Jain, and J. P. Heritage, IEEE J. Quantum Electron. QE-15, 912 (1979).
13. C. K. Chan, S. O. Sari, and R. E. Foster, J. Appl. Phys. 47, 1139 (1975).
14. Cavity bandwidth considerations should not alter this argument.

FIGURE CAPTIONS

- Fig. (1) Reciprocal Mode-Locking Scheme.  $M_1$  and  $M_2$ : broadband high reflectors ( $R = 10$  cm).  $M_4$ : R6G high reflector ( $R = \infty$ ).  $M_5$ : R6G partial transmitter ( $R = \infty$ ).  $M_3$ :  $Ar^+$  broadband high reflector ( $R = \infty$ ).  $M_6$ :  $Ar^+$  output coupler (removed after initial alignment, see text).
- Fig. (2) Sampling scope display of dye laser pulses detected with a photodiode. Combined rise time  $\approx 400$  pSec. Horizontal scale = 2 nSec./div.
- Fig. (3) Intensity autocorrelation trace (with background,  $\text{sech}^2$  pulse shape) of a typical dye pulse.
- Fig. (4) Autocorrelation width vs. cavity length mismatch parameter
- Fig. (5) Intensity autocorrelation trace (with background,  $\text{sech}^2$  pulse shape) of double pulsed operation.


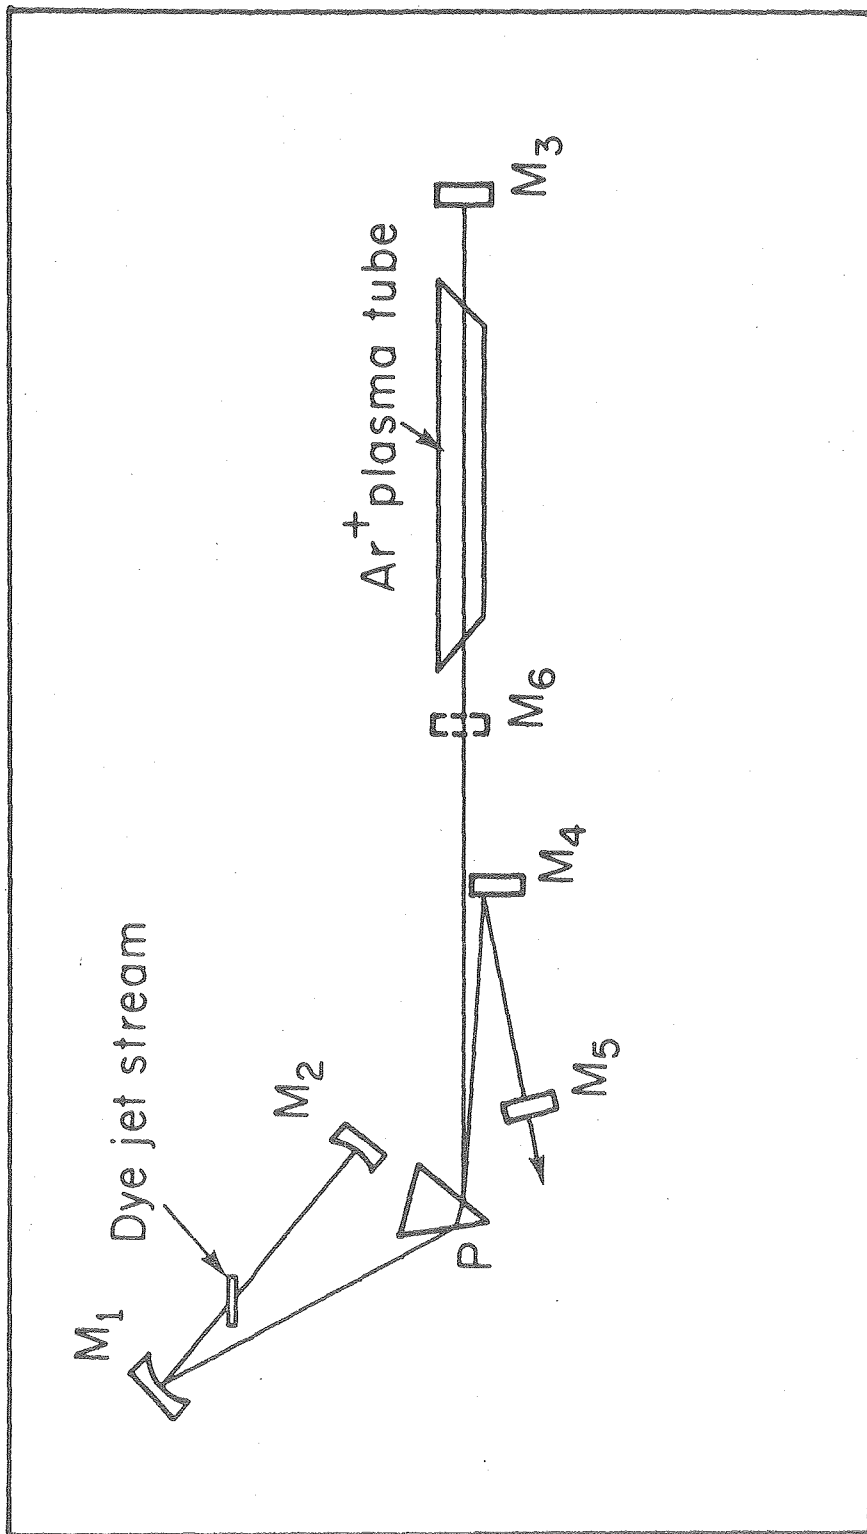


Fig. (1)

XBL8010-2264

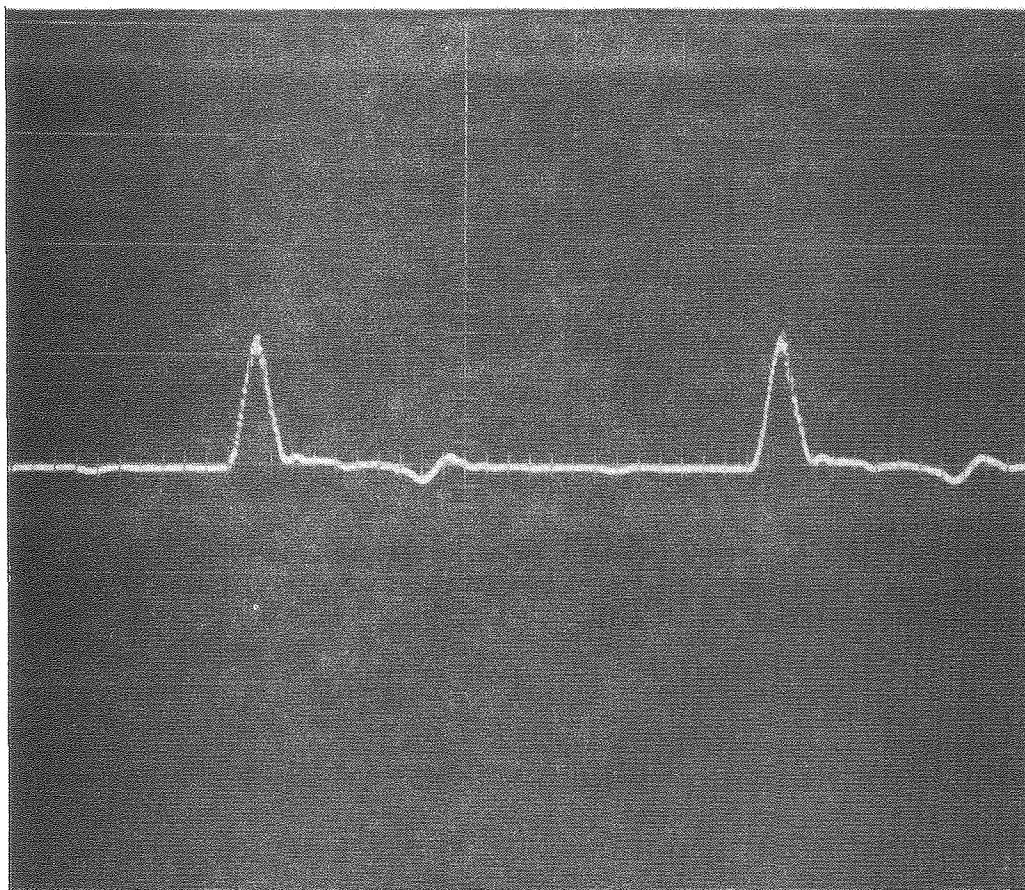

XBB 811-200

Fig. (2)


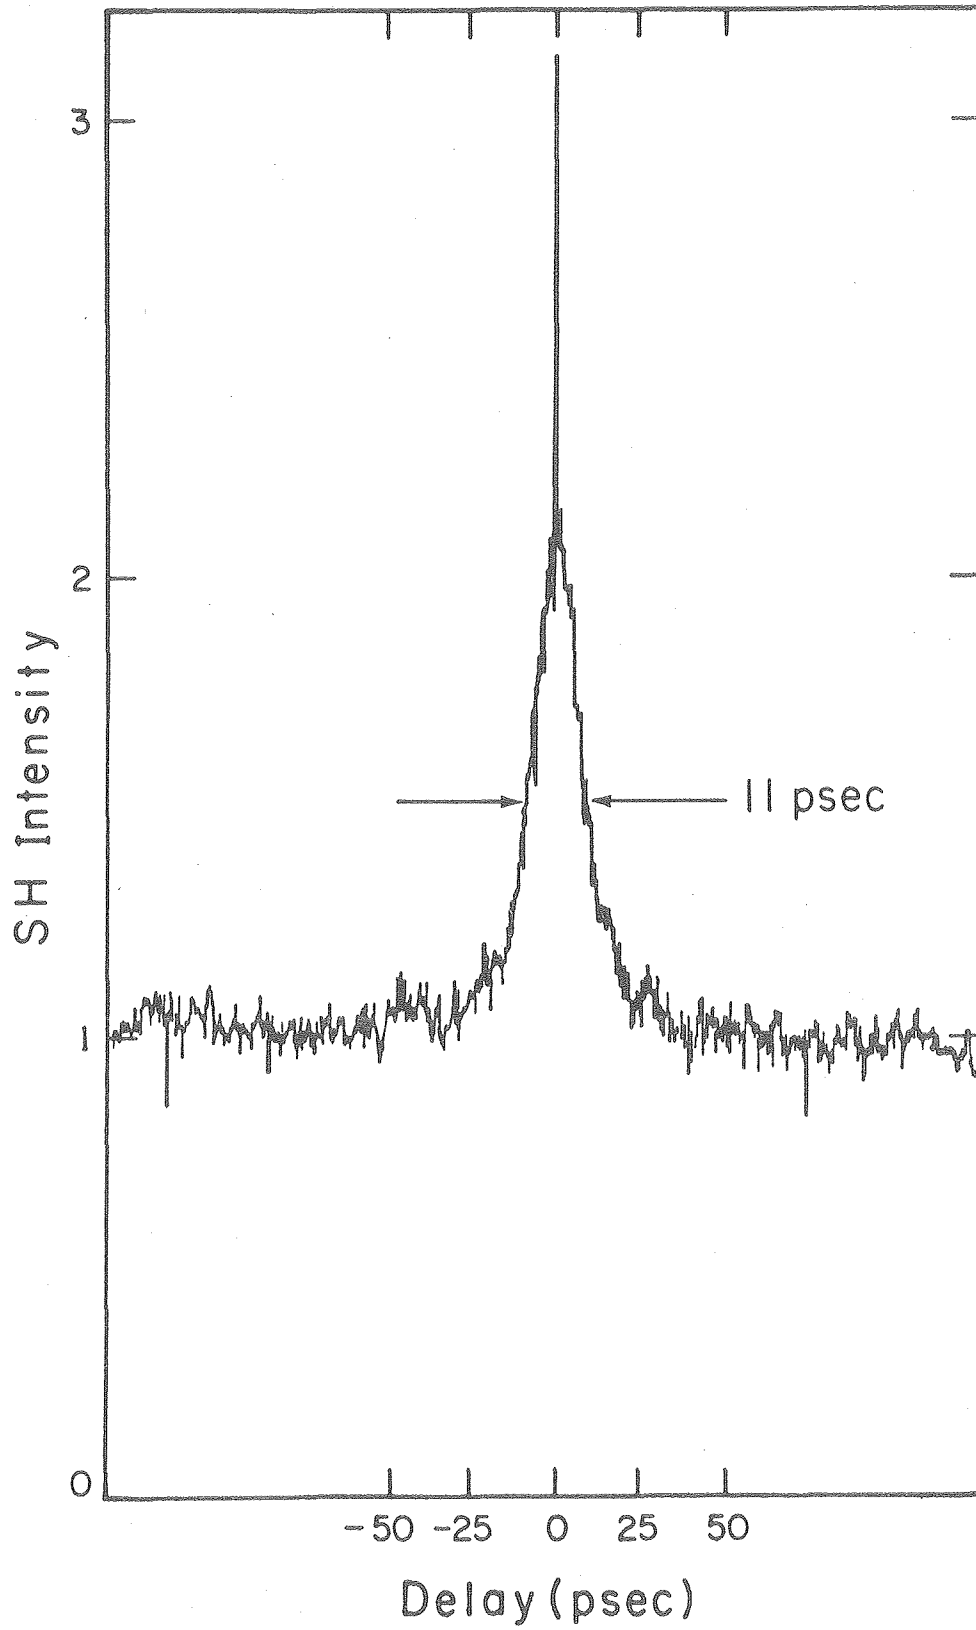


Fig. (3)

XBL8010-2267



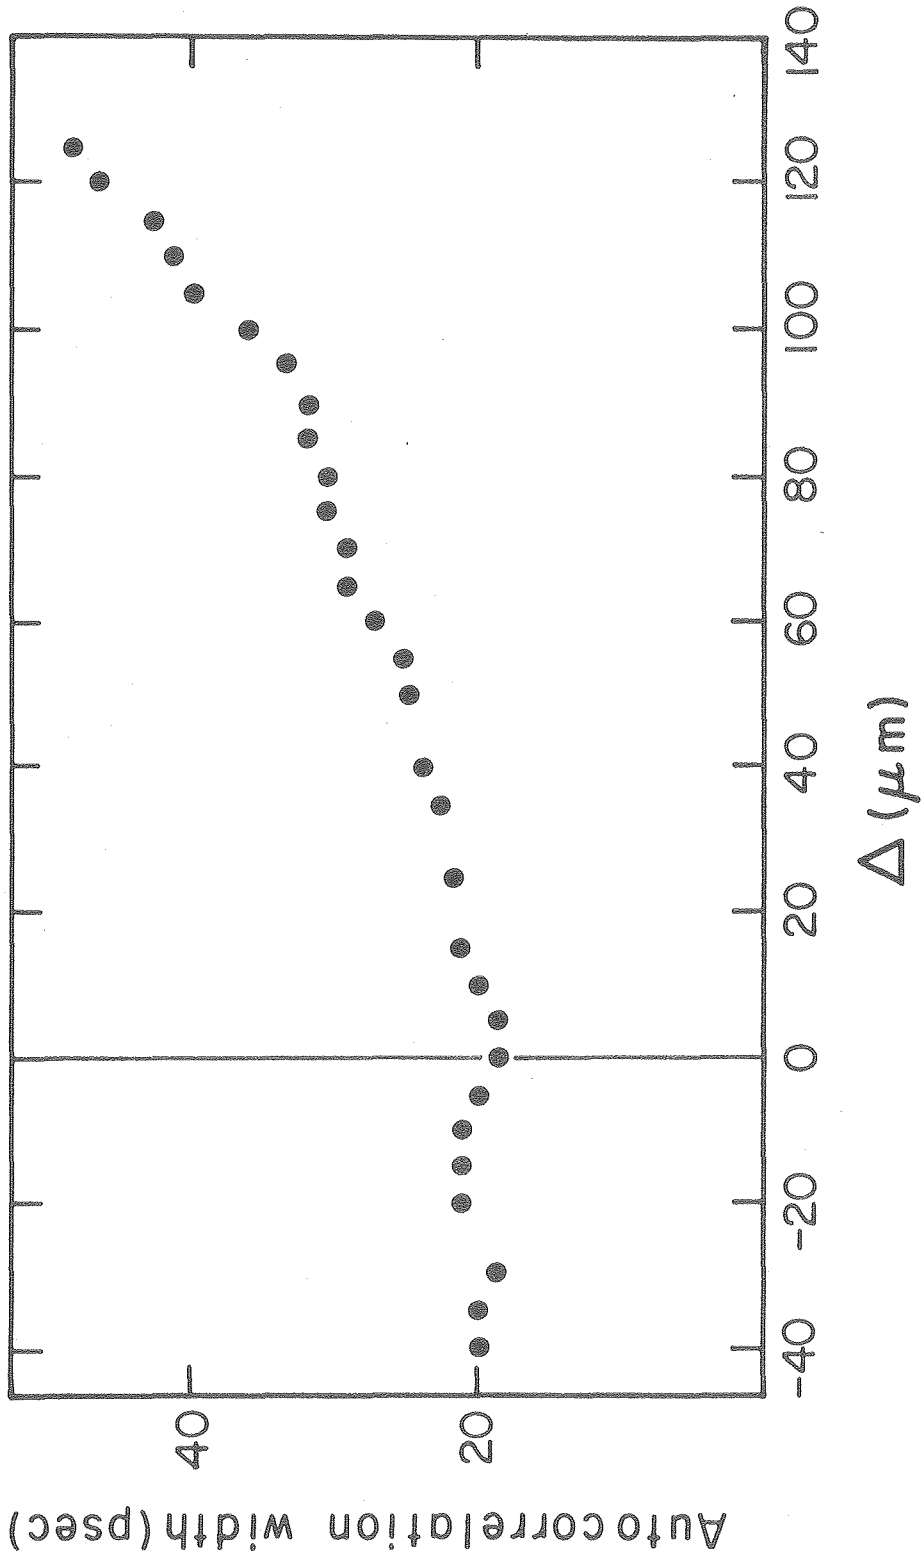

XBL8010-2265

Fig. (4)

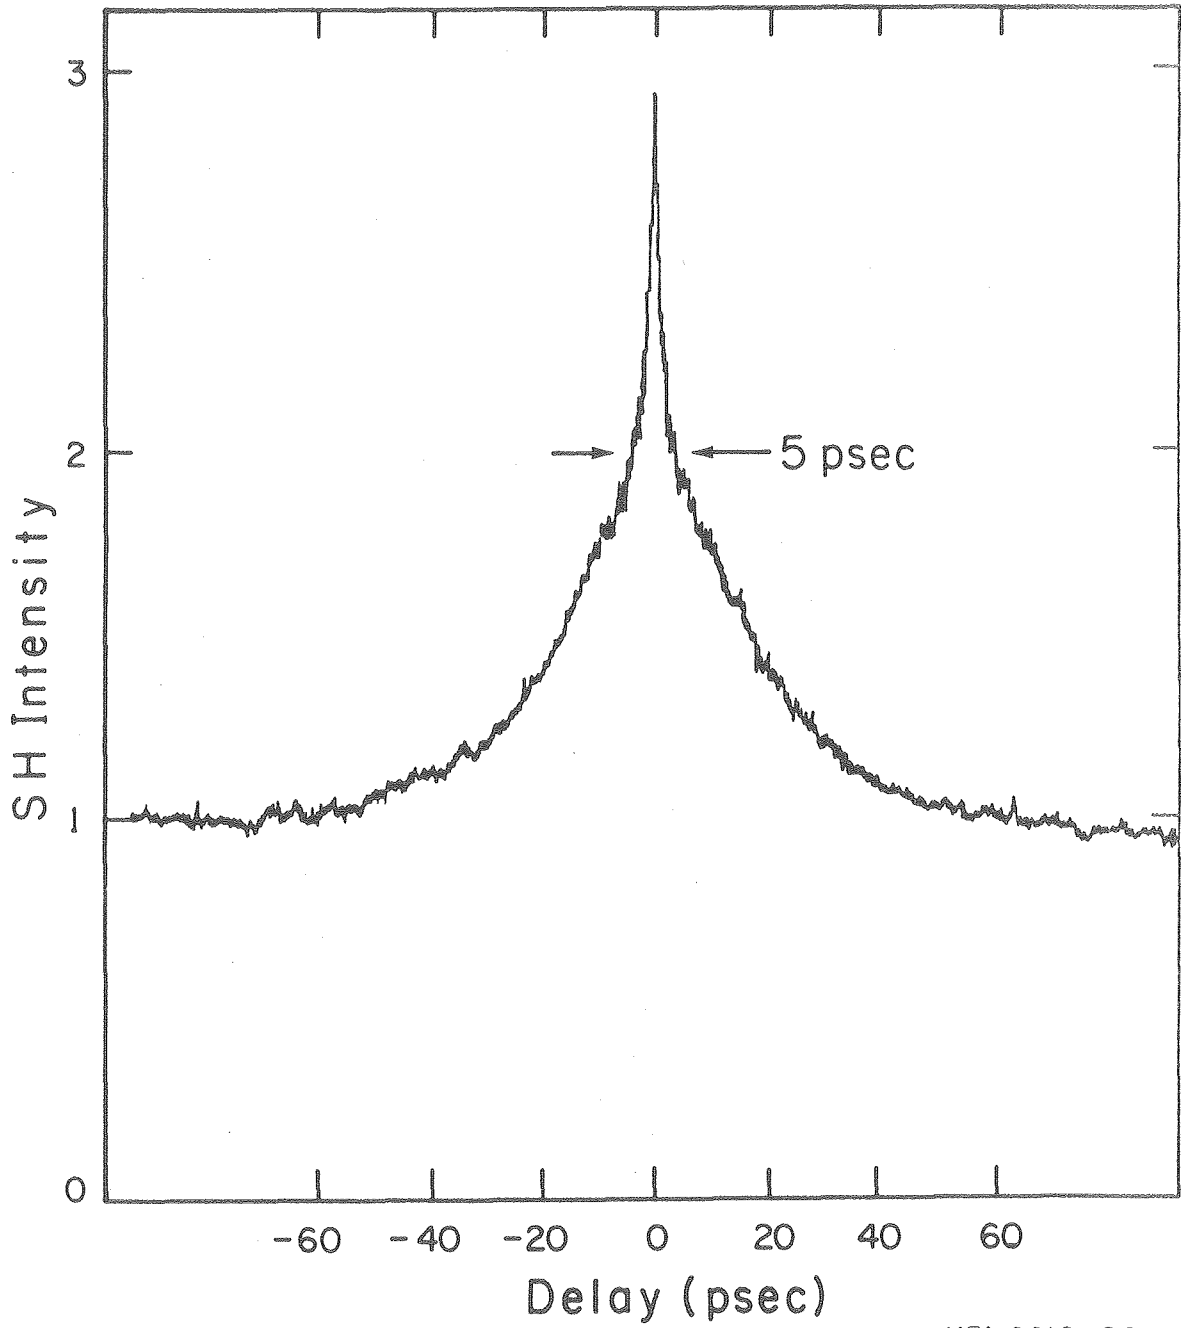


Fig. 5

XBL 8010-2266

