

# UC Berkeley

## Earlier Faculty Research

### Title

Incorporating Vehicular Emissions into an Efficient Mesoscopic Traffic Model: An Application to the Alameda Corridor, CA

### Permalink

<https://escholarship.org/uc/item/02x6c6qz>

### Authors

Gan, Qijian  
Sun, Jieli  
Jin, W L  
[et al.](#)

### Publication Date

2011-02-01

---

University of California Transportation Center  
UCTC-FR-2011-02

**Incorporating Vehicular Emissions into an Efficient  
Mesoscopic Traffic Model:  
An Application to the Alameda Corridor, CA**

Qijian Gan, Jielin Sun, Wenlong Jin,  
and Jean-Daniel Saphores  
University of California, Irvine  
February 2011

1 **Incorporating Vehicular Emissions into an Efficient Mesoscopic Traffic Model**  
2 **An Application to the Alameda Corridor, CA**

3  
4 Qijian Gan  
5 Ph.D. student  
6 Civil and Environmental Engineering  
7 Institute of Transportation Studies  
8 University of California Irvine  
9 Irvine, CA 92697-3600  
10 [ganq@uci.edu](mailto:ganq@uci.edu)

11  
12 Jieli Sun  
13 Ph.D. student  
14 Civil and Environmental Engineering  
15 Institute of Transportation Studies  
16 University of California Irvine  
17 Irvine, CA 92697-3600  
18 [jielins@uci.edu](mailto:jielins@uci.edu)

19  
20 Wenlong Jin  
21 Assistant Professor  
22 Civil and Environmental Engineering  
23 Institute of Transportation Studies  
24 University of California Irvine  
25 Irvine, CA 92697-3600  
26 [wjin@uci.edu](mailto:wjin@uci.edu)

27  
28 Jean-Daniel Saphores  
29 Corresponding Author, Associate Professor  
30 Civil and Environmental Engineering  
31 Institute of Transportation Studies  
32 University of California Irvine  
33 Irvine, CA 92697-3600  
34 Phone: (949) 824 7334  
35 [saphores@uci.edu](mailto:saphores@uci.edu)

36  
37

**1 ABSTRACT**

2 We couple EMFAC with a dynamic mesoscopic traffic model to create an efficient tool for  
3 generating information about traffic dynamics and emissions of various pollutants (CO<sub>2</sub>, PM<sub>10</sub>,  
4 NO<sub>x</sub>, and TOG) on large scale networks. Our traffic flow model is the multi-commodity discrete  
5 kinematic wave (MCDKW) model, which is rooted in the cell transmission model but allows  
6 variable cell sizes for more efficient computations. This approach allows us to estimate traffic  
7 emissions and characteristics with a precision similar to microscopic simulation but much faster.  
8 To assess the performance of this tool, we analyze traffic and emissions on a large freeway  
9 network located between the ports of Los Angeles/Long Beach and downtown Los Angeles.  
10 Comparisons of our mesoscopic simulation results with microscopic simulations generated by  
11 TransModeler under both congested and free flow conditions show that hourly emission  
12 estimates of our mesoscopic model are within 4 to 15 percent of microscopic results with a  
13 computation time divided by a factor of 6 or more. Our approach provides policymakers with a  
14 tool more efficient than microsimulation for analyzing the effectiveness of regional policies  
15 designed to reduce air pollution from motor vehicles.

16

## 1. INTRODUCTION

With increasing public concerns about the health impacts of air pollution from motor vehicles, different models have been developed to better assess their emission of air pollutants. However, there is still no efficient model that can accurately estimate traffic emissions on large scale networks. This paper starts filling this gap by combining the Multi-Commodity Discrete Kinematic Wave model (MCDKW) [1, 2] with EMFAC (Emission FACTors) and illustrating its efficiency on a large network that extends between the San Pedro Bay Ports (i.e., the ports of Los Angeles and Long Beach) and downtown Los Angeles.

Based on their working scale, traffic models can be organized in three different categories: microscopic, mesoscopic, and macroscopic. Macroscopic models, which mainly rely on information about average link speed and convex flow-travel time curves, have received a lot of attention early on because they allow analyzing large areas with relatively modest data requirements [3, 4, 5, or 6]. However, as highlighted by Smith *et al.* [7], macroscopic models cannot accurately predict air pollutant emissions, especially for congested traffic conditions, because their description of traffic dynamics is too coarse. As pointed out by André and Hammarström [8], pollutant emissions estimation is sensitive to the quality and accuracy of vehicle trajectories.

Microsimulation, on the other hand, provides second-by-second speed data of individual vehicles so it is able to accurately capture accelerations, decelerations, and stop-and-go phenomena that drive the emission of air pollutants. However, Jha *et al.* [9] point out that most applications of microscopic simulation are limited to small to medium-sized networks because of the data collection burden and time needed to perform simulations. Moreover, building and calibrating large-scale network is quite challenging and it is currently not well understood [7, 9].

Mesoscopic traffic simulation models, on the other hand, offer a compromise between obtaining accurate traffic dynamics and computational complexity. They combine macroscopic supply (e.g., link performance functions and capacities) with microscopic demand (e.g. individual vehicles) to capture the dynamics of congestion patterns, queues and spillbacks on traffic networks. A number of mesoscopic models such as DynaMIT [10] and DYNASMART [11] have been developed, but they typically do not integrate pollutant emissions. DYNEMO by Schmidt and Schäfer [12] is an exception but it tracks individual vehicles so it requires parallelization to reduce simulation time on large networks to manageable levels.

By contrast, the MCDKW traffic model is based on commodities (pairs of vehicle types and paths in a network) so it is insensitive to the number of vehicles, which makes it attractive to simulate large networks. We couple it with EMFAC [13] to estimate vehicular emissions because of the limitations of current microscopic emission models but also because EMFAC is still the model required for regulatory work in California; see Section 2.2 for more details. We then compare its traffic and emission estimates for a range of air pollutants on a large scale network, with results from TransModeler (one of the leading new microscopic simulators).

Our study area extends from the San Pedro Bay Ports (Ports of Los Angeles and Long Beach, SPBP) to downtown Los Angeles. It includes two major freeways (I-710, I-110), several busy cross freeways (I-405, I-105, and I-5), and the SR-91. These freeways carry the bulk of the

1 container traffic for the SPBP, which plays a very important role in the U.S. economy; in 2004,  
 2 for example, the SPBP handled over 36% of all U.S. container trade [14]. In this paper, we  
 3 concentrate on traffic emissions from freeways only. Moreover, the SPBP provided over 886,000  
 4 California jobs related to the international trade activities, and more than \$6.7 billion in state and  
 5 local tax revenues [15]. However, the economic vitality of this area is threatened by high levels  
 6 of congestion and air pollution. People living in our study area suffer from chronic air pollution,  
 7 which is partly due to the thousands of trucks carrying containers from the SPBP to warehouses  
 8 located downtown Los Angeles and further inland. In addition to its clear economic importance,  
 9 we selected this area because it was recently studied using microsimulation [16, 17], so we have  
 10 a basis for comparing our results

11 The paper is organized as follows. In Section 2, we present the MCDKW model, explain  
 12 how it was coupled with EMFAC, and introduce TransModeler. Section 3 explains how we  
 13 generated our data, and Section 4 discusses our results. Finally, Section 5 summarizes our  
 14 conclusions and suggests directions for future work.

15

## 16 2. MODELING FRAMEWORK

### 17 2.1 A multi-commodity discrete kinematic wave (MCDKW) model

18 Kinematic wave theory has already received a lot of attention (e.g., see Vaughan *et al.* [18];  
 19 Jayakrishnan [19]; Daganzo [20, 21]; Leonard [22]; or Buisson *et al.* [23, 24]) because it can  
 20 efficiently provide aggregate-level traffic conditions such as average travel speed, density, and  
 21 flow rates using procedures and its computational requirements do not depend directly on the  
 22 number of vehicles involved. It is therefore a promising model to study large-scale traffic  
 23 networks. In this section, we summarize the multi-commodity discrete kinematic wave  
 24 (MCDKW) model, which was developed by Jin [1] and Jin and Zhang [2]. In particular, we will  
 25 discuss its efficiency, which is a key motivation for this study.

26 The MCDKW model is obtained through the first-order Godunov method [25, 26].  
 27 Consider a network of total length  $L_{length}$ , with  $K$  links (indexed by  $k=1, 2, \dots, K$ ), such that link  $k$   
 28 is partitioned into  $N_k \geq 1$  cells. Our network has  $P'$  Origin-Destination pairs and  $P$  different paths  
 29 ( $P' < P$ ), so we have  $P$  ( $p=1, \dots, P$ ) different commodities. We call commodities pairs of vehicle  
 30 types and paths in a network; for simplicity, we consider only one vehicle type in this paper. The  
 31 path of each commodity is predefined. Let us denote total traffic density, travel speed, and flow  
 32 rate by  $\rho$ ,  $v$ , and  $q$  respectively and their value for commodity  $p$  by  $\rho_p$ ,  $v_p$ , and  $q_p$ . We assume  
 33 that traffic on all links is additive so  $\rho = \sum_{p=1}^P \rho_p$ ,  $v = v_p$ , and  $q = \sum_{p=1}^P q_p$ . We denote the local

34 proportion of commodity  $p$  as  $\xi_p = \frac{\rho_p}{\rho}$ . To describe the MCDKW model, let us introduce the  
 35 following notation:

36  $v_{f,k}$  = free flow speed on link  $k$ ;

37  $\Delta x_k$  = length of a cell on link  $k$ ;

38  $\Delta t$  = duration of a time step;

- 1  $\rho_{i,k}^j$  = average traffic density  $\rho$  in cell  $i$  at time step  $j$ ;
- 2  $f_{i-\frac{1}{2},k}^j$  = flux through upstream boundary of cell  $i$  from time step  $j$  to time step  $j+1$ ;
- 3  $f_{i+\frac{1}{2},k}^j$  = downstream flux of cell  $i$  from time step  $j$  to time step  $j+1$ ;
- 4  $\rho_{p,i}^j$  = traffic density  $\rho$  in cell  $i$  at time step  $j$  for commodity  $p$ ;
- 5  $f_{p,i-\frac{1}{2},k}^j$  = upstream flux of cell  $i$  from time step  $j$  to time step  $j+1$  for commodity  $p$ ; and
- 6  $f_{p,i+\frac{1}{2},k}^j$  = downstream flux of cell  $i$  from time step  $j$  to  $j+1$  for commodity  $p$ .

7 In the MCDKW model, the total density in cell  $i$  time step  $j+1$  is updated with the  
8 following equation:

9 
$$\rho_{i,k}^{j+1} = \frac{\Delta t}{\Delta x_k} \left( f_{i-\frac{1}{2},k}^j - f_{i+\frac{1}{2},k}^j \right) + \rho_{i,k}^j, \quad (1)$$

10 which also applies to traffic density for each commodity  $p \in \{1, \dots, P\}$ :

11 
$$\rho_{p,i,k}^{j+1} = \frac{\Delta t}{\Delta x_k} \left( f_{p,i-\frac{1}{2},k}^j - f_{p,i+\frac{1}{2},k}^j \right) + \rho_{p,i,k}^j. \quad (2)$$

12 Equation (2) is used to update the proportion of commodity  $p$  on link  $k$  during time step  $j$  in cell  $i$ :

13 
$$\xi_{p,i,k}^{j+1} = \frac{\rho_{p,i,k}^{j+1}}{\rho_{i,k}^{j+1}} \quad (3)$$

14 In a nutshell, the MCDKW model updates the flow and density information in each cell  
15 using the procedure below:

- 16 1) Given traffic conditions, such as road inhomogeneity, density  $\rho_{i,k}^j$ , and the proportion  
17  $\xi_{p,i,k}^j$  of each commodity in the previous step, compute supply and demand in cell  $i$ ;
- 18 2) Compute the flow rates  $f_{i-\frac{1}{2},k}^j, f_{i+\frac{1}{2},k}^j$  in cell  $i$  based on the supply-demand method for  
19 relevant boundary conditions (e.g., link boundaries, merging, diverging, or general  
20 junctions);
- 21 3) Find the density  $\rho_{p,i,k}^{j+1}$  and commodity proportions  $\xi_{p,i,k}^{j+1}$  for the next step.

22 From the procedure above, we see that the simulation time for updating commodity  $p$ 's  
23 density for cell  $i$  at a time step is nearly constant. We simply denote this time by  $T$ .

24 A necessary condition to ensure the numerical convergence of the MCDKW model is  
25 given by the Courant-Friedrichs-Lewy (CFL) condition [27], which forbids a vehicle from  
26 crossing a cell during a time step. If  $\sigma_k$  denotes the CFL condition for link  $k$ , we have:

$$1 \quad \sigma_k = \frac{v_{f,k} \Delta t}{\Delta x_k} < 1. \quad (4)$$

2 If we denote the number of cells on link  $k$  by  $N_k$ , then

$$3 \quad \Delta x_k = \frac{L_k}{N_k}. \quad (5)$$

4 We require that  $N_k \geq 1$  so combining Equations (4) and (5) leads to

$$5 \quad \Delta t < \frac{L_k}{v_{f,k}}, \quad (6)$$

6 which means that the simulation time step  $\Delta t$  should be smaller than the free flow traverse time  
7 on all links. In our simulations, we therefore set

$$8 \quad \Delta t \leq 0.95 \delta, \quad (7)$$

9 where  $\delta = \min_{k=1}^K \frac{L_k}{v_{f,k}}$  is the minimum link traverse time.

10 After choosing the simulation time step  $\Delta t$ , we find the number of cells on link  $k$  from

$$11 \quad N_k = \left\lfloor \frac{L_k}{v_{f,k} \Delta t} \right\rfloor \leq \frac{L_k}{v_{f,k} \Delta t}, \quad (8)$$

12 where the floor function  $\lfloor x \rfloor$  gives the largest integer smaller than  $x$ . From Equation (8),  $N_k$  is the  
13 number of time steps in the free flow traverse time of link  $k$ , so links with larger free flow  
14 traverse times should be divided into more cells. From (6) and (7),  $\frac{L_k}{v_{f,k} \Delta t} \geq \frac{1}{0.95}$  so Equation (8)

15 implies that  $N_k \geq 1$ , and the CFL condition is satisfied since  $\sigma_k = \frac{v_{f,k}}{L_k} \Delta t N_k \leq 0.95$ .

16 If the duration of traffic simulation is  $T_{sim}$ , the number of time steps is  $\frac{T_{sim}}{\Delta t}$ . Let  $T_{total}$   
17 denote the total time it takes to simulate a time interval  $T_{sim}$ . Then:

$$18 \quad T_{total} = \frac{T_{sim}}{\Delta t} \sum_{k=1}^K N_k P_k T = \frac{T_{sim}}{\Delta t} \sum_{k=1}^K \left\lfloor \frac{L_k}{v_{f,k} \Delta t} \right\rfloor P_k T \approx \frac{1}{\Delta t^2} T_{sim} T \sum_{k=1}^K \frac{L_k}{v_{f,k}} P_k \quad (9)$$

19 From Equation (9), we see that the total simulation time  $T_{total}$  is roughly inversely  
20 proportional to the square of the time step size  $\Delta t$ , proportional to the simulation time duration  
21  $T_{sim}$ , and proportional to  $\sum_{k=1}^K \frac{L_k}{v_{f,k}} P_k$ , the total network traverse time of all commodities.

22 Usually the last two terms are predefined, but we can increase the time step  $\Delta t$  to reduce total  
23 simulation time. Theoretically, if we double  $\Delta t$ , the total simulation time can be reduced by 75%.  
24 Most importantly, the computational efficiency of the MCDKW model is not related to the  
25 number of vehicles.


26 Furthermore, when we combine Equations (7) and (9), we obtain the following lower  
27 bound on total computational time:

$$28 \quad T_{total} \geq \frac{1}{0.95^2 \delta^2} T_{sim} T \sum_{k=1}^K \frac{L_k}{v_{f,k}} P_k.$$

29 Therefore, in order to reduce the total computational time, we can increase the minimum  
30 link traverse time, which will increase the length of links whose traverse times are smaller than



1 the desired  $\delta$ . But by increasing the length of shorter links, we may change the traffic dynamics  
 2 of the whole network. We illustrate the trade-off between precision and efficiency in Section 4.  
 3

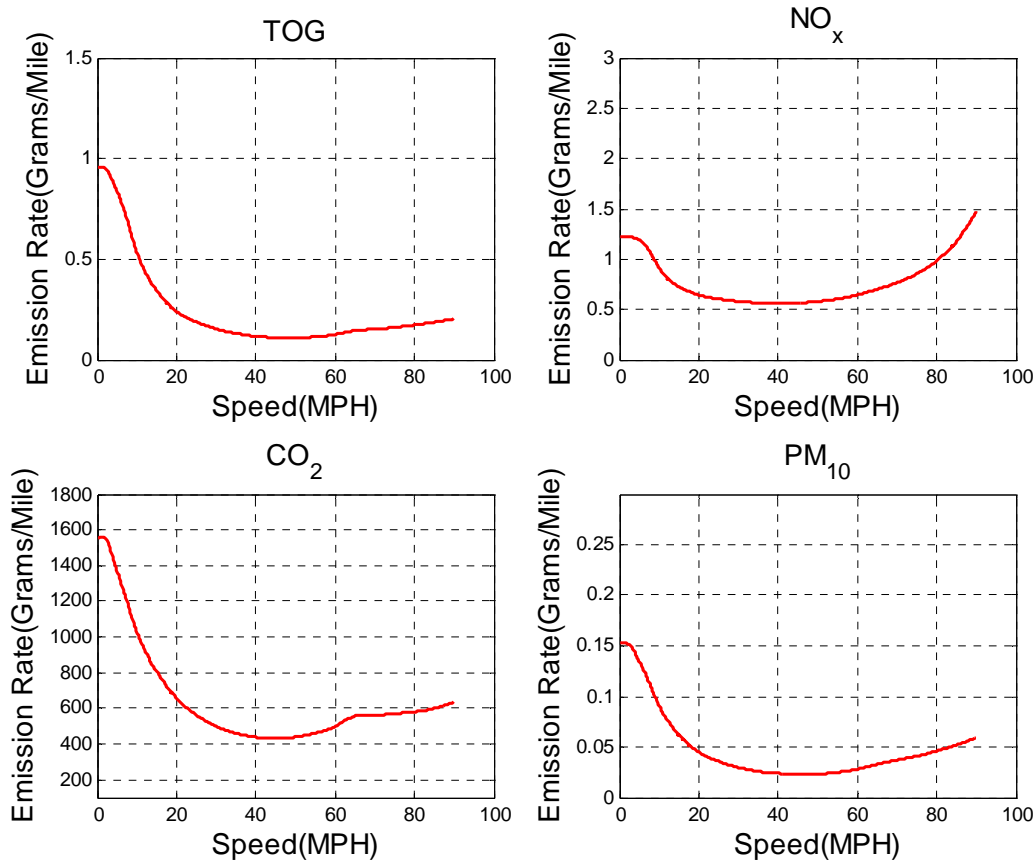

4  
 5 **Figure 1. Emission rates for different pollutants**  
 6

## 7 **2.2 Traffic emission model - EMFAC**


8 Vehicle emissions models are often classified in two categories: macroscopic (or macro-scale)  
 9 and microscopic (or micro-scale) emission models. To take full advantage of the trajectory of  
 10 individual vehicles generated by microscopic traffic simulation models, it would make sense to  
 11 rely on microscopic emission models such as CMEM [28], developed at the University of  
 12 California, Riverside, or VT-Micro [29], developed at Virginia Tech. However, neither of these  
 13 models can currently estimate particulate matter (PM) emissions. The recent release of MOVES  
 14 [30] offers a good alternative to these two models but it is not approved for regulatory work in  
 15 California. The model currently approved for regulatory work in California is EMFAC, which  
 16 was developed by the California Air Resources Board (CARB). EMFAC is an on-road mobile  
 17 source emissions model that estimates both emission rates and emission inventories for various  
 18 geographic areas in California. Because it has regulatory approval and also because we are more  
 19 interested in comparing emissions resulting from a microscopic model with emissions resulting  
 20 from the MCDKW model, we applied EMFAC to second-by-second vehicle trajectory data to

1 estimate emissions, even though it is not a microscopic model. Note that this imperfect approach  
 2 was also used by Lee *et al.* [17]. In future work, we are planning on adapting MOVES to  
 3 California's specific situation to get better estimates of air pollutants.

4 In our study, we obtained aggregate emission factors for the fleet of vehicles operating in  
 5 the South Coast Air Basin for the 2005 calendar year. We selected a temperature of 70 F, with a  
 6 relative humidity of 70% and obtained emission rates every 5 mph for the following pollutants:  
 7 Total Organic Gases (TOG), carbon dioxide (CO<sub>2</sub>), nitrous oxides (NO<sub>x</sub>), and particulate matter  
 8 with a diameter equal to or smaller than 10 μm (PM<sub>10</sub>). To get continuous emission rates, we  
 9 relied on cubic spline interpolation, as shown on Figure 1.

### 11 2.3 Microsimulation Model: TransModeler

12 To compare the performance of our mesoscopic model, we chose to rely on TransModeler to  
 13 perform microsimulations. A couple of reasons justify our choice. First, it allowed us to rely to  
 14 some extent on previous work in this study area (see Lee et al. [17]). The second reason is the  
 15 power and the flexibility of TransModeler, which is one of the leading new microscopic  
 16 simulators. Indeed, TransModeler can easily work with Geographic Information System data  
 17 (GIS), which is very useful for building our network and defining commodity paths. In addition,  
 18 it provides us with an easy way to manipulate vehicle trajectory data for all vehicles in our  
 19 network, which can be used to calculate the emission of various air pollutants.

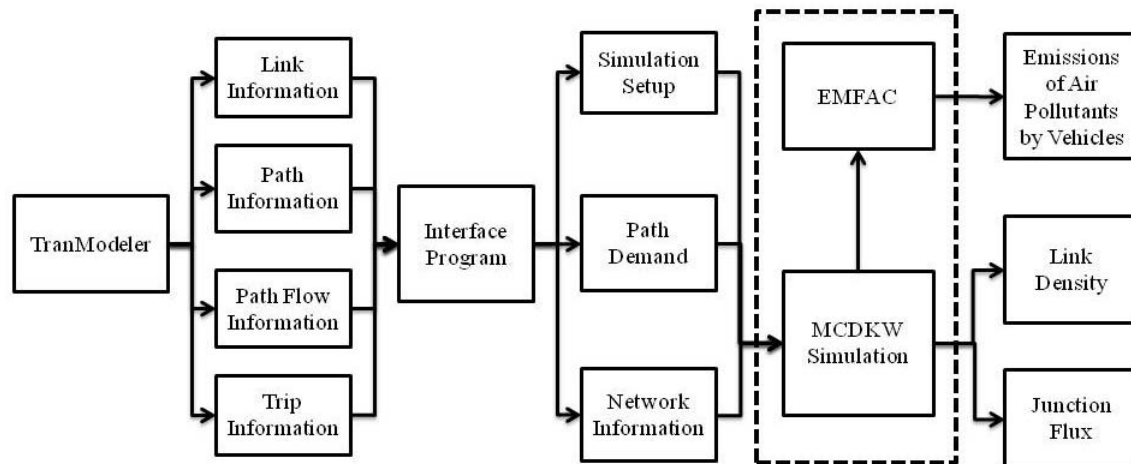

21  
 22 **Figure 2. Framework of Mesoscopic Traffic Simulation and Emission Analysis**

## 24 2.4 Integrated Mesoscopic Traffic Simulation and Emission Analysis

### 25 2.4.1 Network representation

26 Since the MCDKW model does not have a friendly user interface that would be useful for easily  
 27 creating input files for network geometry and path demand data, we relied on TransModeler's  
 28 interface. This simply required that we create an interface program to translate network and  
 29 demand information from TransModeler's format to the MCDKW format. Figure 2 represents

1 the different steps needed to analyze network emissions in our framework.

2

### 3 **2.4.2 Calculating Emissions using EMFAC**

4 To calculate the emissions of various air pollutants with the MCDKW model, we need the speed  
5 and the number of vehicles for each cell within each link after aggregating them every selected  
6 time step. Suppose we have  $D$  ( $d=1,2,\dots,D$ ) different types of pollutants and let  $e_d(v)$  designate

7 the emission rate of pollutant  $d$  at vehicle speed  $v$ . If  $N_k^j$  and  $V_k^j$  are respectively the number of

8 vehicles and their average speed on link  $k$  during the one second interval  $j$ , then  $E_{k,d}^j$ , which is


9 the corresponding amount of pollutant  $d$  emitted, is computed from:

$$10 \quad E_{k,d}^j = e_d(V_{avg,k}^j) * N_k^j * V_k^j * \Delta t \quad (10)$$

11 We can then sum  $E_{k,d}^j$  over the whole network (i.e., over  $k$ ) or over time (i.e., over  $j$ ) to obtain

12 aggregate amounts of pollutant  $d$  emitted during a simulation. Figure 3 summarizes this process.

13

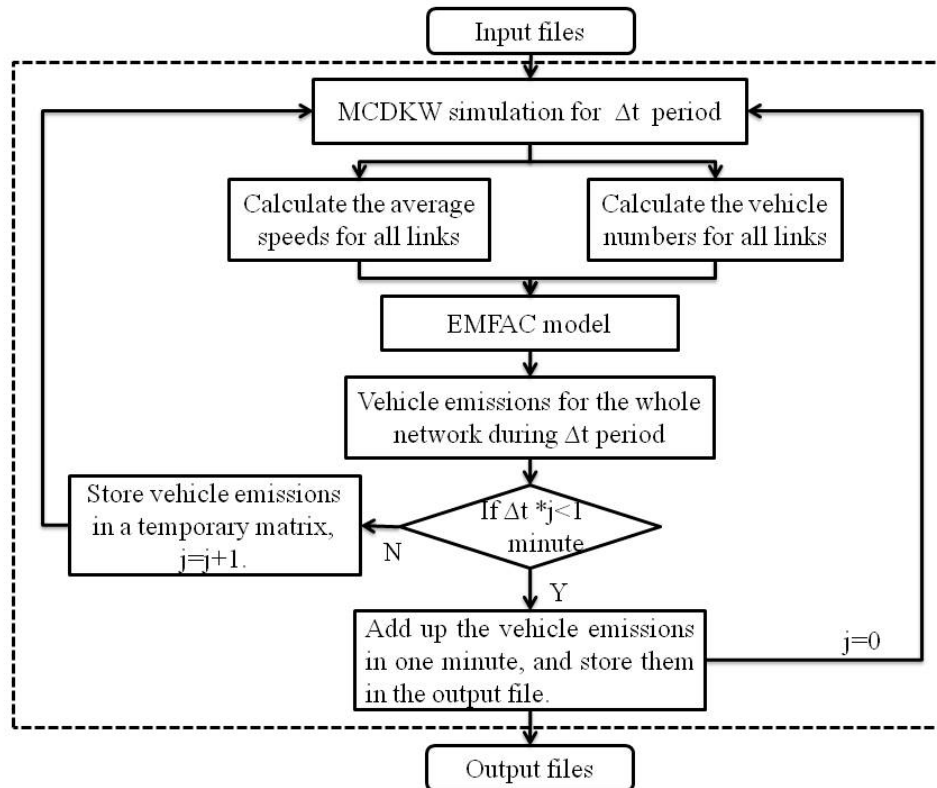

14

15 **Figure 3. Framework of Integrated MCDKW Model and EMFAC Model**

16


17 To calculate the emissions of various air pollutants with TransModeler, we simply  
18 processed the second-by-second trajectory of each vehicle using EMFAC emission factors and

1 aggregated over all vehicles that took part in the simulation

2

3 **3. DATA**

4 To represent our network (see Figure 4), we first extracted coordinates for our basic freeway  
5 layout from a GIS layer provided by Caltrans and obtained basic freeway characteristics (such as  
6 the number of lanes and speed limits) from the Performance Measurement System (PeMS). For  
7 additional details, we relied on Google Earth and TerraServer-USA supported by USGS.  
8

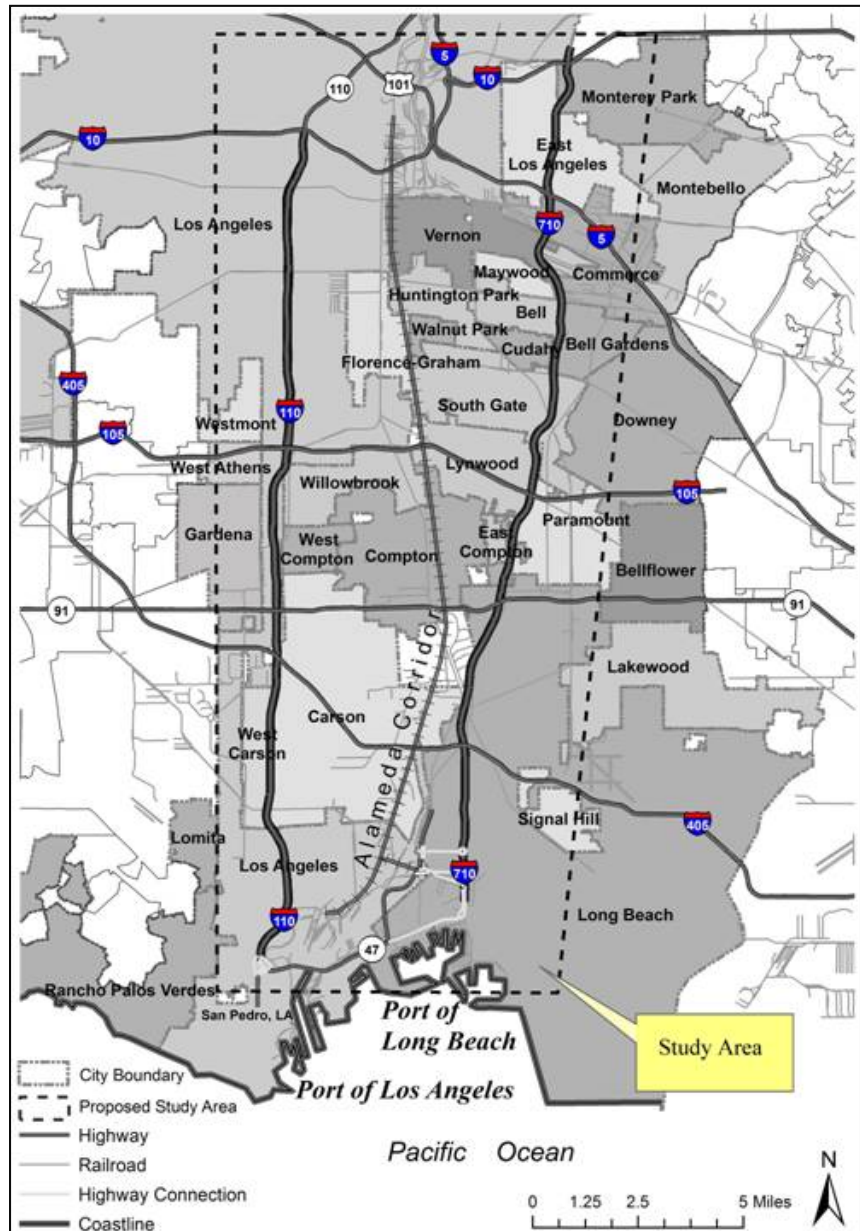

9

10 **Figure 4. Map of our study area.**

11

12 For traffic simulation, traffic OD (Origins and Destinations) demand inputs were

1 obtained from the 2000 Southern California Association of Governments (SCAG) traffic study,  
 2 which is the most comprehensive available for Southern California. To obtain OD demand  
 3 specifically for our network, sub-area analyses were performed in TransCAD: the study-area  
 4 network was extracted from the 2000 SCAG data and OD demand was re-assigned.

5 The OD and path demands were then adjusted to match traffic flow data every hour as  
 6 measured from PeMS loop detectors. When traffic flow data from PeMS were missing, we used  
 7 AADT data provided by Caltrans. For O-D estimation, a path-based algorithm was utilized, and  
 8 the commonly-accepted GEH statistic was selected for assessing goodness of fit:

$$9 \quad \text{GEH} = \sqrt{\frac{(M-S)^2}{0.5(M+S)}} \quad (11)$$

10 where M measures traffic flow and S is simulated traffic flow; both are in vehicles per hour.

11 To obtain a good representation of network traffic conditions, we iterated until the GEH  
 12 statistic was below 5 (10) for at least 50% (85%) of our loop detectors.

13 Obtaining reliable simulations every business day of 2005 would be very impractical, so  
 14 we focused on obtaining calibrated simulation results for two hours on Wednesday, March 9<sup>th</sup>,  
 15 2005 (the day chosen by Lee *et al.* [17]): 7:00 to 8:00 AM, which represents a busy hour during  
 16 morning peak with significant congestion on our network, and 2:00 to 3:00 AM when there is  
 17 little traffic on our network.

18 Each hour was simulated 30 times in TransModeler to obtain reasonable estimates of  
 19 mean pollutant emissions. Emission estimates were then calculated using EMFAC 2007 for each  
 20 of these 30 trials.

## 21 22 **4. RESULTS**

23 A comparison verified that TransModeler and the MCDKW model produced very similar results  
 24 and showed the efficiency gains from using the MCDKW model.

### 25 26 **4.1 Simulation Accuracy**

27 To maximize the consistence between TransModeler and the MCDKW model, we used the  
 28 output traffic data from TransModeler as an input to the MCDKW model. A comparison of traffic  
 29 statistics highlights the similarity of the results for these two models. In TransModeler, 165,778  
 30 vehicles per hour entered the road network for the morning peak versus 156,231 for the  
 31 MCDKW model (a 5.76 percent difference). Average vehicle speed was also quite similar: 35.18  
 32 MPH in TransModeler versus 39.64 MPH for the MCDKW model. A comparison of other traffic  
 33 features (such as average link speed and traffic density at various points of our network) also  
 34 suggests that, although it relies on a more aggregate approach, the MCDKW model produces  
 35 similar traffic dynamics as TransModeler.

36 Table 1 summarizes our estimates of emissions for four air pollutant (TOG, NO<sub>x</sub>, CO<sub>2</sub>,  
 37 and PM<sub>10</sub>) over our network using EMFAC. Interestingly, we note that the MCDKW model tends  
 38 to slightly overestimate air pollutant emissions in congested conditions (AM peak) but it tends to  
 39 underestimate emissions in free flow traffic (nighttime). Overall, however, we find that emission  
 40 estimates from these two models are quite close: differences in emission for all four pollutants

1 are within 10 percent under congested conditions and they do not exceed 15 percent in free flow  
 2 traffic (when overall emissions are much smaller).

		Total Emission (kg)			
		TOG	NO <sub>x</sub>	CO <sub>2</sub>	PM <sub>10</sub>
AM Peak (7:00 AM to 8:00 AM)	TransModeler	141.8	586.8	466,503	30.1
	MCDKW	146.4	620.5	509,535	31.6
	Difference (%)	3.21%	5.74%	9.22%	4.95%
Night time (2:00 AM to 3:00 AM)	TransModeler	20.1	105.5	74,442	4.8
	MCDKW	18.7	90.7	71,832	4.2
	Difference (%)	-7.00%	-14.00%	-3.52%	-12.18%


4 **Table1. Comparison of emission results**

## 5 **4.2 Simulation Efficiency**

6 A key advantage of the MCDKW model is its computational efficiency. In order to obtain mean  
 7 results from TransModeler, we ran 30 simulations for morning peak traffic, which required  
 8 approximately 9 hours on an i7-cpu computer. However, for the MCDKW model, the  
 9 computation time on the same computer (for traffic simulation only) is reduced to less than 1.5  
 10 hour with a simulation time step size of  $\Delta t=0.451$  seconds.

11 As emphasized in Section 2, the simulation speed of the MCDKW model can be  
 12 drastically reduced by increasing the simulation time step size. However, the lower bound of the  
 13 computation time is strongly determined by the network minimum link traverse time  $\delta$ . In the  
 14 TransModeler network, approximately 1 percent of the links had a traverse time under 0.6 s. This  
 15 severely constrained the performance of the MCDKW model, while the computational time in  
 16 TransModeler remained the same (it is not related to link length). We therefore adjusted the  
 17 shortest links to allow larger simulation time steps. Figure 5 illustrates the relationship between  
 18 computation time and minimum link traverse time. After running the MCDKW model on the  
 19 same network with varying minimum link traverse times, we regressed the logarithm of total  
 20 simulation time on network minimum link length. We found a strong relationship between  
 21 computation time (normalized to its original value) and minimum link traverse. The fit was  
 22 excellent ( $R^2=0.9961$ ); the untransformed relationship is given by:

$$23 \quad T_{total} = 0.3856 * \delta^{-1.23} \quad (11)$$

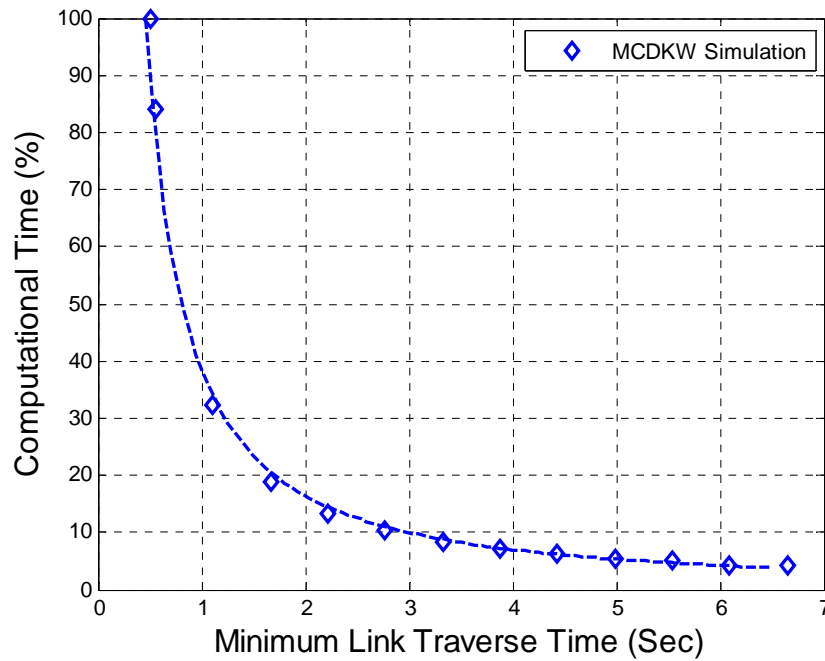


**Figure 5. Relationship between computational time and minimum link traverse time**

Increasing the minimum link length, which means increasing the minimum link traverse time correspondingly, allows us to decrease simulation time dramatically. However, increasing minimum link length also comes with a cost: it may affect some important network features, change traffic patterns, and bias the resulting estimates of air pollutant emissions. To explore this issue, we estimated total network emissions from our network from 7:00 AM to 8 AM for different values of minimum link length. Table 2 shows that even for a tenfold increase in minimum network link length, estimates of air pollutant emissions compared to microsimulation remain within 10%, with the exception of CO<sub>2</sub> (13.34%). This is understandable since generally such short links are on ramps, so an artificial increase of their links would not significantly change the network topology or the resulting traffic dynamics.

Minimum Link Length (miles)	Total network link length change (%)	Total origin flow rate change (%)	Total Emission Change (%)			
			TOG	NO <sub>x</sub>	CO <sub>2</sub>	PM <sub>10</sub>
0.007535 (Original)	0%	5.76%	3.51%	6.15%	9.66%	5.31%
0.01	0.0009%	5.76%	3.72%	6.34%	9.87%	5.52%
0.02	0.0092%	5.84%	4.72%	7.26%	10.84%	6.49%
0.04	0.1713%	5.94%	6.73%	9.11%	12.81%	8.45%
0.08	2.6641%	5.89%	7.04%	9.70%	13.34%	8.83%

**Table 2. Impacts of the change in minimum link length on emission estimates**

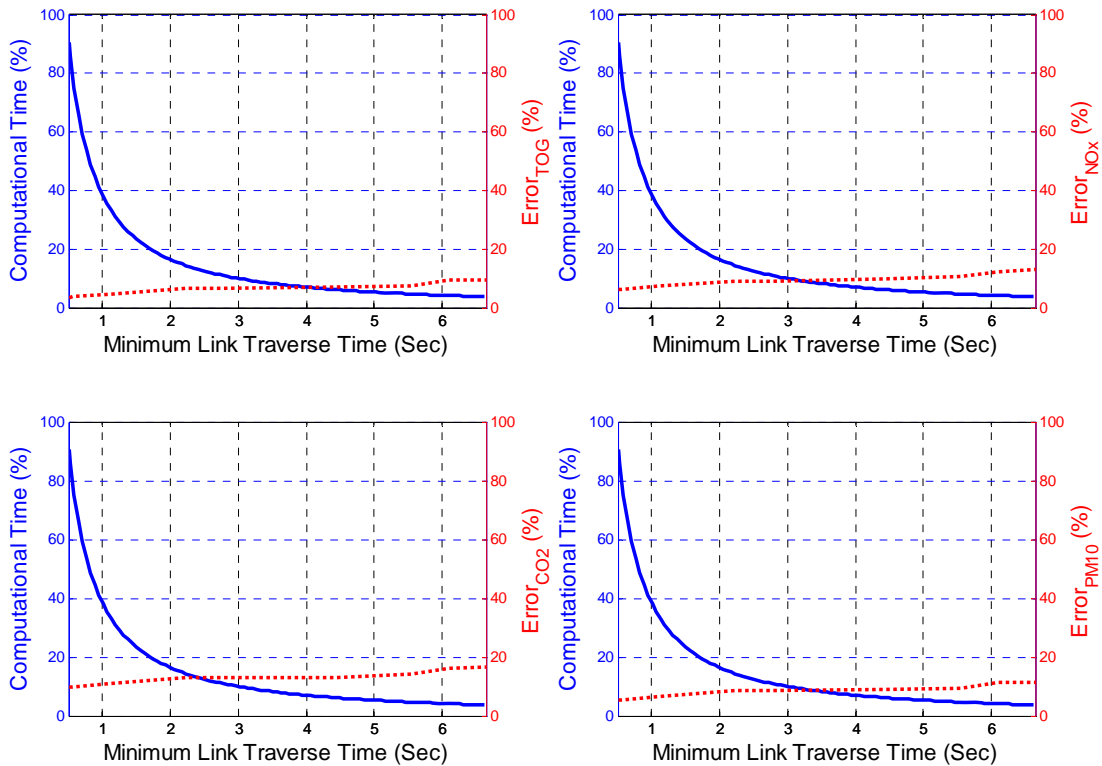

**Figure 6. Trade-offs between efficiency and accuracy for different pollutants**

Figure 6 further characterizes the trade-offs between computational time and minimum link traverse time. It shows sharp gains in computational time when the minimum link traverse time increases to 2 second with only a moderate loss in accuracy. Increasing the minimum link length from 2 to 4 seconds yields smaller efficiency gains while the loss of accuracy continues at the same rate. Further increases in minimum link length result in smaller efficiency gains but also in smaller increases in differences with microsimulation. These results clearly depend on the characteristics of the network considered but they illustrate the trade-offs between efficiency and accuracy of the MCDKW model on a real-world network.

### 4.3 Flexibility analysis for large-scale networks

In order to explore the capability of our framework for different networks scales, we split the I-710 from the ports network to form two networks of different size: a smaller one (I-710) with 57 origins, 54 destinations, 320 links, 318 junctions, 624 paths and 36,620 trips; and a larger network (the ports network) with 188 origins, 177 destinations, 1,572 links, 1,435 junctions, 6700 paths and 156,231 trips. Result shows that the computation time for I-710 is ~20 seconds versus 242 seconds for the ports network with a minimum link length of 0.04 mile. Thus, a large increase in network size still led to a fairly small computation time with an adequate minimum link length.



1           Moreover, to illustrate that our model is not sensitive to the number of vehicles, we  
2 increased the demand levels (i.e., vehicle flows) in our network (with a minimum link length of  
3 0.04 mile) from approximately 15,000 vehicles/hour to 156,231 vehicles/hour. We found that the  
4 computation time is almost unchanged (roughly 242 seconds). This illustrates that the number of  
5 vehicles is irrelevant to the running time of commodity-based models and it confirms that the  
6 MCDKW model is more efficient than microsimulation for estimating emissions in congested  
7 large scale networks.

## 8 9 **5. CONCLUSIONS AND FUTURE WORK**

10 In this paper, we combined EMFAC with the multi-commodity discrete kinematic wave  
11 (MCDKW) model, which is a dynamic mesoscopic traffic model, to create a tool that efficiently  
12 generates information about traffic dynamics and the emissions of various air pollutants (CO<sub>2</sub>,  
13 PM<sub>10</sub>, NO<sub>x</sub>, and TOG). Simulation results show that our integrated model yields emissions  
14 comparable to those obtained via microsimulation, i.e., using TransModeler combined with  
15 EMFAC. Differences in emissions are all within 15 percent, but they can be as low as 3.2 percent  
16 for TOG for morning peak simulations. Most importantly, our integrated model cuts total  
17 computational time by a factor of at least 6 compared to TransModeler combined with EMFAC.  
18 Our results also illustrate trade-offs between total simulation time and accuracy.

19           Although our approach is very promising, it still takes a lot of time to collect and format  
20 network geometry and demand data. We should note, however, that describing the network does  
21 not require the same level of details with the MCDKW model (although for the comparisons  
22 reported herein we used nearly identical networks). In addition to a faster running time,  
23 computational gains are magnified because replications are needed in TransModeler to obtain  
24 reliable estimates of mean pollution emissions, but also because emission estimation is currently  
25 not integrated in TransModeler so post processing can take a long time.

26           In the future, we will combine the MCDKW model with MOVES model to obtain better  
27 emission estimates. We will also incorporate different types of vehicles to better capture traffic  
28 dynamics but also to enhance its ability to perform regional policy analysis. In addition, we will  
29 verify the performance of our mesoscopic model on larger networks.

## 30 31 **ACKNOWLEDGEMENTS**

32 Support for this research from the University of California Transportation Center is gratefully  
33 acknowledged. We thank Ankoor Bhagat, Tae Jung Oh, and Ben Fuller for their very valuable  
34 research assistance. Finally, we thank Gunwoo Lee and Iris You for kindly answering our  
35 questions and for sharing their knowledge of TransModeler with us.

36

**REFERENCES**

1. Jin, W.L. "Kinematic wave models of network vehicular traffic", Ph.D. Dissertation, University of California, Davis, 2003.
2. Jin, W.L., and Zhang, H.M. Multicommodity Kinematic Wave Simulation Model for Network Traffic Flow. *Transportation Research Record: Journal of the Transportation Research Board*. Vol. 1883, No. -1, 2004, pp. 59-67.
3. Gualtieri, G. and Tartaglia, M. Predicting urban traffic air pollution: A GIS framework. *Transportation Research Part D: Transport and Environment*, Vol. **3**, No. 5, 1998, pp. 329—336.
4. Namdeo, A. and Mitchell, G. and Dixon, R. TEMMS: an integrated package for modeling and mapping urban traffic emissions and air quality. *Environmental Modeling and Software*, Vol. **17**, No. 2, 2002, pp. 177—188.
5. H. Bogo, D. R. Gómez, S. L. Reich, R. M. Negri and E. San Román. Traffic pollution in a downtown site of Buenos Aires City. *Atmospheric Environment*, Vol. **35**, No. 10, 2001, pp. 1717—1727.
6. Hao, J. and He, D. and Wu, Y. and Fu, L. and He, K. A study of the emission and concentration distribution of vehicular pollutants in the urban area of Beijing. *Atmospheric environment*, Vol. **34**, No.3, 2000, pp. 453—465.
7. Smith, M.C. and Sadek, A.W. and Huang, S. Large-scale Microscopic Simulation: Toward an Increased Resolution of Transportation Models. *Journal of Transportation Engineering*, Vol. **134**, pp. 273, 2008.
8. André, M., and Hammarström., U. Driving speeds in Europe for pollutant emissions estimation. *Transportation Research Part D: Transport and Environment*, Vol. **5**, No. 5, 2000, pp. 321—335.
9. Jha, M., Gopalan, G., Garms, A., Mahanti, B.P., Toledo, T., and Ben-Akiva, M.E. Development and calibration of a large-scale microscopic traffic simulation model. *Transportation Research Record: Journal of the Transportation Research Board*, Vol. 1876, No. -1, 2004, pp. 121-131.
10. Ben-Akiva, M., Bierlaire, M., Koutsopoulos, H. N., and Mishalani, R. (2002). Gendreau, M. and Marcotte, P., editors, Transportation and network analysis: current trends, chapter Real-time simulation of traffic demand-supply interactions within DynaMIT, pages 19–36. Kluwer Academic Publishers. Miscellanea in honor of Michael Florian.
11. Mahmassani, H. S. (2001). Dynamic network traffic assignment and simulation methodology for advanced system management applications. *Networks and Spatial Economics*, 1(3):267–292.
12. Schmidt, M., and Schäfer, R.-P. An integrated simulation system for traffic induced air pollution. *Environmental Modeling and Software*, Vol. 13, No. 3-4, 1998, pp. 295—303.
13. California Air Resources Board. Calculating emission inventories for vehicles in California (EMFAC2007 2.30 User's Guide). Available from: [http://www.arb.ca.gov/msei/onroad/latest\\_version.htm](http://www.arb.ca.gov/msei/onroad/latest_version.htm).

- 1 14. Haveman, J.D. and Jennings, E.M. and Shatz, H. California and the Global Economy: Recent  
2 Facts and Figures, 2006 Edition. *Public Policy Institute of California*, San Francisco,  
3 California, 2006.
- 4 15. [http://www.portoflosangeles.org/News/news\\_032207acta2.pdf](http://www.portoflosangeles.org/News/news_032207acta2.pdf)
- 5 16. Lee, G. and Ritchie, S.G. and Saphores, J.D. and Sangkapichai, M. and Jayakrishnan, R.  
6 Environmental Impacts of a Major Freight Corridor: A study of the I-710 in California.  
7 *Transportation Research Record: Journal of Transportation Research Board*, Vol. **2123**, pp.  
8 119—128.
- 9 17. Lee, G., You, S., Sangkapichai, M., Ritchie, S., Saphores, J.D., Ayala, R., Jayakrishnan, R.,  
10 and Torres, R. Assessing the Environmental and Health Impacts of Freight Movement in a  
11 Major Urban Transportation Corridor. Presented at the 89th TRB Annual Meeting (CD-  
12 ROM), Washington, DC, 2010.
- 13 18. Vaughan, R., V. F. Hurdle, and E. Hauer. A Traffic Flow Model with Time Dependent O-D  
14 Patterns. *Proc., Ninth International Symposium on Transportation and Traffic Theory*, VNU  
15 Science Press, 1984, pp. 155–178.
- 16 19. Jayakrishnan, R. In-Vehicle Information Systems for Network Traffic Control: A Simulation  
17 Framework to Study Alternative Guidance Strategies. Ph.D. thesis. University of Texas at  
18 Austin, 1991
- 19 20. Daganzo, C. F. The Cell Transmission Model: A Dynamic Representation of Highway  
20 Traffic Consistent with Hydrodynamic Theory. *Transportation Research*, Vol. 28B, No. 4,  
21 1994, pp. 269–287.
- 22 21. Daganzo, C. F. The Cell Transmission Model, II: Network Traffic. *Transportation Research*,  
23 Vol. **29B**, No. 2, 1995, pp. 79–93.
- 24 22. Leonard, J. D. II. A Tool for Evaluating Freeway Congestion. Technical Report. Georgia  
25 Institute of Technology, 1998. [traffic.ce.gatech.edu/gtwaves](http://traffic.ce.gatech.edu/gtwaves).
- 26 23. Buisson, C., J. P. Lebacque, and J. B. Lesort. STRADA, A Discretized Macroscopic Model  
27 of Vehicular Traffic Flow in Complex Networks Based on the Godunov Scheme. *Proc.,*  
28 *CESA'96 IMACS Multiconference*, Lille, France, July 9–12, 1996.
- 29 24. Buisson, C., J. P. Lebacque, J. B. Lesort, and H. Mongeot. The STRADA Model for  
30 Dynamic Assignment. *Proc., Third World Congress on Intelligent Transport Systems*,  
31 Orlando, Fla., 1996.
- 32 25. Godunov, S. K. A Difference Method for Numerical Calculations of Discontinuous Solutions  
33 of the Equations of Hydrodynamics (in Russian). *Matematicheskii Sbornik*, Vol. **47**, 1959, pp.  
34 271–306.
- 35 26. Lebacque, J. P. The Godunov Scheme and What It Means for First Order Traffic Flow  
36 Models. *Proc., International Symposium on Transportation and Traffic Theory*, Lyon,  
37 France, 1996.
- 38 27. Courant, R., K. Friedrichs, and H. Lewy. Ber Die Partiellen Differenzgleichungender  
39 Mathematischen Physik. *Mathematische Annalen*, Vol. **100**, 1928, pp. 32–74.

- 1 28. Scora, G., and Barth, M. Comprehensive Modal Emission Model (CMEM), Version 3.01  
2 User's Guide. University of California, Riverside, Center for Environmental Research and  
3 Technology, 2006.
- 4 29. Rakha, H. and Ahn, K. and Trani, A. Development of VT-Micro model for estimating hot  
5 stabilized light duty vehicle and truck emissions. *Transportation Research Part D: Transport  
6 and Environment*, Vol. **9**, No.1, 2004, pp. 49-74.
- 7 30. U.S. Environmental Protection Agency. Technical Guidance on the Use of MOVES2010  
8 for Emission Inventory Preparation in State Implementation Plans and Transportation  
9 Conformity. <http://www.epa.gov/otaq/models/moves/420b10023.pdf>.