

Lawrence Berkeley National Laboratory

Recent Work

Title

Beam Tube Vacuum in 100 TeV Hadron Colliders

Permalink

<https://escholarship.org/uc/item/0fb833xz>

Author

Turner, William C.

Publication Date

1997-04-01




ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY

Beam Tube Vacuum in 100 TeV Hadron Colliders

William C. Turner
**Accelerator and Fusion
Research Division**

April 1997
Presented at the
*34th Eloisatron
Workshop*,
Erice, Italy,
November 4–13, 1996,
and to be published in
the Proceedings

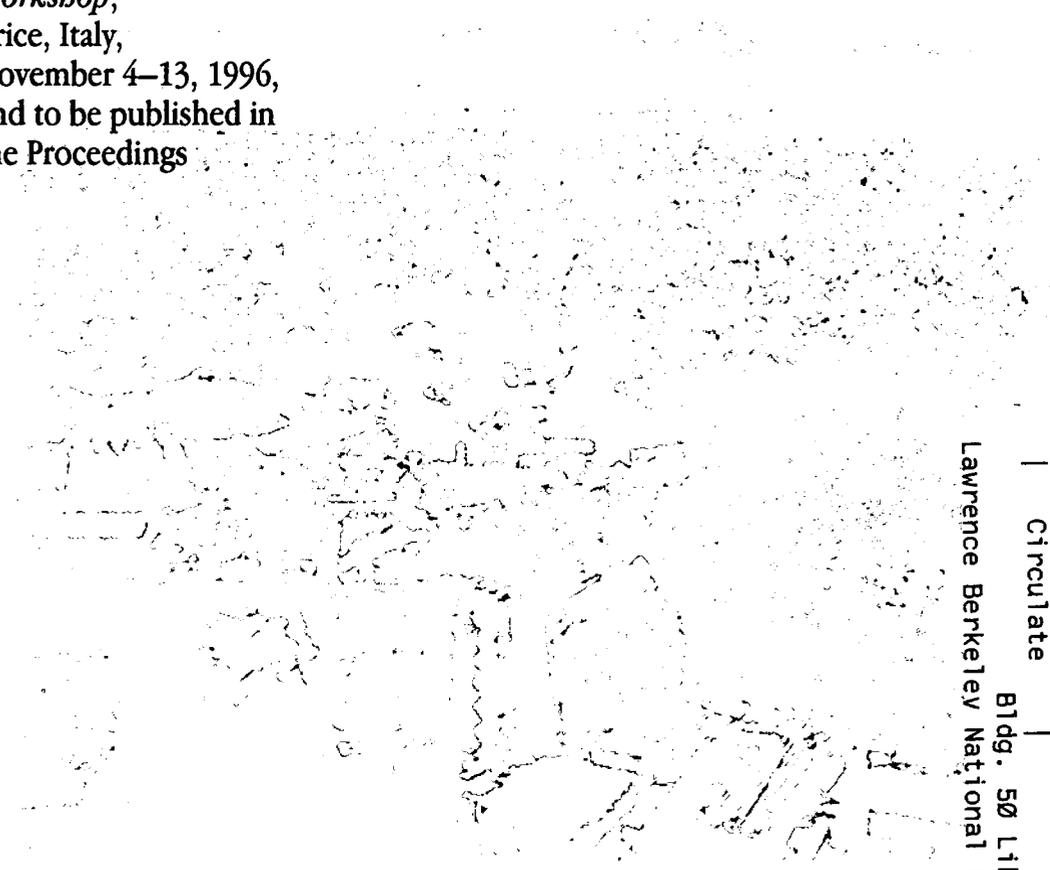

REFERENCE COPY |
Does Not |
Circulate |
Bldg. 50 Library - Ref.
Lawrence Berkeley National Laboratory

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof, or The Regents of the University of California.

Ernest Orlando Lawrence Berkeley National Laboratory
is an equal opportunity employer.

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

Beam Tube Vacuum in 100 TeV Hadron Colliders*

William C. Turner
Lawrence Berkeley National Laboratory
University of California,
Berkeley, California 94720

April 1997

Published in the Proceedings of the 34th Eloisatron Workshop,
Erice, Italy, November 4 - 13, 1996

* This work was supported by the Director, Office of Energy Research, Office of High Energy and Nuclear Physics, High Energy Physics Division, of the U. S. Department of Energy, under Contract No. DE-AC03-76SF00098.

Beam Tube Vacuum in 100 TeV Hadron Colliders*

WILLIAM C. TURNER

Lawrence Berkeley National Laboratory,

Berkeley, CA 94720 USA

ABSTRACT

Bounds on the beam tube gas pressure and the required pumping speed are estimated for ~ 2 T low field (LF) and ~ 12 T high field (HF) 100 TeV center-of-mass hadron colliders. In both cases photodesorption by synchrotron radiation is the dominant source of gas. Assuming beam-gas scattering limited luminosity lifetime five times the IP scattering lifetime, the required CO equivalent beam tube pressure is 0.25 nTorr for LF and 1.8 nTorr for HF, ambient room temperature equivalent. The CO equivalent pumping speeds required to achieve this pressure within a reasonable beam conditioning time (a few tenths of an operational year at design intensity) are estimated to be ~ 300 l/s-m for LF and ~ 40 l/s-m for HF. For the LF case with a superferric warm iron magnet, the beam tube is at ambient room temperature and a distributed NEG plus lumped ion or cryo pump system is considered. The size of antechamber needed, ID ~ 6 cm, requires that it be located outside the ~ 2 cm C-coil magnet gap. Lumped pumps for pumping CH_4 need to be spaced at ~ 20 m intervals on the antechamber. For the HF case the likely beam tube temperature is 15-20 K and cryopumping with a beam screen system is considered. The necessary pumping speed can be achieved with slots covering ~ 2 per cent of the beam screen surface.

1. Introduction

In this paper we will discuss beam tube vacuum for two versions of a 100 TeV center of mass hadron collider - low field (LF) and high field (HF). The two versions correspond to the extremes of recent discussions of ~ 100 TeV hadron colliders. The emphasis will be on establishing firstly how low the beam tube vacuum pressure must be and secondly how much pumping speed is needed to reach the desired pressure in a reasonable conditioning time. Some assessment will then be made of the practicality of achieving the needed pumping speeds in the machines that are under discussion.

The parameters necessary for evaluating beam tube vacuum are summarized in Tables 1 and 2 for 50+50 TeV LF and HF hadron colliders with luminosity $\sim 10^{34}$ $\text{cm}^{-2}\text{sec}^{-1}$. Further discussion of these machines and the rationale for the choice of parameters may be found in Ref. 1. From the viewpoint of beam tube vacuum the first things to notice in Table 1 are: (1) the small apertures, to minimize the cost of the magnets but still achieve acceptable field quality, (2) the difference in the likely beam tube temperatures and (3) the particle lifetimes due to pp collisions at the interaction points (IP). For the LF version the double C superconducting transmission line superferric magnet has an ambient room temperature iron yoke.² The beam tube is also at room temperature $T_w \sim 294$ K and is racetrack or elliptical in cross section with semi-axes 0.75 cm and 1.5 cm. The C magnet geometry is an important feature because it allows the possibility of locating the pump antechamber outside the magnet. Discussions of magnet options for the HF version are

considerably more varied than for LF however they all share the characteristic of a beam tube surrounded by superconductor and cryostat either in $\cos(\theta)$ or block coil construction. The beam tube inside radius has been specified as $r_w = 1.65$ cm. The temperature of superconductor discussed runs from 1.8 K NbTi to 4.5 K Nb₃Sn to high temperature superconductor $\sim 4 - 30$ K. In order to avoid absorbing synchrotron radiation at the lowest temperatures but also to allow for cryopumping H₂ the most likely beam tube temperature is $T_w \sim 15-20$ K for all cases. The proton lifetimes determined by pp collisions at the IP are 130 hrs for LF and 32 hrs for the HF collider. The lifetime due to beam-gas collisions should be much longer and this sets the bounds on beam tube pressure that are discussed in Sec. 2.

Table 1: Initial parameters for low and high field hadron colliders.

Parameter	LF	HF
E_b , TeV		50
B , T	1.8	12.6
C , km	646	104
M	129,240	20,794
N_p	0.94×10^{10}	0.5×10^{10}
I_b , mA	90	48
β , m		255
ϵ_n , π mm-mrad		1
r_w , cm	0.75×1.5	1.65
T_w , °K	~ 294	$\sim 15-20$
τ_p , hrs	130	32

Synchrotron radiation parameters are given in Table 2. Since photodesorbed gas is the dominant gas source in the beam tube, photon intensity is the most important parameter for beam tube vacuum, 0.34×10^{16} ph/m-sec for LF and 1.26×10^{16} ph/m-sec for HF. The magnitude of pumping speed required to remove photodesorbed gas is estimated in Sec. 3. The photon intensity for the LF and HF hadron colliders is much less than present day high current electron-positron storage rings so one might think pumping the hadron machines is relatively trivial. For example the 9 GeV, 1 A PEP-II high energy electron ring (HER) at SLAC has $\dot{\Gamma} = 7.1 \times 10^{18}$ ph/m-sec.³ In fact, because photodesorption coefficients decrease with integrated photon intensity Γ , the electron machines clean up much faster than the hadron machines. It turns out that the pumping speeds, or more accurately the pumping apertures, needed for the LF and HF colliders are the same order of magnitude as for the PEP-II HER. For both LF and HF hadron colliders the photon critical energy E_c is low enough that the synchrotron radiation is absorbed in the beam tube and no special shielding is needed outside the beam tube. The synchrotron radiation power in the LF collider, 0.082 W/m, is absorbed at room temperature and is low enough

that no cooling loop is needed. The synchrotron radiation power for the HF collider is absorbed at $T_w \sim 15\text{-}20\text{ K}$ and will need a cryogenic refrigeration loop to remove it. The radiation damping time for the LF machine is 114 hrs and longer than the luminosity lifetime $\tau_L = 65\text{ hrs}$ whereas radiation damping is only 2.6 hrs in the HF machine and much less than the luminosity lifetime $\tau_L \sim 16\text{ hrs}$. Consequently, for LF we must consider beam-gas scattering by two processes: (1) single proton-nuclear collisions leading to a lost proton and (2) multiple small angle proton-nuclear Coulomb collisions leading to increase in emittance. Only particle loss by a single proton-nuclear collision need be considered for HF.

Table 2: Synchrotron radiation related parameters.

Parameter	LF	HF
Γ , ph/m-sec	0.34×10^{16}	1.26×10^{16}
E_c , keV	0.48	3.4
$P/2\pi\rho$, W/m	0.082	2.12
P , kW	47.5	176.6
ΔE , MeV/turn	0.53	3.7
τ_D , hrs	114	2.6

For purposes of numerical estimates in this report we will always use the initial values of machine parameters given in Tables 1 and 2. The case of emittance in the HF machine is somewhat involved because the value given in Table 1 is an initial value and not an equilibrium one. The emittance will damp to an equilibrium value in a few radiation damping times. This complication is ignored here. Where needed we will simply take emittances from Table 1 and define numerical values of the luminosity lifetime due to pp collisions at the IP as $\tau_L = \tau_p/2$; so $\tau_L = 65\text{ hrs}$ for LF and $\tau_L = 16\text{ hrs}$ for HF. The lifetime characterizing loss of luminosity due to beam-gas collisions should be long compared these estimates of τ_L .

2. Bounds on Beam Tube Gas Pressure

Assuming the LF and HF colliders are not operating at the beam-beam tune shift limit, the luminosity lifetime τ_L is related to the particle loss time τ_p and emittance growth time τ_ϵ (< 0 if there is net damping) by $1/\tau_L = 2/\tau_p + 1/\tau_\epsilon$. For purposes of characterizing beam tube vacuum we define the luminosity loss rate $1/\tau_g$ due to beam gas scattering in an analogous manner with $1/\tau_p$ being the proton loss rate due to collisions with gas nuclei and $1/\tau_\epsilon$ the emittance growth rate due to multiple Coulomb scattering. Proton collision cross sections σ_{pj} per molecule and radiation lengths X_0j are listed for the gases of

interest in Table 3. A convenient formula for calculating τ_g in terms of the circumferentially averaged pressures of the various gases is;

$$\frac{1}{\tau_g(\text{hrs})} = 7.2 \times 10^{-6} \sum_j \sigma_{pj}(\text{mb}) \bar{P}_j(\text{nTorr}) + \frac{1.33 \times 10^{-6} \gamma \beta(m)}{cp(\text{TeV})^2 \epsilon_n(\pi \text{ mm} - \text{mrad})} \sum_j \frac{A_j(\text{gm}) \bar{P}_j(\text{nTorr})}{X_{0j}(\text{gm/cm}^2)} \quad (1)$$

where A_j is the gram molecular weight, γ is the relativistic factor $E_b/m_p c^2$ and $\beta(m)$ is the lattice beta function in Table 1, not to be confused with v/c . The first term in Eq. 1 is twice the proton loss rate and the second is the emittance growth rate. For the HF case we drop the second term because the radiation damping time is much shorter than the luminosity lifetime, $\tau_D \ll \tau_L$, whereas for the LF case we keep both terms because $\tau_D > \tau_L$.

Table 3: Numerical bounds on beam tube gas pressure.

gas	σ_{pj} (mb)	X_{0j} (gm/cm ²)	$\bar{P}_j(\text{nTorr})^a$ ($\tau_g = 5\tau_L$)		$P_j(\text{nTorr})^a$ (0.1 W/m)	
			LF	HF	LF	HF
H ₂	120	63	2.8	14.	56.1	105
				6		
CH ₄	650	47	0.43	2.7	10.3	19.
						4
H ₂	690	36	0.36	2.5	9.7	18.
O						3
CO	1000	38	0.25	1.8	6.7	12.
						6
CO	1600	36	0.15	1.1	4.2	7.9
						2

^a Ambient room temperature equivalent pressure.

The degradation of luminosity lifetime by beam-gas collisions will be negligible if $\tau_g \gg \tau_L$; for purposes here we define negligible by $\tau_g > 5\tau_L$ with $\tau_L = 65$ hrs for LF and 16 hrs for HF. The beam tube gas pressures calculated from Eq. 1 for $\tau_g = 5\tau_L$ are given in Table 3 for each gas species taken separately. From Table 3 we see that the CO scattering equivalent beam tube pressure for $\tau_g > 5\tau_L$ must be less than 0.25 nTorr for LF and less than 1.8 nTorr for HF. The pressures given in Table 3 are ambient room temperature (294 K) equivalent, so density is obtained by multiplying by 3.3×10^{16} molecules/Torr regardless of beam tube temperature. The room temperature equivalent pressure bound for the LF collider is 7.2 times less than for the HF collider; a factor of

four is due to the longer luminosity lifetime for the LF collider and the remaining factor of approximately two is due to inclusion of beam-gas scattering emittance growth in the LF case.

In addition to degradation of luminosity lifetime, a second consideration of beam-gas scattering is the scattered beam power. The energy carried by the scattering products is dominated by deeply penetrating particles that pass through the beam tube. Some of this power gets absorbed in the magnet cryostat, and must be allowed for in the overall heat budget, and some is absorbed in the superconducting cable, and if high enough can cause a magnet quench. For the HF case with the magnet iron surrounding the beam tube most of the scattered beam power can be expected to be absorbed in the superconductor and the magnet iron and, if the iron is cold, in the magnet cryostat. The LF case is different. Owing to the C-coil structure significant beam scattered power will leave the magnet structure in the horizontal plane. Furthermore the magnet iron is warm so heat deposited in it does not have to be removed by the cryogenic system. However the superconducting transmission line lies in the horizontal plane between the two beam tubes and will absorb some fraction of scattered beam power. Usually consideration of luminosity lifetime sets a lower bound on the circumferentially averaged beam tube pressure than consideration of the scattered beam power deposited in the magnet cryostat. However the cryogenic heat load of scattered beam power can be a concern for early accelerator operation, before the beam tube has cleaned up sufficiently to meet the luminosity lifetime goal. Also beam power scattered by local pressure bumps, such as would occur after replacement of a component in an otherwise conditioned ring, could exceed the quench limit without having a noticeable effect on the circumferentially averaged beam tube pressure. Detailed radiation deposition calculations have not yet been done for the LF and HF magnets so in Table 3, to give an idea of the magnitude of the effect, we simply give the beam tube pressure of each gas species that would result in a scattered beam power 0.1 W/m. This corresponds to a typical global bound for the cryogenic refrigeration plant and conventional $\cos\theta$ magnets using today's technology; a local quench bound would typically be ten times higher, again for conventional $\cos\theta$ magnets. A convenient formula for calculating the beam gas scattered beam power is;

$$P'(W/m) = 3.3 \times 10^{-9} I_b(mA) E_b(TeV) \times \sum_j \sigma_{pj}(mb) P_j(nTorr) \quad (2)$$

3. Pumping Options

In principle for the LF option distributed non-evaporable getters (NEG), distributed ion pumps (DIP), distributed titanium sublimation (TSP) and distributed cryopumps could all be used in an antechamber configuration connected to the beam chamber with slots. The getter options would need to be supplemented with lumped ion or cryo pumps to pump methane. These would be connected to the antechamber at an axial interval discussed in Sec. 4 below. The distributed cryopump option has some attraction if it could be incorporated with the cold gas return for the superconducting transmission line; no lumped pumps and no activation are needed. However it adds the complexity of heat shields and cryogenic penetrations into the antechamber. A NEG concept similar to LEP⁴ has been discussed by Ishimaru⁵ with some adaptations to the present situation. It has the merit of relative simplicity, a single NEG strip running inside the antechamber, but needs

significant lumped pumping for methane and cooling during activation and reconditioning. Distributed ion pumps in the form of stacked perforated plates in an antechamber as in the PEP-II HER⁶ are a possibility but the size of system needed would place it outside the double C iron yoke so the ion pumps would need their own magnets and could not run parasitically off the bend magnetic field. Although cost comparisons of these systems haven't been done it seems likely that the NEG approach with lumped ion pumps would be the most cost effective.

For the HF option with the beam tube entirely surrounded by cryostat the only option is cryopumping with a beam screen configuration to shield the cryosorbed gases from the synchrotron radiation, similar to LHC.⁷ If the magnet cryostat temperature is below ~ 10 K the beam screen would probably be thermally isolated from the magnet bore tube to allow absorbing the synchrotron radiation at a higher temperature. A beam screen cooling loop would be needed to remove the radiation heat load at ~ 10-20 K. If the magnet cryostat is above ~ 3 K the saturated isotherm pressure of H₂ is too high for accelerator operation and it is necessary to add cryosorber material to increase the effective surface area and prolong the time to reach saturation. For a cryostat ~ 10 K the beam screen and magnet bore tube could be run at the same temperature, and could be a co-extruded structure as discussed by Chou.⁸ For temperatures above ~ 15 to 20 K, the precise temperature isn't known, cryopumping will cease to work effectively for H₂ beyond a fraction of a monolayer and the beam screen will again need a cooling loop, this time to keep it cooler than the magnet. We thus have the somewhat paradoxical situation that if high temperature T > 20 K superconducting magnets become a reality for accelerators, they will need a cold T < 20 K insertion for pumping the beam tube.

4. Pumping Speed, Conditioning Time and Beam Lifetime

From Table 3 we have an estimate of the beam tube pressure that is needed for beam-gas scattering to have a small impact on luminosity lifetime. In this section we will estimate the pumping speed necessary to achieve this pressure within a reasonably short conditioning time. By "reasonably short" we mean a few tenths of a year of operation at design intensity with an operational year being ~ 10⁷ sec. So we look for the pumping speed needed to reach $\tau_g > 5 \tau_L$ by $I^*t \sim 75$ A-hrs for LF and $I^*t \sim 40$ A-hrs for HF. The precise magnitude of a "reasonably short" conditioning time is a matter of some debate. Most would probably agree with our definition within a factor of two and this range of precision is in the spirit of the estimates we are making.

For each gas species "j",

$$S_j P_j = Q_{j,psd} + Q_{j,tsd} \quad (3)$$

where S_j is the pumping speed, $Q_{j,psd}$ is the photodesorbed gas source and $Q_{j,tsd}$ is the thermally desorbed gas. The photodesorbed gas is related to the photon intensity and photodesorption coefficient η_j by

$$Q_{j,psd}(n\text{Torr} - l/s - m) = 3.03 \times 10^{-11} \eta_j \dot{\Gamma} (\text{ph}/m - s) \quad (4)$$

where the numerical factor converts molecules to Torr-l. The photodesorption coefficients are obtained from experiment⁹ and are functions of the integrated photon dose Γ . The η_j can be adequately fit with a simple power law dependence;

$$\eta_j = \eta_{0j} (\Gamma/\Gamma_0)^{\nu_j} \quad (5)$$

where the integrated photon flux Γ is related to the A-hrs of beam current by;

$$\Gamma(\text{ph}/m) = 2.35 \times 10^{17} \frac{\gamma}{\rho(\text{km})} I * t (A - \text{hrs}). \quad (6)$$

If we define the pumping speed of species "j" relative to CO by $S_j = f_j * S_{CO}$ and substitute Eq. 3 into Eq. 1 we obtain the relationship between S_{CO} and τ_g given by Eq. 7. The magnitude of the right hand side of Eq. 7 is a function of the integrated photon flux Γ or, from Eq. 6, $I*t$. As with Eq. 1 both summations are retained for the LF case and the second summation is dropped for HF.

$$\begin{aligned} \frac{S_{CO}(l/m-s)}{\tau_g(\text{hrs})} &= 7.2 \times 10^{-6} \sum_j \frac{\sigma_{pj}(mb) Q_j(n\text{Torr} - l/s - m)}{f_j} \\ &+ \frac{1.33 \times 10^{-6} \gamma \beta(m)}{cp(\text{TeV})^2 \epsilon_n(\pi \text{mm} - \text{mrad})} \sum_j \frac{A_j(\text{gm}) Q_j(n\text{Torr} - l/s - m)}{f_j X_{0j}(\text{gm}/\text{cm}^2)} \end{aligned} \quad (7)$$

The CO equivalent pumping speed required to achieve a gas scattering loss time τ_g is plotted versus $I*t$ in Figs. 1 and 2 for the LF and HF cases respectively. The parameters needed for this evaluation are summarized in Table 4. The photodesorption coefficients defined in Eq. 5 have been fit to the data in Ref. 9, obtained for Al at critical energy 3 keV. This same data should be adequate for LF and HF cases since the dependence of photodesorption coefficients on critical energy is rather weak between 0.5 and 3 keV.¹⁰ Thermal desorption data have been reported for Al vacuum baked in situ at 150 C for 24 hrs.¹¹ The baking removes water vapor and after that the thermal outgassing rates are very small compared to photodesorption for the time scale of interest here. For the LF case the pumping speeds relative to CO, excluding CH₄, are taken from LEP data utilizing a NEG beam tube vacuum system.¹² For CH₄ the relative pumping speed is varied until it has a noticeable effect and then the supplementary pumping speed by lumped ion pumps is estimated. For the HF case cryopumping is assumed and the f_j coefficients have been taken to be equal to the ratios of the molecular speeds.

From Fig. 1 we conclude that a pumping speed $S = 270$ l/s-m is required to reach a beam gas scattering lifetime $\tau_g = 5\tau_L$ at $I*t = 75$ A-hrs for the LF collider. From Fig. 2 the analogous result for the HF collider is $S = 42$ l/s-m at $I*t = 40$ A-hrs. A factor ~ 6.4 less pumping speed is required for HF compared to LF but the effective pumping aperture

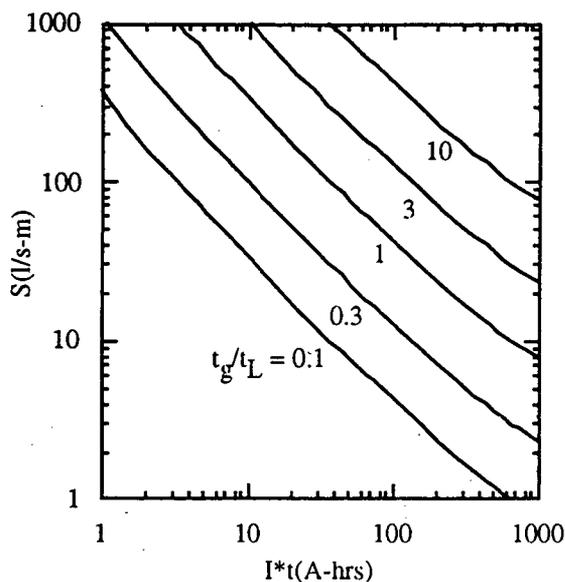


Fig. 1: The pumping speed required to achieve a specified gas scattering luminosity lifetime versus $I*t$ for the LF version. The gas scattering luminosity lifetime τ_g is normalized to the IP luminosity lifetime $\tau_L = 65$ hrs. Beam tube conditioning is expressed in A-hrs, 1 A-hr = 1.36×10^{20} photons/m.

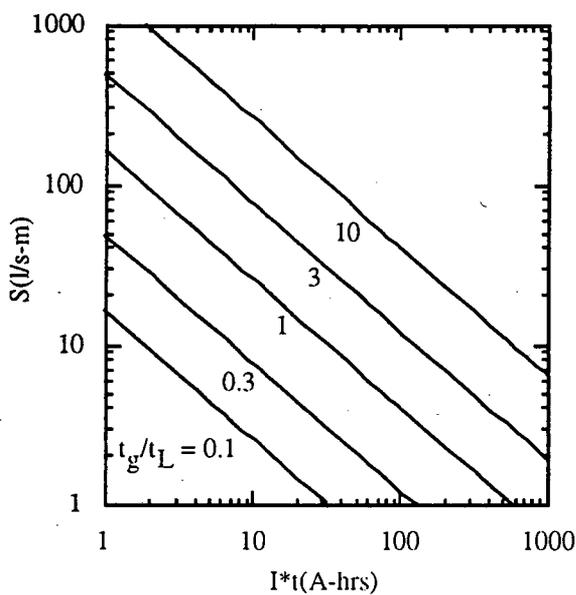


Fig. 2: The calculation in Fig. 1 repeated for the HF version. 1 A-hr = 9.45×10^{20} photons/m.

Table IV: Numerical values of parameters used for evaluation of Figs. 1 and 2.

gas	η_{0j}^*	v_j	$Q_{j,tsd}$ (nTorr-l/s-m)	f_j	
				LF	HF
H ₂	.035	0.8	1.61	1.1	3.74
CH ₄	.0032	1.25	.016	.005	1.32
CO	.005	0.8	.032	1	1
CO ₂	.008	0.8	.032	1	0.8

* For $\Gamma_0 = 10^{20}$ ph/m.

required differs by a smaller factor of $6.4/4.4 = 1.5$ owing to the different molecular velocities at $T = 15$ K and 294 K.

To assess the feasibility of the pumping speed estimate for the LF case we note that the LEP NEG pumping system achieves a peak pumping speed following conditioning of 500 l/s-m with a 3 cm wide NEG ribbon in a 5 cm x 7 cm antechamber coupled to the beam tube with a 7 mm slot. We conclude that the pumping speed required for the LF case can be achieved provided the antechamber is located outside the 2 cm magnet gap. It does not seem reasonable to reduce the size of the antechamber so that it fits in the magnet gap and at the same time achieve the required pumping speed.

For the HF case we assume a transmission probability 0.7 for molecules passing through slots to the region where they are cryopumped. A pumping speed 42 l/s-m then requires a slot area $22.6 \text{ cm}^2/\text{m}$, or equivalently the slots perforate 2.2% of the wall area of a 1.65 cm radius tube. This is reasonable to achieve and in the range discussed for LHC pumping slots.⁷

We return now to a few comments regarding the LF case. If a NEG system is used, the pumping speed decreases as molecules accumulate on the surface until the NEG is regenerated and regains its maximum pumping speed. For this reason and because the photodesorption coefficients decrease with the ~ 0.8 power of the integrated photon flux, the actual pumping speed will tend to follow a line of constant τ_g/τ_L in Fig. 1 until the NEG is regenerated and then jump up to a new line. The calculations in Fig. 1 were done assuming lumped ion or cryo pumps for pumping CH₄, with a fixed pumping speed relative to CO, $f_{\text{CH}_4} = S_{\text{CH}_4}/S_{\text{CO}} = .005$. The CO pumping speed 270 l/s-m then implies a pumping speed 1.35 l/s-m for CH₄ supplied by lumped pumps attached to the antechamber. The effective pumping speed of the lumped pumps will be conductance limited by the beam tube and antechamber and given by;

$$S_{\text{eff}}(\text{l/s-m}) = 12 \frac{C_L(\text{l/s})}{L(\text{m})} \quad (8)$$

where L is the distance between lumped pumps and C_L is the axial conductance of the antechamber and beam tube. If the lumped pumps are located only at the $L \sim 250$ m half cell length, as has sometimes been mentioned, the cross section of the antechamber would need to be $\sim 30 \text{ cm} \times 30 \text{ cm}$ which seems impractical. If the lumped pumps are located every $L \sim 20$ m the cross section is reduced to $\sim 6 \text{ cm} \times 6 \text{ cm}$ which seems reasonable.

5. References

1. G. Dugan, P. Limon, M. Syphers, "Really Large Hadron Collider Working Group Summary", *Snowmass 96 Proc.*
2. G.W. Foster, E. Malamud, "Low-Cost Hadron Colliders at Fermilab", TM-1976(1996).
3. *PEP-II, An Asymmetric B Factory*, SLAC-418(1993).
4. LEP Vacuum Group, "LEP Vacuum System, Present Status", CERN-LEP-VA/89-48, *11th Intl. Vac. Congress*, Köln, Sep. 1989.
5. H. Ishimaru, "Conceptual Design Study for a Very Low-Cost Al Alloy Vacuum Chamber in a High Energy Low-Field Collider", *Snowmass 96 Proc.*
6. M. Calderon et al., *Proc. of the Euro. Part. Acc. Conf.*, London (1994).
7. B. Angerth et al., *Proc. 1995 Part. Acc. Conf.*, Dallas, pg. 1999 (1995).
8. W. Chou, *Proc. 1995 Part. Acc. Conf.*, Dallas, pg. 437 (1995).
9. A. Mathewson, O. Gröbner, P. Strubin, P. Marin, R. Souchet, *AIP Conf. Proc.*, **236**, 313 (1990).
10. J. Gómez-Gofi, O. Gröbner, A Mathewson, CERN Vac. Tech. Note 92-06 (1992).
11. A. Mathewson, C. Reymerier, S. Zhang, CERN Vac. Tech. Note 95-22 (1995).
12. J-P. Bojon, O. Gröbner, J-M. Laurent, P. Strubin, *Proc. of the Euro. Part. Acc. Conf.*, Berlin (1992).

**ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY
ONE CYCLOTRON ROAD | BERKELEY, CALIFORNIA 94720**