

Lawrence Berkeley National Laboratory

Recent Work

Title

COMPENSATED-SURFACE OXIDE-PASSIVATED SILICON JUNCTION RADIATION DETECTORS

Permalink

<https://escholarship.org/uc/item/94k2t820>

Authors

Hansen, William L.
Goulding, Frederick S.
Lothrop, Robert P.

Publication Date

1962-12-04

University of California

**Ernest O. Lawrence
Radiation Laboratory**

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 5545*

**COMPENSATED-SURFACE OXIDE-PASSIVATED
SILICON JUNCTION RADIATION DETECTORS**

Berkeley, California

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

ted to Applied Physics Letters

UCRL-10578

UNIVERSITY OF CALIFORNIA
Lawrence Radiation Laboratory
Berkeley, California
Contract No. W-7405-eng-48

COMPENSATED-SURFACE OXIDE-PASSIVATED
SILICON JUNCTION RADIATION DETECTORS

William L. Hansen, Frederick S. Goulding and Robert P. Lothrop

December 4, 1962

Compensated-Surface Oxide-Passivated
Silicon Junction Radiation Detectors^{*}

William L. Hansen, Frederick S. Goulding and Robert P. Lothrop

Lawrence Radiation Laboratory
University of California
Berkeley, California

December 4, 1962

It has been evident for some time that extended use of silicon junction radiation detectors depends upon development of a successful technique for junction edge protection. Epoxy resins¹ have been employed with some success in surface-barrier detectors, and silicone resins, waxes, and other protective materials have all been employed with varying degrees of success. The guarding structure was devised at this laboratory to reduce the effect of the exposed junction edge on leakage and noise characteristics of the diode.²

The success of oxide passivation in conventional transistors and diodes suggested that this technique might prove useful in edge-protecting diffused radiation-detector junctions. Anticipated use of the technique for this purpose has been mentioned briefly in several papers,^{3, 4} but early results were disappointing because of the effect of donor states at the Si-SiO₂ interface. In n-on-p detectors, the n type surface channel caused high leakage current, while in p-on-n detectors it caused low breakdown voltage.

* Work done under the auspices of the U. S. Atomic Energy Commission.

1. R. J. Fox and C. J. Borkowski, IRE Trans. Nucl. Sci. 9, 213 (1962).
2. F. S. Goulding and W. L. Hansen, Nucl. Instr. Methods 12, 249 (1961).
3. J. W. T. Dabbs and F. J. Walter, Eds., Semiconductor Nuclear Particle Detectors, National Academy of Sciences-National Research Council Pub. 871, 1961.
4. W. M. Gibson and T. C. Madden, Bull. Am. Phys. Soc. 7, No. 3, 553 (1962).

In the work reported here diffusion of an acceptor impurity into the Si surface prior to oxidation is used to compensate for the donors introduced by the oxide growth. Conditions have been established for adequate control of the degree of compensation, and it has been demonstrated that good detectors can be made by this process using high-resistivity silicon ($> 2000\Omega \text{ cm}$). Resolution of the α -particle spectrum is typically 17 keV for 1-cm-diam. detectors made by this process and initial indications are that these detectors are much less sensitive to ambient conditions than were earlier types of detector.

These detectors are manufactured from thin wafers of p type high-resistivity silicon. A boron diffusion for 3 hours at 1000°C using B_2I_3 vapor with dry N_2 carrier gas produces a p^+ back contact, the boron-diffused layer on the front being removed by etching. A gallium diffusion at 900°C for 1 hour is then employed to produce a shallow p^+ layer with very low hole concentration. The sheet resistance of this p^+ layer is about $3400\Omega/\text{square}$. The wafer is then oxidized in steam at 1000°C for 2 hours. The gallium is partially gettered by the oxide growth and, if the amount of oxidation is correct, the gallium acceptor centers remaining in the silicon just compensate the donor states which occur at the Si-SiO_2 interface. The structure shown in Fig. 1 is now etched in the front face (piccin is used as a mask) and phosphorus is diffused at 900°C for 30 min through the oxide mask. The phosphorus source is PBr_3 at room temperature, with dry N_2 mixed with a trace of O_2 as a carrier. The oxygen inhibits bromine etching of the silicon. The oxide is then etched off the back of the wafer to permit electrical connection to the boron-diffused layer, and connections are made as shown in Fig. 1. The detector is then operated as a guard-ring detector.

FIGURE LEGEND

Fig. 1. Oxide passivated guard-ring detector.

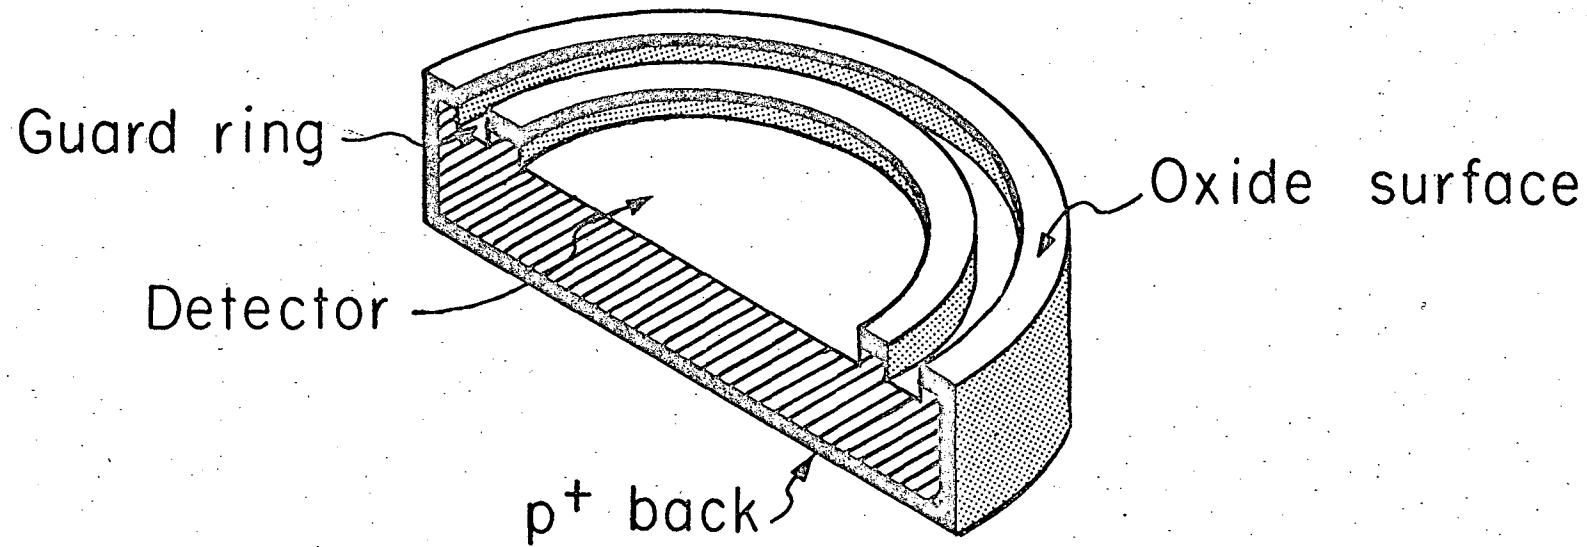


Fig. 1.

MU-28753

UCRL-10578

