

Lawrence Berkeley National Laboratory

LBL Publications

Title

A Comparison of Three Building Simulation Models for Residences: Twozone, DOE-1 and NBSLD/BLAST

Permalink

<https://escholarship.org/uc/item/2v37x354>

Authors

Gadgil, A

Goldstein, D

Kammerud, R

et al.

Publication Date

1979-06-01


U U 1 - 3 4 U U 1 3 5

UC-95d
LBL-9293
Abstract

To be presented at the 4th National
Passive Solar Conference, Kansas
City, Kansas, October 3-5, 1979.

For Reference
Not to be taken from this room

Energy and Environment Division

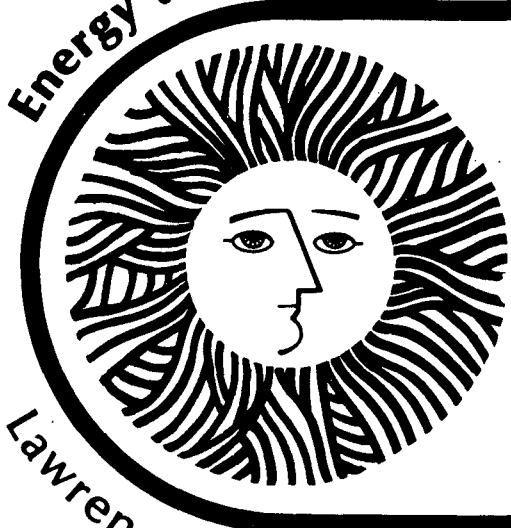

A Comparison of Three Building
Simulation Models for Residences:
TWOZONE, DOE-1 and
NBSLD/BLAST

*A. Gadgil, D. Goldstein, R. Kammerud
and J. Mass*

June 1979

Lawrence Berkeley Laboratory University of California/Berkeley
Prepared for the U.S. Department of Energy under Contract No. W-7405-ENG-48

LBL-9293

LEGAL NOTICE

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

A COMPARISON OF THREE BUILDING SIMULATION MODELS
FOR RESIDENCES: TWOZONE, DOE-1 AND NBSLD/BLAST*

A. Gadgil, D. Goldstein, R. Kammerud, J. Mass
Lawrence Berkeley Laboratory
Berkeley, California 94720

Several related public domain building simulation models have recently been available to building designers for energy analysis. While these programs have been checked against experiment in a few cases, their availability has been sufficiently recent that no systematic comparisons between the programs has been available. Such comparisons are useful in determining the differences between the programs within their common range of applicability.

Three public domain programs--TWOZONE, DOE-1, and NBSLD/BLAST--are compared both in terms of their calculation methodology and modeling assumptions, and in terms of their results. We find some differences in the programs' treatment of internal heat transfers, and discuss their significance to predictions of annual heating and cooling loads. Annual loads are found to be generally consistent between the programs over a wide range of climates and conductivities. However, the differences can be important for some applications, particularly for passive solar buildings. These differences are discussed in terms of aggregate annual loads and in terms of hour-by-hour loads from individual building elements. It is concluded that none of the three programs treat internal heat transfers satisfactorily at present, and thus their applicability to analyzing passive solar design options is limited.

*This work was partly supported by the Solar Heating and Cooling Research and Development Branch, Office of Conservation and Solar Applications, U.S. Department of Energy, under Contract No. W-7405-ENG-48.

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DIVISION
LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720