

# Lawrence Berkeley National Laboratory

## Lawrence Berkeley National Laboratory

**Title**

STUDIES OF FLOW PROBLEMS WITH THE SIMULATOR SHAFT78

**Permalink**

<https://escholarship.org/uc/item/44z309kc>

**Author**

Pruess, K.

**Publication Date**

1978-11-01

Presented at the Fourth Geothermal  
Reservoir Engineering Workshop,  
Stanford University,  
December 13-15, 1978

LBL-8515 c.2

STUDIES OF FLOW PROBLEMS WITH THE SIMULATOR SHAFT78


K. Pruess, R. C. Schroeder, and J. Zerzan

November 1978

Prepared for the U. S. Department of Energy  
under Contract W-7405-ENG-48

**TWO-WEEK LOAN COPY**

*This is a Library Circulating Copy  
which may be borrowed for two weeks.  
For a personal retention copy, call  
Tech. Info. Division, Ext. 6782*

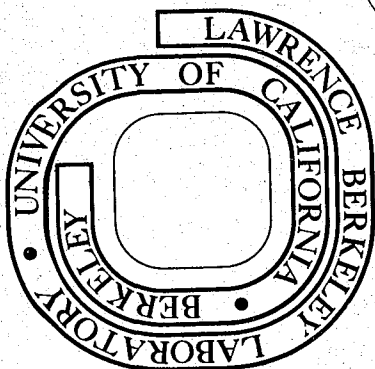

RECEIVED  
LAWRENCE  
BERKELEY LABORATORY

MAY 4 1979

LIBRARY AND  
DOCUMENTS SECTION

LBL-8515 c.2

LEGAL NOTICE

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, process, or methods disclosed, or represents that its use would not infringe upon privately owned rights.

## STUDIES OF FLOW PROBLEMS WITH THE SIMULATOR SHAFT78

K. Pruess, R.C. Schroeder, J. Zerzan

## INTRODUCTION

In recent years, a number of numerical simulators for geothermal reservoirs have been developed. The general purpose of these is to aid reservoir engineers in (i) determining characteristic parameters of reservoirs (most important among those being the reserves of fluid and heat), and (ii) simulating the performance of reservoirs upon production and injection.

The various simulators differ in the approximations made in the underlying physical model (e.g., dependence of rock and fluid properties upon thermodynamic variables), in the geometrical definition of the reservoir (one-, two-, or three-dimensional, regular or irregular shape), in the choice of thermodynamic variables, and in the mathematical techniques used for solving the coupled mass and energy transport equations.

Criteria for desirable performance of numerical simulators depend in part upon the particular problems to be investigated. Different problems will often differ in the required level of detail to be resolved, and in the optimum balance of speed and accuracy of computation. Much can be learned about two-phase flow in porous media from model studies for idealized systems. Such studies can be performed with less-than-three-dimensional models, and algorithms which are based on regular grid spacings will be perfectly acceptable. For modeling natural geothermal reservoirs, on the other hand, it is important that irregular three-dimensional geometries may be handled easily.

In comparison with other two-phase simulators which have been discussed in the literature, the main distinctive feature of SHAFT78 is that it uses an integrated finite difference method (IFD). We solve finite difference equations that are obtained by integrating the basic partial differential equations for mass and energy flow over discrete surface and volume elements. This method is as easily applicable to irregular geometries of actual reservoirs as it is to idealized, regular geometries; yet the relative simplicity of the finite difference method is retained in the theory and algorithms.

The purpose of this paper is to give a brief review of the basic concepts associated with SHAFT78 and the IFD approach, and to present comparisons of SHAFT78 calculations with some analytical solutions. The comparisons include both single-phase and two-phase water problems and demonstrate the accuracy and calculational stability of the algorithm.

The governing equations for mass and energy transport in porous media when both rock and fluid are in local thermodynamic equilibrium can be written

$$\frac{\partial \phi \rho}{\partial t} = - \vec{\nabla} \cdot \vec{F} + q \quad (1a) \text{ (Mass)}$$

$$\begin{aligned} \frac{\partial U_{vol}}{\partial t} = & - \vec{\nabla} \cdot [\vec{F}_l H_l + \vec{F}_v H_v - KVT] \\ & + \left\{ \left[ \frac{\vec{F}_v}{\rho_v} + \frac{\vec{F}_l}{\rho_l} \right] \nabla P + \text{dissipative} \right\} + Q \quad (1b) \text{ (Energy)} \end{aligned}$$

$$\vec{F} = -k \left[ \frac{k_l}{\mu_l} \rho_l (\nabla P - \rho_l \vec{g}) + \frac{k_v}{\mu_v} \rho_v (\nabla P - \rho_v \vec{g}) \right] \quad (2)$$

Under suitable assumptions, we get the integrated form of equations (1)

$$\frac{d}{dt} \int_V \phi \rho dV = \int_A \vec{F} \cdot \vec{n} da + \int_V q dV \quad (\vec{n} \text{ the inward normal}) \quad (3a)$$

$$\frac{d}{dt} \int_V U dV = \frac{\int_A \{ \vec{F}_\ell H_\ell + \vec{F}_v H_v - \vec{F} U_{ave} - KVT \} \cdot \vec{n} da + \int_V (Q-Uq) dV}{\{ \phi \rho + (1-\phi) c_{rock} \rho_{rock} [ (\frac{\partial T}{\partial U})_\rho + (\frac{\partial T}{\partial \rho}) U (\frac{\partial \rho}{\partial t}) ] \}_{ave}} \quad (3b)$$

The solution to equations (3) is computed on a polyhedral partitioning of the reservoir whose connected components share a common polygonal interface. Volume and interface averages are computed using standard finite difference techniques.<sup>1,2</sup> The fluid parameters are obtained by bilinear interpolation (triangular interpolation near the saturation line and in the liquid region)<sup>1</sup> using an inverted form of the 1967 ASME Steam Tables.

It is clear on examination that equations (3) are nonlinear and coupled. These are solved by reduction to an appropriate linear approximation at each time step. Accuracy controls are set to allow only small variations in all parameters over a given time step. The energy equation is solved first using density changes predicted by the behavior of the system in the previous time step. Thus, a good estimate for the expected change of fluid energy over the energy time step can be made, which is subsequently corrected during the density time steps. Special interpolation procedures and automatic time-step controls ensure high accuracy of the calculation even when phase transitions occur (elements crossing the saturation line).<sup>2</sup>

An iterative strategy is employed in solving the discretized version of equations (3) after the first-order explicit solution has been generated in each time step. The time-averaged flux terms  $\bar{F}$  (density) or  $\bar{F}_\ell H_\ell + \bar{F}_v H_v - \bar{F} U_{ave}$  (energy) are written as

$$\bar{F} = \bar{F}(t + \theta \Delta t) = \bar{F} + \theta \Delta t \frac{\partial \bar{F}}{\partial t} \quad (4)$$

and an iteration is performed over the whole mesh to minimize the residual term.<sup>1,8</sup>

#### SAMPLE PROBLEMS

In order to evaluate the SHAFT78 program, calculated results were compared to numerical calculations reported in the literature (e.g., Toronyi<sup>7</sup> and Garg<sup>5</sup>), and to analytic solutions. The remainder of this paper is devoted to a comparison of the computed solutions with the analytic results.

#### SINGLE-PHASE VAPOR

In 1957 R.E. Kidder presented to the ASME<sup>3</sup> the solution to the problem of isothermal flow of a gas (obeying Darcy's and Boyle's laws) in the semi-infinite homogenous porous solid.

Specifically, the problem solved was

$$\frac{\partial}{\partial x} \left[ p \frac{\partial p}{\partial x} \right] = \phi \frac{\mu}{k} \frac{\partial p}{\partial t} \quad (5)$$

with initial conditions

$$P(x,0) = P_o \quad 0 < x < \infty \quad (6)$$

and boundary conditions

$$P(0,t) = P_1 < P_o \quad 0 < t < \infty \quad (7)$$

SHAFT78 was run on a 30-element linear mesh with internode distances of .2m, and large nodes at the boundaries of the grid with the appropriate boundary conditions. Initial conditions were

$$\begin{aligned} P_o &= 5\text{MPa} \\ T_o &= 300\text{ }^\circ\text{C} \end{aligned}$$

with rock properties

$$k = 10^{-12} \text{ m}^2, K_{\text{rock}} = 0, c_{\text{rock}} = 10^7 \text{ J/kg }^\circ\text{C}, \rho_{\text{rock}} = 2200 \text{ kg/m}^3, \phi = .2$$

Three boundary conditions on the left of the grid

$$\begin{aligned} P_1 &= 4\text{MPa} \\ P_1 &= 2\text{MPa} \\ P_1 &= 1\text{MPa} \end{aligned}$$

were chosen and the results are compared with the analytic solution for each case in Figure 1.

The computed solution shows a slightly lower pressure drop than the analytic solution. This is probably due to inaccuracies introduced in the boundary approximations.

#### SINGLE-PHASE LIQUID

To evaluate the performance of SHAFT78 in the liquid region, the "This problem"<sup>4</sup> was run on a 15-element mesh with a large element at the outer boundary to simulate the reservoir conditions at infinity.

Reservoir conditions were

Thickness	= 100 m
Initial pressure	= 20.37 MPa
Initial temperature	= 180 $^\circ\text{C}$
Rock porosity	= .2
Permeability	= $10^{-13} \text{ m}^2$
Rate of fluid withdrawal	= 18 kg/s·m



5a


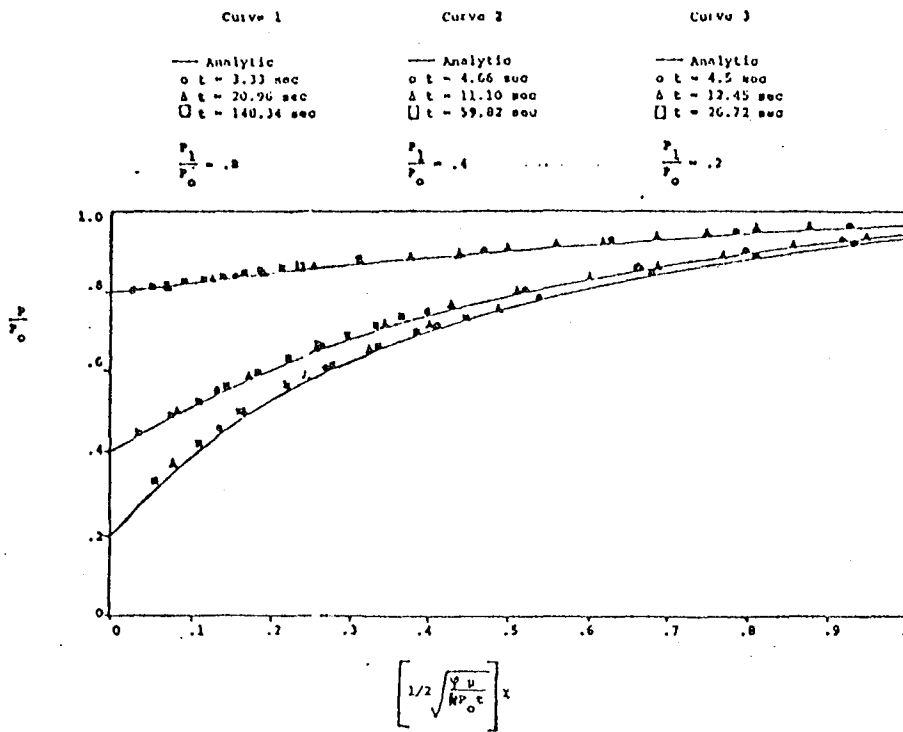


FIGURE 1

KIDDER PROBLEM ANALYTIC VS. COMPUTED SOLUTION.

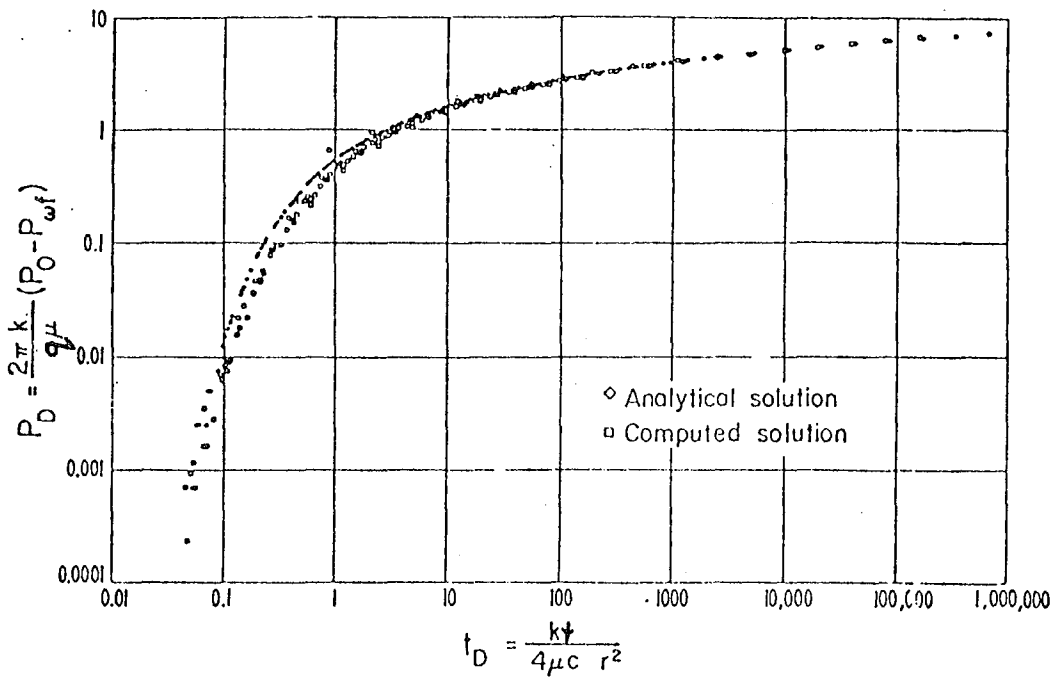

XBL 7811-12789

FIGURE 2

THIS PROBLEM ANALYTIC VS. COMPUTED SOLUTION

The results are compared in Figure 2 to the analytic solution of the line source problem ( $t_D$  vs  $P_D$  on a log-log scale)

$$\nabla^2 P = \frac{\phi \mu c}{k} \frac{\partial P}{\partial t} \quad (8)$$

$$P(r,0) = P_0 \quad \text{initial conditions} \quad (9)$$

$$\left. \begin{array}{l} \lim_{r \rightarrow \infty} P(r,t) = P_0 \\ \lim_{r \rightarrow \infty} \frac{2\pi r k}{\mu} \frac{\partial p}{\partial r} = -q \end{array} \right\} \text{boundary conditions} \quad \begin{array}{l} \text{(Constant flux} \\ \text{with Darcy} \\ \text{assumption)} \end{array} \quad (10)$$

with solution given by the exponential integral

$$P = P_0 + \frac{q\mu}{4\pi k} \text{Ei} \left\{ \frac{-r^2}{4t} \frac{\phi \mu c}{k} \right\} \quad (11)$$

Agreement is close near the sink (to the right of the plot) with deviations increasing to the left. The scatter of computed points around the analytic solution seems to reflect a deviation from the solution at late times and large radius when the boundary approximation becomes less accurate.

#### TWO-PHASE RESERVOIR

Garg derives an approximate diffusivity equation<sup>5</sup> for pressure in a two-phase reservoir initially at equilibrium pressure  $p_0$ , which is valid near the wellbore.

$$\frac{\partial P}{\partial t} - \frac{(k/\nu)_T}{\phi \rho C_T} [\nabla^2 P] = 0 \quad (12)$$

Here we have introduced the total kinematic mobility

$$\left(\frac{k}{\nu}\right)_T = k \left[ \frac{k_\ell}{\mu_\ell} \rho_\ell + \frac{k_v}{\mu_v} \rho_v \right]. \quad (13)$$

For a line source, we have the boundary conditions at the well

$$r \frac{\partial P}{\partial r} \Big|_{r=r_w} = - \frac{q}{2\pi(k/\nu)_T} \quad (\nu \equiv \frac{\mu}{\rho}) \quad (14)$$

and at infinity

$$\lim_{r \rightarrow \infty} P(r, t) = P_o \quad (15)$$

The solution (after Carslaw and Jaeger) to the above equation is

$$P(r, t) = P_o + \frac{q}{4\pi(k/\nu)_T} \text{Ei} \left\{ - \frac{r^2}{4t} \frac{\phi \rho C_T}{(k/\nu)_T} \right\} \quad (16)$$

For sufficiently large  $t$  (argument of the exponential integral less than  $10^{-2}$ ) we have for the wellbore pressure<sup>5</sup>

$$p_w(t) = P(r_w, t) = P_o - \frac{1.15q}{2\pi(k/\nu)_T} \left\{ \log_{10} \left( \frac{t(k/\nu)_T}{\phi r_w^2 \rho C_T} \right) + .351 \right\} \quad (17)$$

This implies that a plot of  $P_w$  vs.  $\log t$  should be a straight line, with slope equal to  $1.15q/2\pi(k/\nu)_T$ .

SHAFT78 was used to simulate the problem of a mass withdrawal of .14 kg/s·m on a radial grid identical to that reported by Garg<sup>5</sup> with

$$\begin{aligned}\Delta r_1 &= \Delta r_2 = \dots \Delta r_{11} = 1\text{m} \\ \Delta r_{12} &= 1.2\Delta r_{11}, \dots, \Delta r_{50} = 1.2\Delta r_{49}\end{aligned}$$

using rock properties

$$\begin{aligned}\rho_{\text{rock}} &= 2.65 \times 10^3 \text{ kg/m}^3 \\ \phi &= .2 \\ c_{\text{rock}} &= 1000 \text{ J/kg} \cdot ^\circ\text{C} \\ K_{\text{rock}} &= 5.25 \text{ W/m} \cdot ^\circ\text{C} \\ \text{Permeability (k)} &= 10^{-13} \text{ m}^2 \text{ (100 millidarcy)}\end{aligned}$$

The relative permeability curves used<sup>6</sup> for the simulation are shown in Figure 6A.

Results of our simulations for three different initial conditions are given in Table 1 and Figures 3-5.  $P$  is seen to be a linear function of  $\log t$ , the slope of which gives a good estimate of the total kinematic mobility  $(k/\nu)_T$ . We have also plotted  $P$  vs  $\log(t/r^2)$  for the same simulations, but including all elements, not just the wellblock (Figures 3B, 4B, 5B). Again a straight line results, with slope almost identical to that of the  $P$  vs.  $\log t$  plots. This result, which is outside the scope of Garg's theory, seems to indicate that total kinematic mobilities could also be obtained from observation well data rather than just from flowing wellbore data.

Table 1

Results for Total Kinematic Mobilities  $(k/v)_T$ 

Initial saturation ( $S_o$ ) and pressure ( $P_o$ )	$(k/v)_T$ from P vs log(t) plot	$(k/v)_T$ from P vs log $(t/r^2)$ plot	Time (sec)	Actual value of $(k/v)_T$
$P_o = 8.5$ MPa  $S_o = .9$	$2.2146 \times 10^{-7}$	$2.4265 \times 10^{-7}$	0.	$2.3117 \times 10^{-7}$
			1889.	$2.2119 \times 10^{-7}$
			7490.	$2.2154 \times 10^{-7}$
			10184.	$2.2105 \times 10^{-7}$
$P_o = 8.6$ MPa  $S_o = .5$	$1.1610 \times 10^{-7}$	$1.2266 \times 10^{-7}$	0.	$1.2633 \times 10^{-7}$
			3775.	$1.1596 \times 10^{-7}$
			7033.	$1.1479 \times 10^{-7}$
			19268.	$1.1404 \times 10^{-7}$
			45883.	$1.1314 \times 10^{-7}$
$P_o = 8.6$ MPa  $S_o = .1$	$3.8239 \times 10^{-7}$	$4.161 \times 10^{-7}$	0.	$5.5535 \times 10^{-7}$
			2336.	$4.0947 \times 10^{-7}$
			19327.	$3.9253 \times 10^{-7}$
			76549.	$3.8568 \times 10^{-7}$
			142060.	$3.7956 \times 10^{-7}$
217406.	$3.7866 \times 10^{-7}$			

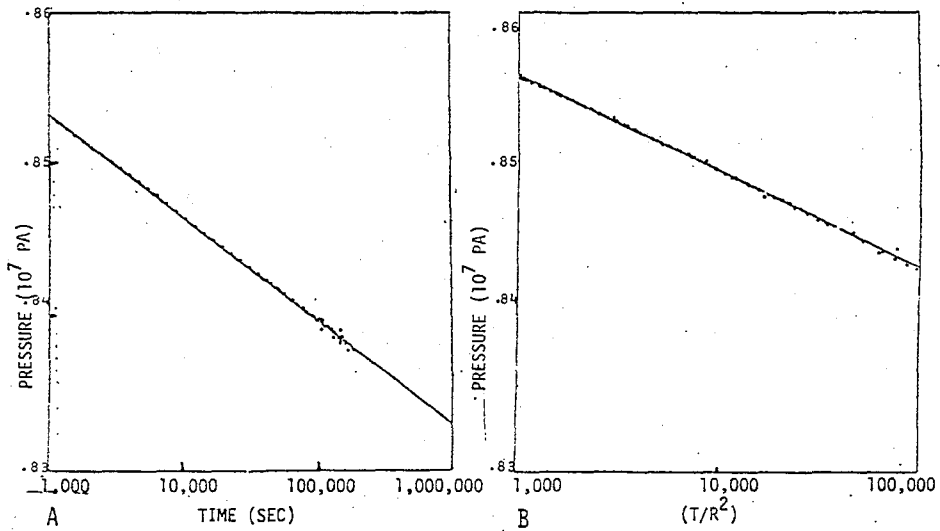


FIGURE 3. GARG PROBLEM - INITIAL RESERVOIR SATURATION = .1

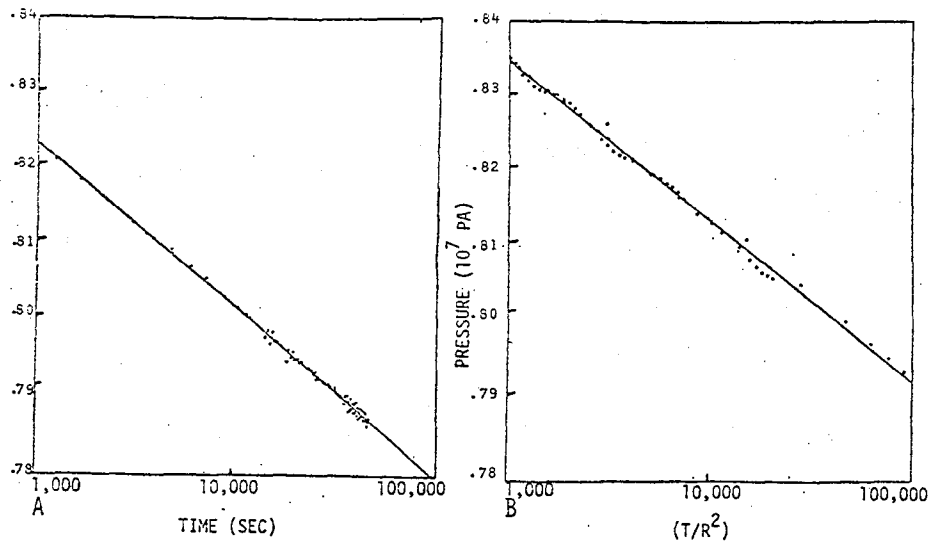


FIGURE 4. GARG PROBLEM - INITIAL RESERVOIR SATURATION = .5

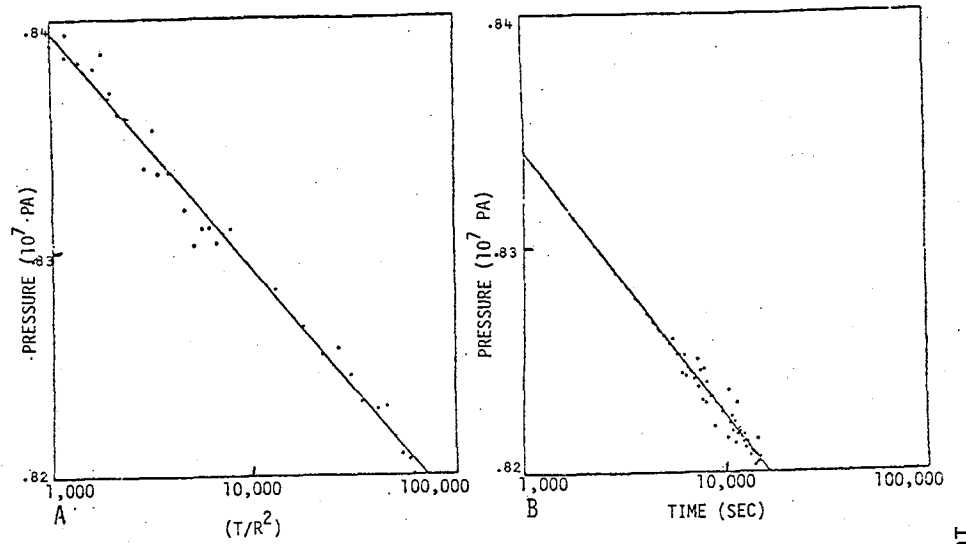


FIGURE 5. GARG PROBLEM - INITIAL RESERVOIR SATURATION = .9

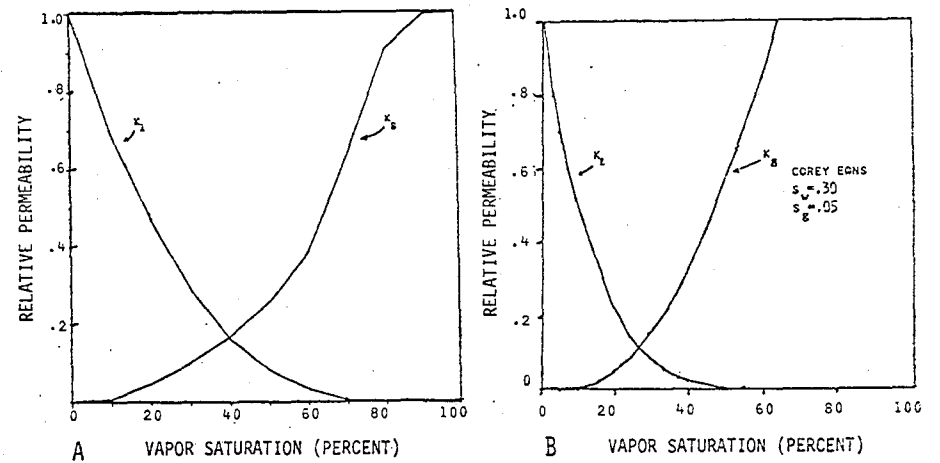


FIGURE 6. RELATIVE PERMEABILITY CURVES


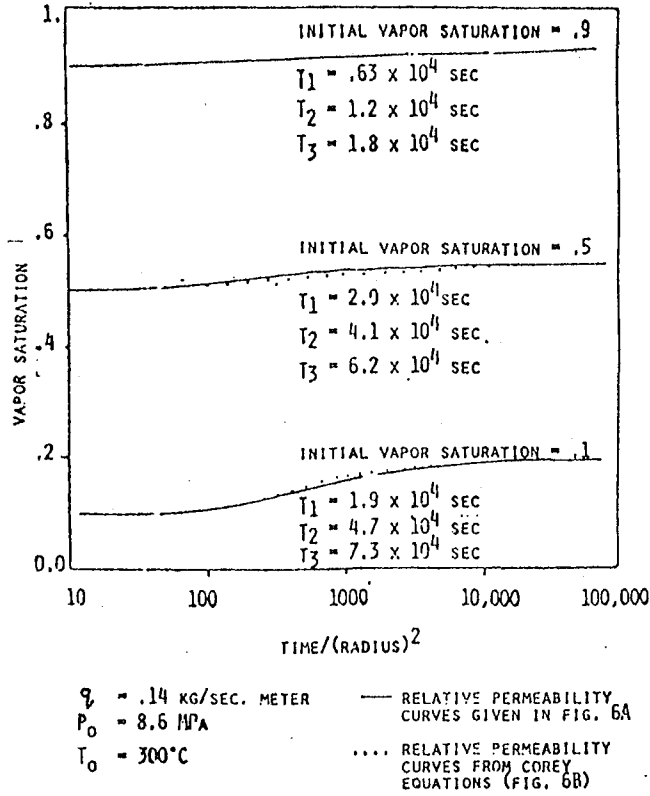


FIGURE 7. PLOT OF VAPOR SATURATION VS.  $T/R^2$  ON A LOG-LINEAR SCALE FOR GARG PROBLEM.

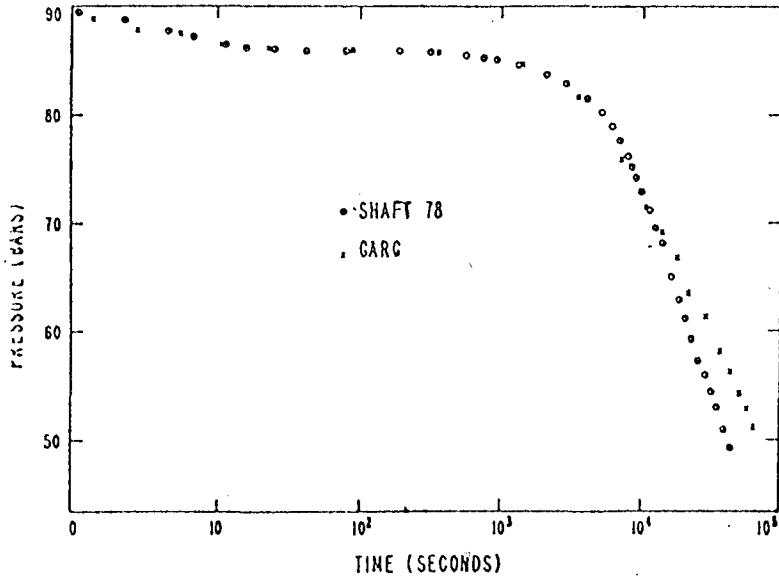

XBL 7811-2168

FIGURE 8. DRAWDOWN FROM AN INITIALLY LIQUID RESERVOIR WITH A PROPAGATING TWO-PHASE REGION.

In addition, saturation vs  $\log(t/r^2)$  was plotted for 3 times for each of the three cases just discussed. As can be seen in Figure 7, saturation appears to be a function of  $t/r^2$  only. At a position proportional to  $\sqrt{t}$  there appears a broad saturation front, which becomes more diffuse as vapor saturation increases. Changing the relative permeability curves (Figure 6B) has only a slight effect on the saturation profiles. We are still investigating these results.

Program SHAFT78 was also run to simulate a drawdown from a liquid reservoir with initial conditions

$$\begin{aligned} T_o &= 300 \text{ }^\circ\text{C} \\ P_o &= 9.0 \text{ MPa} \\ k &= 10^{-14} \text{ m}^2 \end{aligned}$$

and the results are compared with Garg's reported results in Figure 8.

For this comparison, the Corey equation was used to generate the relative permeability curves with the parameters

$$\begin{aligned} S_w &= .3 \\ S_g &= .05 \end{aligned}$$

From the slope of the straight line portion of the curve we compute a  $(k/v)_T$  value of .86E-8 as compared to numerical values ranging from 1.4E-8 to 1.9E-8. However,  $(k/v)_T$  values computed from the numerical simulation are decreasing with increasing time, while the straight line portion of the curve appears to be flattening out as time progresses. Thus, it appears that the computed  $(k/v)_T$  values are converging to the numerically generated values as the flash front passes through the grid blocks.



## CONCLUSION

The simulator SHAFT78 has been verified for a number of one- and two-phase flow problems involving subcooled water, water/steam mixtures, and superheated steam. The flow of water and steam in porous media, boiling and condensation, and heat exchange between rock and fluid are all described properly. No difficulties are encountered in crossing the saturation line (phase transitions).

Our simulation results confirm Garg's method of deducing total kinematic mobilities in two-phase reservoirs from production well pressure decline. It is suggested that total kinematic mobilities can also be inferred from observation well data. For uniform initial conditions we observe a simple dependence of vapor saturation upon production time and upon distance from the producing well. This as yet unexplained phenomenon indicates an underlying simplicity of two-phase porous flow.

Apart from idealized model studies, SHAFT78 is also being used for irregular three-dimensional systems. A simulation of production and recharge in the Krafla geothermal field (Iceland) is reported elsewhere.<sup>9</sup> At present, we are developing a history match for production and injection in the highly irregular shaped field of Serrazzano (Italy).<sup>10</sup>

## REFERENCES

1. Pruess, K, R. Schroeder, P. Witherspoon, J. Zerzan. "SHAFT78, A Two-Phase Multidimensional Computer Program for Geothermal Reservoir Simulation," (LBL-8264)
2. Pruess, K, R. Schroeder, P. Witherspoon, J. Zerzan. "Description of the 3-D 2-Phase Simulator SHAFT78 for use in Geothermal Reservoir Studies, (SPE-7699), paper to be presented at the 5th SPE-Symposium on Reservoir Simulation, Denver, 31 January— 2 February (1979).
3. Kidder, R. 1957, "Unsteady Flow of Gas through a Semi-Infinite Porous Medium," presented at Applied Mechanics Division Summer Conference, Berkeley, California, Paper #57.
4. Matthews, C.S. and D.G. Russell, 1967, "Pressure Build-Up and Flow Tests in Wells," SPE Monographs.
5. Garg, S.K., 1978, "Pressure Transient Analysis for Two-Phase (Liquid Water/Steam) Geothermal Reservoirs," SSS-IR-78-3568(R2).
6. Muskat, M., R.D. Wyckoff, H.G. Botset, and M.W. Meres, 1937, "Flow of Gas-Liquid Mixtures through Sands," Trans. AIME, 123, p. 69.
7. Toronyi, R.M. and S.M. Farouq Ali, "Two-Phase, Two-Dimensional Simulation of a Geothermal Reservoir," Soc. Pet. Eng. J. (June 1977) 171-183.
8. Lasseter, T.J., P.A. Witherspoon, and M.J. Lippmann, "Multiphase Multidimensional Simulation of Geothermal Reservoirs," Proceedings Second United Nations Symposium on the Development and Use of Geothermal Resources, San Francisco, Calif. (1975) vol. 3, 1715-1723.
9. Jonsson, V., "Simulation of the Krafla Geothermal Field," Lawrence Berkeley Laboratory Rept. LBL-7076, Berkeley, Calif. (1978).
10. Weres, O., "A Model of the Serrazano Zone," Proceedings Third Stanford Workshop on Geothermal Reservoir Engineering, Stanford, Calif. (1977) 214-219.

## NOMENCLATURE

## Latin — Upper Case

$C_T$	= total compressibility
$F$	= mass flux per unit area, $\text{kg/m}^2\text{s}$
$H$	= enthalpy per unit mass, $\text{J/kg}$
$K$	= rock heat conductivity, $\text{J/ms } ^\circ\text{C}$
$P$	= pressure, $\text{Pa} = \text{N/m}^2$
$P_D$	= dimensionless pressure
$P_w$	= wellbore pressure, $\text{N/m}^2$
$P_o$	= initial pressure, $\text{N/m}^2$
$Q$	= energy source term, $\text{J/m}^3\text{s}$
$T$	= temperature, $^\circ\text{C}$
$U$	= energy per unit mass (specific energy), $\text{J/kg}$
$U_{\text{vol}}$	= energy per unit volume, $\text{J/m}^3$
$S$	= volumetric vapor saturation

## Latin — Lower Case

$c$	= rock specific heat, $\text{J}/^\circ\text{C kg}$
$k$	= absolute permeability, $\text{m}^2$
$(k/v)_T$	= total kinematic mobility, $\text{s}$
$q$	= mass source term, $\text{kg/m}^3\text{s}$
$r_w$	= wellbore radius, $\text{m}$
$t$	= time, $\text{s}$

## Greek

$\theta$	= time averaging factor (dimensionless)
$\rho$	= density, $\text{kg/m}^3$
$\phi$	= rock porosity, dimensionless
$\mu$	= dynamic viscosity, $\text{Ns/m}^2$
$\nu$	= kinematic viscosity, $\text{Nsm/kg}$

**Subscripts**

ave = average (over volume or surface element)  
l = liquid component  
rock = referring to rock  
v = vapor component  
vol = volumetric measurement of the variable  
(e.g.,  $U_{vol}$  = Energy/unit volume).



This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

TECHNICAL INFORMATION DEPARTMENT  
LAWRENCE BERKELEY LABORATORY  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720