

# Lawrence Berkeley National Laboratory

## Recent Work

### Title

RESTRICTED DIFFUSION IN BINARY SOLUTIONS

### Permalink

<https://escholarship.org/uc/item/60w0w40n>

### Authors

Newman, John  
Chapman, Thomas W.

### Publication Date

1972-09-01

Submitted to the American Institute of  
Chemical Engineers Journal

RECEIVED  
LAWRENCE  
RADIATION LABORATORY

LBL-1142  
Preprint c.1

DEC 4 1972  
LIBRARY AND  
DOCUMENTS SECTION

**RESTRICTED DIFFUSION IN BINARY SOLUTIONS**

John Newman and Thomas W. Chapman

September 1972

AEC Contract No. W-7405-eng-48

**For Reference**

Not to be taken from this room



LBL-1142  
c.1

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

Restricted Diffusion in Binary Solutions

John Newman and Thomas W. Chapman<sup>1</sup>

Inorganic Materials Research Division,  
Lawrence Berkeley Laboratory, and  
Department of Chemical Engineering;  
University of California, Berkeley

September, 1972

Abstract

Diffusion coefficients of binary solutions can be measured accurately by observation at long times of isothermal diffusion in a vertical cell closed at the ends (restricted diffusion). The present analysis, which accounts for the effects of solvent flux and variable solution properties, demonstrates that the experiment yields a well-defined, differential diffusion coefficient, even in concentrated solutions.

Observation is effected by Rayleigh interference optics, and results for aqueous potassium chloride solutions confirm the accuracy of the method.

<sup>1</sup>Present address: Department of Chemical Engineering,  
University of Wisconsin, Madison, Wisconsin 53706.

key words: diffusion coefficient, potassium chloride, Rayleigh  
interference

-1a-

## Scope

Accurate values of diffusion coefficients of binary mixtures, including their dependence on composition and temperature, are required to provide complete transport-property data (somewhat analogous to thermodynamic data like activity coefficients), to permit quantitative design of separation processes like distillation and electrochemical deposition, and to permit detailed comparison with theoretical results. Among theoretical results we have in mind, on the one hand, the treatment of simple systems where variable physical properties have been included in the analysis and, on the other hand, the theoretical prediction or correlation of transport properties on a molecular basis such as the Debye-Hückel theory.

For binary solutions of electrolytes, three methods are used to measure the diffusion coefficient: the magnetically stirred diaphragm cell, optical observation of diffusion from an initially sharp boundary, and (restricted) diffusion in a box of finite height with observation of the concentration distribution by measurement of the electrical conductivity at two positions in the box. The last method, developed by Harned beginning in 1949, appeals to the intuition because the maximum concentration difference in the system vanishes as the experiment progresses, and an absolute determination of the diffusion coefficient requires only the height of the box.

One question we raise is just what diffusion coefficient is measured and is this complicated by the reference velocity for the diffusion flux, the precise definition of transport properties for concentrated

solutions, or the variation of physical properties with composition?

Harned's method is restricted to very dilute solutions of electrolytes because adequate resistance measurement with solutions of higher conductivity requires larger cell dimensions where free convection becomes a problem. The second question is how can the method be extended to concentrated solutions?

### Conclusions and Significance

An analysis of the restricted diffusion process shows that the measurement yields the differential diffusion coefficient  $D$  at the final, average concentration. This is the diffusion coefficient which appears in the flux equations 13 (where  $Q$  can be set equal to zero) and is related to the fundamental diffusion coefficient  $\mathcal{D}$  by equation 15.  $D$  is equivalent to the binary diffusion coefficient  $\mathcal{D}_{AB}$  used by Bird, Stewart, and Lightfoot.

The analysis with variable physical properties gives a new form, different from previous results, for the correction to the dominant behavior of the cell. This permits quantitative determination of the time after which this perturbation would become negligible. The detailed analysis also permits one to estimate how much the height of the liquid column changes during the course of the experiment due to volume changes on mixing (or diffusion). This relates to the uncertainty in the value to be used for the height of the box in the determination of the diffusion coefficient.

To overcome the restriction to dilute electrolytic solutions, apparatus was procured and adapted for observing the concentration profile by Rayleigh interference optics. The refractive index varies enough with composition for most liquid solutions to permit measurement with a conveniently sized cell. Solutions of nonelectrolytes are also subject to measurement, with some accuracy being lost at high dilutions or for solutes with low solubility.

The accuracy of this system is 0.1 to 0.2% on the basis of the internal consistency and the reproducibility of the data and also

from comparison with results of free diffusion from an initially sharp boundary. The system is thus capable of providing accurate data for a variety of binary systems of chemical-engineering importance over a range of composition and temperature.



## Introduction

A number of years ago, Onsager<sup>1</sup> devised an ingenious technique for measuring quite accurately the diffusion coefficients of electrolytes in solution at concentrations as low as  $10^{-3}$  molar. In the following decade, Harned and coworkers reported results for many electrolytes. The great significance of this work was that the experimental results for many systems verified, for the first time, the theoretical Nernst<sup>2</sup> limiting value of the diffusion coefficient at infinite dilution and permitted comparison with the theoretical concentration dependence at high dilutions.

The essential features of Harned's method are that it involves a cell of finite length such that diffusion is of the restricted type<sup>3</sup> and that the decay of an initial concentration gradient with time is monitored by a conductivity difference between two points in the cell. Although the conductivity measurement limits applicability of the method to dilute solutions, the upper limits of Harned's measurements for several systems agree quite well with the low concentration measurements of the Gouy optical method as developed by Gosting.<sup>4</sup> The accuracies of these two methods thus appear to be comparable and are claimed to be on the order of one or two tenths of a percent. Furthermore, these two absolute methods are complimentary in their ranges of applicability, and, together, they provide the data necessary to calibrate the third important method for diffusion-coefficient measurement, the diaphragm cell, as refined by Stokes.<sup>5,6,7</sup>

The analyses of these three experimental methods on the basis of transport relations valid only in the limit of infinite dilution and with constant physical properties leave unanswered the question of just what diffusion coefficient is measured. The strong concentration dependence of physical properties might show up in dilute solution, and the nonzero solvent flux might manifest itself in more concentrated solutions. A significant concentration difference is always present in the Gouy free-diffusion measurements and in the diaphragm-cell measurements. On the other hand, the concentration difference disappears in restricted diffusion at long times, permitting an unambiguous measurement of the differential diffusion coefficient. Furthermore, the present analysis provides a quantitative expression of the distortion of the concentration profile due to these non-ideal effects.

### Simplified Analysis of Restricted Diffusion

For a dilute, constant-property solution, Fick's second law in one dimension takes the form

$$\frac{\partial c}{\partial t} = D \frac{\partial^2 c}{\partial y^2}, \quad (1)$$

and its solution for an enclosed column of height  $a$  is a Fourier series:<sup>5</sup>

$$c = c^\infty + \sum_{n=1}^{\infty} A_n \exp\left(-\frac{n^2 \pi^2 Dt}{a^2}\right) \cos \frac{n\pi y}{a}, \quad (2)$$

where  $D$  is the diffusion coefficient,  $y$  is the distance from the bottom of the cell,  $t$  is time, and  $c^\infty$  is the uniform solute concentration at infinite time. The coefficients  $A_n$  depend upon the initial distribution of solute in the cell.

The experimentalists always look at the difference in concentration between  $y = a/6$  and  $y = 5a/6$ . Because a number of terms cancel or vanish, the expression for this concentration difference becomes

$$\begin{aligned} \Delta c = c\left(\frac{a}{6}\right) - c\left(\frac{5a}{6}\right) &= 2A_1 \exp\left(-\frac{Dt\pi^2}{a^2}\right) \cos \frac{\pi}{6} \\ &+ 2A_5 \exp\left(-25\frac{Dt\pi^2}{a^2}\right) \cos \frac{5\pi}{6} + \dots \end{aligned} \quad (3)$$

Because of the factor 25 in the exponent of the second term, this series converges very rapidly with time, and at sufficiently large times a plot of  $\ln(\Delta c)$  versus time is linear with a slope of  $-D\pi^2/a^2$ . The same time constant holds for any property which is linear in concentration.

As the concentration variations get smaller with increasing time, the conductivity of the solution in the cell can be well approximated as a linear function of the concentration. Harned placed two pairs of electrodes in his cell one sixth of the distance from each end and thus was able to determine the diffusion coefficient from the change in the difference of conductivity between these two locations over a period of days.

Since Harned's analysis was based on the dilute-solution equations with constant properties, the identification of a well-defined, differential diffusion coefficient rests on the assumption that the concentration differences during measurement are sufficiently small to justify the constant-property approximation. It remains to show how generally a restricted-diffusion experiment yields meaningful results. A more complete analysis of the problem based on general concentrated-solution flux equations will elucidate the nature of the diffusion coefficient which is measured in this type of experiment.

### Transport Relations for Concentrated Electrolytes

A completely consistent description of isothermal diffusion requires the use of a set of flux equations of the type

$$c_i \nabla \mu_i = RT \sum_j \frac{c_i c_j}{c_T \mathcal{D}_{ij}} (v_j - v_i) \quad , \quad (4)$$

where  $\mu_i$  is the electrochemical potential of species  $i$  and  $\mathcal{D}_{ij}$ , the transport coefficients defined by these equations, are functions of temperature, pressure, and composition only, being independent of the fluxes and the gradients. This equation is analogous to the Stefan-Maxwell equations for diffusion in mixtures of gases. It may be viewed as a force balance, and by Newton's third law of motion  $\mathcal{D}_{ij} = \mathcal{D}_{ji}$ . This particular set of flux equations has been proposed by Newman, Bennion, and Tobias<sup>8</sup> and discussed by Newman.<sup>9</sup> It is consistent with the principles of irreversible thermodynamics and is equivalent to flux laws discussed by Onsager<sup>10</sup> and others.

Equations of this form may be written for each ionic species as well as for the solvent, although one of these equations will be redundant. To apply such equations in differential material balances for mass-transfer or diffusion calculations, one must invert them and express the fluxes in terms of the forces. This inversion requires a choice of the frame of reference for the fluxes. For example, if the solvent velocity  $v_0$  is chosen as the reference velocity, one obtains for a binary salt solution the flux expressions<sup>9</sup>

$$\begin{aligned}
 \underline{N}_+ &= c_{+v} = - \frac{v_+ \mathcal{D} c_T}{vRT c_o} c \nabla \mu_e + \frac{t_+^o i}{Fz_+} + c_{+v_o} \\
 \underline{N}_- &= c_{-v} = - \frac{v_- \mathcal{D} c_T}{vRT c_o} c \nabla \mu_e + \frac{t_-^o i}{Fz_-} + c_{-v_o} \\
 \underline{N}_o &= c_{o-v_o}
 \end{aligned}
 \tag{5}$$

where

$$\mathcal{D} = \frac{\mathcal{D}_{o+} \mathcal{D}_{o-} (z_+ - z_-)}{z_+ \mathcal{D}_{o+} - z_- \mathcal{D}_{o-}}
 \tag{6}$$

is the diffusion coefficient,

$$t_+^o = 1 - t_-^o = \frac{z_+ \mathcal{D}_{o+}}{z_+ \mathcal{D}_{o+} - z_- \mathcal{D}_{o-}}
 \tag{7}$$

is the cation transference number relative to the solvent, and

$$\mu_e = v_+ \mu_+ + v_- \mu_-
 \tag{8}$$

is the chemical potential of the electrolyte.

Transport equations using the molar-average velocity or the mass-average velocity for the frame of reference can be found in reference 8 or 9. In those cases, the mole fraction or the mass fraction becomes the natural way to express concentration. In the present work, we shall illustrate how to use the so-called volume-average velocity<sup>11</sup>

$$v^{\pm} = c_0 \bar{V}_{O-O} + c_+ \bar{V}_{+} v_+ + c_- \bar{V}_{-} v_- \quad (9)$$

For electrolytic solutions we generally avoid using the volume-average velocity because the partial molar volumes  $\bar{V}_i$  of individual ionic species are not accessible to experimental determination. Here we require  $\bar{V}_+$  and  $\bar{V}_-$  to yield the partial molar volume of the electrolyte  $\bar{V}_e$  according to

$$\bar{V}_e = v_+ \bar{V}_+ + v_- \bar{V}_- \quad (10)$$

In addition, we shall let Q represent the quantity

$$Q = \frac{t_+^{\circ}}{z_+} \bar{V}_+ + \frac{t_-^{\circ}}{z_-} \bar{V}_- \quad (11)$$

This quantity cannot be measured independently, and it can arbitrarily be taken to be zero, in which case

$$t_+^{\circ} v_+ \bar{V}_+ = t_-^{\circ} v_- \bar{V}_- \quad (12)$$

In other words, the transference numbers of the ions are assumed to be inversely proportional to their partial molar volumes. However, this choice is based solely on convenience, and no physical significance should be attached to it.

In terms of the volume-average velocity, equations 5 become

$$\left. \begin{aligned} \underline{N}_+ &= -D\nabla c_+ + \frac{i}{F} \left( \frac{t_+^0}{z_+} - c_+ Q \right) + c_+ \underline{v} \\ \underline{N}_- &= -D\nabla c_- + \frac{i}{F} \left( \frac{t_-^0}{z_-} - c_- Q \right) + c_- \underline{v} \\ \underline{N}_0 &= -D\nabla c_0 - \frac{i}{F} c_0 Q + c_0 \underline{v} \end{aligned} \right\} \quad (13)$$

since

$$\frac{\bar{v}_0}{\nu RT} c \nabla \mu_e = D \nabla c = -D \frac{\bar{v}_0}{\bar{v}_e} \nabla c_0 \quad (14)$$

where<sup>8,9</sup>

$$D = \bar{v}_0 \frac{c T}{c_0} \left( 1 + \frac{d \ln \gamma}{d \ln m} \right) \quad (15)$$

For each species in the solution, the conservation law is<sup>12</sup>

$$\frac{\partial c_i}{\partial t} = -\nabla \cdot \underline{N}_i \quad (16)$$

provided there are no homogeneous reactions. Substitution of equations 13 and rearrangement gives three important relations for a solution of a binary electrolyte:

$$\nabla \cdot \underline{i} = 0 \quad (17)$$



$$\nabla \cdot \left( \underline{v} - \frac{iQ}{F} \right) + \bar{v}_e \frac{i \cdot \nabla t_+^{\circ}}{z_+ v_+ F} = -D \frac{\nabla c \cdot \nabla \bar{v}_e}{c_0 \bar{v}_0} \quad (18)$$

$$\frac{\partial c}{\partial t} + \left( \underline{v} - \frac{iQ}{F} \right) \cdot \nabla c + c \nabla \cdot \left( \underline{v} - \frac{iQ}{F} \right) = \nabla \cdot (D \nabla c) - \frac{i \cdot \nabla t_+^{\circ}}{z_+ v_+ F} \quad (19)$$

Equation 17, saying that the divergence of the current density is zero, is an expression of conservation of charge in an electrically neutral solution.<sup>9</sup> Equation 18 is an overall conservation equation, expressing perhaps conservation of volume. Note that the divergence of the volume-average velocity is not exactly zero, as one might expect. Equation 19 is a material balance for the electrolyte and should be compared to equations 26, 72, 81, and 82 of reference 9. The volume-average velocity is ambiguous to the extent that Q is undefined. Equations 18 and 19 show that it is convenient to set Q equal to zero. When the current density is zero, one is not concerned at all with Q, and the anions and cations diffuse together as though they were a single solute, the electrolyte.

Analysis of Restricted Diffusion in  
Concentrated Binary Solutions

The continuity equations have been put into the above form (equations 17, 18, and 19) because it is a particularly convenient one for the analysis of experimental measurements of diffusion coefficients in binary solutions. The diffusion coefficient  $D$  given by equation 15 is the quantity usually measured and reported as the differential diffusion coefficient. This statement anticipates the result of the following analysis, but it is convenient to simplify the mathematical expressions and important to emphasize that only one experimental diffusion coefficient need be defined, although it can be used in a variety of flux expressions.<sup>9,13</sup> The diffusion coefficient  $\mathcal{D}$ , based on a thermodynamic driving force, is convenient in the correlation and theoretical interpretation of transport properties,<sup>8,14</sup> although its definition does depend on the assumed state of dissociation of the electrolyte.<sup>15</sup> In very dilute solutions, these subtle refinements are irrelevant because  $\mathcal{D} = D$  at infinite dilution. In more concentrated solutions, however, one must take care to identify exactly which coefficient he is measuring.

Micka<sup>16</sup> has suggested a disagreement with the relationship 15 between the experimental diffusion coefficient  $D$  and the diffusion coefficient  $\mathcal{D}$  based on a thermodynamic driving force. However, to us it appears possible to derive this result from Micka's equations 5, 14, 21, 28, and 41 without any assumption about the value of the transference number.

In the restricted-diffusion process, as it occurs in the experiments of Harned, no current flows, and equations 18 and 19 are to

be solved for the decay of a one-dimensional concentration gradient in a column of solution of height  $a$ , subject to the boundary conditions

$$v = 0 \quad \text{and} \quad \frac{\partial c}{\partial y} = 0 \quad \text{at} \quad y = 0 \quad (20)$$

(at the bottom of the cell)

$$\frac{\partial c}{\partial y} = 0 \quad \text{at} \quad y = a \quad (21)$$

(at the free surface). At the bottom of the cell, the fluxes are all zero, while at the top of the column the fluxes are supposed to be zero relative to the interface, which may actually be moving as the volume changes on mixing. To stipulate further the condition at the top, we can use an overall mass balance or a balance on the solute:

$$\int_0^a c dy = c^{\infty} a \quad (22)$$

The total amount of electrolyte in the column remains constant. The superscript infinity ( $\infty$ ) will be used to denote quantities evaluated after a long time, when the concentration will have become uniform in the cell.

One can solve equations 18 and 19 subject to these boundary conditions and an arbitrary initial condition by assuming that the

unknown functions can at large times be represented by perturbation expansion series of the form

$$c = c^{\infty} + \epsilon c^{(1)} + \epsilon^2 c^{(2)} + \dots, \quad (23)$$

$$a = a^{\infty} + \epsilon a^{(1)} + \epsilon^2 a^{(2)} + \dots, \quad (24)$$

and

$$v = \epsilon v^{(1)} + \epsilon^2 v^{(2)} + \dots, \quad (25)$$

where  $\epsilon$  is a function of time and goes to zero at infinite time. Equation 2 is a special case of this form. The coefficients  $c^{(i)}$ ,  $a^{(i)}$ , and  $v^{(i)}$  should be independent of time if this scheme is valid;  $c^{(i)}$  and  $v^{(i)}$  then depend only on position  $y$ .

For convenience we employ the definition of  $D$  given above to simplify the equations. Furthermore, we account for the concentration dependence of  $D$  formally by expressing this quantity as its Taylor expansion around the value at  $c^{\infty}$ :

$$D = D^{\infty} + \left. \frac{dD}{dc} \right|_{c^{\infty}} (c - c^{\infty}) + \frac{1}{2} \left. \frac{d^2D}{dc^2} \right|_{c^{\infty}} (c - c^{\infty})^2 + \dots \quad (26)$$

where  $D^{\infty} = D(c^{\infty})$ . Substitution of equations 23 through 26 into equations 18 and 19 and the boundary conditions 20 through 22 and equating terms of like order in  $\epsilon$  accomplishes a separation of variables for this

problem by yielding a hierarchy of differential equations with boundary conditions from which  $\epsilon$  and all the coefficients  $c^{(i)}$ ,  $a^{(i)}$ , and  $v^{(i)}$  can be determined. The ability to generate these necessary equations justifies the assumptions expressed in equations 23, 24, and 25.

The results of these manipulations can be rather complicated.<sup>17</sup> The significant results are that

$$\epsilon = e^{-D^\infty t (\pi/a^\infty)^2} \quad (27)$$

and that the difference in concentration between points one-sixth of the overall length from each end of the cell, as previously estimated by equation 3, is given more completely by

$$\begin{aligned} \Delta c &= c\left(\frac{a^\infty}{6}\right) - c\left(\frac{5a^\infty}{6}\right) \\ &= 2A_1 e^{-D^\infty t (\pi/a^\infty)^2} \cos(\pi/6) + B e^{-3D^\infty t (\pi/a^\infty)^2} + \dots, \quad (28) \end{aligned}$$

where the coefficient  $A_1$  depends on the initial condition and the coefficient  $B$  is a complicated function of the initial condition and concentration derivatives of the physical properties:

$$\begin{aligned} B &= A_1^3 \frac{\pi}{12} \left( \frac{\bar{v}_o}{M_o} \frac{d^2 \rho}{dc^2} \right)^\infty + \frac{\sqrt{3}}{16} A_1^3 \left[ \frac{1}{D} \frac{d^2 D}{dc^2} - 2 \left( \frac{1}{D} \frac{dD}{dc} \right)^2 \right. \\ &\quad - 3 \frac{c}{D} \frac{dD}{dc} \frac{\bar{v}_o}{M_o} \frac{d^2 \rho}{dc^2} + 6 \left( \frac{c \bar{v}_o}{M_o} \frac{d^2 \rho}{dc^2} \right)^2 + 2c \frac{\bar{v}_o}{M_o} \frac{d^3 \rho}{dc^3} \\ &\quad \left. + 7 \frac{\bar{v}_o}{M_o} \frac{d^2 \rho}{dc^2} \right]^\infty \quad (29) \end{aligned}$$

Furthermore, it was found that  $a^{(1)}$  and  $v^{(1)}$  are both zero and that  $a^{(2)}$  is very small,


$$a^{(2)} = - \frac{A_1^2 a^\infty}{4} \left( \frac{\bar{V}_o}{M_o} \frac{d^2 \rho}{dc^2} \right)^\infty, \quad (30)$$

so that it is not necessary in practice to recognize the variation in solution volume.

#### Experimental System

Because a conductimetric method fails with conductivities of appreciable magnitude, we developed an optical arrangement for measuring the concentration difference  $\Delta c$  in the cell, using the Rayleigh interferometer of a commercial electrophoresis apparatus manufactured by Perkin-Elmer Corporation. The glass diffusion cell shown in figure 1 had dimensions 79 mm by 9 mm by 2 mm, which were small enough to prevent convection. The length of the cell was measured accurately, and fine lines were scribed on the cell face one sixth of the distance from either end.

Temperature control was to within 0.01°C. The interferometer served to generate an interference, or fringe, pattern which plots very precisely the profile of concentration versus position in the cell. After a boundary was formed and the cell was closed off at both ends, photographs of the fringe pattern were taken every few hours for a period of several days. Figures 2 and 3 correspond to times just after forming the boundary and toward the end of an experiment,

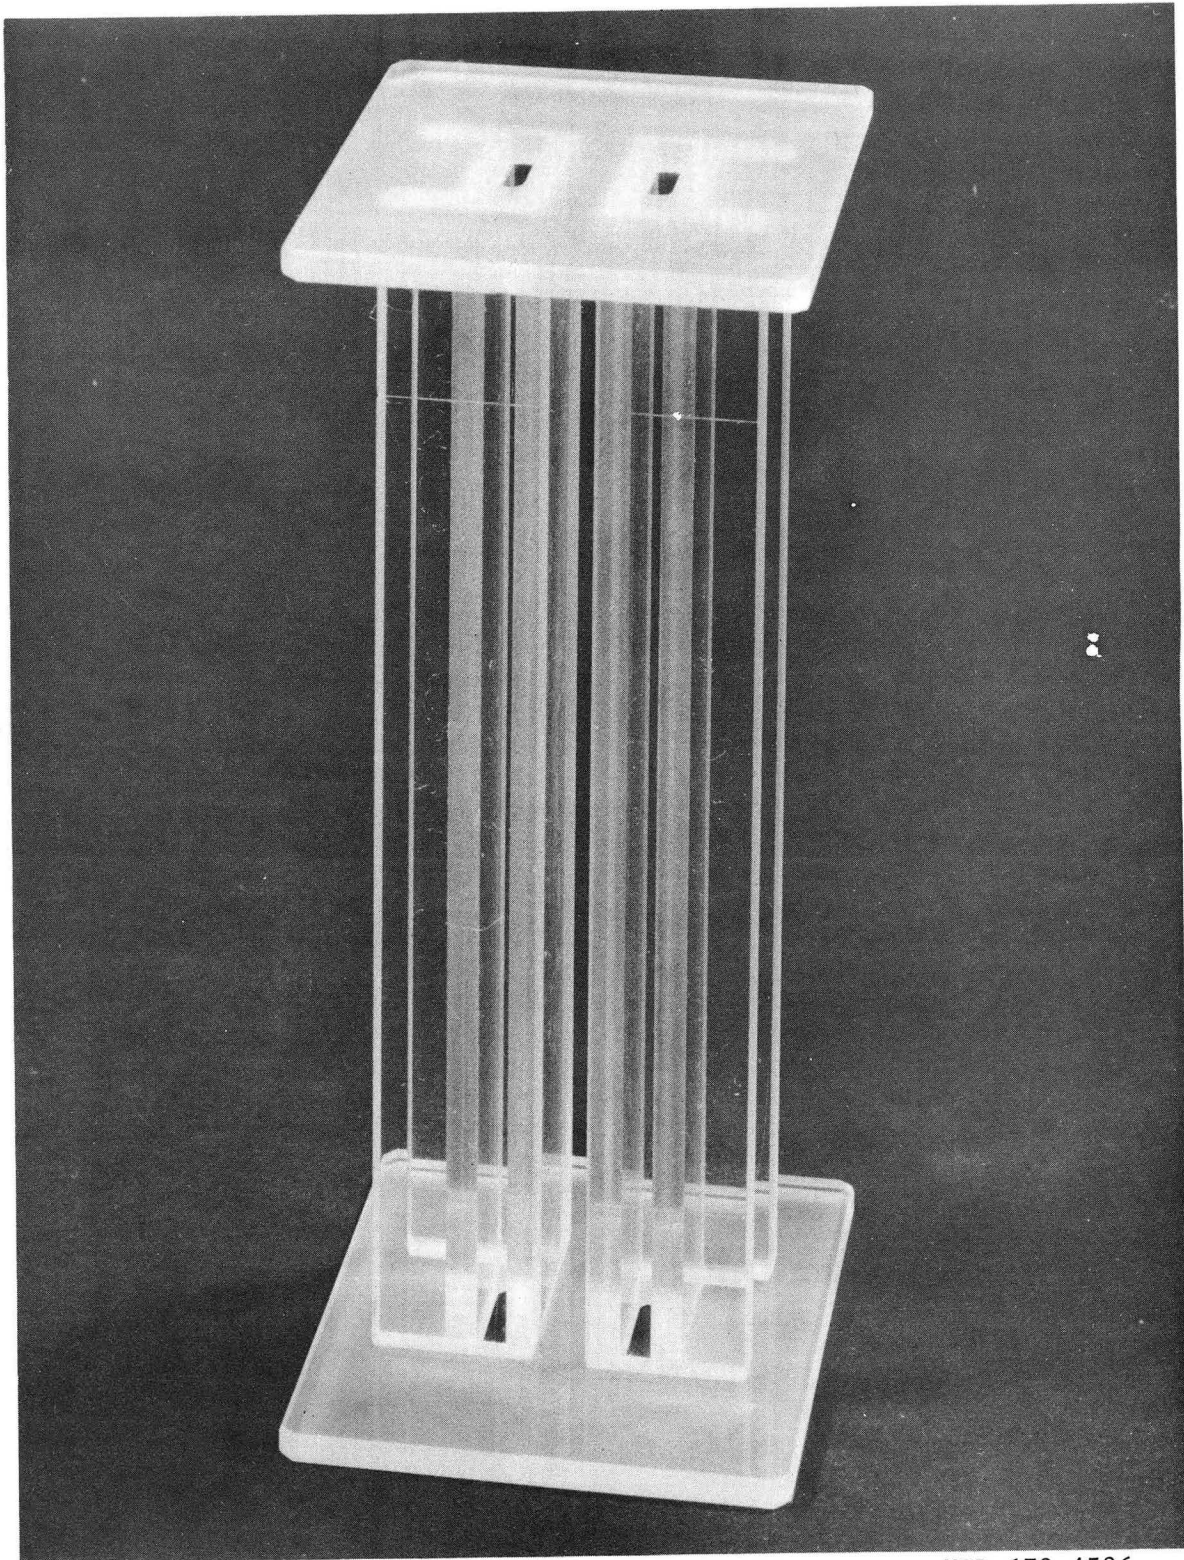

XBB 678-4586

Figure 1. Optical cell.

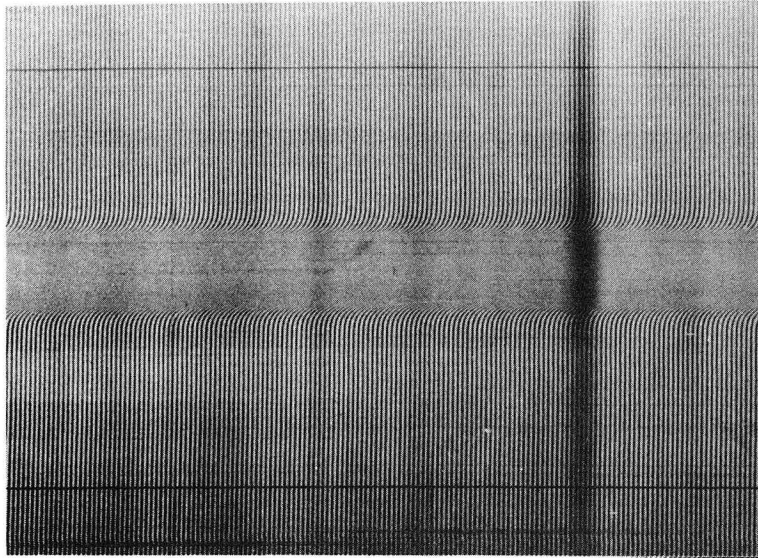


Figure 2. Fringe pattern about half an hour after the formation of the boundary. The fringes cannot yet be distinguished in the boundary. The scribed marks show up as horizontal lines.

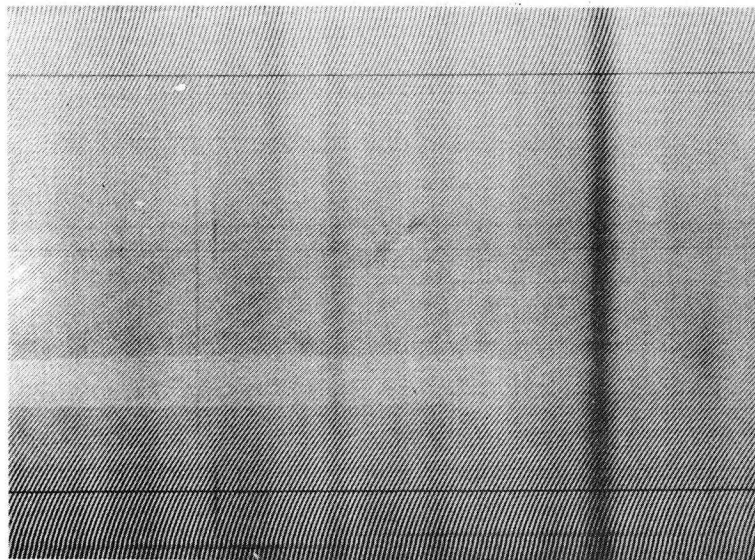



Figure 3. Fringe pattern toward the end of the run.

XBB 6911-7618



respectively. Provided that the refractive index is linearly dependent upon concentration, as is normally the case over a narrow concentration range, the displacement of a fringe is proportional to  $\Delta c$ , and the measured fringe displacements can be used directly in equation 28 to determine the diffusion coefficient from the time constant of their decay.

As a test for the method, measurements were made on solutions of potassium chloride at 25°C, the system which has been studied most extensively and is accepted as a standard for diffusion measurements. It was found that after our experimental techniques were perfected, our values agreed within 0.2 percent of the literature values, as shown in figure 4. Furthermore, statistical analyses of the fit of measured fringe displacements with time yielded a standard deviation in the slope which corresponds to about 0.1 or 0.2 percent of the diffusion coefficient. Thus, it was concluded that the method is valid and that our apparatus is capable of measurements comparable in accuracy to the other modern methods for measuring diffusion coefficients.

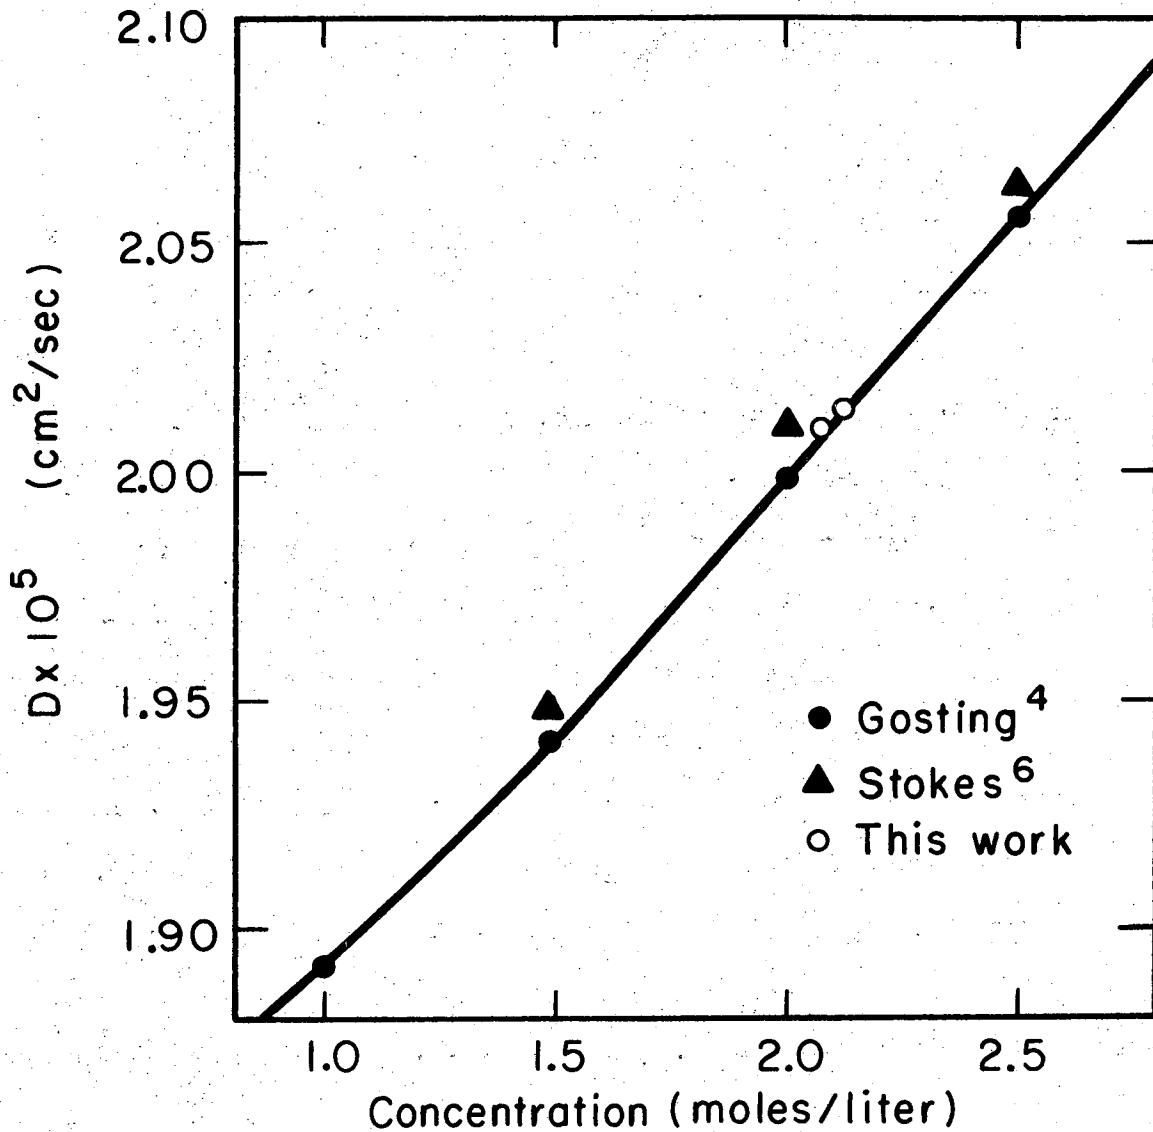

XBL728-3938

Figure 4. The diffusion coefficient of potassium chloride in water at 25°C and high concentrations.

### Discussion and Conclusions

It is seen in equation 28 that the second term in the complete series for  $\Delta c$  is of order  $\epsilon^3$  rather than  $\epsilon^{25}$ , as indicated by the approximate Fourier series solution in equation 3. Although the effect is no longer demonstrated so dramatically, it is clear that at sufficiently large times the first term necessarily dominates, and the Harned-type measurement and calculation of the decay time constant (from the slope of a semilogarithmic plot of  $\Delta c$  versus time) yield the differential value of the diffusion coefficient  $D$  corresponding to the concentration  $c^\infty$ .

Thus, consideration of the complete continuity equations for concentrated, variable-property binary solutions demonstrates that a restricted diffusion experiment is generally valid. The method does indeed yield a well-defined, differential diffusion coefficient even in concentrated solutions provided that an analytical technique suitable for measuring  $\Delta c$  in such solutions is used. Since the analysis of restricted diffusion presented here is more thorough than any available for free diffusion or the diaphragm cell method, and since it is equally valid for nonelectrolytic solutions as for electrolytes, we suggest that more extensive experimental implementation of the restricted diffusion method should be considered.

A new optical, restricted-diffusion method has been developed and has been shown to yield accurate diffusion coefficients in concentrated solutions. Restricted diffusion is an absolute method, requiring no calibration. Only the height  $a$  of the liquid column need be measured with great accuracy. The initial concentration distribution within the

cell is not critical. Any concentration variations perpendicular to the long dimension of the cell will decay very rapidly, leaving only the desired one-dimensional profile.

Any velocity disturbances generated in the cell by the boundary formation would be expected to decay exponentially with a time constant depending upon the kinematic viscosity rather than the diffusion coefficient. Since the kinematic viscosity of liquid solutions is about three orders of magnitude greater than the diffusion coefficient, any small convective velocities should vanish long before the concentration profile does.

The nature of restricted diffusion at long times eliminates several other potential sources of error.  $\Delta c$  does not need to be made between points exactly one sixth of the way from either end of the cell. The optical system does not need to be perfect. Distortion from the nonzero gradients of refractive index and a nonuniform temperature from the heat of mixing also become higher order effects at long times. The scale between the cell and the film image and the scale in the direction of the fringe shifts are also irrelevant as long as they are constant throughout a run.

### Acknowledgment

This work was supported by the United States Atomic Energy Commission.

### Nomenclature

a	height of restricted diffusion cell or of liquid column (cm)
$\Lambda_n$	coefficients of series expression for concentration in restricted diffusion cell
B	constant identified in equation 29
c	concentration of binary electrolyte = $c_+/v_+ = c_-/v_-$ (mole/cm <sup>3</sup> )
$\Delta c$	concentration difference measured in diffusion cell
$c_i$	concentration of species i (mole/cm <sup>3</sup> )
$c_o$	concentration of solvent
$c_T$	total solution concentration
D	experimental diffusion coefficient of binary electrolyte (cm <sup>2</sup> /sec)
$\mathcal{D}$	diffusion coefficient of electrolyte for thermodynamic driving force (cm <sup>2</sup> /sec)
$\mathcal{D}_{ij}$	diffusion coefficient for binary interactions (cm <sup>2</sup> /sec)
F	Faraday's constant (96,487 C/equiv)
$\underline{i}$	current density (amp/cm <sup>2</sup> )
$M_o$	molecular weight of the solvent (g/mole)
m	molality of electrolyte (mole/kg)
$\underline{N}_i$	flux of species i (mole/cm <sup>2</sup> -sec)
Q	defined in equation 11
R	universal gas constant (J/mole-deg)
T	absolute temperature (deg K)

$t$	time (sec)
$t_j^{\circ}$	transference number of species $j$ with respect to the solvent
$\bar{V}_e$	partial molar volume of electrolyte ( $\text{cm}^3/\text{mole}$ )
$\bar{V}_o$	partial molar volume of solvent ( $\text{cm}^3/\text{mole}$ )
$\underline{v}_o$	velocity of solvent (cm/sec)
$\underline{v}_i$	velocity of species $i$ (cm/sec)
$\underline{v}$	volume average velocity (cm/sec)
$y$	position coordinate in diffusion cell (cm)
$z_i$	valence or charge number of species $i$
$\gamma$	mean molal activity coefficient
$\epsilon$	perturbation parameter (see equation 27)
$\mu_i$	electrochemical potential of species $i$ (J/mole)
$\mu_e$	chemical potential of salt in binary electrolyte (J/mole)
$\nu$	$\nu_+ + \nu_-$
$\nu_+, \nu_-$	numbers of cations and anions produced by dissociation of one molecule of electrolyte
$\rho$	density of solution ( $\text{g}/\text{cm}^3$ )

### Superscripts

- $\infty$  indicates values at infinite time, i.e., uniform concentration
- (i) identifies coefficients of terms in perturbation expansion series, eq. 23 and following

Subscripts

- o indicates property of solvent
- +,- indicate properties of cations and anions
- e indicates properties of electrolyte

References

1. Herbert S. Harned and Douglas M. French. "A Conductance Method for the Determination of the Diffusion Coefficients of Electrolytes." Annals of the New York Academy of Sciences, 46, 267-281 (1945).
2. W. Nernst. "Zur Kinetik der in Lösung befindlichen Körper." Zeitschrift für physikalische Chemie, 2, 613-637 (1888).
3. L. G. Longworth. "The Diffusion of Electrolytes and Macromolecules in Solution: A Historical Survey." Annals of the New York Academy of Sciences, 46, 211-240 (1945).
4. Louis J. Gosting. "A Study of the Diffusion of Potassium Chloride in Water at 25° with the Gouy Interference Method." Journal of the American Chemical Society, 72, 4418-4422 (1950).
5. R. H. Stokes. "An Improved Diaphragm-cell for Diffusion Studies, and Some Tests of the Method." Journal of the American Chemical Society, 72, 763-767 (1950).
6. R. H. Stokes. "The Diffusion Coefficients of Eight Uni-univalent Electrolytes in Aqueous Solution at 25°." Journal of the American Chemical Society, 72, 2243-2247 (1950).
7. R. H. Stokes. "Integral Diffusion Coefficients of Potassium Chloride Solutions for Calibration of Diaphragm Cells." Journal of the American Chemical Society, 73, 3527-3528 (1951).
8. John Newman, Douglas Bennion, and Charles W. Tobias. "Mass Transfer in Concentrated Binary Electrolytes." Berichte der Bunsengesellschaft für physikalische Chemie, 69, 608-612 (1965). For corrections, see ibid., 70, 493 (1966).



9. John Newman. "Transport Processes in Electrolytic Solutions." Charles W. Tobias, ed. Advances in Electrochemistry and Electrochemical Engineering, 5, 87-135 (1967).

10. Lars Onsager. "Theories and Problems of Liquid Diffusion." Annals of the New York Academy of Sciences, 46, 241-265 (1945).

11. R. Byron Bird, Warren E. Stewart, and Edwin N. Lightfoot. Transport Phenomena (New York: John Wiley & Sons, Inc., 1960), p. 518.

12. Ibid., p. 556.

13. Ibid., p. 502 and problem 16.I.

14. Ibid., p. 570. Note that the notation is essentially the reverse of that used here.

15. John Newman. Electrochemical Systems (Englewood Cliffs: Prentice-Hall, Inc., 1973), problem 2-1, pp. 60-61.

16. Karel Micka. "Mass Transfer in Concentrated Binary Electrolytes." Berichte der Bunsengesellschaft für physikalische Chemie, 72, 60-63 (1968).

17. Thomas W. Chapman. The Transport Properties of Concentrated Electrolytic Solutions. Ph.D. Thesis, University of California, Berkeley, California, 1967 (UCRL-17768).

LEGAL NOTICE

*This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Atomic Energy Commission, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.*

TECHNICAL INFORMATION DIVISION  
LAWRENCE BERKELEY LABORATORY  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720