

Lawrence Berkeley National Laboratory

Lawrence Berkeley National Laboratory

Title

Grid Integration of Aggregated Demand Response, Part 1: Load Availability Profiles and Constraints for the Western Interconnection

Permalink

<https://escholarship.org/uc/item/6ps4r3xp>

Author

Olsen, Daniel J.

Publication Date

2013-09-09

Grid Integration of Aggregated Demand Response, Part 1: Load Availability Profiles and Constraints for the Western Interconnection

Daniel J. Olsen, Nance Matson, Michael D. Sohn, Cody Rose, Junqiao Dudley, Sasank Goli, and Sila Kiliccote

Lawrence Berkeley National Laboratory

Marissa Hummon, David Palchak, Paul Denholm, and Jennie Jorgenson

National Renewable Energy Laboratory

September 2013

Disclaimer

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or The Regents of the University of California.

Acknowledgements

This work described in this report was coordinated by the Demand Response Research Center and funded by the Department of Energy (DOE) Office of Energy Efficiency and Renewable Energy and Office of Electricity Delivery and Energy Reliability, under Contract No. DE-AC02-05CH11231 and by the California Energy Commission (CEC), Public Interest Energy Research (PIER) Program, under Work for Others Contract No. 500-03-026.

This project benefits synergistically from the CEC PIER funded work conducted by LBNL's Demand Response Research Center. The initial CEC funded study, Watson *et al.* 2012, created a framework upon which to evaluate California commercial, industrial, and agricultural end uses capabilities for slow (2 hour duration) and fast (20 minute duration) demand response. This DOE-funded Western Interconnection Demand Response and Storage Integration Study was conducted in parallel with the CEC PIER funded Collaboration with Lawrence Livermore National Laboratory Smart Grid Modeling (California), allowing the team to leverage the knowledge, data, and methods of both projects to determine demand response capabilities.

The authors would like to thank Ookie Ma, Brendan Kirby, and Mark O'Malley for their leadership on this project. Additionally, the authors would like to thank Mary Ann Piette, Aimee McKane, Phil Price, and Andrew Satchwell for their guidance; Galen Barbose and Mitch Tian for providing data for the project; and Greg Wikler and Manual Alcazar-Ortega for providing reviews of the report.

Abstract

Demand response (DR) has the potential to improve electric grid reliability and reduce system operation costs. However, including DR in grid modeling can be difficult due to its variable and non-traditional response characteristics, compared to traditional generation. Therefore, efforts to value the participation of DR in procurement of grid services have been limited. In this report, we present methods and tools for predicting demand response availability profiles, representing their capability to participate in capacity, energy, and ancillary services. With the addition of response characteristics mimicking those of generation, the resulting profiles will help in the valuation of the participation of demand response through production cost modeling, which informs infrastructure and investment planning.

We present an approach for predicting demand response availability profiles for thirteen end-use loads within the Western Interconnection for the year 2020. For each end-use, we estimate an annual hourly load profile for each of the 36 balancing authority areas. These load profiles are further evaluated and filtered to obtain an estimate of the amount of load available to participate in each of five products (three ancillary services, an energy product, and a capacity product) for each hour of the 2020 calendar year. We supplement these DR availability profiles with expectations on constraints for the duration and frequency of the load responses, in order to best represent the expected electricity customer system, such as their willingness and capability (e.g., equipment) to participate in demand response events. Finally, we discuss the projected theoretical availability for full load participation.

The resulting availability profiles serve as input to a production cost model. In an accompanying report by the same authors (*Modeling Energy-Limited Demand Response in a Production Cost Model*), the integration of these availability profiles into the production cost model is discussed and the value of their participation is estimated.

Keywords: Demand response, ancillary services, production cost modeling, load modeling, resource valuation

Please use the following citation for this report:

Olsen, D. J., N. Matson, M. D. Sohn, C. Rose, J. Dudley, S. Goli, S. Kiliccote (Lawrence Berkeley National Laboratory); M. Hummon, D. Palchak, J. Jorgenson, P. Denholm (National Renewable Energy Laboratory). 2013. *Grid Integration of Aggregated Demand Response, Part 1: Load Availability Profiles and Constraints for the Western Interconnection*. LBNL-XXXX.

Foreword

This report is one of a series stemming from the U.S. Department of Energy (DOE) Demand Response and Energy Storage Integration Study. This study is a multi-National Laboratory effort to assess the potential value of demand response and energy storage to electricity systems with different penetration levels of variable renewable resources and to improve our understanding of associated markets and institutions. This study was originated, sponsored, and managed jointly by the Office of Energy Efficiency and Renewable Energy and the Office of Electricity Delivery and Energy Reliability.

Grid modernization and technological advances enable resources, such as demand response and energy storage, to support a wider array of electric power system operations. Historically, thermal generators and hydropower in combination with transmission and distribution assets have been adequate to serve customer loads reliably and with sufficient power quality, even as variable renewable generation like wind and solar power become a larger part of the national energy supply. While demand response and energy storage can serve as alternatives or complements to traditional power system assets in some applications, their values are not entirely clear. This study seeks to address the extent to which demand response and energy storage can provide cost-effective benefits to the grid and to highlight institutions and market rules that facilitate their use.

The project was initiated and informed by the results of two DOE workshops; one on energy storage and the other on demand response. The workshops were attended by members of the electric power industry, researchers, and policymakers; and the study design and goals reflect their contributions to the collective thinking of the project team. Additional information and the full series of reports can be found at www.eere.energy.gov/analysis/.

Table of Contents

Disclaimer.....	ii
Acknowledgements	iii
Abstract	iv
Foreword	v
Table of Contents	vi
List of Figures	viii
List of Tables.....	x
Executive Summary	1
Introduction	1
Approach.....	2
Results.....	4
Discussion, Conclusions, and Areas of Future Research	7
CHAPTER 1: Introduction.....	9
1.1 Background	9
1.2 Report Organization	11
1.3 Overall Approach.....	11
CHAPTER 2: Methodology	17
2.1 Load Profiles	17
2.1.1 Additional Loads to be Considered in Future Studies	20
2.2 Flexibility Factors	20
2.3 Flexibility Factor Determination.....	22
2.3.1 Commercial Loads	22
2.3.2 Residential Loads	24
2.3.3 Industrial Loads	26
2.4 Modeling Loads as Generation Resources	26
CHAPTER 3: Results: DR Profiles	29
3.1 Projected Demand Response Availability in 2020.....	29

3.2 Capacity and Energy Interpretations	36
3.3 BAA Summaries	38
3.4 Projected Theoretical Availability in 2020	41
CHAPTER 4: Discussion, Conclusions, and Areas of Future Research.....	45
4.1 Discussion	45
4.2 Conclusions.....	46
4.3 Future Research	46
REFERENCES	48
GLOSSARY	52
Appendix A - Tables of Flexibility Factor Values	54
Appendix B – Table of Files.....	57
Appendix C – Product availability patterns.....	58
Estimated Product Availability	58
Product Availability Relative to Total Load.....	64
Technical Potential Relative to Total Load	70
Appendix D – Resource Load Profiles	76
Appendix E – Resource Contributions to Products	81
Appendix F – Geographic Dispersion of Resource Availability	87

List of Figures

Figure ES-1: Demand response generator profile	4
Figure ES-2: Product availability ranges with maximum and minimum hours.....	5
Figure ES-3: Regulation reserves availability pattern.....	6
Figure 1: Balancing Authority Areas (BAAs). Boundaries are approximate.....	12
Figure 2: Filtering hierarchy from total load to provisioned DR for ancillary services.....	13
Figure 3: Illustration of flexibility filters combined to achieve overall flexibility for commercial lighting.....	14
Figure 4: Demand response generator profile	15
Figure 5a: CEUS load profiles for selected end-uses: yearly profile showing average daily demand.	18
Figure 5b: CEUS load profiles for selected end-uses: daily profile showing average hourly demand.	18
Figure 6: Product availability ranges with maximum and minimum hours	30
Figure 7: Availability pattern for regulation reserves	31
Figure 8: Availability pattern for the energy product	31
Figure 9a: Average daily contingency reserve availability over one year, by resource	33
Figure 9b: Average hourly contingency reserve availability over one day, by resource	33
Figure 10: Ratio of capacity product availability to total load.....	34
Figure 11: Ratio of average Contingency reserves availability from DR resources to average load, by BAA.....	35
Figure 12a: Capacity value derivation in PSE.....	36
Figure 12b: Capacity value derivation in SCE	37
Figure 12c: Capacity value derivation in AVA	37
Figure 13a: Regulation reserves availability relative to total load, by BAA.....	38
Figure 14a: Projected theoretical availability of the capacity product across the Western Interconnection, relative to total load	44
Figure 14b: Projected theoretical availability of contingency reserves across the Western Interconnection, relative to total load	44

List of Tables

Table ES-1: Product Characteristics.....	2
Table ES-2: End-uses considered	2
Table ES-3: Total Western Interconnection product availability relative to load, projected availability and projected theoretical availability	7
Table 1: End-uses considered	11
Table 2: Ancillary service products considered.....	16
Table 3: Participation of resources in ancillary services products. Shading colors identify resources which contribute to the same set of products.	21
Table 4. Commercial Cooling and Heating Values	23
Table 5. Residential Cooling and Heating Values	25
Table 6. Residential Electric Water Heating and Refrigerator Values.....	25
Table 7: Product constraints	28
Table 8: Resource ramping times for slow and fast responses.	28
Table 9: Summary of Product Capabilities, by Balancing Authority Area.....	40
Table 10: Projected Availability, Maximum and Cumulative, and Projected Theoretical Potential – Regulation Reserves.....	41
Table 11: Projected Availability, Maximum and Cumulative, and Projected Theoretical Availability – Flexibility Reserves	42
Table 12: Projected Availability, Maximum and Cumulative, and Projected Theoretical Availability – Contingency Reserves	42
Table 13: Projected Availability and Projected Theoretical Availability of Energy and Capacity Products.....	43

Executive Summary

Introduction

The goal of the Demand Response and Storage Integration Study is to estimate the value that demand response (DR) and storage resources can provide to the United States by participating in energy, capacity, and ancillary services in the year 2020. A key part of this investigation is an estimation of the capabilities of loads to respond to these grid service needs. This report focuses on describing the capabilities of loads to provide grid services via DR, and we investigate the loads within the Western Interconnection to develop the process of load analysis, with the goal of eventually expanding to the entire United States. The Western Interconnection, Eastern Interconnection, and Texas Interconnection are the three synchronous alternating current networks in the United States; all areas within an interconnection are electrically linked during normal operation.

The value that load resources can provide to the grid is estimated using a production cost model with hourly resolution; therefore, we estimate load capabilities for each hour. Though some grid services require sub-hourly response times, the production cost model provisions them for each hour according to projected grid needs within that hour. Load capabilities are disaggregated by end-use, balancing authority area, and market product. The assumed products are described in Table ES-1. This report does not presume to estimate precisely the amount of load available to respond to a given product in a given hour in the year 2020; rather, this report presents the results of an initial estimation effort based on available information, and forms a general framework to refine these estimates as more or better data emerge.

Table ES-1: Product Characteristics

Products		Physical Requirements			
Product Type	General Description	How fast to respond	Length of response	Time to fully respond	How often called
Regulation	Response to random unscheduled deviations in scheduled net load (bidirectional)	30 seconds	Energy neutral in 15 minutes	5 minutes	Continuous within specified bid period
Flexibility	Additional load-following reserve for large un-forecasted wind/solar ramps (bidirectional)	5 minutes	1 hour	20 minutes	Continuous within specified bid period
Contingency	Rapid and immediate response to a loss in supply	1 minute	≤ 30 minutes	≤ 10 minutes	\leq Once per day
Energy	Shed or shift energy consumption over time	5 minutes	≥ 1 hour	10 minutes	1-2 times per day with 4-8 hour notification
Capacity	Ability to serve as an alternative to generation	Top 20 hours coincident with balancing authority area system peak			

Approach

Sector-specific end-uses are selected for inclusion in the study based on the magnitude of their electrical demand (their “load”), and their ability to control their demand in response to the needs of the electrical grid. Ultimately, we select thirteen end-uses for inclusion, based on their significant share of total load and their likelihood of having demand response enabling controls systems by 2020. These end uses span the residential, commercial, industrial, and municipal sectors, and are listed in Table ES-2. All available data on magnitude and the pattern of the selected end-uses are gathered and processed in order to predict hourly load profiles for the year 2020: one for each combination of end-use and balancing authority area. In addition to these end-uses, many types of manufacturing process loads are potential demand response providers (Starke *et al.* 2013).

Table ES-2: End-uses considered

Residential	Commercial	Industrial	Municipal
<ul style="list-style-type: none"> • Space Cooling • Space Heating • Water Heating 	<ul style="list-style-type: none"> • Space Cooling • Space Heating • Indoor Lighting • Ventilation 	<ul style="list-style-type: none"> • Agricultural Water Pumping • Data Centers • Refrigerated Warehouses 	<ul style="list-style-type: none"> • Freshwater Distribution Pumping • Road & Garage Lighting • Wastewater Pumping

To determine what fraction of these loads can respond to each of the products in each hour of the year, three flexibility filters are established:

- **Sheddability** refers to the percentage of the load for a given end-use which can be shed by a typical demand response strategy, assuming adequate communications, controls and incentives exist
- **Controllability** refers to the percentage of the load for a given end-use which is associated with equipment that has the necessary communications and controls capabilities in place to trigger and achieve load sheds/shifts.
- **Acceptability** refers to the percentage of the load for a given end-use which is associated with equipment or services that are willing to accept the reduced level of service in a demand response event, in exchange for financial incentives.

Applying these criteria to the hourly load profiles results in five demand response availability profiles with hourly resolution (one for each product) for each combination of end-use and balancing authority area (BAA). The response characteristics of the end-uses are described as analogous to conventional generators by specifying response times, ramp rates, minimum and maximum up times, and allowable call frequency for each combination of end-use and product. The response time is the time between when a product signal is sent and when the end-use begins generating (shedding load) and the ramp rate describes the rate that generation (load sheds) can be increased or decreased. Minimum and maximum up-times refer to limits on the length of sheds, and the call frequency determines how often sheds can be called. For end-use resources which achieve load reductions by using some form of energy storage, where the storage medium must be “re-charged”, the end-uses are modeled as storage and the timing and magnitude of the energy re-charge are specified. These generator profile parameters are shown graphically in Figure ES-1. The maximum “generation” at each hour is specified using the demand response availability profiles.

One example of the energy storage concept can be seen with agricultural irrigation. Energy is used to pump water onto fields to maintain soil moisture levels within an acceptable range as water leaves the soil through evaporation and uptake by crops. The water already within the field’s soil can be considered a form of storage, and during a demand response event irrigation can be curtailed due to this stored water, which keeps the soil moisture level in the appropriate range as water slowly leaves the soil (“dis-charging”). However, during normal operation, the grower will want to maintain a buffer above minimum soil moisture levels, so after an event they will pump more water to make up for what was not pumped during the demand response event (“re-charging” the soil). Other storage mediums considered include pumped storage of wastewater and freshwater for municipal treatment facilities and storage of thermal energy in buildings, domestic water heating, and refrigerated warehouses.

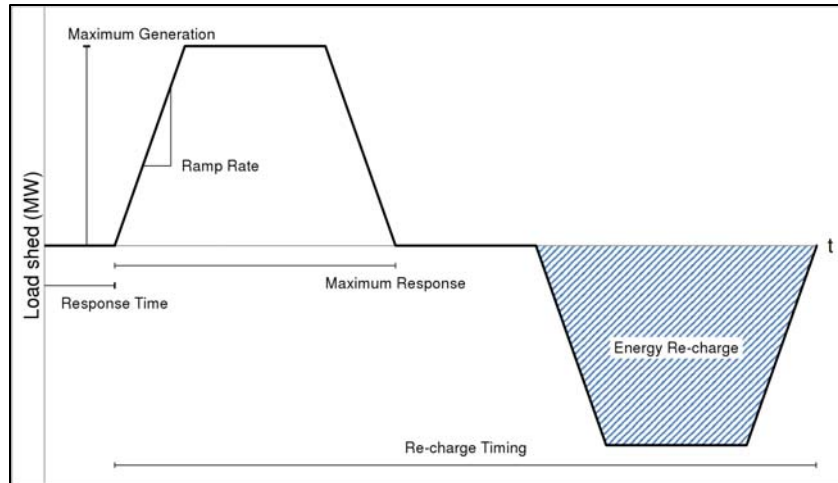


Figure ES-1: Demand response generator profile

Results

Based on the assumptions made about the magnitude, behavior, and abilities of the selected end-uses within the Western Interconnection to respond, the demand response resources can contribute as much as 4,233 MW of the capacity product, 2,846 MW of the energy product, 2,990 MW of contingency reserves, 2,162 MW of flexibility reserves, and 1,822 MW of regulation reserves. Expressed as a fraction of total predicted Western Interconnection load in each hour, these values represent up to 2% of load for regulation reserves, 2.3% for flexibility reserves, 2.8% for contingency reserves, 2.3% for the energy product, and 3.5% for the capacity product. Hourly total loads are estimated using the Transmission Expansion Planning Policy Committee (TEPPC) PC1 reference case.

The interpretation of the availability values for the energy and capacity products differs from the interpretation of the ancillary services values. For each BAA, the energy product availability is combined with the maximum event durations for each resource to calculate the largest single-event energy shift that can be achieved. The availability of the capacity product from DR resources is only relevant during the 20 hours of highest load for each BAA; the average availability during these hours is referred to as the capacity value for the resources in that BAA.

The range of values for each product is shown in Figure ES-2. For each product, the range of total product availability within the Western Interconnection is calculated by summing the availability of each resource in each BAA. Though most of the total product availability is in a somewhat narrow range (the blue boxes, representing the range between the first and third quartile), the maximum availability can be several times larger, as shown by the long whiskers for each product, which represent the minimum and maximum values.

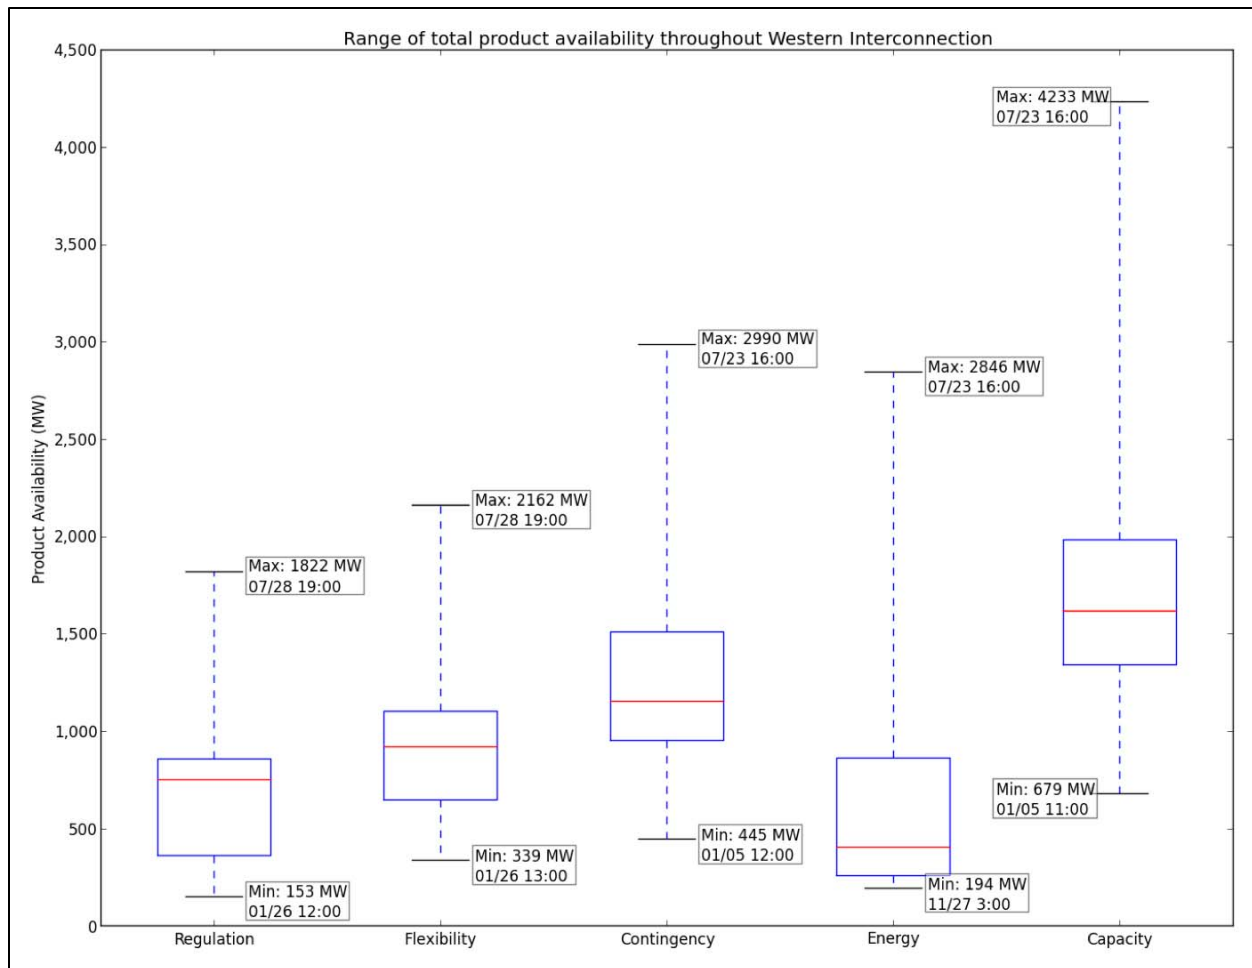


Figure ES-2: Product availability ranges with maximum and minimum hours

In general, product availability maximums are in the afternoons and evenings, there is significant availability throughout the year, and consistent patterns of availability emerge by product. The availability pattern for regulation reserves is shown in Figure ES-3. In the figure, the total availability of regulation reserves throughout the Western Interconnection for each hour is calculated by summing the availability for each resource in each BAA, is given a color code based on its magnitude (blue for minimum availability, and red for maximum), and then plotted on the left side of the figure, where the horizontal axis represents the days of the year and the vertical axis represents the hours of each day. The frequency of each color, representing the number of hours that the total product availability is in a certain range, is shown in the histogram to the right. For regulation reserves, there is usually more availability at night than during the day, as represented by the light blue and green horizontal band running through most of the year. However, during summer there is increased availability in the afternoon and early evening, as represented by the yellow, orange, and red in the upper center. Availability patterns for each of the products are presented in Appendix C.

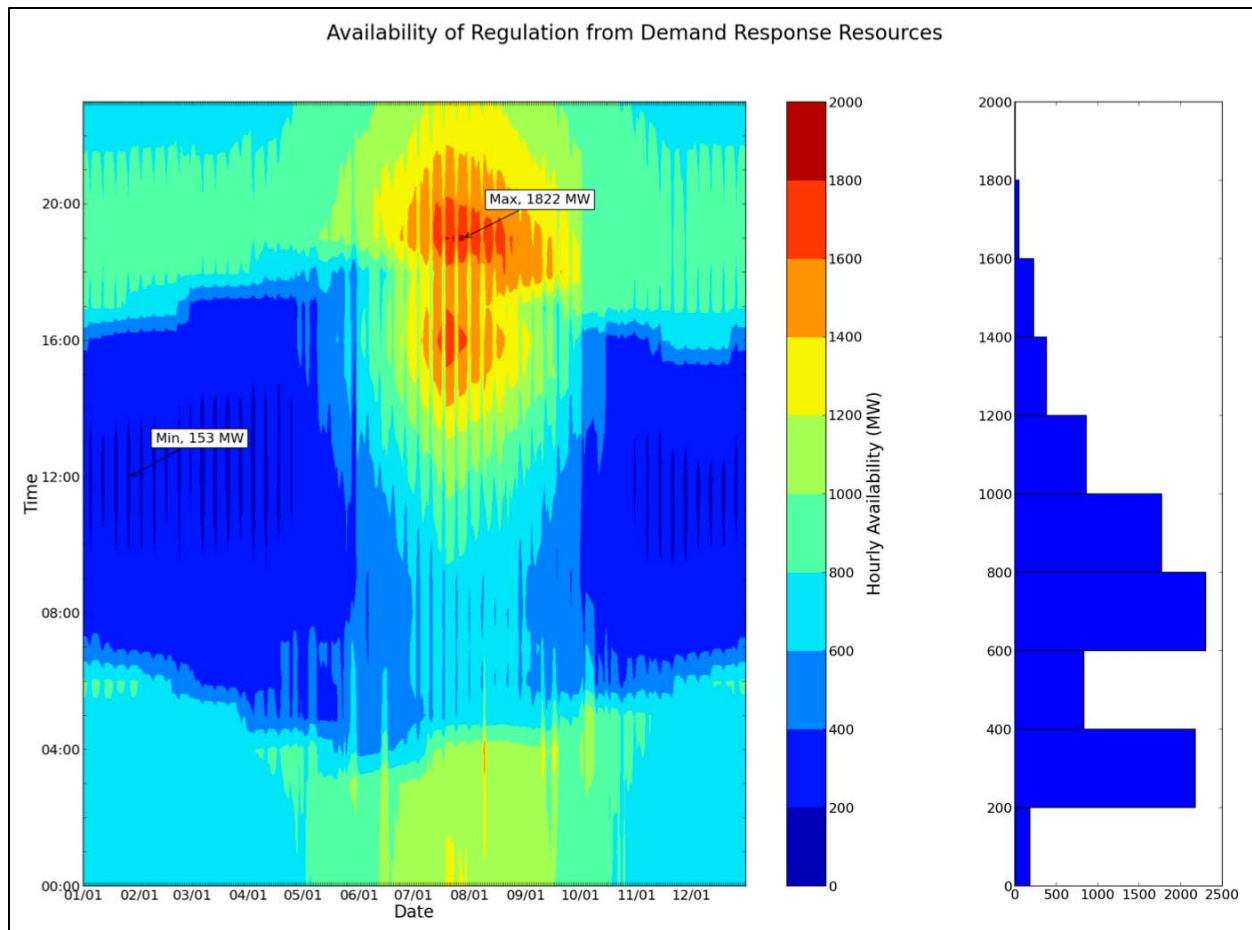


Figure ES-3: Regulation reserves availability pattern

These availability profiles can be disaggregated in several ways: one example is by resource. Over the course of a day, the availabilities from the resources vary, and reach their maximums at different times:

- Commercial lighting and ventilation peak during the hours of 8am to 6pm.
- Commercial and residential heating peak from 7am to 9am.
- Commercial and residential cooling peak from 12 noon to 8pm.
- Residential water heating peaks in the morning and evening.
- Municipal lighting peaks from 8pm to 4am.
- Refrigerated warehouses peak from 12 noon to 4pm.
- Agricultural pumping, data centers, municipal pumping, and wastewater pumping remain fairly flat.

These maximum availability times vary between balancing authority areas due to differences in the load shapes and assumed differences in the end-user population's willingness to shed load at different times of day (e.g. customers in areas with a history of afternoon demand response are assumed to be more willing to shed or shift loads in the afternoon, compared to those in other areas).

Over the course of a year, the availabilities from each resource also reach their maximums at different periods:

- Agricultural pumping, commercial cooling, residential cooling, and refrigerated warehouses peak in the summer.
- Municipal lighting, commercial heating, and residential heating peak in the winter.
- Data centers, residential water heating, commercial lighting, commercial ventilation, municipal pumping, and wastewater pumping loads remain fairly constant over the year, with a regular weekday-weekend usage pattern.

These patterns are shown in Appendix E.

Since the Controllability and Acceptability of the selected end uses are dependent on the actions of policymakers, utilities, and system operators over the next several years, it is also useful to analyze a projected theoretical availability case, which assumes full Controllability and Acceptability (i.e. all loads are able to participate, and choose to be available at all times). This projected theoretical availability represents the maximum achievable availability, assuming no change to the magnitude and pattern of load profiles. In this case, there is a maximum of 24 GW available for regulation and flexibility reserves, 27 GW available for contingency reserves, 26 GW available for the energy product, and 32 GW available for the capacity product. These numbers represent roughly a ten-fold increase in availability compared to the projected availability. The projected availability and projected theoretical availability are compared in Table ES-3.

Table ES-3: Total Western Interconnection product availability relative to load, projected availability and projected theoretical availability

Product	Projected Availability (relative to total load)	Projected Theoretical Availability (relative to total load)
Regulation	153-1,822 MW (0.2-2.0%)	3,954-23,906 MW (6-20%)
Flexibility	339-2,162 MW (0.4-2.3%)	3,954-23,906 MW (6-20%)
Contingency	445-2,990 MW (0.5-2.8%)	5,156-26,712 MW (7-22%)
Energy	194-2,846 MW (0.2-2.3%)	2,185-25,592 MW (2-21%)
Capacity	679-4,233 MW (0.8-3.5%)	5,390-32,353 MW (7-27%)

Discussion, Conclusions, and Areas of Future Research

In this study, we conducted a detailed investigation of load capabilities, and our results provide an initial estimate of the magnitude of bulk power system services available from end-use loads, and constraints on their use. We present a transparent approach to predicting load availability that is as data-driven as possible. By design, the profiles are results of various aggregations and analysis decisions due to data limitations. Nonetheless, the results are the first significant efforts on how to produce such profiles. They are suitable for scoping studies, ground-truthing models, and prioritizing future data gathering and analyses. The use of

analysis criteria using “shedability”, “controllability”, and “acceptability” as qualitative and quantitative filters is novel, testable, and extensible to other regions in the US.

The process of integration of these end-uses into a production cost model and an analysis of their behavior in a test system under various scenarios will be described in the next report in this series (Hummon *et al.* 2013). The results from model runs in a full Western Interconnection model will be described in a subsequent report. These efforts assess the projected theoretical availability and economic incentives for load to participate in capacity, energy, and ancillary services markets; however, they do not cover the regulatory and market aspects of load participation. These regulatory and market issues are discussed in *Market and Policy Barriers for Demand Response Providing Ancillary Services in U.S. Markets* (Cappers *et al.* 2013) a report developed as part of this study.

Although this study produces an estimation of both the hourly projected availability and the projected theoretical availability for DR to participate in ancillary services in 2020, additional work is needed to fully interpret our results. For example, a detailed sensitivity analysis between various design and input decisions on model outcomes is still needed. Moreover, new high-resolution, end-use, load data are becoming available at a rapid pace. Limitations and uncertainty in the present study will be reduced as we incorporate such data. Our analysis does not take into account the economics of participation, the effort required to enable the end-uses to communicate with grid operators, the effort required to control the end-uses effectively, or the impact on the distribution grid of high penetrations of responsive load.

Finally, there have been few large-scale assessments of the capabilities of loads to respond to various DR products other than for shaving peak loads. Future work with potential to expand on the conclusions of this report includes:

- Collection and analysis of multi-region, high-resolution end-use demand data to improve estimates of baseline load profiles
- Field testing of the end-uses covered in this report to quantify their response characteristics and flexibility
- Analysis of distribution system stability during DR events in areas with high penetrations of responding load
- Detailed assessments of consumer behaviors and preferences regarding demand response participation, including customer fatigue (reduced willingness to respond to events in quick succession to previous events) and price elasticity (the relationship between price and magnitude of participation).

These additional analyses will test the assumptions used in this report and refine projections of the potential capabilities of demand response resources to serve as alternatives and complements to conventional supply options. These future studies will require careful research designs that facilitate access to data for researchers and market participants. This topic is an important area of research and will require cooperation among national, state, and local agencies in developing a common vision for new technology, markets, and policies for advanced DR participation.

CHAPTER 1:

Introduction

1.1 Background

Electricity grid operators must continuously balance supply and demand on the grid. To meet the demand for electricity, power is generated, transmitted, and distributed to users; this process is aided by scheduling energy and holding ancillary services. While energy scheduling balances supply with forecasted load, ancillary services respond to unexpected changes in load that occur in real time. A variety of ancillary services exist, and contrary to their name, these services are vital to maintaining a stable electric grid. In addition to the scheduling and dispatch of the grid assets, ancillary services react to unscheduled load-generation mismatches to keep the system frequency within acceptable limits and tie-line flows among balancing areas at their scheduled levels, and also provide backup generation able to quickly come online in the case of unexpected failure of generators or transmission lines. This subset is commonly referred to as operating reserves.

Though ancillary services have been traditionally provided by generators, many responsive end-uses are also capable of, and are beginning to come into use to provide, ancillary services in the United States (Ela *et al.* 2011). Some responsive end-uses can respond quicker than generation resources, as some end-uses can shed load instantaneously as soon as the control signal is received, while generators have limitations on their ramp rates due to the physical inertia of their mechanical and thermal systems. In addition, there may be less risk procuring ancillary services from large collections of small participants, compared to a few large ones.

Most states require their utilities to undergo some type of Integrated Resource Planning (IRP) process (SEEAAction 2011). In an IRP process, the utilities must develop a long-term plan for how to provide their customers with safe and reliable service, at minimal cost, using a combination of supply-side and demand-side resources. Since the energy, capacity, and ancillary services needs of the grid can be fulfilled by a mixture of both traditional generation, energy efficiency, and responsive loads, the costs and benefits of each option must be assessed to determine the least-cost combination. Since the main incentives for loads to respond to grid needs are economic ones, market simulations must be conducted to determine the amount of load which can be expected to participate, and the resulting prices. This information can then be used to advise the ratio of resources to procure to provide services in the future.

Previous work has modeled participating loads, also known as demand response (DR), in several ways. Kwag and Kim (2012) demonstrate the modeling DR as generators using available generation magnitude, minimum and maximum generation length, participation rate, and a quadratic cost function dependent on power 'generated,' and show that system operating cost decreases with increasing load participation. Aalami *et al.* (2010) model electricity demand as having price elasticity and with some ability to shift the time of consumption, with the impact of several utility programs rewarding or penalizing consumers based on their load deviation, and ranks the model outcomes based on various metrics. Su and Kirschen (2009) model an

electricity market where some consumers are price-responsive and can shift the time of consumption and conclude that the reduction in generating costs is shared amongst responsive and non-responsive consumers. Wang *et al.* (2003) see a similar benefit in a market where loads and generators can submit bids for both energy and some ancillary services. Behrangrad *et al.* (2011) model generators and loads bidding into a spinning reserve market, each with piecewise linear cost curves, and show that load participation can both reduce system cost and reduce generation-associated pollution.

This work demonstrates an approach for scoping the potential depth of end-uses supplying ancillary services. This approach is distinct from the previously mentioned work in several ways. First, the estimation of DR availability varies over the course of each day as well as over the course of a year according to weather effects, the behavior of end-use equipment, and the desires of their users. These variations must be taken into account for an accurate valuation of the loads. Second, the participation of the loads is constrained based on the inherent inconvenience of altering electricity consumption. Finally, the daily and seasonal variations in ancillary service market prices are incorporated into the valuation of load participation. This research is posed as a scoping study and does not presume to present definitive estimates of DR for the Western Interconnection. Rather, the overall research presents initial estimates of DR availability, a framework to further refine these estimate, and a way to value the aggregate response, taking into account their variability and constraints. This research highlights a number of current data needs and knowledge gaps.

This report is the first part of a series, with the overall approach to this project is summarized in Ma *et al.* (2013). Lawrence Berkeley National Laboratory's role in the project is the development of the load capability profiles, which can be implemented in production cost modeling of the power system. Production cost models are typically used by power system planners to evaluate options for system expansion; gauge aspects of reliability and market efficiency; and estimate fuel costs, operations and maintenance costs, and emissions. This phase of modeling focuses on the Western Interconnection, and is run by the National Renewable Energy Laboratory. Interpretation of the results of this modeling effort in a test system will be discussed in the second report of this series (Hummon *et al.* 2013), and interpretation of model runs in the full Western Interconnection will be discussed in a subsequent report. Market and policy issues are discussed in Cappers *et al.* (2013), also developed as part of this study.

1.2 Report Organization

The report is organized as follows:

- Chapter 1 describes the background of the project, and Section 1.3 describes our overall approach to load characterization.
- Chapter 2 describes our methodology for characterizing load capabilities for the Western Interconnection.
- Chapter 3 describes the results of our load characterization in the Western Interconnection.
- Chapter 4 discusses the implications of our works and its limitations, concludes the report, and offers suggestions for future research.

1.3 Overall Approach

This project is an assessment of the amount of load able to respond to energy and ancillary services calls in the year 2020, for each of the 8,784 hours of the year, the value of their participation to the grid in reducing overall system costs, and the compensation the responding loads might receive from market payments. The goal is not to make a precise projection of the amount of responsive load that will be available in any given hour; rather, the aim is to make a reasonable estimate of the potential magnitude and pattern of responsive load, and the constraints on its responses. The estimates can be refined through an iterative process based on the analysis of the results of the production cost model that can illustrate the types of resources of greatest value to the power system.

The load capabilities research focuses primarily on residential and commercial end-use loads, with some industrial and municipal loads selected based on Lawrence Berkeley National Laboratory's (LBNL) previous experience with demand response in these sectors (Woo and Herter 2006, Kiliccote *et al.* 2010, Goli *et al.* 2011, Ghatikar *et al.* 2012, Olsen *et al.* 2012, Watson *et al.* 2012, Marks *et al.* 2013). Specific end-uses within these sectors are selected for inclusion based on whether they possess a significant share of load and their likelihood of having DR controls by 2020 (if not there already). Table 1 lists the end-uses included in this study. The projected economics of participation, existence of utility programs in which the loads can participate, and policy issues related to load participation are outside the scope of our assessment.

Table 1: End-uses considered

Residential	Commercial	Industrial	Municipal
<ul style="list-style-type: none">• Space Cooling• Space Heating• Water Heating	<ul style="list-style-type: none">• Space Cooling• Space Heating• Indoor Lighting• Ventilation	<ul style="list-style-type: none">• Agricultural Water Pumping• Data Centers• Refrigerated Warehouses	<ul style="list-style-type: none">• Freshwater Distribution Pumping• Road & Garage Lighting• Wastewater Pumping

The availability of loads is disaggregated by balancing authority areas (BAAs) within the Western Interconnection, of which there are 36. These areas are shown in Figure 1 (three small BAAs in Washington are omitted from the map: CHPD, DOPD, and GCPD). BAA abbreviations are expanded in the Glossary.

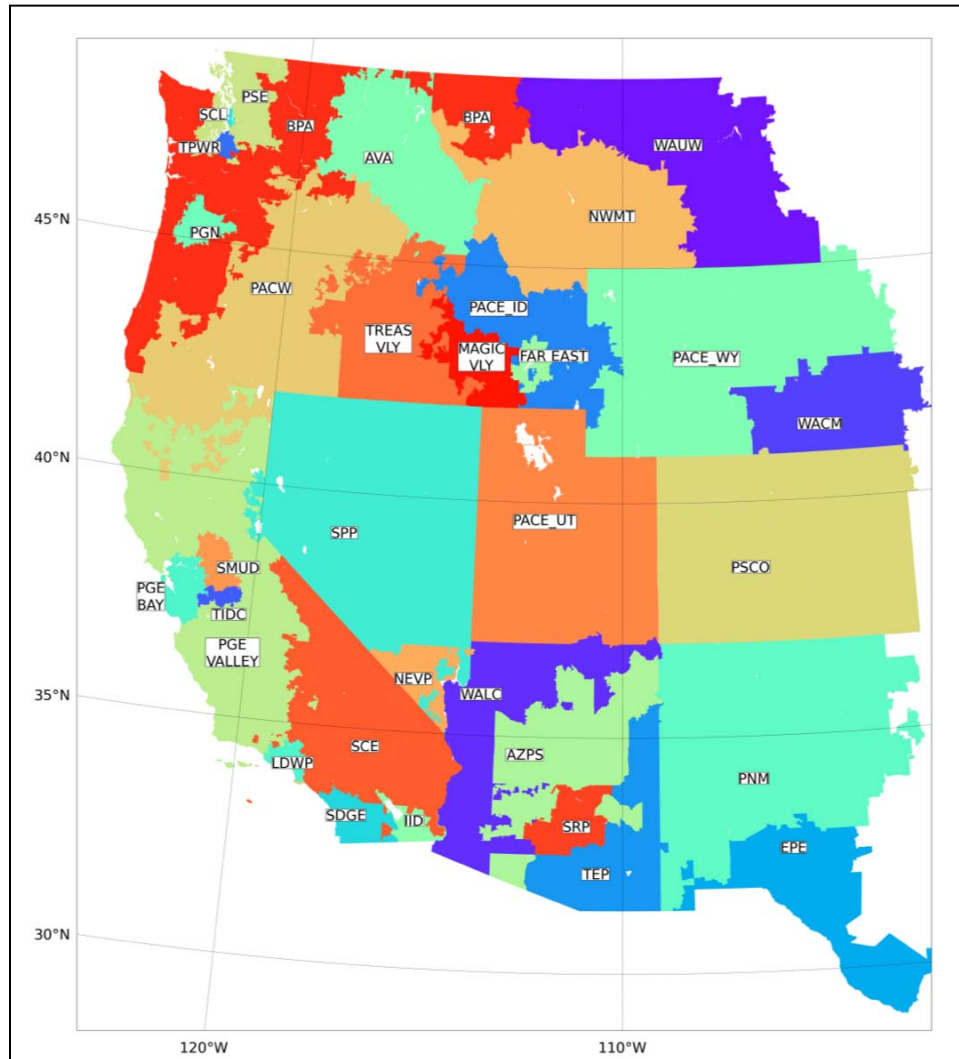


Figure 1: Balancing Authority Areas (BAAs). Boundaries are approximate.

To estimate the magnitude of DR potentially available from a selected end-use at each hour, it is necessary to first estimate the magnitude of end-use loads at each hour. Representative load profiles for each end-use are scaled to match predicted energy consumption for 2020, and in some cases modified to account for weather differences between locations. A full listing of the load profiles generated, by BAA and resource, can be found in Appendix B.

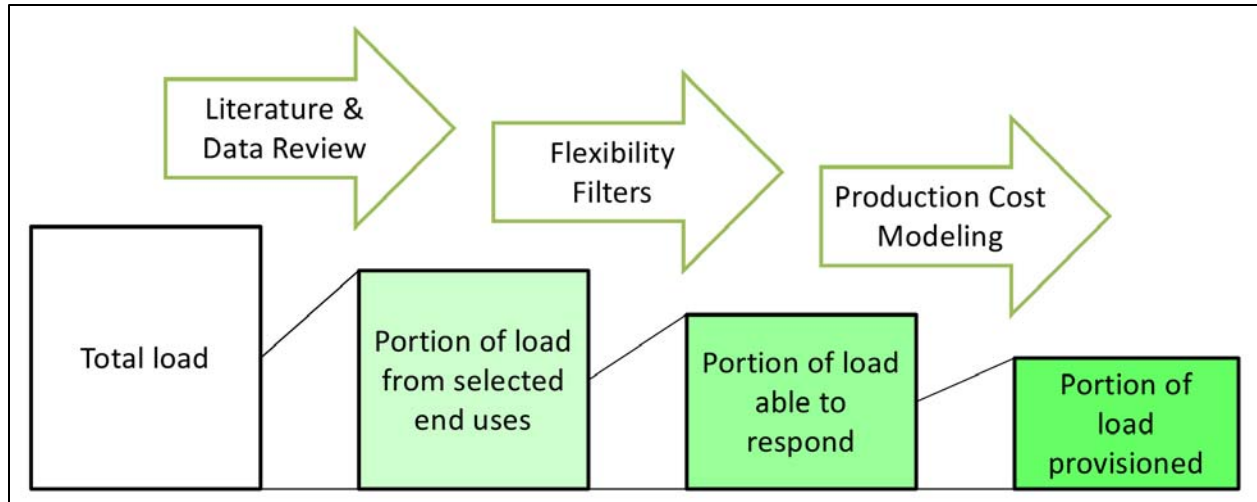


Figure 2: Filtering hierarchy from total load to provisioned DR for ancillary services.

The hourly load profiles for each end-use (“resources”) are run through a set of filters to obtain an estimate of the load shed which could be achieved at any given hour (“availability profiles”), for energy, capacity, and ancillary services (“products”). A subset of this available load is coincident with the grid needs, and could be provisioned (reserved) in a production cost model, as shown in Figure 2. Each filter is a one-dimensional vector of 8,784 hourly values (the study year 2020 is a leap year) between 0 and 1, representing the fraction of load during each hour that meets each filter criteria.

Three “flexibility filters” are used to arrive at the overall flexibility values for each hour.

- **Sheddability** refers to the percentage of the load for a given end-use which can be shed by a typical demand response strategy, assuming adequate communications, controls and incentives exist.
- **Controllability** refers to the percentage of the load for a given end-use which is associated with equipment that has the necessary communications and controls in place to trigger and achieve load sheds/shifts.
- **Acceptability** refers to the percentage of the load for a given end-use which is associated with equipment or services that are willing to accept the reduced level of service in a demand response event, in exchange for financial incentives.

Depending on the end-use, these flexibility filter values may vary throughout the year, week, and day, and are affected by end-users’ requirements and the corresponding operation schedules. Figure 3 shows an example of the flexibility factors and the resulting “overall flexibility” for commercial lighting, where the overall flexibility is a function of the individual flexibility filters and ranges between 3 and 5%.

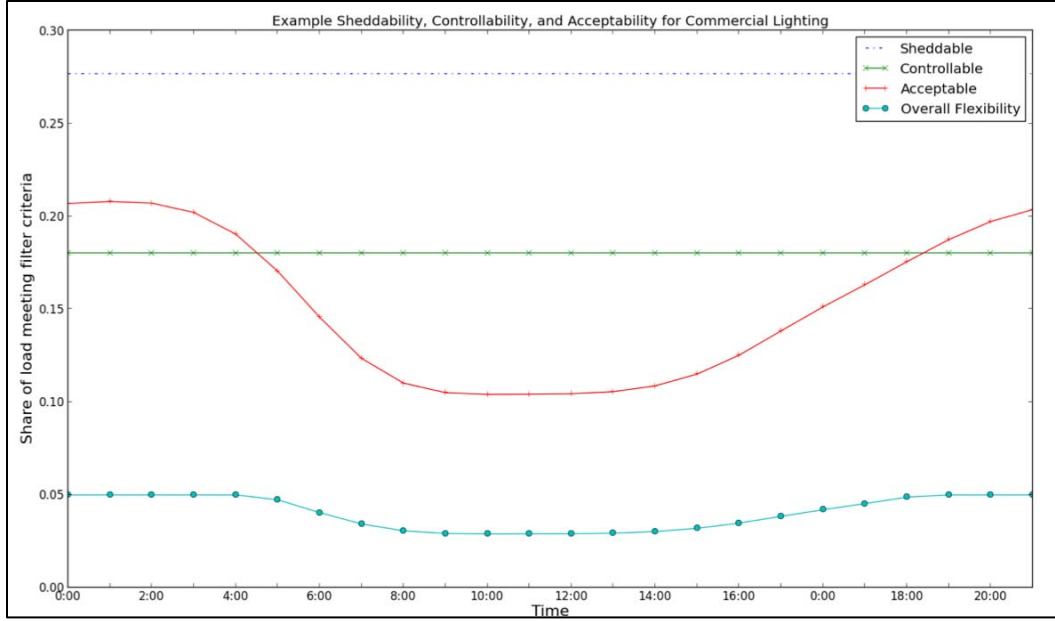


Figure 3: Illustration of flexibility filters combined to achieve overall flexibility for commercial lighting.

The end result of this approach to characterizing loads is two-fold: first, for each combination of end-use and product, an annual availability profile is produced, with hourly resolution. This resolution is necessary as it matches the resolution of the power system and market modeling, which the end-uses will participate in. Second, a generator profile and a set of constraints that can be used to interpret the availability profiles for each end-use is produced. Figure 4 demonstrates some of these constraints. The constraints considered are minimum and maximum shed length, number of calls in a given period of time, a requirement to re-charge ‘borrowed’ energy for some end-uses, and when this energy can be re-charged. For thermal end-uses, energy may be ‘pre-charged’ before an event begins by storing this thermal energy in the building for a short period of time. Depending on building characteristics and the details of the pre-charging regime, the amount of energy used may be more or less than during a typical day, but for simplicity all pre-charging/re-charging energy magnitude is set at 100% of shifted energy. Some pumping end-uses also have the ability to pre-charge by using inline storage, in these cases the pre-charge is achieved by advancing pumping schedules.

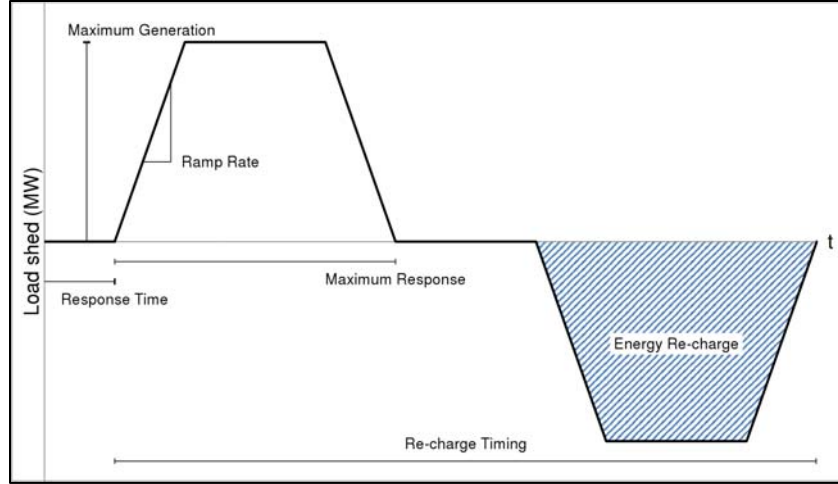


Figure 4: Demand response generator profile

The generated demand response availability profiles are indicative of the maximum availability of loads to respond in each hour. Since the number of calls any particular load will respond to in a given timeframe is limited, a production cost model will consider these constraints when deciding which resources to procure in each hour.

For the purposes of this project, DR is assumed to provide several ancillary services, as well as an energy product and a capacity product. These products vary in their response time, duration, and frequency of call. As such, not all resources can contribute to all products. Regulation is the fastest product and is called continuously, to balance short-term (<5 minute) mismatches of supply and demand. It is generally energy neutral over long time periods (>15 minutes). Contingency reserves are called in the event that a large generator or transmission line fails, and are brought online quickly while additional generation is needed. Flexibility reserves, a proposed product being considered by the California Independent System Operator, the Midcontinent Independent System Operator, and others, will be used to correct for unexpected large and long-lasting (several hours) errors in supply and demand, such as the ramping of a large solar or wind generation facility (Navid *et al.* 2011, Xu & Tretheway 2012). The capacity and energy products are slower and longer-lasting products, scheduled day-ahead and used to reduce the required generation energy over several hours. The details of these products are shown in Table 2.

Several criteria are considered when deciding which products each resource can contribute to. These include:

- **Time dependence:** whether the end-use's provided service is on a fixed schedule, or can be shifted in time without incident. For example, lighting loads in occupied space are time dependent, but the defrosting of evaporator coils in refrigeration systems is not.
- **Storage:** whether the end-use's provided service has energy storage (whether passive or active). For example, space heating and cooling loads have energy storage in the form of thermal mass of the served building, but ventilation loads do not.
- **Wear and tear:** Whether controlling the end-use for the selected product would cause a significant amount of wear and tear on equipment. For example, controlling a large

chiller with control signals every 4 seconds would put undue wear and tear on the chiller, while controlling dimmable lighting at the same frequency should be much less harmful.

- **Independence:** whether the end-use is part of a standalone process, or if it must be coordinated with other end-uses up- or down-stream of it. For example, ventilation and heating or cooling systems should be controlled together, otherwise one system may try to compensate for the reduced service of the other by increasing its energy usage.

Table 2: Ancillary service products considered.

Products		Physical Requirements			
Product Type	General Description	How fast to respond	Length of response	Time to fully respond	How often called
Regulation	Response to random unscheduled deviations in scheduled net load	30 seconds	Energy neutral in 15 minutes	5 minutes	Continuous within specified bid period
Flexibility	Additional load following reserve for large un-forecasted wind/solar ramps	5 minutes	1 hour	20 minutes	Continuous within specified bid period
Contingency	Rapid and immediate response to a loss in supply	1 minute	≤ 30 minutes	≤ 10 minutes	\leq Once per day
Energy	Shed or shift energy consumption over time	5 minutes	≥ 1 hour	10 minutes	1-2 times per day with 4-8 hour notification
Capacity	Ability to serve as an alternative to generation	Top 20 hours coincident with balancing authority area system peak			

CHAPTER 2: Methodology

End-use loads are selected for inclusion based on possession of a significant share of load and their likelihood of having demand response enabling controls systems by 2020. Load profiles for the included end-uses are collected from publically available data, or constructed based on a combination of sources (e.g. combining a monthly pattern from one source with a daily pattern from another). Flexibility filters are constructed, varying spatially and temporally, to filter the total end-use load into end-use load available to participate in energy and ancillary services. Finally, participating loads are translated into generator profiles to simulate the constraints that limit the participation of the available load.

Section 2.1 lists the sources of the load profiles to be used for the selected end-uses. Section 2.2 discusses the approach for filtering load profiles to yield demand response availability profiles. Section 2.3 discusses the assumptions used to assign magnitudes to the filters. Section 2.4 discusses the process of describing the loads as generation resources.

2.1 Load Profiles

Commercial: Commercial load profiles from California are obtained from the California Commercial End-use Survey (CEUS), conducted by the California Energy Commission (CEC). CEUS provides a stratified random sample of 2,800 commercial buildings, and collects their physical characteristics and equipment details, along with their demand data and weather data from nearby weather stations. The buildings were modeled using a custom-built software program (DrCEUS™, incorporating previously developed software SitePro¹ and eQuest², which uses DOE 2.2 for simulation), and the model parameters were calibrated using the measured data. The calibrated models were then run using typical weather profiles, to simulate the hourly demand experienced in a ‘typical’ year (California Energy Commission 2006).

The four selected end-uses (heating, cooling, lighting, and ventilation) make up 57% of the simulated electricity consumption of the commercial building stock. Figures 5a and 5b show the average demand for each day and the average demand for each hour, for each end-use. Looking at the daily averages, weekends and holidays can be observed as dips in load, and heating and cooling loads can be seen to rise and fall with the seasons. For the hourly averages, the occupancy impact on loads can be seen for lighting and ventilation, and the need to overcome the thermal capacitance and infiltration of the building can be seen for temperature-dependent loads. Load profiles for all considered end-uses are shown in Appendix D.

¹ <https://www.itron.com/na/productsAndServices/Pages/Load%20Research%20Services.aspx>

² <http://www.doe2.com/equest/>

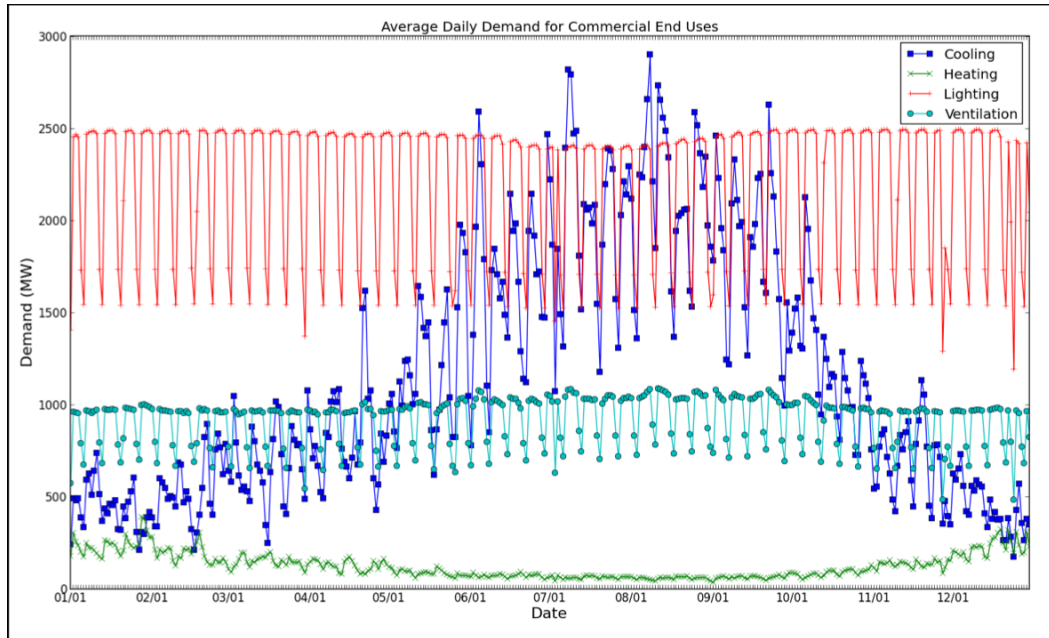


Figure 5a: CEUS load profiles for selected end-uses: yearly profile showing average daily demand.

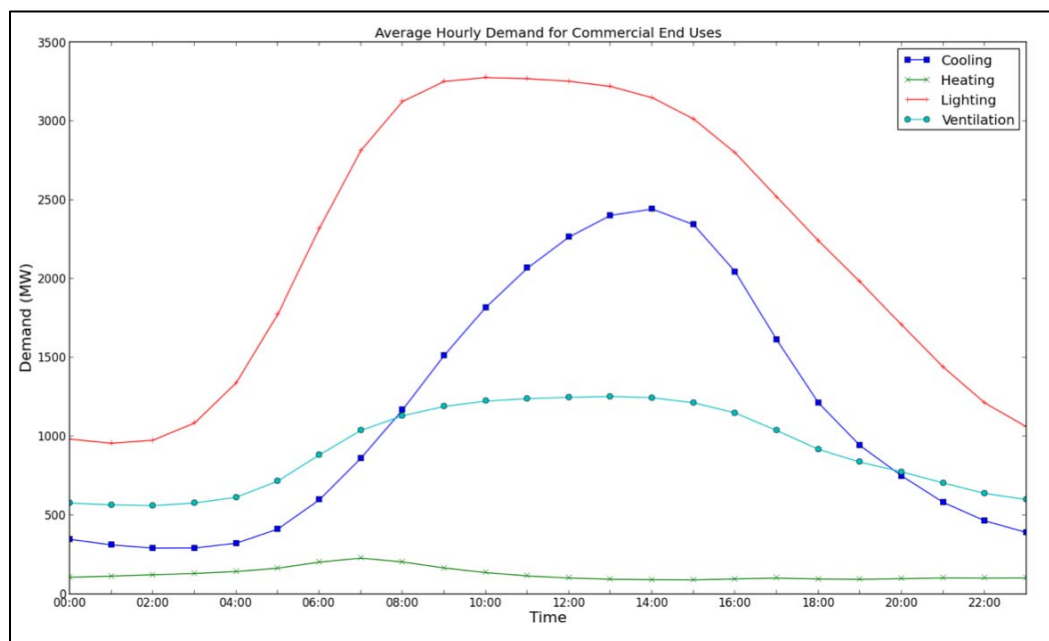


Figure 5b: CEUS load profiles for selected end-uses: daily profile showing average hourly demand.

Residential: For residential loads, residential end-use forecast data from the California Energy Commission for the year 2020 is used (CEC 2012). Residential end-uses included for this project are space heating, cooling, and water heating.

For both residential and commercial loads, the California end-use data are extrapolated to the rest of the Western Interconnection based on Itron's predictions of monthly energy use for each

balancing authority area (McMenamin and Sukenik 2012). Though CEUS contains end-use load data for 13 different climate zones within California, there is concern about extrapolating these load profiles to areas with vastly different weather patterns. To solve this problem, the various California load profiles and their relationship to different weather conditions are studied.

Using the California data, we observed a correlation between the average daily temperature variability ($T_{\max}-T_{\min}$) and the load variability ($[L_{\max}-L_{\min}]/L_{\text{av}}$) for heating and cooling loads. This relationship is assumed to exist in the non-California BAAs as well, so this correlation is extrapolated for BAAs with greater diurnal temperature swings.

For each climate zone in California, this correlation is modeled using a linear regression. For each non-California BAA to be approximated with the California data, the most similar California climate zone is selected based on seasonal energy consumption patterns. The California climate zone's regression equation is combined with average temperatures in the non-California BAA to estimate the load variability in each month. The California climate zone load curve is then scaled and offset to match both the predicted monthly energy consumption and the predicted daily load variability in the target BAA.

Agricultural Pumping: Seasonal load shapes are derived based the estimated irrigation water requirements in each BAA. The irrigation demand estimate is based on United States Department of Agriculture (USDA) records of the crops grown by each state (USDA 2009) and their typical planting/harvest dates (USDA 2010), along with historical evapotranspiration patterns (National Oceanic and Atmospheric Administration 1982). Load magnitude is determined by the number, size, and average operating hours of pumps in each state (USDA 2009), and state magnitudes are disaggregated into balancing authority areas based on coverage area, with metropolitan areas excluded. Based on previous analysis of California agricultural load, we project a flat load shape. Though some utilities offer agricultural time-of-use (TOU) rates to encourage load to be shifted to off-peak hours, adoption of TOU irrigation schedules by growers has not been widespread.

Data Centers: The Environmental Protection Agency's (EPA) Energy Star program estimates that the energy use of the nation's servers and data centers in 2006 more than doubled the electricity that was consumed for this purpose in 2000 and, for 2006, is estimated to be 3% of the total U.S. electricity consumption (EPA 2007). For the purpose of this analysis, we assume that the data center load is 3% of annual average demand for each BAA. Data centers tend to have relatively constant levels of electricity consumption, and thus we assume a flat load curve for both the year and the day. Further information is needed to accurately model the spatial and temporal distribution of data center load.

Municipal Lighting (also referred to as Outdoor Lighting): The municipal lighting load pattern is assumed to follow the sunrise and sunset times over the course of the year, and the magnitude is estimated from a report estimating potential benefits from LED lighting conversions (US DOE 2011c). The considered end-uses are road lighting, parking lighting, and area/flood lighting. Sunrise/sunset times over the course of a year are obtained from the US Naval Observatory for one representative city in each BAA (United States Naval Observatory 2012).

Municipal and Wastewater Pumping: A rule-of-thumb energy intensity value (100 kWh/person/year) is applied to the population of each BAA (determined from the zip codes comprising each BAA and US Census data). This energy intensity figure is consistent with estimates by the Electric Power Research Institute (2000). Municipal daily load profiles are obtained from an LBNL report, *Water Supply Related Electricity Demand in California* (House 2007). Municipal monthly load profiles are obtained from the *Urban Water Use in California*, Figure 3-3 (California Department of Water Resources 1994). Wastewater pumping loads are assumed to be flat.

Refrigerated Warehouses: The seasonal load shape is determined by the temperature variation of each BAA (colder weather leading to lower load for refrigerated warehouses), and the daily load shape is based on CEUS data on refrigerated warehouses in California. Total annual energy is estimated by the amount of storage volume in each state (USDA 2012) and an assumed energy intensity factor (1.3 kWh/ft³-year), determined via literature review and consultation with industry experts (Scott 2012). To break down state energy consumption into its constituent BAAs, the population in each BAA is used, compiled based on population data from the 2010 Census.

2.1.1 Additional Loads to be Considered in Future Studies

Several end-uses were considered for inclusion in this project, but eventually omitted, due to either insufficient information on their capabilities, perceived low load magnitude, or predicted nonexistent participation ability. However, future studies may benefit from inclusion of these end-uses, which include:

- Residential refrigerators and freezers
- Residential and commercial cleaning appliances (dishwashers, washing machines, dryers)
- Residential and commercial pool pumps
- Commercial electric water heating
- Electric vehicle charging (and potentially discharging)
- Miscellaneous plug loads

Industrial manufacturing loads are considered in a related report (Starke *et al.* 2013).

2.2 Flexibility Factors

To obtain an amount of participating load in each hour from the load profiles, a “flexibility” value is used for each hour, representing the fraction of load that is willing and able to participate in demand response at that hour. The true magnitude of participating load in 2020 can be estimated but is impossible to precisely predict. As more information becomes available, the assumed flexibility can be updated. The first assumptions that must be made are which loads can participate in which products. The assumed ability of each resource to contribute to these products is shown in Table 3.

Table 3: Participation of resources in ancillary services products. Shading colors identify resources which contribute to the same set of products.

Resources	Products				
	Regulation	Flexibility	Contingency	Energy	Capacity
Agricultural Pumping			✓	✓	✓
Commercial Cooling	✓	✓	✓	✓	✓
Commercial Heating				✓	✓
Commercial Lighting	✓	✓	✓		✓
Commercial Ventilation	✓	✓	✓		✓
Data Centers			✓	✓	✓
Municipal Lighting	✓	✓	✓		✓
Municipal Pumping				✓	✓
Refrigerated Warehouses				✓	✓
Residential Cooling	✓	✓	✓	✓	✓
Residential Heating	✓	✓	✓	✓	✓
Res. Water Heating	✓	✓	✓	✓	✓
Wastewater Pumping				✓	✓

The determination of the demand response available for ancillary services by hour is shown in Equation 1. The determination of each of these factor values is described in Section 2.3.

$$DR(hour, BAA, end\ use, product) = Load * Participation\ rate * Shed\ Rate \quad (1)$$

In this equation, the participation rate is the percentage of load that is willing and able to respond to a product, and the shed rate (shedability) is the proportion of the responding load that is shed in typical DR strategies. The product of these two factors yields the overall flexibility rate of the load in question, at the hour in question. Shed rate is based on the LBNL Demand Response Research Center's field experience with customers in California, and is a static value for a given end-use/product combination. The Participation rate is defined in Equation 2.

$$Participation\ rate(hour, BAA, end\ use, product) = \min (Acceptability, Controllability) \quad (2)$$

In this equation, the Controllability is a static value representing the share of the loads that are projected to have the necessary controls for the corresponding DR products. In some cases, controllability can be time-varying based on operator schedules, if the control scheme is not fully automated and requires some manual oversight or intervention. The Acceptability factor is a time-varying value that represents the willingness of customers to shed load at a particular hour. It is assumed that the most controllable portions of load are also the most willing to participate in DR, and vice versa: therefore the smaller of the two values at any given hour is taken as the participation rate, representing the loads that satisfy both criteria. For end-uses whose participation rate is not assumed to be time-varying, a single Participation value is used.

The value of the Acceptability factor is assumed to vary inversely with occupancy for commercial and residential end-uses, and is assumed to be constant for agricultural irrigation, municipal lighting, municipal pumping, municipal wastewater treatment, and refrigerated warehouses (a static Participation rate is used for these end-uses). Occupancy is assumed to be

inferred from the interior lighting load for commercial buildings and the water heating load for residential end-uses. A maximum and minimum acceptability value is assigned to each BAA-end-use-product combination, based on previous experience with demand response demonstrations and historical penetration of DR programs in each BAA and end-use. Depending on the ratios of the load and acceptability throughout the day and through the year, the maximum available load in any day may be coincident with utility “peak” hours, coincident with “partial peak” hours, or during the “off-peak” hours.

2.3 Flexibility Factor Determination

Ancillary services, energy, and capacity product flexibility factors (shedability, controllability, and availability) are derived for each end-use by expanding on the methodology and assumptions used in Watson, *et.al.* (2012), a report which estimated California’s demand response availability for energy and capacity (2 hour duration) and ancillary services (20 minute duration) on typical hot and cold peak days, using current controllability levels and increased technical potential (increased penetration of communicating control technologies). Following is a brief description of how these values are derived for each sector. A full listing of the range of values for each combination of resource and product can be found in Appendix A.

2.3.1 Commercial Loads

Table 4 shows the range in flexibility factor values for the four commercial building end-uses (heating, cooling, ventilation and lighting).

Sheddability and Controllability. Shedability and controllability values, derived by end-use and building type for the Watson *et al.* report, are weighted by building type-specific end-use annual energy usage data from CEUS, the Northwest Power and Conservation Council, and the Commercial Building Energy Consumption Survey, to obtain weighted end-use specific shedability and controllability values for each state. “Current controllability” values are used to estimate controllability for energy and capacity products in 2020, while “technical potential” controllability values are used for projected 2020 ancillary services controllability.

Acceptability. Acceptability is time-varying over the course of a day, based on region and estimated building occupancy (lighting load is used as a proxy for occupancy). For each region and end-use, minimum and maximum acceptability values are used, corresponding to the maximum and minimum occupancy hours of the day, respectively. Intermediate values are interpolated. Maximum and minimum values for each region are determined based on current utility programs and pilots and on projections as to what 2020 programs and related participation may be. As such, California is projected to continue to have higher acceptability values for cooling, ventilation, and indoor lighting load response, but have minimal heating response given the low penetration of electric space heating in California (therefore this end-use will not be targeted by California utilities, and customers will not be comfortable with heating DR). Low levels of minimum acceptability (~2%) for all commercial end-uses were assumed for the rest of the Western Interconnection due to the level of current programs in these areas. These values may increase depending on the aggressiveness of specific programs and policies.

Table 4. Commercial Cooling and Heating Values

	Energy and Capacity			Ancillary Services				
	Sheddability	Controllability	Acceptability	Sheddability	Controllability	Acceptability		
						Regulation	Flexibility	Contingency
Heating	46 – 51%	10 – 25%	Default Daily min: 0% Daily max: 75-77%	53 – 64%	7-16%	Daily min: 0% Daily max: 0.6%	Daily min: 0% Daily max: 1.8%	Daily min: 0% Daily max: 1.8%
			Northwest Daily min: 3% Daily max: 75-77%					
Cooling	41 – 49%	15-25%	Default Daily min: 3% Daily max: 75-77%	50 – 58%	7-16%	Default Daily min: 0% Daily max: 2%	Default Daily min: 0% Daily max: 2%	Default Daily min: 0% Daily max: 2%
			California Daily min: 35% Daily max: 75-77%			California Daily min: 3% Daily max: 7%	California Daily min: 10% Daily max: 21%	California Daily min: 3% Daily max: 77%
Ventilation	46-49%	17-25%	Daily min: 3% Daily max: 75-77%	53 – 59%	8-16%	Default Daily min: 0% Daily max: 2%	Default Daily min: 0% Daily max: 2%	Default Daily min: 0% Daily max: 2%
						California Daily min: 3% Daily max: 7%	California Daily min: 10% Daily max: 21%	California Daily min: 10% Daily max: 21%
Indoor Lighting	26 – 28%	15-17%	Daily min: 3% Daily max: 75-77%	26 – 28%	7-11%	Default Daily min: 0% Daily max: 2%	Default Daily min: 0% Daily max: 2%	Default Daily min: 0% Daily max: 2%
						California Daily min: 3% Daily max: 7%	California Daily min: 10% Daily max: 21%	California Daily min: 10% Daily max: 21%

2.3.2 Residential Loads

A framework similar to the commercial approach is used to determine residential load flexibility values. While multiple residential loads were considered, heating and cooling responses are better known. Water heating and refrigerator demand response are in the developmental phase, but included here for completeness.

Heating and Cooling: The level of residential heating and cooling load response possible depends on the type of site-based control available, including user adjustments of standard or programmable thermostat setpoints (Manual), automatic adjustment of temperature setpoints through programmable communicating thermostats (PCT), and direct load control (DLC). While all three control mechanisms could be used to respond for Energy or Capacity products, given the current utility programs and communications infrastructures, only DLC is assumed to be able to be used for ancillary services. However, since this assumption was made, an ARPA-E project aiming to demonstrate the use of PCTs for ancillary services was selected for funding and has begun work³. Depending on the outcome of the ARPA-E project, modification to our assumptions may be warranted. The range in flexibility factors for residential heating and cooling can be seen in Table 5.

Sheddability. Based on a review of past field test results, it is assumed that 20% of manual thermostat controlled heating and cooling electricity usage could be sheddable, while 30% could be shed using programmable communicating thermostats. Direct load control has typically been used to turn on and off residential air conditioning compressors which typically make up 70% of the electrical load of a residential air conditioning system, thus an aggressive 70% sheddability value is used for DLC-controlled cooling systems. DLC has not typically been used on residential heating systems, thus it is assumed that there is no DLC-based heating response.

Controllability. Controllability values for 2020 are derived from 2009 Residential Energy Consumption Survey (RECS) data for the manual and PCT case and from Brattle (2012) for the DLC case, resulting in 2% of houses with PCTs in 2020 and 12.5% DLC in most of the Western Interconnection (26% DLC in Utah).

Acceptability. The prevalence of current utility programs and pilots in residential heating and cooling is used as a guide to determine the corresponding projected acceptability values. As such, acceptability for manual and PCT-based responses are assumed to be low and only in the regions where pilots have taken place (for example, California and the Northwest). Direct load controllers have typically been installed as part of utility programs. As such, it is assumed that the DLC acceptability values will be the same as the corresponding controllability values. It is assumed that all control method can contribute to energy and capacity, but that only DLC is fast enough to contribute to ancillary services. However, demonstrations of PCT control for ancillary services have begun, so this assumption may need to be revised in the future.

³ <http://arpa-e.energy.gov/?q=arpa-e-projects/integration-renewables-demand-management>

Table 5. Residential Cooling and Heating Values

	Cooling			Heating		
	Sheddability	Controllability	Acceptability	Sheddability	Controllability	Acceptability
Manual	20%	31 – 52%	Daily min: 2% Daily max: 3%	20%	39% - 48%	Default 0%
						Northwest Daily min: 1% Daily max: 1.5%
PCT	30%	2%	Default 0%	30%	2%	Default 0%
			California, Northwest Daily min: 2% Daily max: 3%			Northwest Daily min: 1% Daily max: 1.5%
DLC	70%	Default: 13%	Default Daily min: 13% Daily max: 19%	N/A	N/A	N/A
		Utah: 26%	Utah Daily min: 26% Daily max: 39%			

Refrigerators and Water Heaters: There are a number of on-going studies evaluating and developing communication and control mechanisms and infrastructures for direct load control of residential refrigerators and water heaters for demand response and ancillary services. Based on research to date, it is assumed that 25% of electric water heating electricity loads and 5% of refrigerator electricity loads could be sheddable. It is assumed that there could be an increased level of DLC for residential electric water heaters similar to that projected for residential heating and cooling – however, this may be a higher penetration than would be reasonable given the current state of research and program development. It is assumed that refrigerator demand response programs will not yet be in place for 2020, reflected in the 0% controllability and acceptability values assumed. Thus, refrigerators are omitted from the resource assessment. Values for sheddability, controllability, and acceptability for refrigerators and water heaters are shown in Table 6.

Table 6. Residential Electric Water Heating and Refrigerator Values

	Electric Water Heating			Refrigerators		
	Sheddability	Controllability	Acceptability	Sheddability	Controllability	Acceptability
DLC	25%	Default: 13%	Default Daily min: 13% Daily max: 19%	5%	0%	0%
		Utah: 26%	Utah Daily min: 26% Daily max: 39%			

2.3.3 Industrial Loads

Demand response in the industrial sector is not a new concept; in fact there are several decades of DR history in the form of interruptible tariffs. However, information on load flexibility is not as readily available as in the commercial or residential sectors, so many assumptions are made. Note that only a select group of industrial end-uses are included here based on the Demand Response Research Center's previous experience with these end-uses, there are many others that can be considered as discussed in Starke *et al.* (2013).

Agricultural Irrigation Pumping: A shed rate of 100% represents the full shutdown of pumps. As automated demand response is not widespread in agriculture, the participation rate is expected to be low, but should still represent a significant minority of load, since farms have built-in water storage in their soil. A participation rate of 15% is assumed for the capacity and contingency products, and a participation rate of 10% is assumed for the energy product.

Data Centers: Given that data center loads are relatively flat throughout the day and year, a flat shed rate of 3% is assumed for all products at all hours, with a 100% participation rate. Data centers with attached office space exhibit a diurnal load profile peaking during daytime, but the variability is due to conventional commercial end-uses which are not considered as part of this resource.

Municipal Lighting: A temporary 5% shed in lighting load is likely to be un-noticeable, and thus available 100% of the time for all products in which municipal lighting participates.

Municipal and Wastewater Pumping: Demonstrations of DR in wastewater pumping show that there is easily-achievable DR available in the range of 5% of total plant load, so that value is assumed for sheddability. A participation rate of 50% represents that not all plants will have the spare capacity or control systems necessary to shed load.⁴

Refrigerated Warehouses: There is a large amount of thermal storage present in refrigerated warehouses, and temporary deviations in air temperature do not easily transfer into stored product. Therefore, full participation is assumed, but only for small load shifts, which can ride the temperature-change transient without affecting product. Load sheds of 10% are assumed to be available for the shorter-duration capacity and contingency products, and 5% is assumed to be available for the energy product.

2.4 Modeling Loads as Generation Resources

After the resources are filtered to obtain estimates of hourly DR availability profiles, the end-use DR potential participation in energy transactions requires additional parameters to be input into a production cost model. These resources are modeled similarly to generators. The parameters used are response time, ramp rate, minimum and maximum duration, and

⁴ Due to a programming bug, a participation rate of 10% was used in the dataset initially sent to NREL.

constraints on call frequency. For loads which respond by shifting load rather than shedding it, an energy re-charge is required, and the timing and magnitude of this re-charge are also parameters. For these resources, there are hourly availability profiles for both the load curtailment and the load recovery. The speed of energy re-charge is constrained as well. For end-uses with a constant load profile, re-charge occurs at the same rate as the daily availability, while for variable end-uses, re-charge is constrained to the difference between scheduled availability during re-charge hours and maximum daily availability (precluding the creation of a new peak due to re-charge). These parameters are listed for all resources in Tables 7 and 8. The ‘faster’ response times are used for regulation, flexibility, and contingency reserves, while the ‘slower’ ramp times are used for the energy and capacity products.

For some thermal end-uses, this energy re-charge can occur before an event (a pre-charge), with the building thermal mass providing energy storage (Yin *et al.* 2010). For example, pre-cooling to enable commercial cooling energy shifting and pre-heating to enable commercial heating energy shifting are limited to 6am-6pm and 3am-7am, respectively; these times are selected as roughly adjacent to the maximum load hours for these resources. Ideally, energy re-charge/pre-charge via pre- and post-cooling would be constrained to occur immediately adjacent to an energy shift, whenever it occurred, but due to typical limitations in production cost models they are modeled on a 24-hour cycle with restricted hours of charging. Some pumping loads also have inline storage that can be used by re-scheduling pump operation.

Whereas a conventional generator has a maximum ramp rate set by the physical constraints of the generator, an aggregation of loads can be switched off fairly rapidly, the main delay coming from the time it takes for control systems to enact all of the load reductions. For many end-uses, load reductions can be achieved within one minute if proper communications and controls are in place. Since the amount of load participating is variable, but the time required to shed is constant, the ramp rate is variable: this is modeled by using an assumed ramp time with the variable availability profile to calculate hourly ramp rate. For the industrial process resources (agricultural pumping, municipal pumping, refrigerated warehouses, and wastewater pumping), a start-up cost is specified for the energy product. Some resources also have costs based on shed length.

Figure 4, in Section 1.3, shows these parameters graphically in the context of a single response event with associated energy storage re-charge. Since the loads must respond in a manner similar to conventional generators, they are subject to the same constraints, namely: ramp rate, maximum time to achieve full output, and minimum response length. Loads with energy re-charge requirements behave as an energy storage medium, without losses.

Table 7: Product constraints

Resource	Minimum Duration	Maximum Duration	Call Limits	Energy Re-charge/ Pre-charge
Agricultural Pumping	1 hour	8 hours	1 per day	100% within 24 hours
Commercial Cooling	5 minutes	N/A	N/A	100% within 24 hours Limited to 6am-6pm
Commercial Heating	5 minutes	N/A	N/A	100% within 24 hours Limited to 3am-7am
Commercial Lighting	N/A	N/A	N/A	N/A
Commercial Ventilation	5 minutes	N/A	N/A	N/A
Data Centers	N/A	4 hours	N/A	100% within 24 hours
Municipal Lighting	N/A	N/A	N/A	N/A
Municipal Pumping	N/A	2 hours	1 per day	100% within 24 hours
Residential Cooling	5 minutes	N/A	N/A	100% within 24 hours Limited to 6am-6pm
Residential Heating	5 minutes	1 hour	N/A	N/A
Residential Water Heating	5 minutes	N/A	N/A	100% within 24 hours
Refrigerated Warehouses	N/A	4 hours	1 per day	100% within 24 hours
Wastewater Pumping	N/A	3 hours	1 per day	100% within 24 hours

Table 8: Resource ramping times for slow and fast responses.

Resource	Faster Response Ramp Time	Slower Response Ramp Time
Agricultural Pumping	1 minute	1 minute
Commercial Cooling	1 minute	15 minutes
Commercial Heating	1 minute	15 minutes
Commercial Lighting	30 seconds	30 seconds
Commercial Ventilation	1 minute	15 minutes
Data Centers	1 minute	15 minutes
Municipal Lighting	40 seconds	40 seconds
Municipal Pumping	1 minute	5 minutes
Residential Cooling	1 minute	15 minutes
Residential Heating	1 minute	15 minutes
Residential Water Heating	30 seconds	30 seconds
Refrigerated Warehouses	1 minute	5 minutes
Wastewater Pumping	1 minute	5 minutes

CHAPTER 3:

Results: DR Profiles

In this section, two sets of results are explored. The first set is the estimation of the DR availability in 2020, based on the three flexibility factors described in the previous section (Sheddability, Controllability, and Acceptability). This base case is described in Section 3.1. Notes on interpretation of values and a summary of BAA statistics are in Section 3.2 and 3.3. The second set of results to be explored is the “projected theoretical availability”.

Since the Controllability and Acceptability of the selected end uses are dependent on the actions of policymakers, utilities, and system operators over the next several years, it is also useful to analyze a projected theoretical availability which assumes full Controllability and Acceptability (i.e. all loads are able to participate, and choose to be available at all times). This projected theoretical availability represents the maximum achievable availability, assuming no change to the magnitude and pattern of load profiles. This projected technical availability case is evaluated in Section 3.4.

The availability profiles of both sets of results can be analyzed and visualized in several ways: ranges of values, temporal distributions over the year, availability from the various end-uses, availability by BAA, etc. This section discusses some of these disaggregations.

The full datasets are available by request from the Demand Response Research Center for analysis.

3.1 Projected Demand Response Availability in 2020

Based on this study’s assumptions about the magnitude and behavior of the selected end-uses within the Western Interconnection, Figure 6 shows the range of availability for each product. The pattern of availability for regulation reserves is shown in Figure 7, and the pattern of availability for the energy product is shown in Figure 8. Availability patterns for all products are contained in Appendix C. The disaggregation of the availability of contingency reserves into end-uses is shown in Figures 9a and 9b. Patterns can be seen at the seasonal level, weekly level, and daily level. Disaggregations for all products into end-uses are contained in Appendix D.

Looking at the maximum availability of a given product in the year, demand response can be seen to contribute up to 4,233 MW for the capacity product, 2,846 MW for the energy product, 2,990 MW of contingency reserves, 2,162 MW of flexibility reserves, and 1,822 MW of regulation reserves. Expressed as a fraction of total Western Interconnection load, these values represent up to 2% of load for regulation reserves, 2.3% for flexibility reserves, 2.8% for contingency reserves, 2.3% for the energy product, and 3.5% for the capacity product. Maximum availabilities for each product are not coincident, and the sum of the non-coincident maximums for each BAA is greater than the coincident maximum.

The availability of regulation reserves is greatest during the evening, night, and early morning hours, due to the relative magnitude of municipal lighting in the daily availability profile. The seasonal maximum is in summer evenings, due to the magnitude and seasonality of cooling loads.

The energy product is most available in the afternoon, especially during summer. This is due to the magnitude and seasonality of cooling loads. Though there is a maximum of 2,846 MW available for the energy product, for the majority of the year there is less than 600 MW available. The energy product typically has lower availability than the other products due to its longer duration, which excludes many end-uses without significant storage.

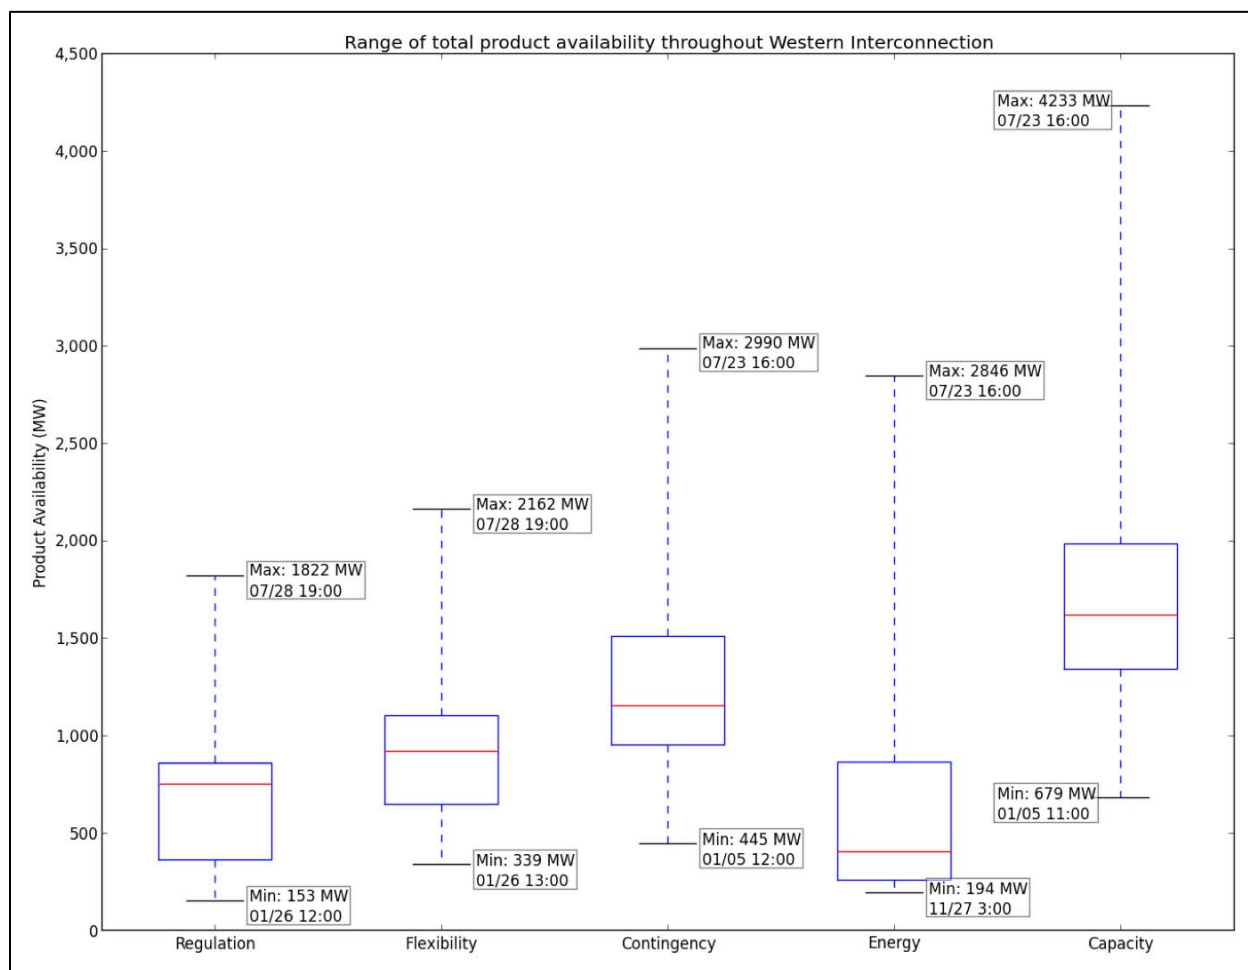


Figure 6: Product availability ranges with maximum and minimum hours

As seen in Figure 6, though most of the total product availability is in a somewhat narrow range (the blue boxes, representing the range between the first and third quartile), the maximum availability can be several times larger, as shown by the long whiskers for each product (representing the minimum and maximum values).

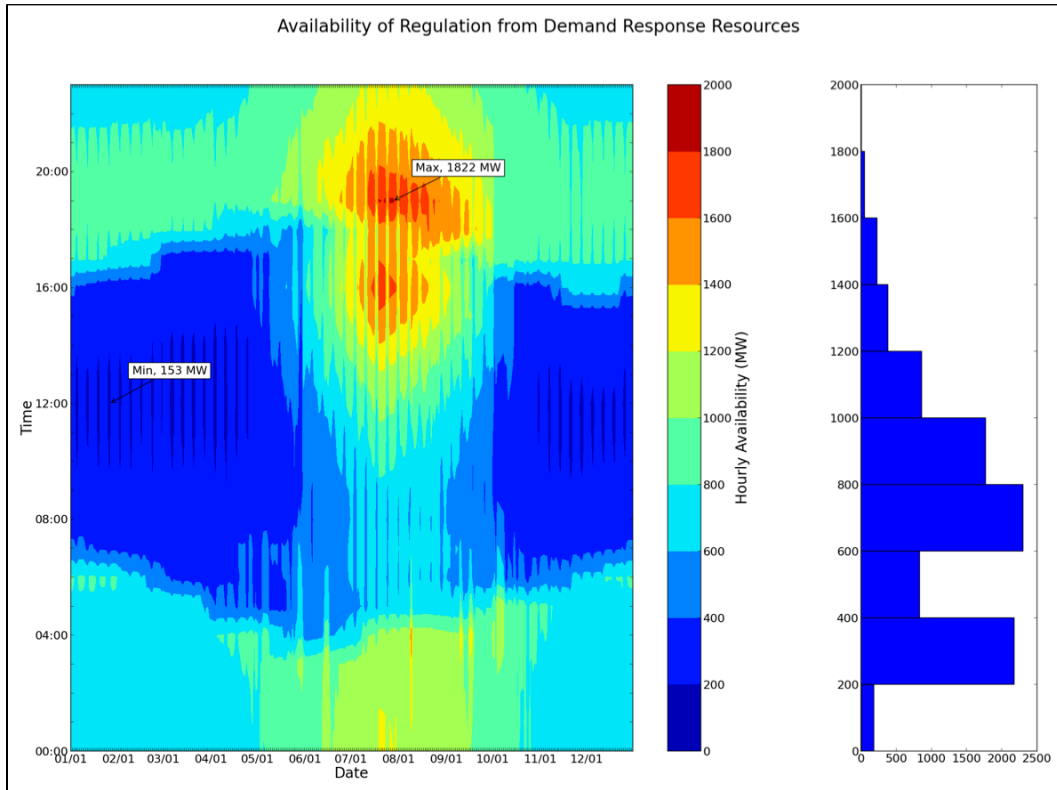


Figure 7: Availability pattern for regulation reserves

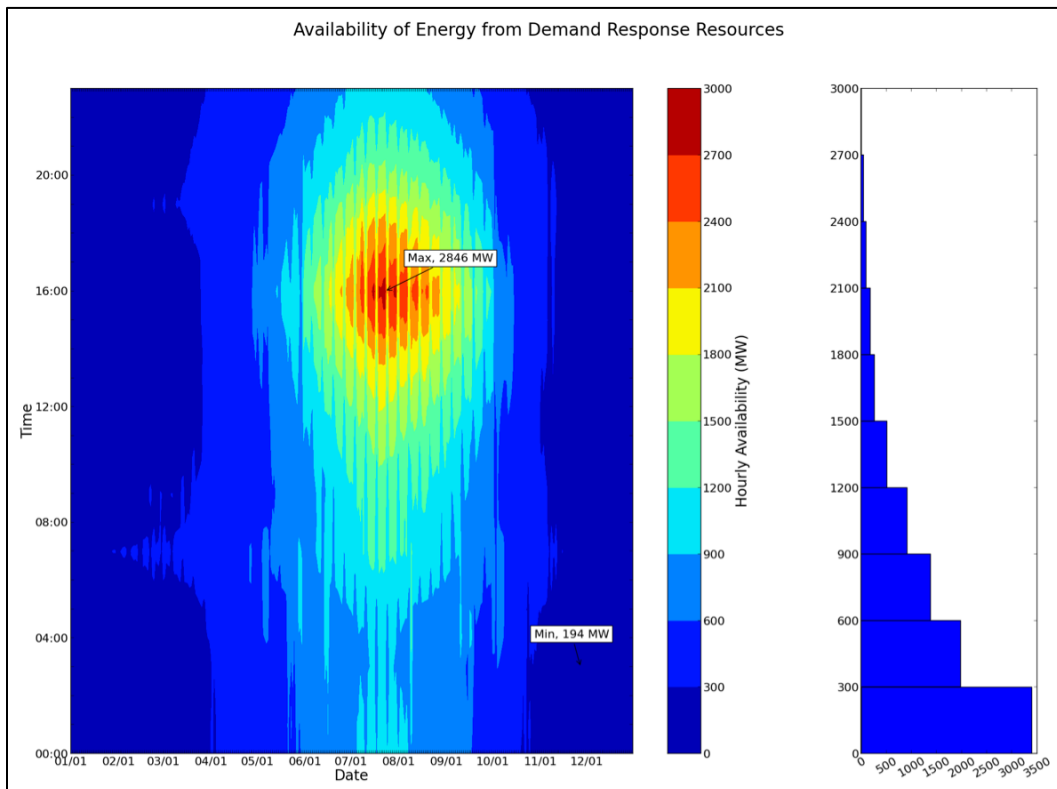


Figure 8: Availability pattern for the energy product

Over the course of a day, the availabilities from the resources vary, and reach their maximums at different times:

- Commercial lighting and ventilation peak during the hours of 8am-6pm.
- Commercial and residential heating peak from 7am-9am.
- Commercial and residential cooling peak from 12pm-8pm.
- Residential water heating peaks in the morning and evening.
- Municipal lighting peaks from 8pm-4am.
- Refrigerated warehouses peak from 12pm-4pm.
- Agricultural pumping, data centers, municipal pumping, wastewater pumping remain fairly flat.

These maximum availability times varied between balancing authority areas due to differences in the regional load shapes and assumed differences in the end-user population's willingness to shed load at different times of day (e.g. customers in areas with a history of afternoon demand response will be more willing to shed or shift loads in the afternoon compared to those in other areas).

Over the course of a year, the availabilities from each resource also reach their maximums at different periods:

- Agricultural pumping, commercial cooling, residential cooling, and refrigerated warehouses peak in the summer.
- Municipal lighting, commercial heating, and residential heating peak in the winter.
- Data centers, residential water heating, commercial lighting, commercial ventilation, municipal pumping, and wastewater pumping loads remain fairly constant over the year, with a regular weekday-weekend usage pattern.

These patterns are shown in Appendix E.

The daily and seasonal contributions of end-uses to contingency reserves can be seen in Figures 9a and 9b, respectively. Seasonally, residential cooling, commercial cooling, and agricultural irrigation peak in the summer, while municipal lighting and residential water heating peak in the winter. Daily, commercial cooling, lighting, and ventilation peak during mid-day, residential cooling peaks in the afternoon, and municipal lighting peaks at night. Commercial heating is omitted from the figures as less than 1 MW is available for contingency reserves; commercial heating has greater availability for the slower energy and capacity products.

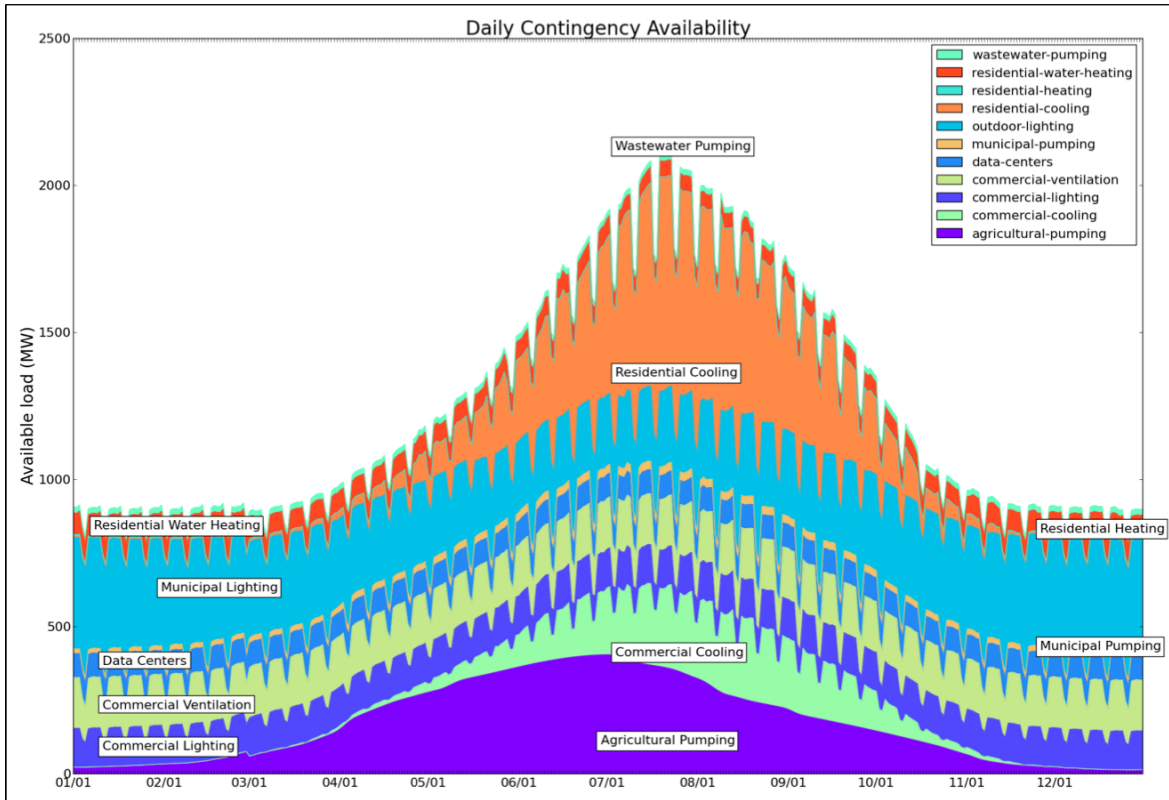


Figure 9a: Average daily contingency reserve availability over one year, by resource

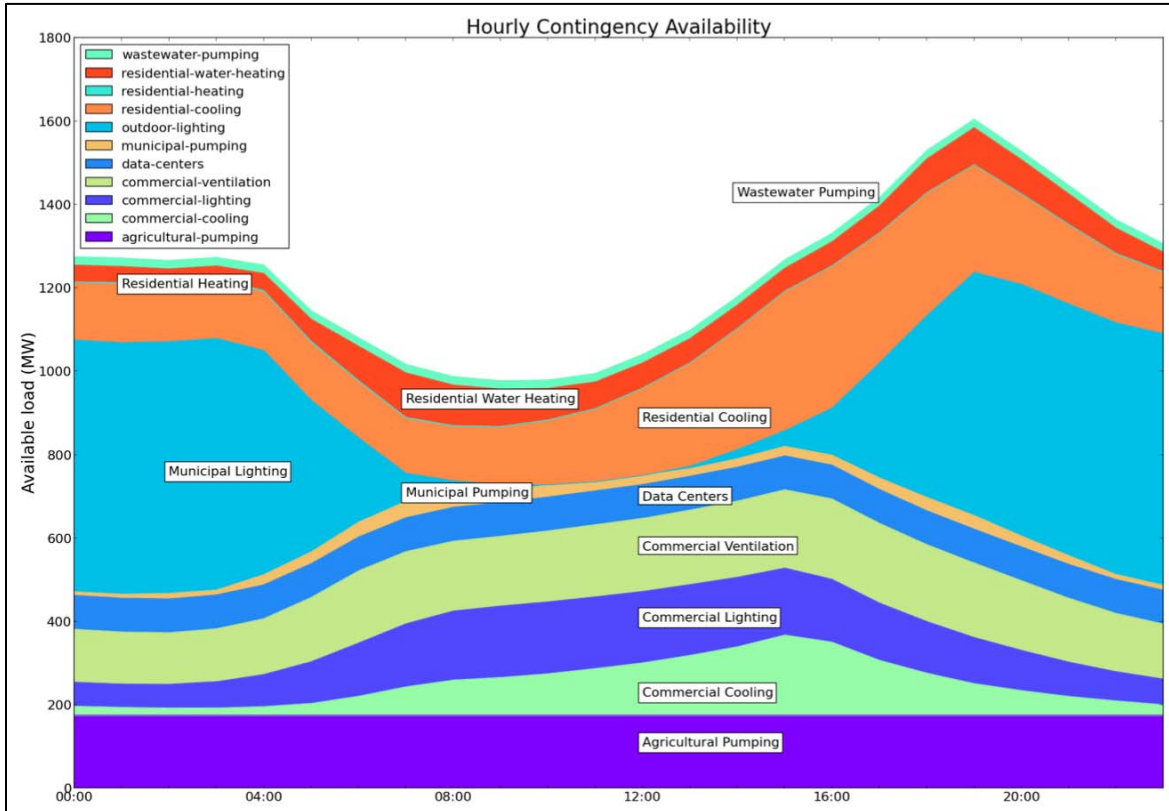


Figure 9b: Average hourly contingency reserve availability over one day, by resource

By dividing the hourly capacity product availability by the predicted load for each hour of the year, an estimation of the overall load flexibility can be established (the capacity product is chosen as it is the product with greatest potential). The 2020 load values used were the Transmission Expansion Planning Policy Committee (TEPPC) PC1 reference case (Western Electricity Coordinating Council 2011). For virtually the entire year, 1-3% of the total load can be shed, as shown in Figure 10. This available load fraction reaches its maximum during summer weekday mornings and evenings, and is at its minimum mid-day on winter weekends. This relative availability is less variable than the absolute capacity availability, as the total load and the available capacity are positively correlated (i.e. the increased cooling loads in summer also result in increased cooling availability). Patterns for all products relative to load can be seen in Appendix C. The availability of regulation ranges from 0.2-2.0% of load, flexibility ranges from 0.4-2.3%, contingency ranges from 0.5-2.8%, and energy ranges from 0.2-2.3%.

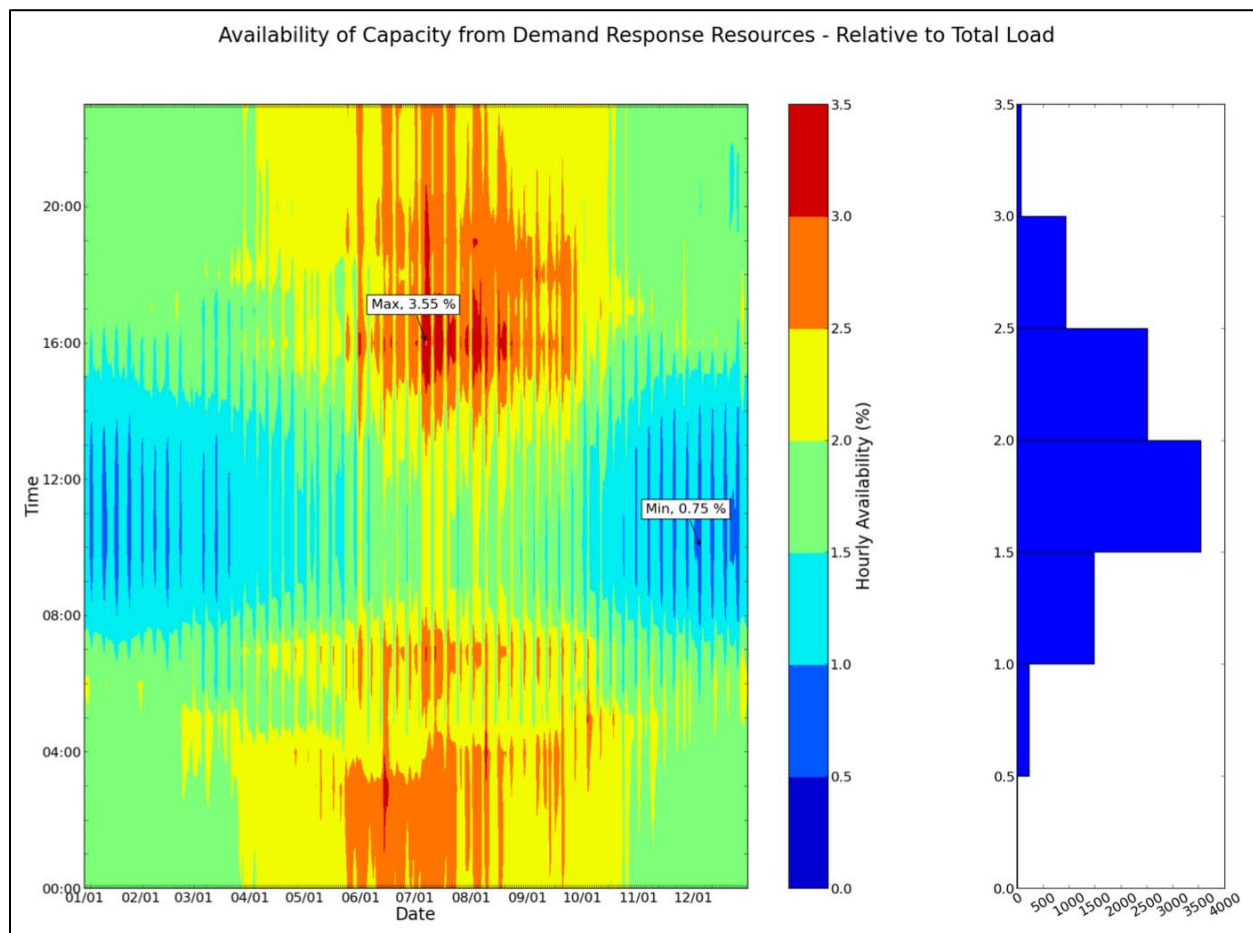


Figure 10: Ratio of capacity product availability to total load.

This ratio of product availability to load can also be explored geographically. Figure 11 shows the average contingency reserve availability as a percentage of average load over the course of the year, disaggregated by BAA. Generally, there is more availability in the southwestern states compared to the northwestern ones, with the PACE_ID BAA being a notable exception, with an average contingency product availability at 3.1% of average load. These ratios are influenced by the underlying load composition of the BAAs.

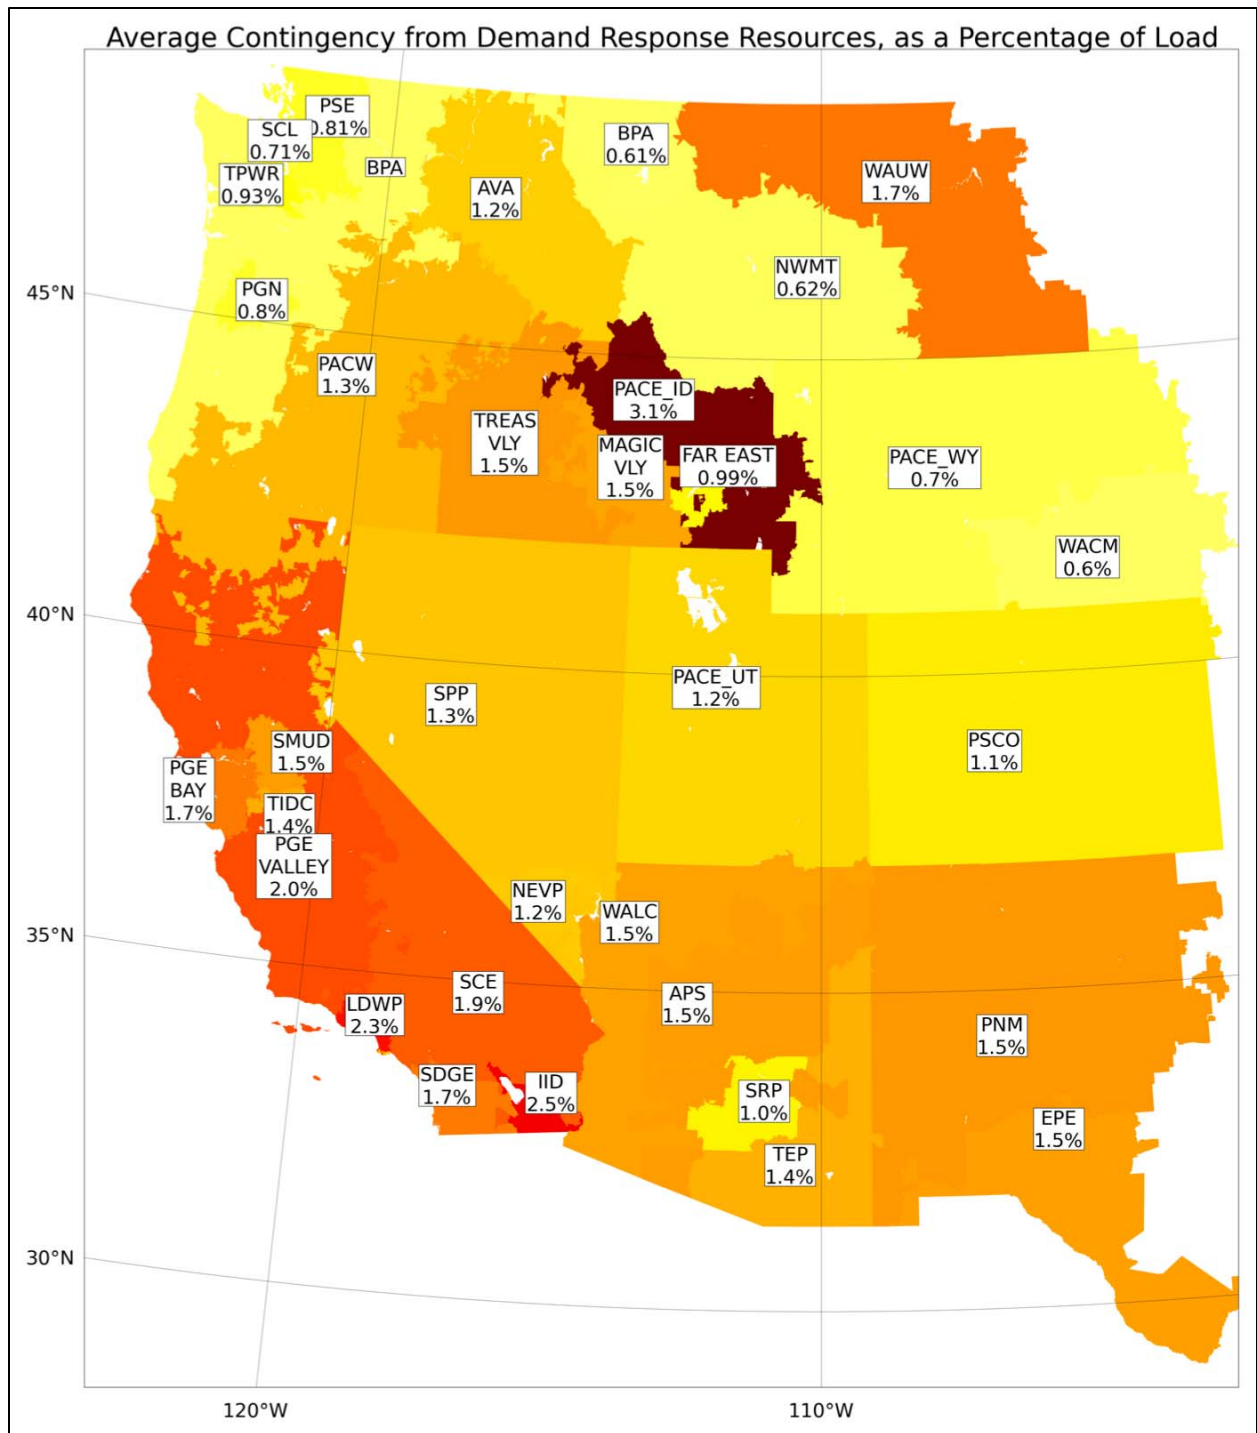


Figure 11: Ratio of average Contingency reserves availability from DR resources to average load, by BAA

3.2 Capacity and Energy Interpretations

Though capacity product availability was calculated as time-series values, for the purposes of grid planning it is a single number, representing additional generation capabilities during the top 20 hours of load. To find this value for the collection of demand response resources in each BAA, the top 20 hours of load in the BAA are identified, the capacity product availability from each resource is summed for each of the top hours, and the 20 hourly values are averaged to come up with a singular capacity value. The top load hours are derived from the TEPPC 2010 Study Program's PC1 reference case (Western Electricity Coordinating Council 2011). Thus, the capacity value represents the average DR availability from the selected resources during the 20 hours of highest load. Illustrations of this derivation in PSE, SCE, and AVA are shown in Figures 12a, 12b, and 12c, respectively. PSE is a winter-peaking system with maximum load capabilities in winter, and SCE is a summer-peaking system with maximum load capabilities in summer. However, there are also BAAs whose load peaks in the winter, but have maximum load capabilities in summer, such as AVA. In these cases, the collection of resources included in this study is suboptimal for meeting the capacity needs of the BAA.

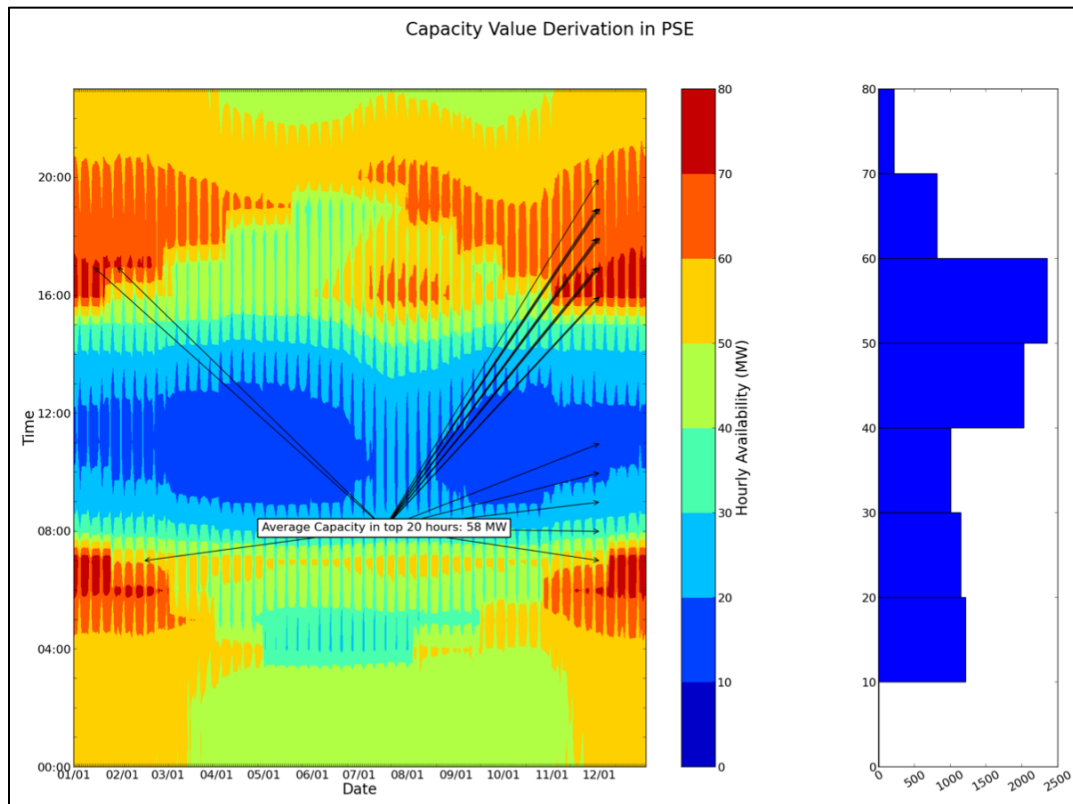


Figure 12a: Capacity value derivation in PSE

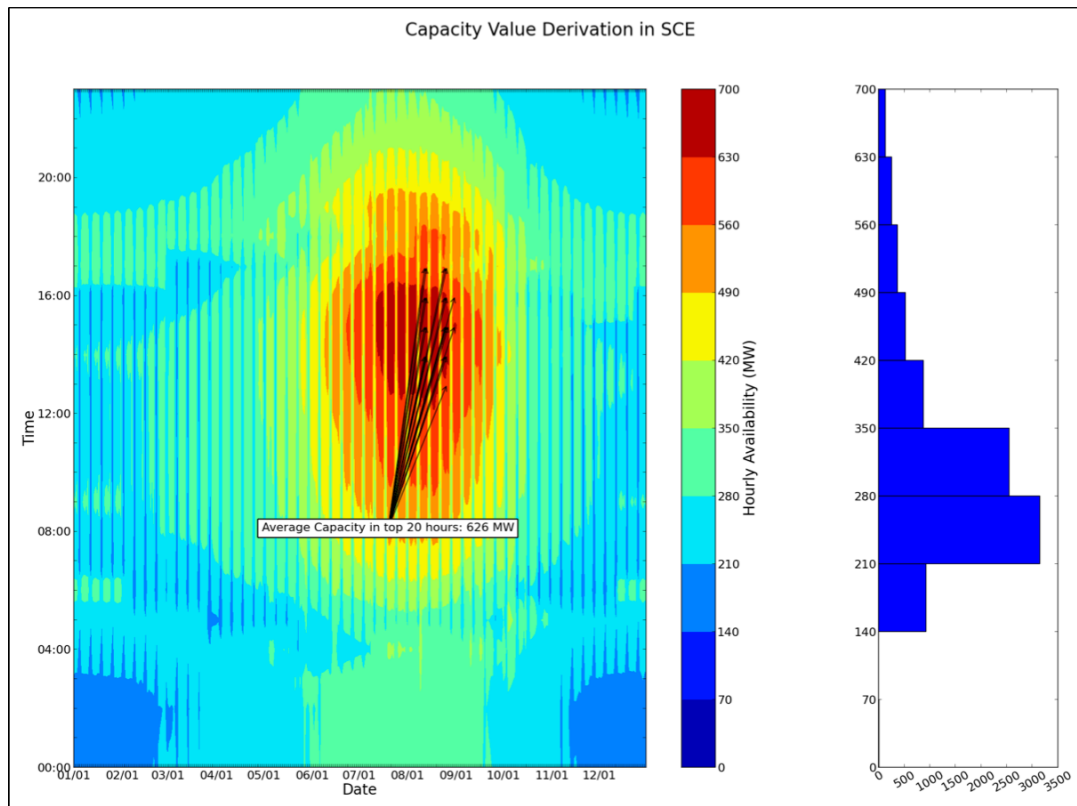


Figure 12b: Capacity value derivation in SCE

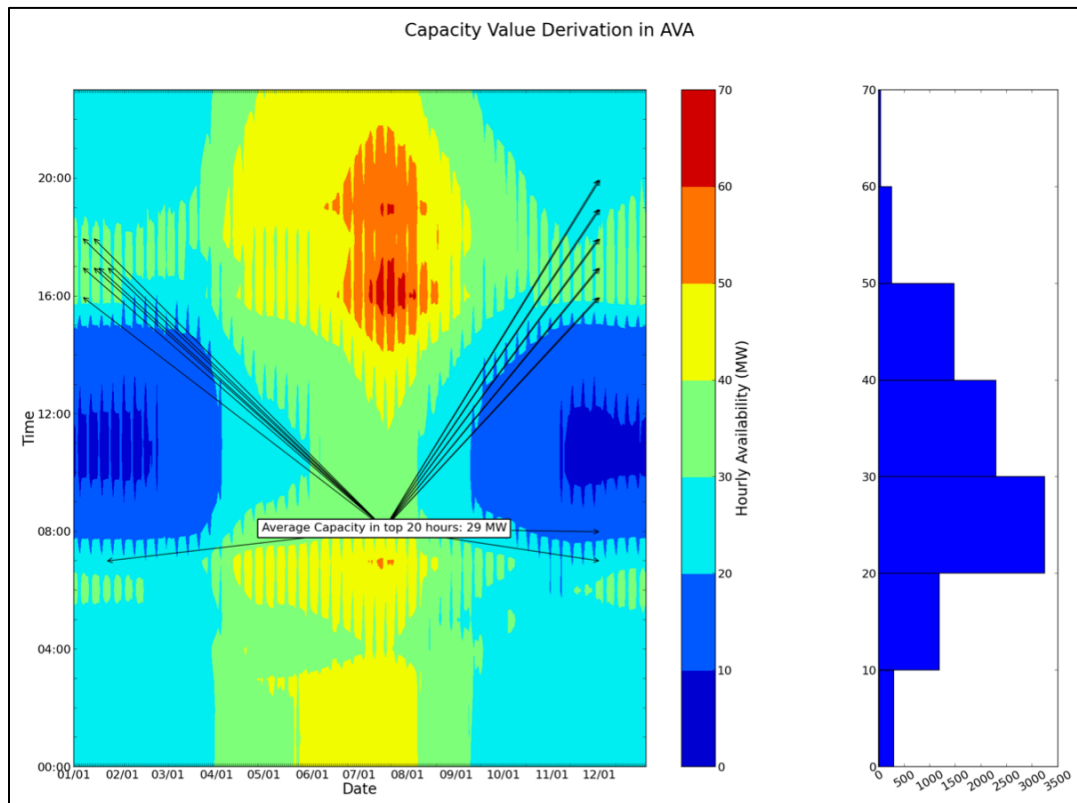


Figure 12c: Capacity value derivation in AVA

To estimate the maximum magnitude of energy which can be shifted in a single event using the energy product, an “available shift” was calculated for each hour by summing the potential energy shift from each resource (the sum of the availability from the start hour through the length of the maximum shed duration). For some resources, a maximum shed duration was not specified, but the lengths of the responses are constrained by the resource’s need for energy re-charge: for these resources, the maximum shed duration was assumed to be equal to the re-charge duration. For resources with 24 hour re-charge windows, a 12-hour shed and 12-hour re-charge are assumed. The resulting values for each BAA are shown in Table 13.

3.3 BAA Summaries

Based on our analysis, there exists a wide range of load flexibility amongst the 36 BAAs. Not only are there large differences in average relative flexibility, there are also differences in the variability of this flexibility. These differences are due to differences in the relative magnitude of end-uses in each BAA and assumed differences in the end-user population’s willingness to shed load. The range of product ability by BAA can be seen in Figures 13a, 13b, and 13c for regulation, flexibility, and contingency reserves, respectively. The product availability relative to load for all products can be seen in Table 9.

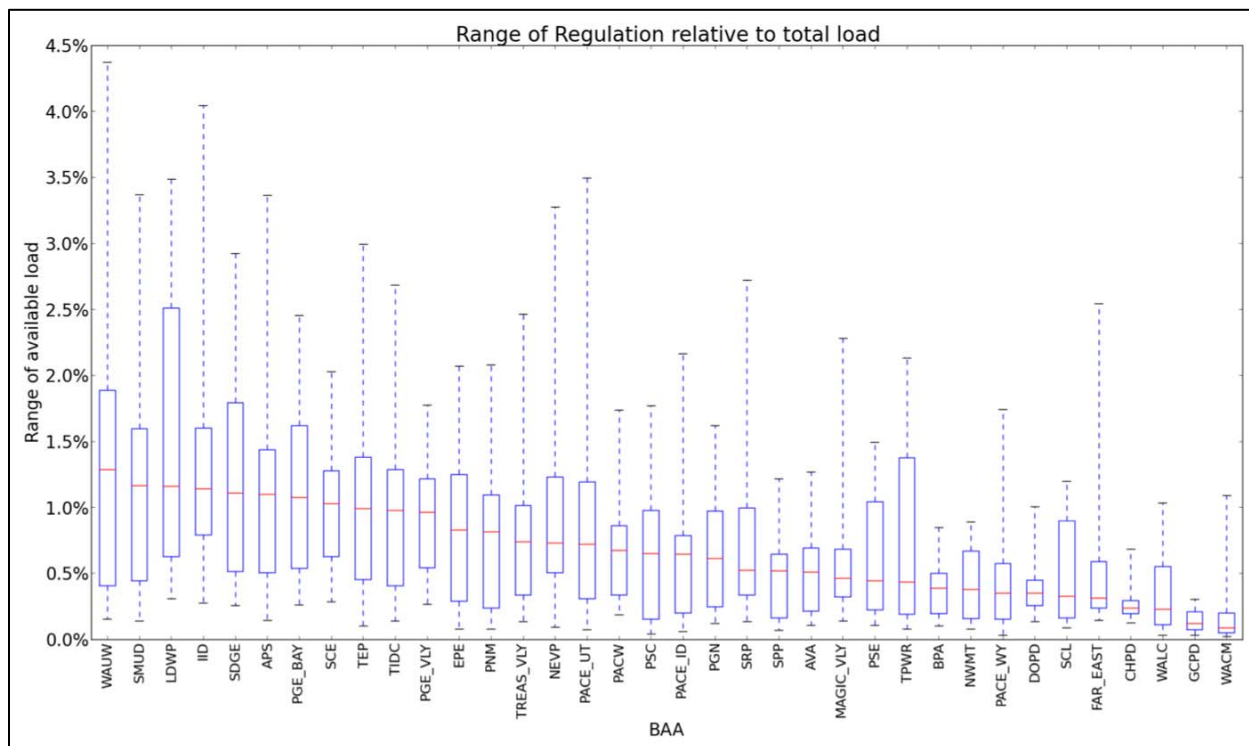


Figure 13a: Regulation reserves availability relative to total load, by BAA

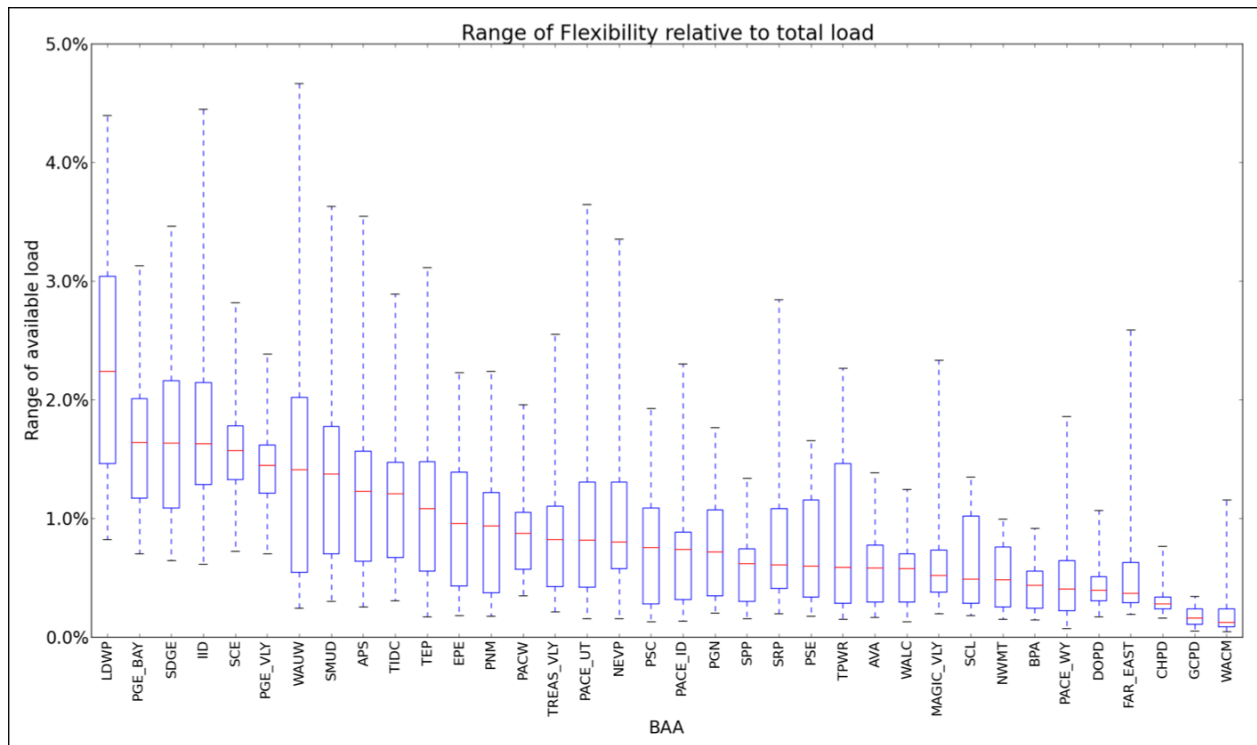


Figure 13b: Flexibility reserves availability relative to total load, by BAA

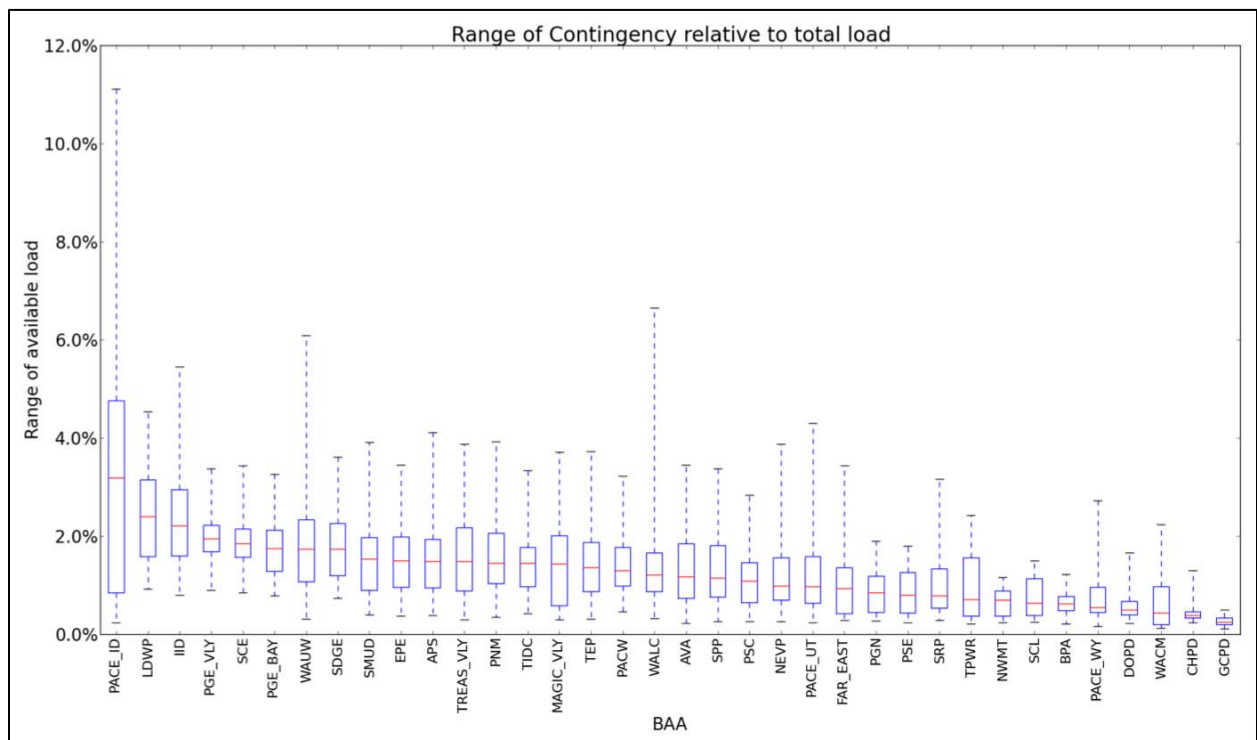


Figure 13c: Contingency reserves availability relative to total load, by BAA

Table 9: Summary of Product Capabilities, by Balancing Authority Area

BAA	Hourly product availability relative to hourly total load: Minimum % - Maximum % (Average %)				
	Regulation	Flexibility	Contingency	Energy	Capacity
APS	0.14-3.36 (1.06)	0.25-3.54 (1.19)	0.38-4.10 (1.50)	0.17-3.61 (1.03)	0.52-5.17 (2.20)
AVA	0.11-1.27 (0.46)	0.16-1.38 (0.54)	0.22-3.44 (1.23)	0.20-2.33 (0.80)	0.35-4.09 (1.78)
BPA	0.10-0.85 (0.35)	0.14-0.91 (0.40)	0.21-1.22 (0.61)	0.20-1.06 (0.42)	0.31-1.90 (0.98)
CHPD	0.13-0.69 (0.25)	0.16-0.76 (0.30)	0.23-1.29 (0.41)	0.19-1.37 (0.37)	0.33-2.32 (0.87)
DOPD	0.14-1.00 (0.36)	0.17-1.06 (0.41)	0.22-1.66 (0.53)	0.19-1.78 (0.49)	0.34-2.66 (0.99)
EPE	0.08-2.07 (0.75)	0.18-2.23 (0.89)	0.37-3.44 (1.49)	0.17-3.74 (0.88)	0.51-5.61 (2.28)
Far East	0.14-2.54 (0.50)	0.19-2.59 (0.55)	0.28-3.43 (0.99)	0.24-3.26 (0.84)	0.40-4.32 (1.46)
GCPD	0.03-0.30 (0.13)	0.05-0.34 (0.16)	0.11-0.49 (0.25)	0.09-0.42 (0.18)	0.15-1.11 (0.51)
IID	0.27-4.04 (1.28)	0.61-4.45 (1.86)	0.80-5.45 (2.45)	0.23-4.99 (1.76)	1.14-6.18 (3.00)
LDWP	0.31-3.49 (1.44)	0.82-4.39 (2.15)	0.92-4.53 (2.26)	0.19-1.81 (0.51)	1.41-5.08 (2.83)
Magic Vly.	0.14-2.28 (0.61)	0.20-2.33 (0.66)	0.30-3.71 (1.46)	0.20-3.36 (1.08)	0.41-4.50 (1.89)
NEVP	0.09-3.27 (0.94)	0.15-3.35 (1.02)	0.26-3.87 (1.25)	0.15-4.73 (1.07)	0.33-5.22 (1.67)
NWMT	0.08-0.89 (0.40)	0.15-0.99 (0.49)	0.23-1.16 (0.62)	0.16-1.23 (0.32)	0.36-2.58 (1.24)
PACE_ID	0.06-2.16 (0.60)	0.14-2.30 (0.70)	0.23-11.10 (3.13)	0.16-6.77 (2.04)	0.36-12.07 (3.79)
PACE_UT	0.07-3.50 (0.88)	0.16-3.64 (0.98)	0.24-4.30 (1.18)	0.15-4.45 (0.82)	0.36-5.98 (1.85)
PACE_WY	0.03-1.74 (0.42)	0.07-1.86 (0.48)	0.16-2.73 (0.70)	0.11-2.99 (0.49)	0.23-4.02 (1.15)
PACW	0.19-1.74 (0.62)	0.35-1.96 (0.83)	0.46-3.22 (1.34)	0.23-2.57 (0.73)	0.65-4.62 (2.06)
PGE Bay	0.26-2.45 (1.04)	0.70-3.13 (1.58)	0.78-3.26 (1.69)	0.17-1.80 (0.47)	1.20-3.73 (2.15)
PGE Vly.	0.26-1.78 (0.88)	0.70-2.38 (1.41)	0.89-3.37 (1.96)	0.20-2.22 (0.78)	1.34-4.06 (2.42)
PGN	0.12-1.62 (0.59)	0.20-1.76 (0.69)	0.27-1.90 (0.80)	0.19-1.37 (0.38)	0.40-2.86 (1.38)
PNM	0.08-2.08 (0.73)	0.17-2.24 (0.86)	0.35-3.92 (1.53)	0.17-2.92 (0.83)	0.48-4.88 (2.27)
PSC	0.04-1.77 (0.57)	0.13-1.92 (0.69)	0.25-2.84 (1.07)	0.12-2.10 (0.48)	0.34-4.05 (1.72)
PSE	0.11-1.49 (0.60)	0.18-1.65 (0.70)	0.23-1.80 (0.81)	0.19-0.95 (0.39)	0.37-2.77 (1.44)
SCE	0.29-2.03 (0.97)	0.72-2.81 (1.56)	0.85-3.43 (1.87)	0.19-2.88 (0.78)	1.32-4.52 (2.39)
SCL	0.09-1.20 (0.49)	0.18-1.35 (0.61)	0.24-1.50 (0.71)	0.17-0.64 (0.32)	0.41-3.04 (1.54)
SDGE	0.26-2.92 (1.10)	0.64-3.46 (1.59)	0.73-3.61 (1.70)	0.17-1.64 (0.51)	1.09-3.99 (2.09)
SMUD	0.14-3.37 (1.09)	0.30-3.63 (1.31)	0.40-3.91 (1.50)	0.19-2.96 (0.80)	0.50-4.25 (1.68)
SPP	0.07-1.22 (0.44)	0.16-1.33 (0.56)	0.26-3.37 (1.29)	0.12-2.47 (0.72)	0.37-3.96 (1.81)
SRP	0.14-2.72 (0.72)	0.19-2.84 (0.81)	0.28-3.16 (1.02)	0.13-3.55 (0.91)	0.43-4.66 (1.74)
TEP	0.10-2.99 (0.98)	0.17-3.11 (1.07)	0.31-3.72 (1.40)	0.15-3.53 (0.94)	0.41-4.33 (1.78)
TIDC	0.14-2.68 (0.90)	0.30-2.89 (1.14)	0.43-3.33 (1.41)	0.16-3.02 (0.79)	0.57-3.62 (1.60)
TPWR	0.08-2.13 (0.75)	0.15-2.27 (0.84)	0.21-2.42 (0.93)	0.20-0.55 (0.32)	0.26-2.60 (1.07)
Treas. Vly.	0.14-2.46 (0.74)	0.21-2.55 (0.82)	0.29-3.87 (1.54)	0.26-2.94 (1.05)	0.42-4.44 (2.02)
WACM	0.02-1.09 (0.16)	0.04-1.15 (0.20)	0.12-2.23 (0.60)	0.09-2.14 (0.46)	0.18-3.17 (0.98)
WALC	0.03-1.03 (0.32)	0.13-1.24 (0.51)	0.33-6.65 (1.48)	0.13-9.36 (1.17)	0.51-11.32 (2.74)
WAUW	0.15-4.37 (1.15)	0.24-4.67 (1.29)	0.31-6.09 (1.72)	0.26-3.46 (0.82)	0.38-6.65 (2.01)

3.4 Projected Theoretical Availability in 2020

The projected theoretical availability of end-use availability was estimated by assuming full participation from the selected end-uses, setting controllability and acceptability to 100% in all hours. In this case, there is a maximum of 23,906 MW available for regulation and flexibility reserves, 26,712 MW available for contingency reserves, 25,592 MW available for the energy product, and 32,353 MW available for the capacity product. Generally, projected theoretical availability is around 10 times higher than the projected availability, with variations due to the end-use mixture in each area and the assumed controllability and acceptability. Tables 10, 11, and 12 show the projected maximum availability (MW), the projected cumulative availability (MWh), and the projected theoretical potential for both, for each of the ancillary services products. The maximum energy shift and capacity value, for both projected availability and projected theoretical potential, are listed in Table 13.

The projected theoretical availability of resources to contribute to the capacity product and contingency reserves, relative to total load, is shown in Figures 14a and 14b. Due to the dominance of cooling loads, this relative potential reaches its maximum during summer afternoons. For the capacity product, 7-27% of load is available, 7-22% is available for contingency reserves, 2-20% is available for the energy product, and 6-20% is available for flexibility and regulation reserves. This projected theoretical availability far exceeds current product requirements, which are under typically less than 5% of load. Projected theoretical availabilities for all products relative to load are contained in Appendix C.

Table 10: Projected Availability, Maximum and Cumulative, and Projected Theoretical Potential – Regulation Reserves

Region	Projected Availability		Projected Theoretical Availability		Projected Cumulative Availability	Projected Cumulative Theoretical Availability
	Min	Max	Min	Max		
Arizona	12 MW	307 MW	525 MW	5,089 MW	797 GWh	13,219 GWh
California North	37 MW	349 MW	595 MW	3,418 MW	1,291 GWh	11,248 GWh
California South	55 MW	497 MW	906 MW	5,095 MW	1,854 GWh	17,371 GWh
Colorado	3 MW	129 MW	337 MW	1,871 MW	332 GWh	6,318 GWh
Idaho	3 MW	75 MW	96 MW	796 MW	149 GWh	2,153 GWh
Montana	1 MW	12 MW	53 MW	253 MW	48 GWh	1,002 GWh
Nevada	1 MW	20 MW	51 MW	311 MW	54 GWh	968 GWh
Nevada South	2 MW	134 MW	90 MW	1,722 MW	256 GWh	3,114 GWh
New Mexico	2 MW	60 MW	157 MW	911 MW	190 GWh	3,145 GWh
Northwest	23 MW	193 MW	713 MW	2,826 MW	785 GWh	13,569 GWh
Utah	3 MW	186 MW	198 MW	1,414 MW	219 GWh	4,013 GWh
Wyoming	1 MW	28 MW	51 MW	406 MW	327 GWh	1,105 GWh
Total – Western Interconnection*	153 MW	1,822 MW	3,954 MW	23,906 MW	6,139 GWh	77,226 GWh

*Columns may not sum to totals due to non-coincident maxima and independent rounding

Table 11: Projected Availability, Maximum and Cumulative, and Projected Theoretical Availability – Flexibility Reserves

Region	Projected Availability		Projected Theoretical Availability		Projected Cumulative Availability	Projected Cumulative Theoretical Availability
	Min	Max	Min	Max		
Arizona	19 MW	329 MW	525 MW	5,089 MW	898 GWh	13,219 GWh
California North	95 MW	453 MW	595 MW	3,418 MW	1,936 GWh	11,248 GWh
California South	145 MW	683 MW	906 MW	5,095 MW	2,877 GWh	17,371 GWh
Colorado	9 MW	139 MW	337 MW	1,871 MW	399 GWh	6,318 GWh
Idaho	4 MW	78 MW	96 MW	796 MW	165 GWh	2,153 GWh
Montana	2 MW	14 MW	53 MW	253 MW	59 GWh	1,002 GWh
Nevada	2 MW	23 MW	51 MW	311 MW	68 GWh	968 GWh
Nevada South	4 MW	139 MW	90 MW	1,722 MW	276 GWh	3,114 GWh
New Mexico	5 MW	66 MW	157 MW	911 MW	224 GWh	3,145 GWh
Northwest	38 MW	216 MW	713 MW	2,826 MW	940 GWh	13,569 GWh
Utah	6 MW	192 MW	198 MW	1,414 MW	364 GWh	4,013 GWh
Wyoming	1 MW	29 MW	51 MW	406 MW	66 GWh	1,105 GWh
Total – Western Interconnection*	339 MW	2,162 MW	3,954 MW	23,906 MW	8,273 GWh	77,226 GWh

Table 12: Projected Availability, Maximum and Cumulative, and Projected Theoretical Availability – Contingency Reserves

Region	Projected Availability		Projected Theoretical Availability		Projected Cumulative Availability	Projected Cumulative Theoretical Availability
	Min	Max	Min	Max		
Arizona	32 MW	494 MW	598 MW	5,221 MW	1,204 GWh	14,241 GWh
California North	114 MW	535 MW	733 MW	3,941 MW	2,395 GWh	13,914 GWh
California South	166 MW	749 MW	1,040 MW	5,477 MW	3,318 GWh	19,635 GWh
Colorado	20 MW	212 MW	459 MW	2,301 MW	706 GWh	8,168 GWh
Idaho	7 MW	138 MW	136 MW	1,184 MW	394 GWh	3,639 GWh
Montana	3 MW	18 MW	62 MW	267 MW	75 GWh	1,078 GWh
Nevada	4 MW	49 MW	68 MW	462 MW	158 GWh	1,530 GWh
Nevada South	7 MW	190 MW	105 MW	1,749 MW	339 GWh	3,280 GWh
New Mexico	10 MW	104 MW	217 MW	1,117 MW	389 GWh	4,087 GWh
Northwest	63 MW	298 MW	942 MW	3,259 MW	1,338 GWh	15,806 GWh
Utah	10 MW	228 MW	228 MW	1,488 MW	442 GWh	4,379 GWh
Wyoming	3 MW	43 MW	65 MW	441 MW	96 GWh	1,252 GWh
Total – Western Interconnection*	445 MW	2,990 MW	5,156 MW	26,712 MW	10,855 GWh	90,011 GWh

*Columns may not sum to totals due to non-coincident maxima and independent rounding

Table 13: Projected Availability and Projected Theoretical Availability of Energy and Capacity Products

BAA	Projected Capacity	Projected Theoretical Capacity	Projected Energy Shift		Projected Theoretical Energy Shift	
			Min	Max	Min	Max
APS	162 MW	1,920 MW	60 MWh	1,312 MWh	502 MWh	16,385 MWh
AVA	29 MW	214 MW	32 MWh	285 MWh	275 MWh	3,200 MWh
BPA	68 MW	788 MW	97 MWh	478 MWh	801 MWh	5,456 MWh
CHPD	5.2 MW	65 MW	7 MWh	35 MWh	57 MWh	391 MWh
DOPD	3.3 MW	50 MW	4 MWh	25 MWh	32 MWh	295 MWh
EPE	31 MW	434 MW	17 MWh	252 MWh	152 MWh	2,767 MWh
Far East	7.6 MW	82 MW	6 MWh	97 MWh	52 MWh	1,184 MWh
GCPD	2.6 MW	24 MW	4.4 MWh	9.5 MWh	30 MWh	82 MWh
IID	41 MW	302 MW	8 MWh	326 MWh	60 MWh	3,230 MWh
LDWP	140 MW	817 MW	43 MWh	412 MWh	313 MWh	3,619 MWh
Magic Vly.	24 MW	235 MW	8 MWh	216 MWh	68 MWh	2,588 MWh
NEVP	168 MW	1,853 MW	32 MWh	1,428 MWh	246 MWh	17,572 MWh
NWMT	17 MW	211 MW	15 MWh	86 MWh	100 MWh	952 MWh
PACE_ID	36 MW	282 MW	4 MWh	251 MWh	32 MWh	2,866 MWh
PACE_UT	193 MW	1,455 MW	48 MWh	1,731 MWh	304 MWh	11,944 MWh
PACE_WY	28 MW	387 MW	11 MWh	293 MWh	97 MWh	3739 MWh
PACW	50 MW	424 MW	49 MWh	426 MWh	433 MWh	4,731 MWh
PGE Bay	173 MW	1,084 MW	60 MWh	646 MWh	439 MWh	6,144 MWh
PGE Vly.	314 MW	2,113 MW	104 MWh	1,537 MWh	825 MWh	14,817 MWh
PGN	53 MW	310 MW	43 MWh	232 MWh	342 MWh	2,690 MWh
PNM	54 MW	627 MW	25 MWh	393 MWh	243 MWh	4,701 MWh
PSC	112 MW	1,415 MW	54 MWh	827 MWh	456 MWh	10,147 MWh
PSE	58 MW	389 MW	54 MWh	150 MWh	398 MWh	1,584 MWh
SCE	626 MW	4,141 MW	173 MWh	2,775 MWh	1,334 MWh	26,381 MWh
SCL	26 MW	168 MW	17 MWh	35 MWh	130 MWh	329 MWh
SDGE	89 MW	606 MW	36 MWh	401 MWh	278 MWh	4,005 MWh
SMUD	84 MW	792 MW	27 MWh	655 MWh	214 MWh	7,352 MWh
SPP	56 MW	475 MW	12 MWh	294 MWh	102 MWh	3,323 MWh
SRP	196 MW	2,183 MW	58 MWh	1,357 MWh	480 MWh	17,043 MWh
TEP	49 MW	570 MW	25 MWh	435 MWh	203 MWh	5,519 MWh
TIDC	13 MW	115 MW	4 MWh	99 MWh	30 MWh	1,076 MWh
TPWR	9.0 MW	52 MW	9 MWh	17 MWh	74 MWh	174 MWh
Treas. Vly.	58 MW	585 MW	26 MWh	425 MWh	220 MWh	5,085 MWh
WACM	61 MW	634 MW	16 MWh	528 MWh	150 MWh	6,532 MWh
WALC	32 MW	562 MW	7 MWh	362 MWh	58 MWh	2,430 MWh
WAUW	2.1 MW	21 MW	1 MWh	17 MWh	14 MWh	209 MWh

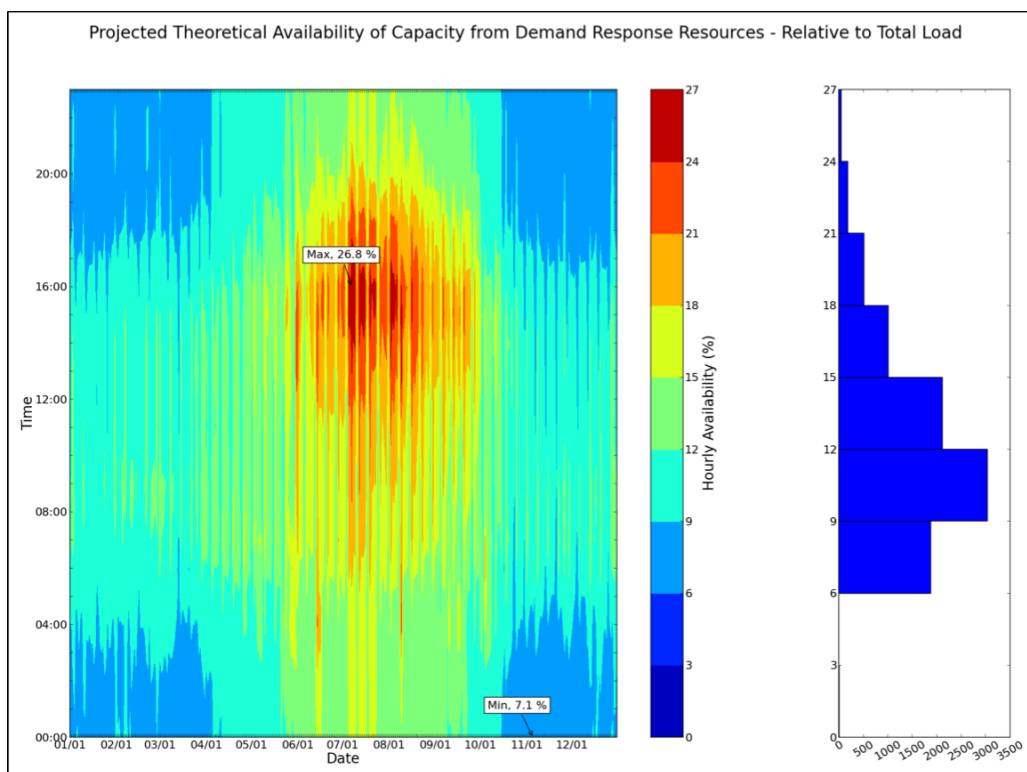


Figure 14a: Projected theoretical availability of the capacity product across the Western Interconnection, relative to total load

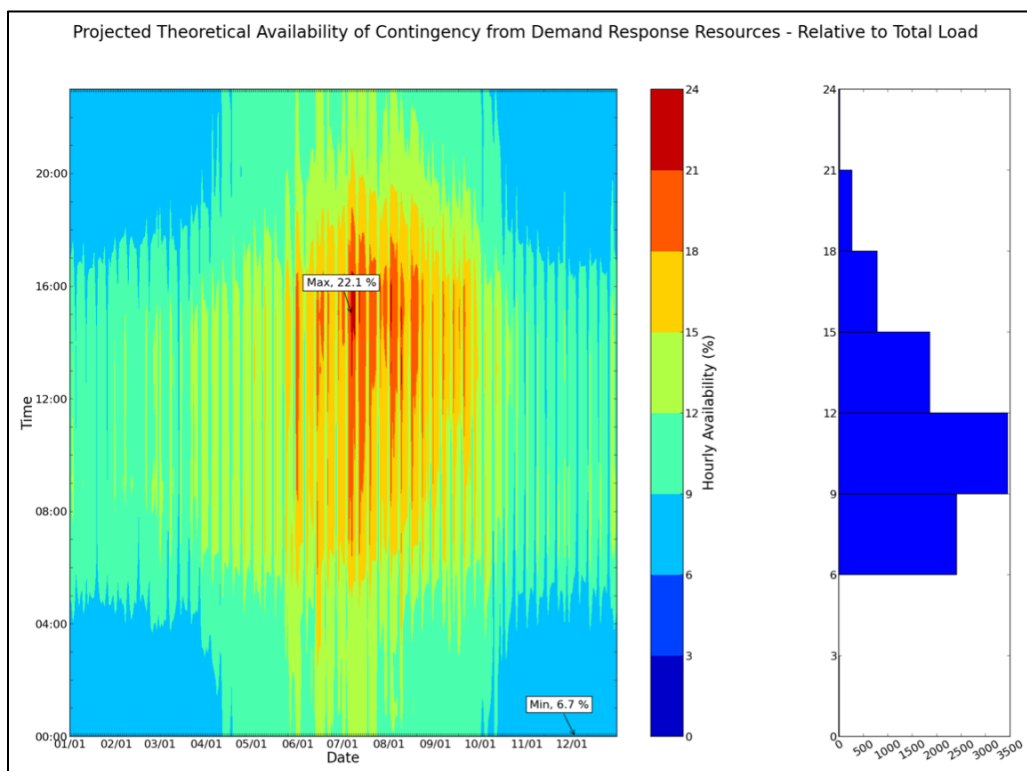


Figure 14b: Projected theoretical availability of contingency reserves across the Western Interconnection, relative to total load

CHAPTER 4:

Discussion, Conclusions, and Areas of Future Research

4.1 Discussion

Our analysis of load capabilities predicts significant availability from end-use resources. Our results are similar in magnitude to estimates made in the 2012 Federal Energy Regulatory Commission (FERC) survey by the Western Energy Coordinating Council (WECC), the organization responsible for coordination within the Western Interconnection. We predict a maximum availability of 4,233 MW from the capacity product, the product with greatest availability. WECC reported potential peak load reductions of 5,284 MW and realized peak load reductions of 2,870 MW (FERC 2012). However, this total includes 15 types of peak load reduction programs, many of which do not map to our selected products.

Our results, relative to total load, are slightly lower than current figures for PJM and ISO New England (ISO-NE). PJM serves the mid-Atlantic region and parts of the eastern Midwest, while ISO-NE serves Connecticut, Maine, Massachusetts, New Hampshire, Rhode Island and Vermont. Recent DR events in PJM shed ~5% of load in one zone, and ISO-NE projects a DR capacity of ~6.6% of their peak load (PJM 2013, ISO-NE 2013). However, PJM and NE-ISO have different market rules and structures than the Western Interconnect that may provide additional revenue streams (e.g., forward capacity market revenues), able to attract additional DR-capable loads and that encourage enablement and customer outreach.

Though our projected load availability seems consistent with other estimates, care should be taken in interpreting our results. Our analysis does not take into account the economics of participation, the effort required to enable the end-uses to communicate with grid operators, the effort required to control the end-uses effectively, or the impact on the distribution grid of high penetrations of responsive load. A sensitivity analysis, linking the nonlinear association between decisions about load capabilities and their resulting valuations, would be useful in identifying the most important input parameters. Data to confirm and refute the predictions of load capabilities must be gathered and analyzed, and our load capability assumptions revised. An assessment of the uncertainty and variability in the overall availability profiles would be a valuable addition.

In conducting this study, we also note the paucity of high-resolution, broadly representative, time-series data on the electrical demand of end-uses. Therefore, many high-level assumptions are made to extrapolate and interpolate the data gathered into a format that is suitable for the market and grid modeling. Current and future work, such as the newly released *Commercial and Residential Hourly Load Profiles for all TMY3 Locations in the United States* (National Renewable Energy Laboratory 2013), can offer a more accurate assessment of the baseline behavior of loads.

4.2 Conclusions

We conducted a detailed investigation of end-use capabilities and load data, and developed key filters to estimate their availability. Our results provide an initial estimate of the magnitude of bulk power system services available from end-use loads, and constraints on their use. We present a transparent approach to predicting end-use availability that is as data-driven as possible. By design, the DR data sets are results of various aggregations and analysis decisions due to data limitations. Nonetheless, the results are the first significant efforts on how to produce such data sets. They are suitable for scoping studies, ground-truthing models, and prioritizing future data gathering and analyses. The use of analysis criteria using “shedability”, “controllability”, and “acceptability” as qualitative and quantitative filters is novel, testable, and extensible to other regions in the US.

The resulting DR data sets from this report serve as input to a production cost model. We discuss the resulting valuation of DR, including how characteristics of products are valued, in accompanying “results” reports (Hummon *et al.* 2013). Our efforts to value load participation assess the projected theoretical availability and economic incentives for load to participate in capacity, energy, and ancillary services markets; however, they do not cover the regulatory and market aspects of load participation. These issues are discussed in a recently released report developed as part of this project, *Market and Policy Barriers for Demand Response Providing Ancillary Services in U.S. Markets* (Cappers *et al.* 2013).

4.3 Future Research

There have been few large-scale assessments of the capabilities of electric end-use loads to respond to various wholesale market products other than for shaving peak loads. In this work, a relatively small number of case studies and experiences gathered in the field through demonstration projects are extrapolated to a large and diverse population of loads across several states. This work has also relied heavily on engineering estimates of end-use load characteristics and their controllability.

Further work to assess the capabilities of end-use loads to respond to a variety of wholesale market products and situations expected to occur due to large scale deployment of renewable resources is needed. Such work will assist in confirming and refining the assumptions of end-use load flexibility. There are key outstanding questions that exist well beyond the scope of this study which include:

- What communications and control architecture will be the lowest cost platform to enable these loads to participate in the wholesale markets and products described in this report?
- What are the latency, control, and communications challenges for fast demand response systems both on the grid side and within the building and end-use load controls?

- What type of aggregation system allows the best deployment platform to automate these systems and use them in multiple DR products? How can we automate once and use many times?
- What is the frequency, duration and response time of individual and aggregated DR resources?
- What price points and payment options will motivate the end-users to participate and enroll their loads in these wholesale market products?

Suggested follow-on work includes:

- Collection and analysis of multi-region, high-resolution end-use demand profiles to improve estimates of baseline load and DR data sets.
- Field testing DR end-uses and control systems to quantify their response characteristics and flexibility. This should include the telemetry and control system architectures and equipment costs.
- Analysis of distribution system stability during DR events in areas with high penetrations of flexible loads.
- Detailed assessments of consumer behavior and preferences regarding demand response participation, including customer fatigue (reduced willingness to respond to events in close proximity to previous events) and price elasticity (the relationship between price and magnitude of participation).

These additional analyses will test the assumptions used in this report and refine projections of the potential capabilities of demand response resources to serve as alternatives and complements to conventional supply options. These future studies will require careful research designs that facilitate access to data for researchers and market participants. This is a large area of research and will require cooperation among national, state, and local agencies in developing a common vision for new technology, markets, and policies for advanced DR participation.

REFERENCES

- Aalami, H.A.; M. Parsa Moghaddam; G.R. Yousefi. 2010. *Demand response modeling considering Interruptible/Curtailable loads and capacity market programs*, Applied Energy, Volume 87, Issue 1, January 2010, Pages 243-250, ISSN 0306-2619, 10.1016/j.apenergy.2009.05.041.
- Behrangrad, Mahdi; Hideharu Sugihara; Tsuyoshi Funaki. 2011. *Effect of optimal spinning reserve requirement on system pollution emission considering reserve supplying demand response in the electricity market*. Applied Energy, Volume 88, Issue 7, Pages 2548-2558, July 2011, ISSN 0306-2619, 10.1016/j.apenergy.2011.01.034.
- Brattle. 2012. *WECC 20-Year Demand Response Forecast: Proposed Modeling Assumptions*, May 4th, 2012 presentation to LBNL.
- California Department of Water Resources. 1994. *Urban Water Use in California (Bulletin 166-4)*.
- California Energy Commission. 2006. *California Commercial End-use Survey*, CEC-400-2006-005.
- California Energy Commission, Demand Forecasting Office. 2012. *CEC 2020 Residential End-use Forecast Spreadsheets*. Provided by Mitch Tian.
- Cappers, Peter; Jason MacDonald, Charles Goldman. 2013. *Market and Policy Barriers for Demand Response Providing Ancillary Services in U.S. Markets*. LBNL-6155E.
- Ela, Erik; Michael Milligan; Brendan Kirby. 2011. *Operating Reserves and Variable Generation*, National Renewable Energy Laboratory. NREL/TP-5500-51978.
- Electric Power Research Institute. 2000. *Water & Sustainability (Volume 4): U.S. Electricity Consumption for Water Supply & Treatment - The Next Half Century*.
- Federal Energy Regulatory Commission. 1996. *Order 888*.
- Federal Energy Regulatory Commission. 2012. *Assessment of Demand Response and Advanced Metering*. <http://www.ferc.gov/legal/staff-reports/12-20-12-demand-response.pdf>
- Ghatikar, Girish; Venkata Ganti; Nance Matson; Mary Ann Piette. 2012. *Demand Response Opportunities and Enabling Technologies for Data Centers: Findings From Field Studies*. LBNL-5763E.
- Goli, Sasank; Aimee McKane; Daniel Olsen. 2011. *Demand Response Opportunities in Industrial Refrigerated Warehouses in California*, 2011 ACEEE Summer Study on Energy Efficiency in Industry. LBNL-4837E.
- House, Lon. 2007. *Water Supply Related Electricity Demand in California*. CEC 500-2007-114.
- Hummon, Marissa; David Palchak; Daniel Olsen; Sila Kiliccote; Paul Denholm; Jennie Jorgenson; Nance Matson; Cody Rose; Michael Sohn; Brendan Kirby; Mark O'Malley. 2013. *Grid Integration of Aggregated Demand Response, Part 2: Modeling Energy-Limited Demand Response in a Production Cost Model*. National Renewable Energy Laboratory. NREL Report No. TP-6A20-58492

ISO New England. 2013. *CELT Report: 2013 – 2022 Forecast Report of Capacity, Energy, Loads, and Transmission*. http://www.iso-ne.com/trans/celt/report/2013/2013_celt_report.pdf

Kiliccote, Sila; Mary Ann Piette; Johanna Mathieu; Kristen Parrish. 2010. *Findings from Seven Years of Field Performance Data for Automated Demand Response in Commercial Buildings*. 2010 ACEEE Summer Study on Energy Efficiency in Buildings. LBNL-3643E.

Kwag, Hyung-Geun; Jin-O Kim. 2012. *Optimal combined scheduling of generation and demand response with demand resource constraints*. *Applied Energy*, Volume 96, August 2012, Pages 161-170, ISSN 0306-2619, 10.1016/j.apenergy.2011.12.075.

Ma, Ookie; Nasr Alkadi; Peter Cappers; Paul Denholm; Junqiao Dudley; Sasank Goli; Marissa Hummon; Sila Kiliccote; Jason MacDonald; Nance Matson; Daniel Olsen; Cody Rose; Michael D. Sohn; Michael Starke; Brendan Kirby; Mark O'Malley. 2013. *Demand Response for Ancillary Services*. *IEEE Transactions on Smart Grid*.

Marks, Gary; Edmund Wilcox; Daniel Olsen; Sasank Goli. 2013. *Opportunities for Demand Response in California Agricultural Irrigation: A Scoping Study*. LBNL-6108E.

McMenamin, Stuart; Andy Sukenik (Itron, Inc.). 2012. *WECC 20-Year Reference Forecast: Draft Results*.

Navid, Nivad; Gary Rosenwald; Dhiman Chatterjee. 2011. *Ramp Capability for Load Following in the MISO Markets*. Midcontinent Independent System Operator, Carmel, Indiana.

National Oceanic and Atmospheric Administration. 1982. *Mean Monthly, Seasonal, and Annual Pan Evaporation for the United States*. www.nws.noaa.gov/oh/hdsc/Technical_reports/TR34.pdf

National Renewable Energy Laboratory. 2013. *Commercial and Residential Hourly Load Profiles for all TMY3 Locations in the United States*. Accessible from <http://en.openei.org/datasets/node/961>. Developed at the National Renewable Energy Laboratory and made available under the ODC-BY 1.0 Attribution License.

Northwest Power and Conservation Council. 2010. *Detail Assumptions and Load Forecasts tables 6th Power Plan – Feb 2010 update*. <http://www.nwcouncil.org/energy/powerplan/6/plan>, accessed October 29, 2012.

Olsen, Daniel; Sasank Goli; David Faulkner; Aimee McKane. 2012. *Opportunities for Automated Demand Response in Wastewater Treatment Facilities in California – Southeast Water Pollution Control Plant Case Study*. LBNL-6056E.

PJM. 2013. *PJM Estimated Demand Response Activity July 15-19, 2013*. <http://www.pjm.com/~media/markets-ops/demand-response/pjm-hot-days-report-for-july-15-july-19-2013.ashx>

Scott, Doug. 2012. Personal communication.

- SEEAAction. 2011. *Using Integrated Resource Planning to Encourage Investment in Cost-Effective Energy Efficiency Measures*.
http://www1.eere.energy.gov/seeaction/pdfs/ratepayer_efficiency_irpportfoliomanagement.pdf
- Starke, M; D. Letto; N. Alkadi; R. George; B. Johnson; K. Dowling; S. Khan. 2013. *Demand-Side Response from Industrial Loads*. Clean Technology Conference Technical Proceedings (Cleantech 2013), Washington D.C.
- Su, Chua-Liang; Daniel Kirschen. 2009. *Quantifying the Effect of Demand Response on Electricity Markets*, Power Systems, IEEE Transactions on , vol.24, no.3, pp.1199-1207, Aug. 2009, 10.1109/TPWRS.2009.2023259.
- United States Department of Agriculture. 2009. *Farm and Ranch Irrigation Survey*.
http://agcensus.usda.gov/Publications/2007/Online_Highlights/Farm_and_Ranch_Irrigation_Survey/index.php
- United States Department of Agriculture. 2010. *Field Crops: Usual Planting and Harvest Dates*.
<http://usda.mannlib.cornell.edu/usda/current/planting/planting-10-29-2010.pdf>
- United States Department of Agriculture. 2012. *Capacity of Refrigerated Warehouses: 2011 Summary*.
<http://usda.mannlib.cornell.edu/MannUsda/viewDocumentInfo.do?documentID=1424>
- United States Department of Energy. 2011a. *Analytic Challenges to Valuing Energy Storage*. Office of Energy Efficiency and Renewable Energy, Workshop Report, November 2011
- United States Department of Energy. 2011b. *Load Participating in Ancillary Services*. Office of Energy Efficiency and Renewable Energy, Workshop Report, December 2011
- United States Department of Energy. 2011c. *Energy Savings Estimates of Light Emitting Diodes in Niche Lighting Applications*. Office of Energy Efficiency and Renewable Energy, Building Technologies Program, prepared by Navigant Consulting Inc.
- United States Energy Information Agency. 2003. *Commercial Building Energy Consumption Survey*.
<http://www.eia.gov/consumption/commercial/index.cfm>
- United States Energy Information Agency. 2009. *Residential Energy Consumption Survey*.
<http://www.eia.gov/consumption/residential/>
- United States Environmental Protection Agency. 2007. *Report to Congress on Server and Data Center Energy Efficiency*, Public Law 109-431.
- United States Naval Observatory. 2012. *Sun or Moon Rise/Set Table for One Year*.
http://aa.usno.navy.mil/data/docs/RS_OneYear.php
- Wang, Jing; N. E. Redondo; F. D. Galiana. 2003. *Demand-Side Reserve Offers in Joint Energy/Reserve Electricity Markets*, Power Systems, IEEE Transactions on , vol.18, no.4, pp.1300-1306, Nov. 2003, 10.1109/TPWRS.2003.818593.

Watson, David; Nance E. Matson; Janie Page; Sila Kiliccote; Mary Ann Piette; Karin Corfee; Betty Seto; Ralph Masiello; John Masiello; Lorin Molander; Samuel Golding; Kevin Sullivan; Walt Johnson; David Hawkins. 2012. *Fast Automated Demand Response to Enable the Integration of Renewable Resources*. LBNL-5555E.

Western Energy Coordinating Council. 2011. *TEPPC 2010 Study Program 10-Year Regional Transmission Plan*. Technical report . Western Electricity Coordinating Council, Salt Lake City, UT

Woo, C.K; Karen Herter. 2006. *Residential Demand Response Evaluation: A Scoping Study*. LBNL-61090.

Xu, Lin; Donald Tretheway. 2012. *Flexible Ramping Products*. Second Revised Draft Final Proposal. California Independent System Operator, Folsom, CA.

Yin, Rongxin; Peng Xu, Mary Ann Piette, S. Kiliccote. 2010. *Study on Auto-DR and Pre-cooling of Commercial Buildings with Thermal Mass in California*. Energy and Buildings, vol. 42, no. 7, pp. 967-975, January 2010. LBNL-3541E.

GLOSSARY

Abbreviations

BAA	Balancing Authority Area
CEC	California Energy Commission
CEUS	Commercial End-use Survey
DLC	Direct Load Control
DR	Demand Response
DRRC	Demand Response Research Center
EPA	Environmental Protection Agency
FERC	Federal Energy Regulatory Commission
GWh	Gigawatt-hour
LBNL	Lawrence Berkeley National Laboratory
MW	Megawatt
NPCC	Northwest Power and Conservation Council
NREL	National Renewable Energy Laboratory
PCT	Programmable Communication Thermostat
RECS	Residential Energy Consumption Survey
TOU	Time of Use
USDA	United States Department of Agriculture
US DOE	United States Department of Energy

Balancing Authority Area Abbreviations

APS	Arizona Public Service Company
AVA	Avista Corporation
BPA	Bonneville Power Administration
CHPD	PUD No. 1 of Chelan County
DOPD	PUD No. 1 of Douglas County
EPE	El Paso Electric Company
Far East	Idaho Power – Far East Region
GCPD	PUD No. 2 of Grant County
IID	Imperial Irrigation District
LDWP	Los Angeles Department of Water and Power
Magic Vly.	Idaho Power – Magic Valley Region
NEVP	Nevada Power Company
NWMT	NorthWestern Energy
PACE_ID	PacifiCorp East - Idaho
PACE_UT	PacifiCorp East – Utah
PACE_WY	PacifiCorp East – Wyoming
PACW	PacifiCorp West
PGE Bay	Pacific Gas and Electric Company – San Francisco Bay Area
PGE Vly.	Pacific Gas and Electric Company – Central Valley
PGN	Portland General Electric Company
PNM	Public Service Company of New Mexico
PSC	Public Service Company of Colorado
PSE	Puget Sound Energy
SCE	Southern California Edison
SCL	Seattle City Light
SDGE	San Diego Gas and Electric
SMUD	Sacramento Municipal Utilities District
SPP	Sierra Pacific Power Company
SRP	Salt River Project
TEP	Tucson Electric Power Company
TIDC	Turlock Irrigation District
TPWR	City of Tacoma, Department of Public Utilities
Treas. Vly.	Idaho Power – Treasure Valley Region
WACM	Western Area Power Administration – Colorado-Missouri Region
WALC	Western Area Power Administration – Lower Colorado Region
WAUW	Western Area Power Administration – Upper Great Plains West

Adapted from *Western Interconnection Balancing Authorities* (38).

http://www.wecc.biz/library/WECC%2520Documents/Publications/WECC_BA_Map.pdf

Appendix A - Tables of Flexibility Factor Values

The range of values accounts for both differences between BAAs and differences between hours within BAAs.

Commercial Cooling			
Product	Sheddable	Controllable	Acceptable
Regulation	51-58%	7-16%	0.3-7%
Contingency	51-58%	7-16%	3-77%
Flexibility	51-58%	7-16%	1-21%
Energy	41-49%	15-25%	3-77%
Capacity	41-49%	15-25%	3-77%

Commercial Heating			
Product	Sheddable	Controllable	Acceptable
Regulation	53-64%	7-16%	0-0.6%
Contingency	53-64%	7-16%	0-1.8%
Flexibility	53-64%	7-16%	0-1.8%
Energy	46-51%	10-25%	0-77%
Capacity	46-51%	10-25%	0-77%

Commercial Lighting			
Product	Sheddable	Controllable	Acceptable
Regulation	26-28%	7-11%	0.3-7%
Contingency	26-28%	7-11%	1-21%
Flexibility	26-28%	7-11%	1-21%
Energy	26-28%	15-17%	3-77%
Capacity	26-28%	15-17%	3-77%

Commercial Ventilation			
Product	Sheddable	Controllable	Acceptable
Regulation	53-59%	8-16%	0.3-7%
Contingency	53-59%	8-16%	1-21%
Flexibility	53-59%	8-16%	1-21%
Energy	46-49%	17-25%	3-77%
Capacity	46-49%	17-25%	3-77%

Residential Cooling			
Product	Sheddable	Controllable	Acceptable
Regulation	70%	13-26%	0-39%
Contingency	70%	13-26%	13-39%
Flexibility	70%	13-26%	0-39%
Energy	20-70%	2-52%	13-39%
Capacity	20-70%	2-52%	13-39%

Residential Heating			
Product	Sheddable	Controllable	Acceptable
Regulation	30%	2%	0-1.5%
Contingency	30%	2%	0-1.5%
Flexibility	30%	2%	0-1.5%
Energy	20-30%	2-48%	0-1.5%
Capacity	20-30%	2-48%	0-1.5%

Residential Water Heating			
Product	Sheddable	Controllable	Acceptable
Regulation	25%	13-26%	13-39%
Contingency	25%	13-26%	13-39%
Flexibility	25%	13-26%	13-39%
Energy	25%	13-26%	13-39%
Capacity	25%	13-26%	13-39%

Agricultural Irrigation Pumping		
Product	Sheddable	Participation rate
Regulation	100%	0%
Contingency	100%	15%
Flexibility	100%	0%
Energy	100%	10%
Capacity	100%	15%

Data Centers		
Product	Sheddable	Participation rate
Regulation	3%	100%
Contingency	3%	100%
Flexibility	3%	100%
Energy	3%	100%
Capacity	3%	100%

Municipal Lighting		
Product	Sheddable	Participation rate
Regulation	5%	100%
Contingency	5%	100%
Flexibility	5%	100%
Energy	0%	0%
Capacity	5%	100%

Municipal Pumping		
Product	Sheddable	Participation rate
Regulation	0%	0%
Contingency	5%	50%
Flexibility	5%	50%
Energy	5%	25%
Capacity	5%	25%

Refrigerated Warehouses		
Product	Sheddable	Participation rate
Regulation	0%	100%
Contingency	10%	100%
Flexibility	0%	100%
Energy	5%	100%
Capacity	10%	100%

Wastewater Pumping		
Product	Sheddable	Participation rate
Regulation	0%	0%
Contingency	5%	50%
Flexibility	5%	50%
Energy	5%	25%
Capacity	5%	25%


Appendix B – Table of Files

BAA	Agricultural Pumping	Commercial Cooling	Commercial Heating	Commercial Lighting	Commercial Ventilation	Data Centers	Municipal Lighting	Municipal Pumping	Refrigerated Warehouses	Residential Cooling	Residential Heating	Residential Water Heating	Wastewater Pumping
APS	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
AVA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BPA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CHPD		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DOPD		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
EPE	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Far East	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
GCPD			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
IID	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LDWP		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Magic Vly.	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
NEVP	✓	✓		✓	✓	✓	✓	✓		✓	✓	✓	✓
NWMT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PACE_ID	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PACE_UT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PACE_WY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PACW	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PGE Bay		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PGE Vly.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PGN		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PNM	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PSC	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PSE		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SCE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SCL		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SDGE		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SMUD	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SPP	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SRP	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TEP	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TIDC	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TPWR		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Treas. Vly.	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WACM	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WALC	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WAUW	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓


Appendix C – Product availability patterns

Estimated Product Availability


Availability of Regulation from Demand Response Resources

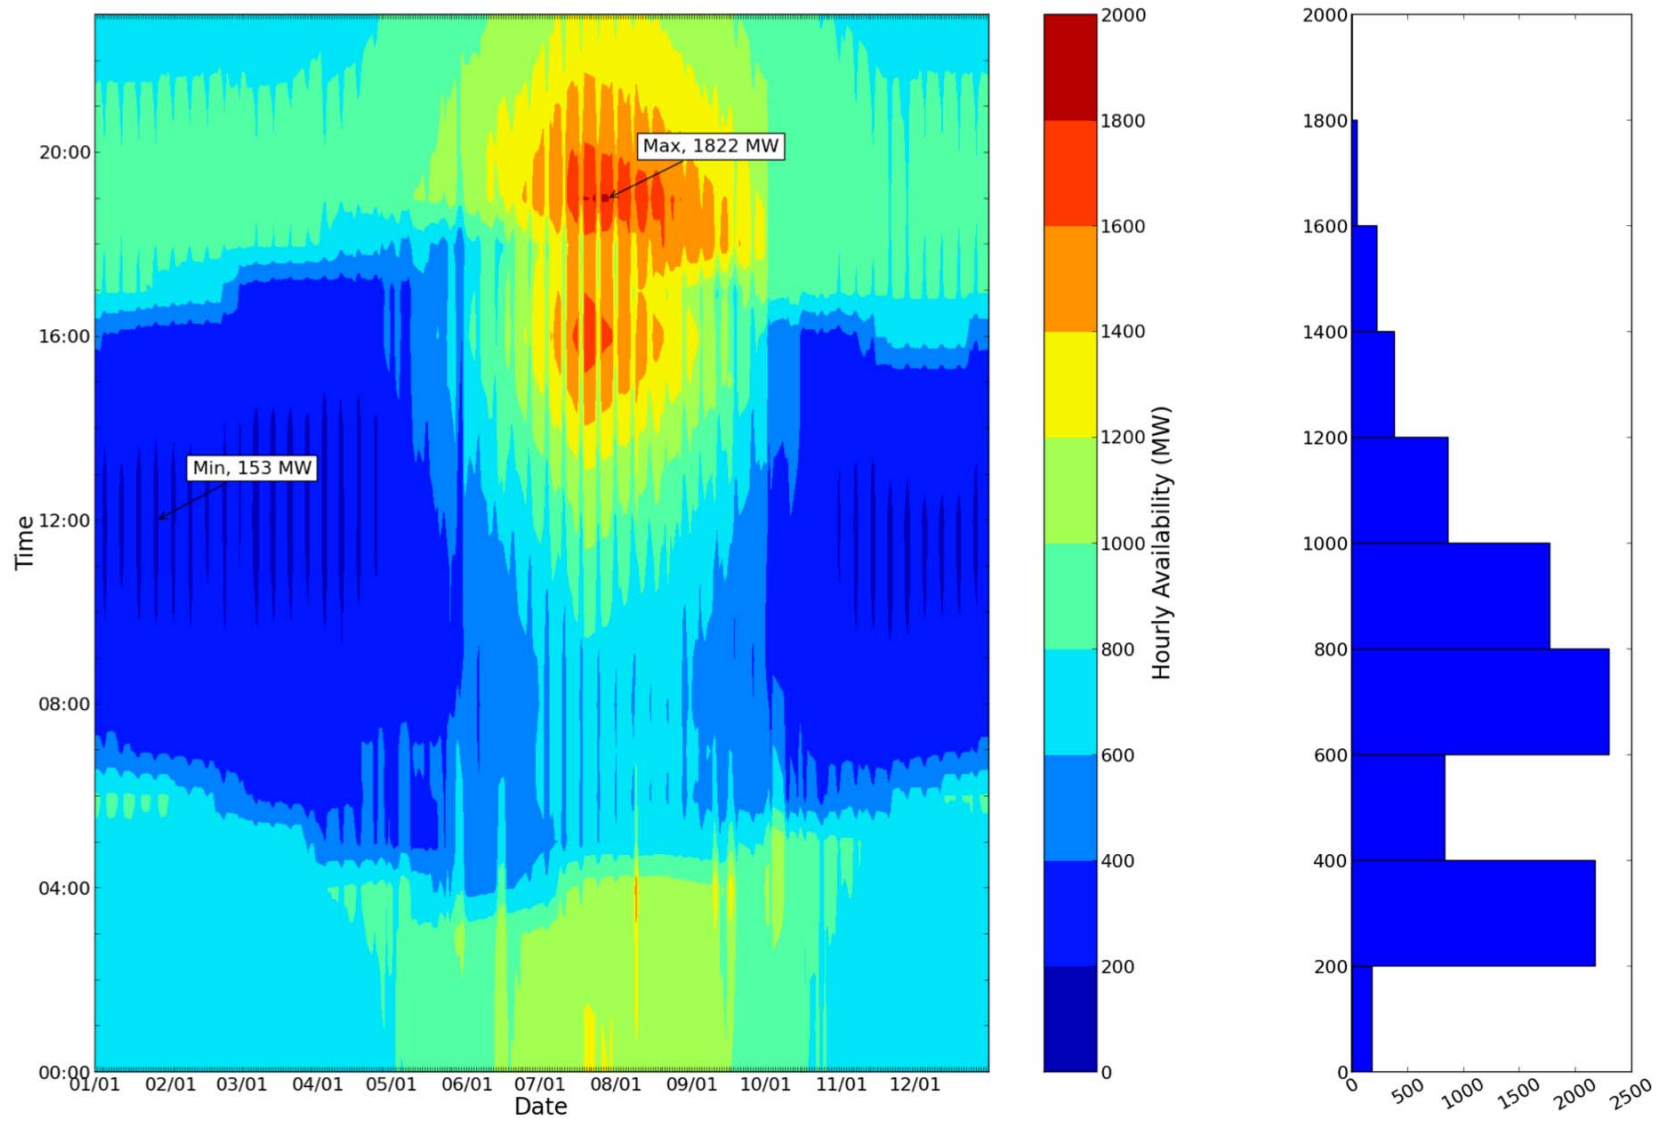


Availability of Flexibility from Demand Response Resources

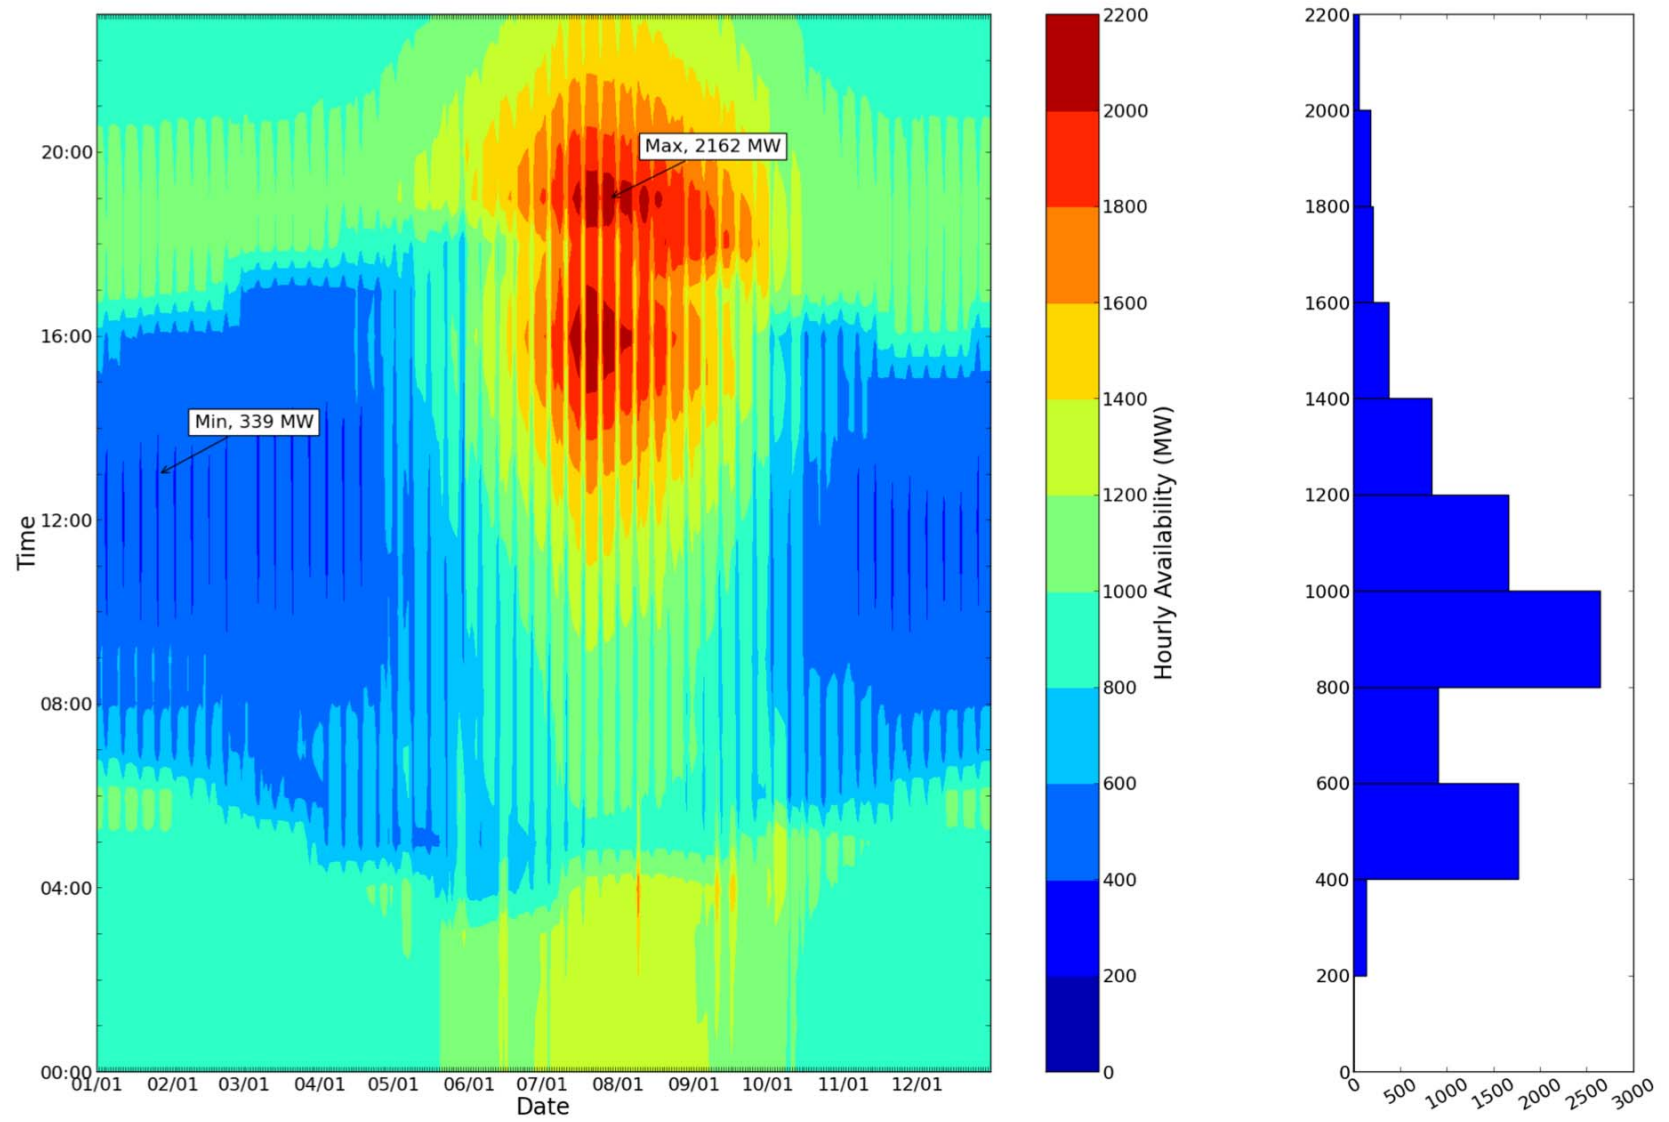


Availability of Contingency from Demand Response Resources

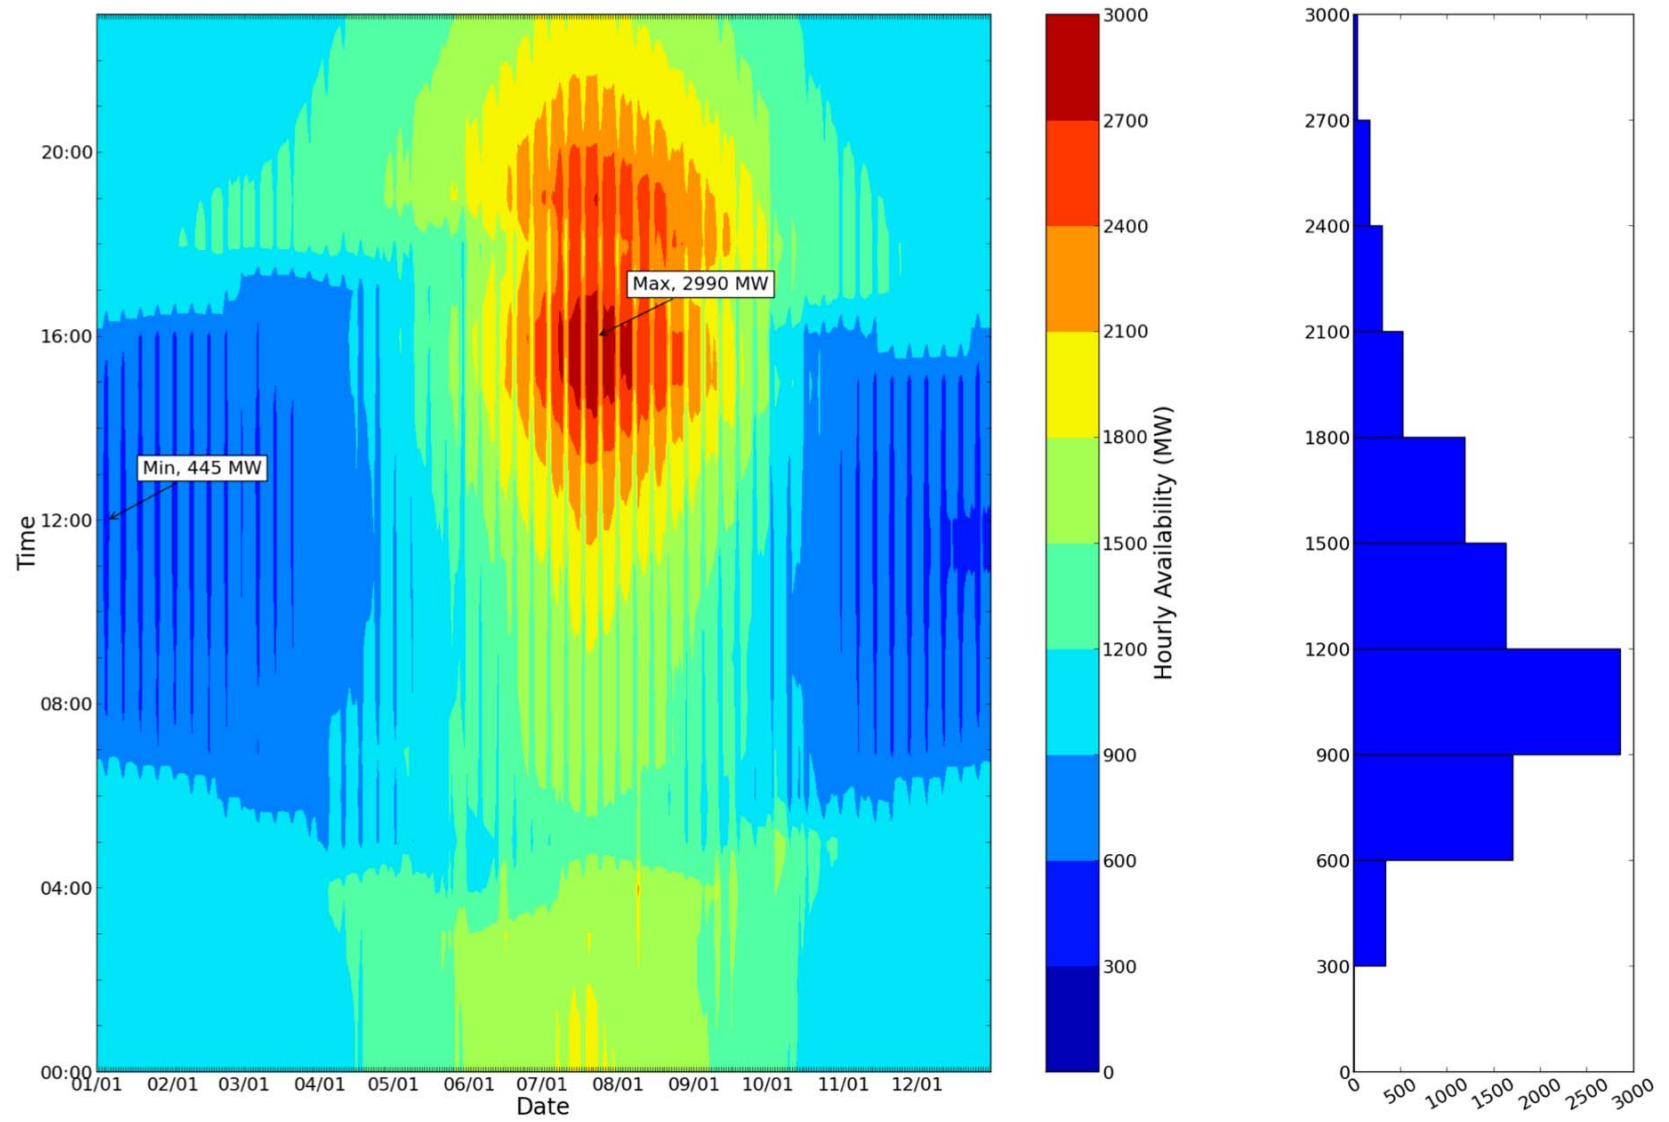

Availability of Energy from Demand Response Resources

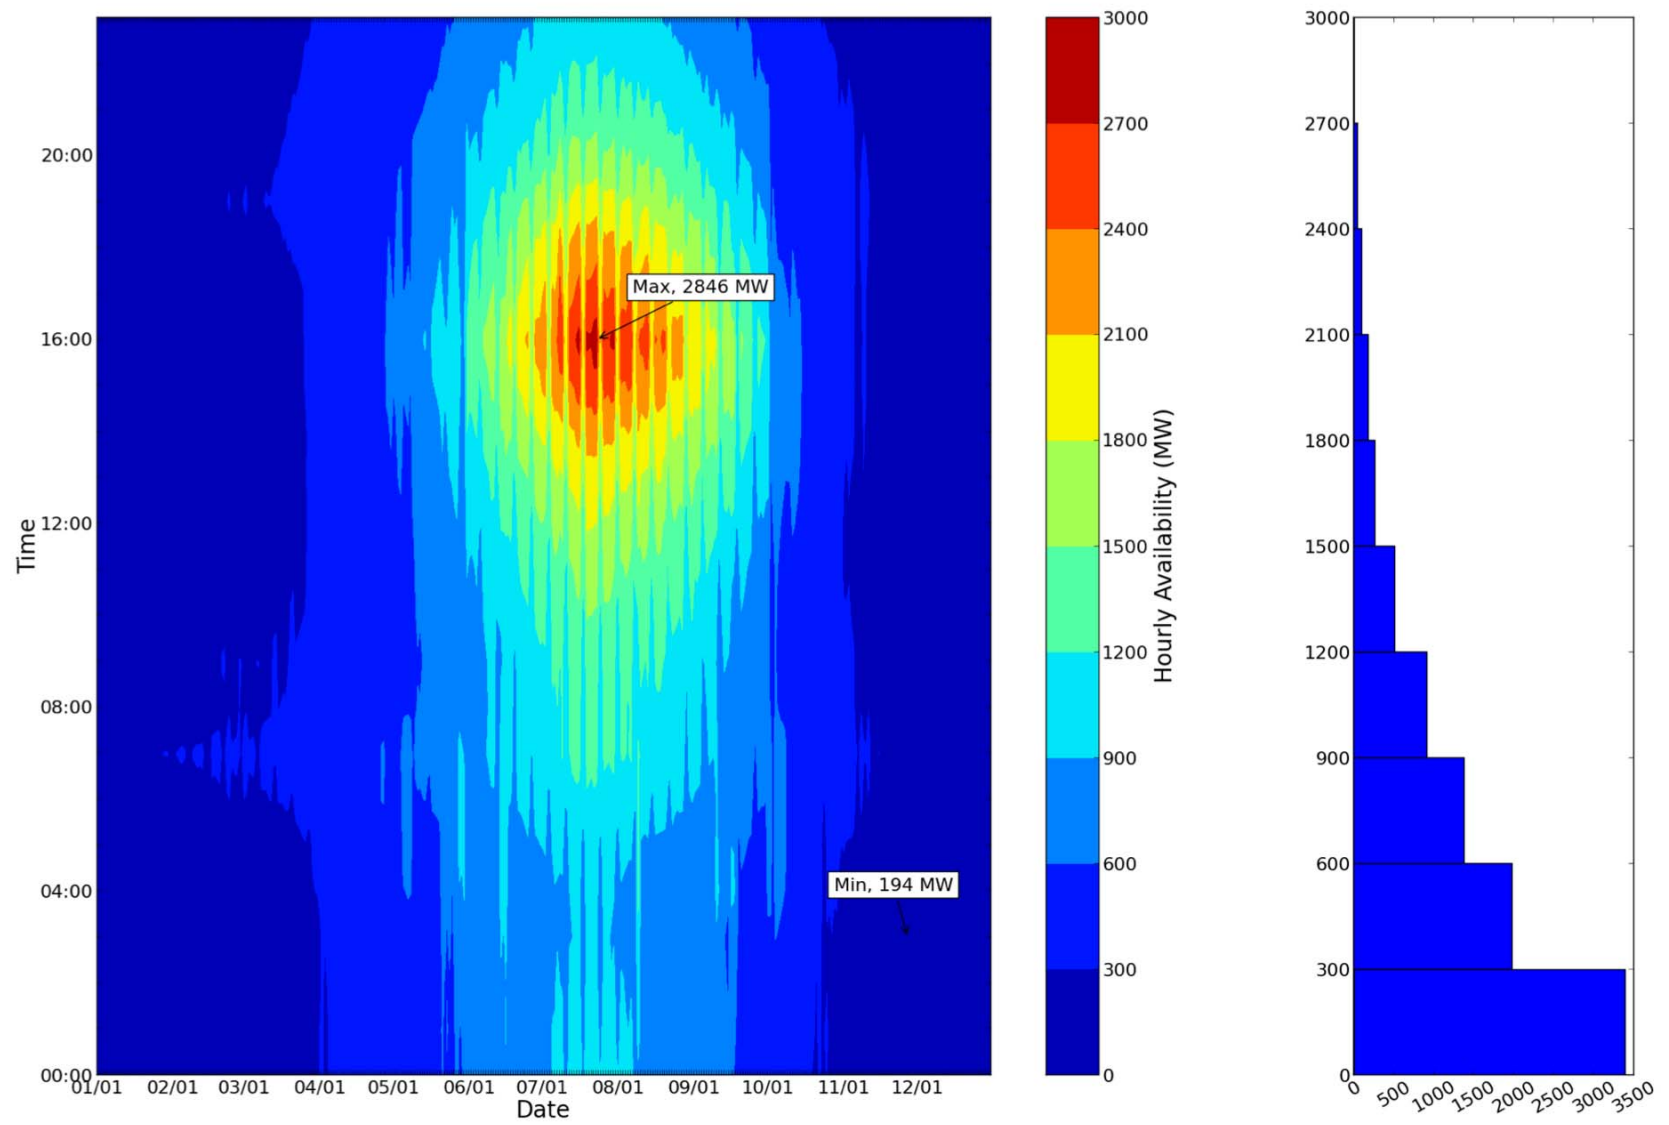


Availability of Capacity from Demand Response Resources

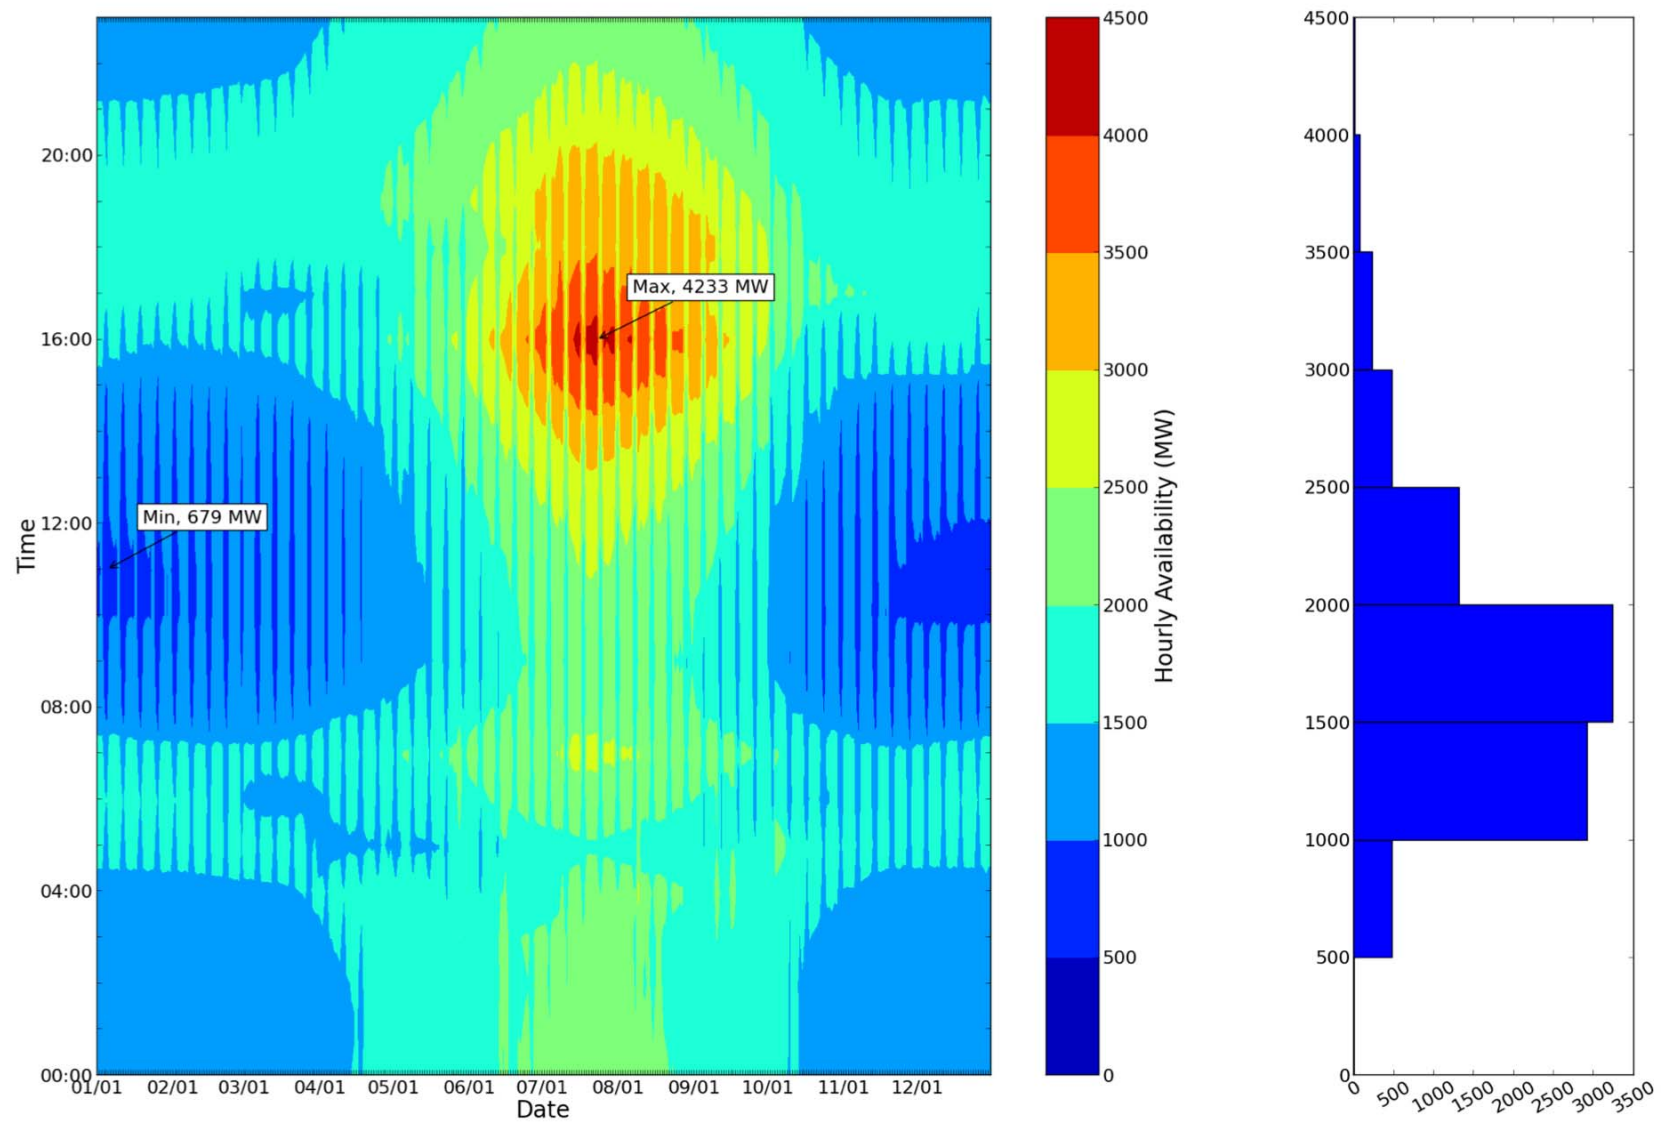


Product Availability Relative to Total Load


Availability of Regulation from Demand Response Resources - Relative to Total Load

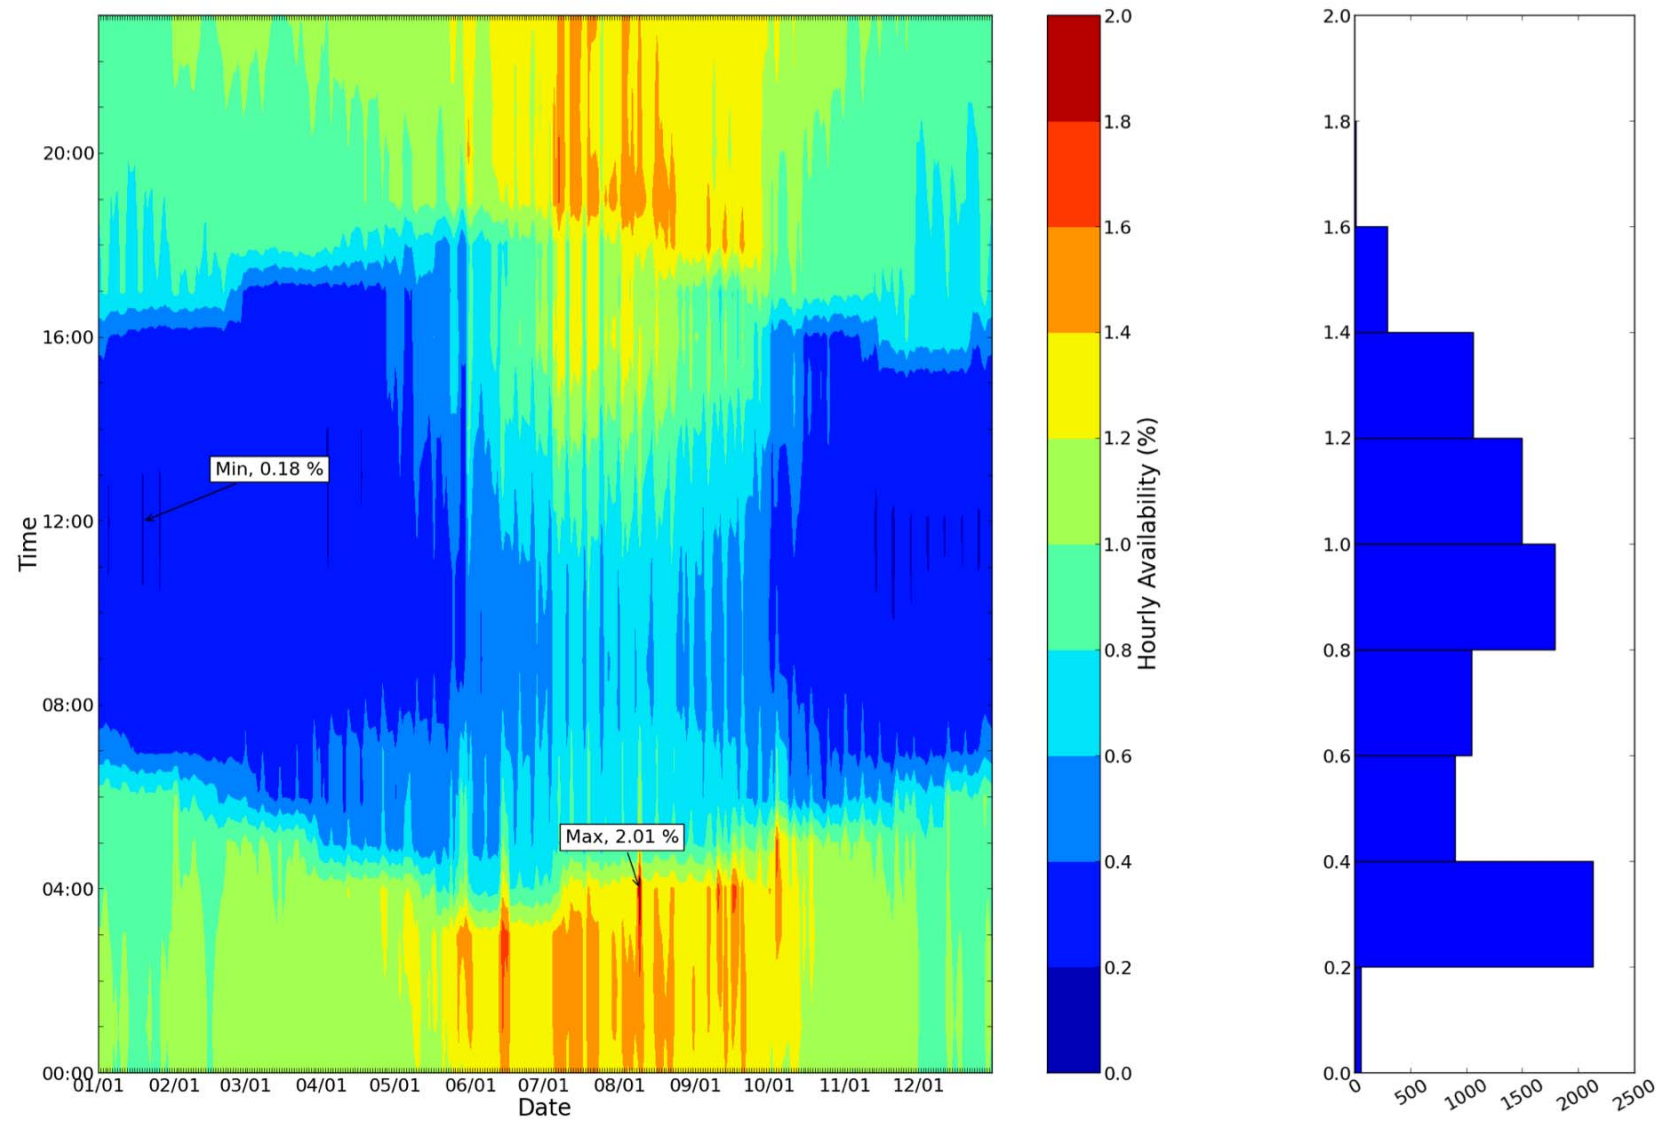


Availability of Flexibility from Demand Response Resources - Relative to Total Load

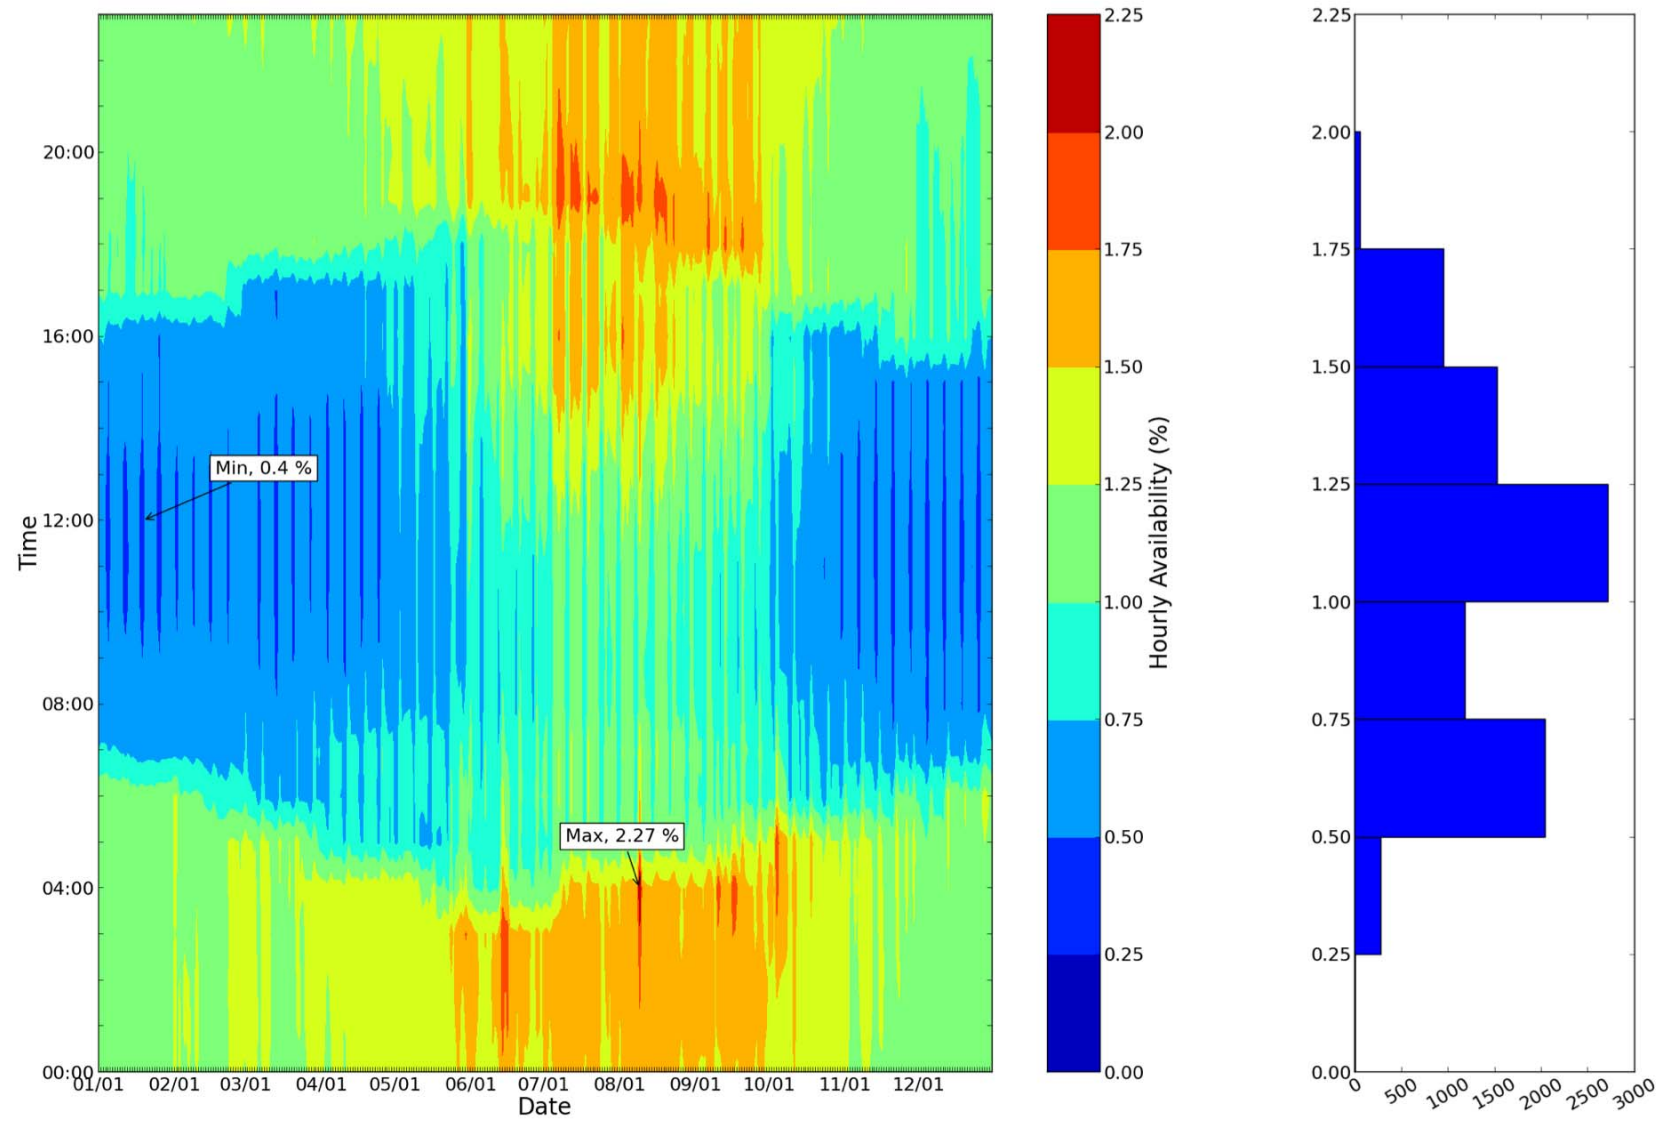


Availability of Contingency from Demand Response Resources - Relative to Total Load

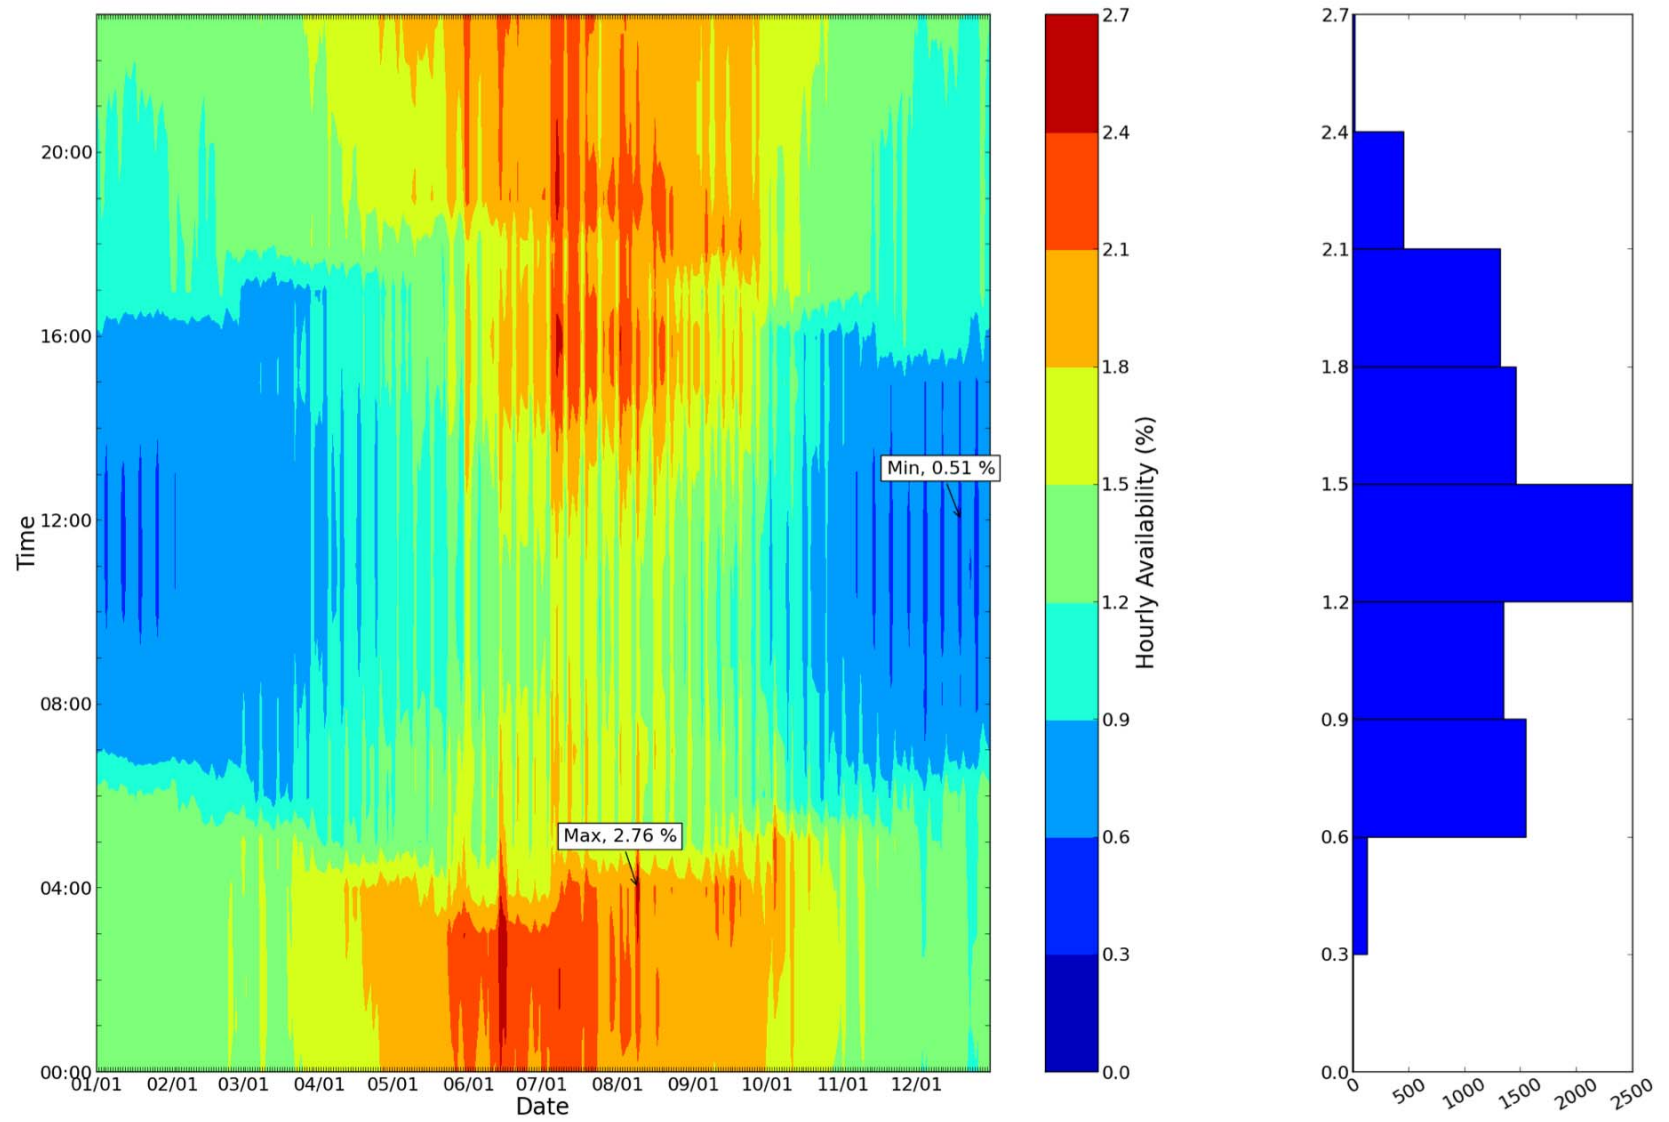

Availability of Energy from Demand Response Resources - Relative to Total Load

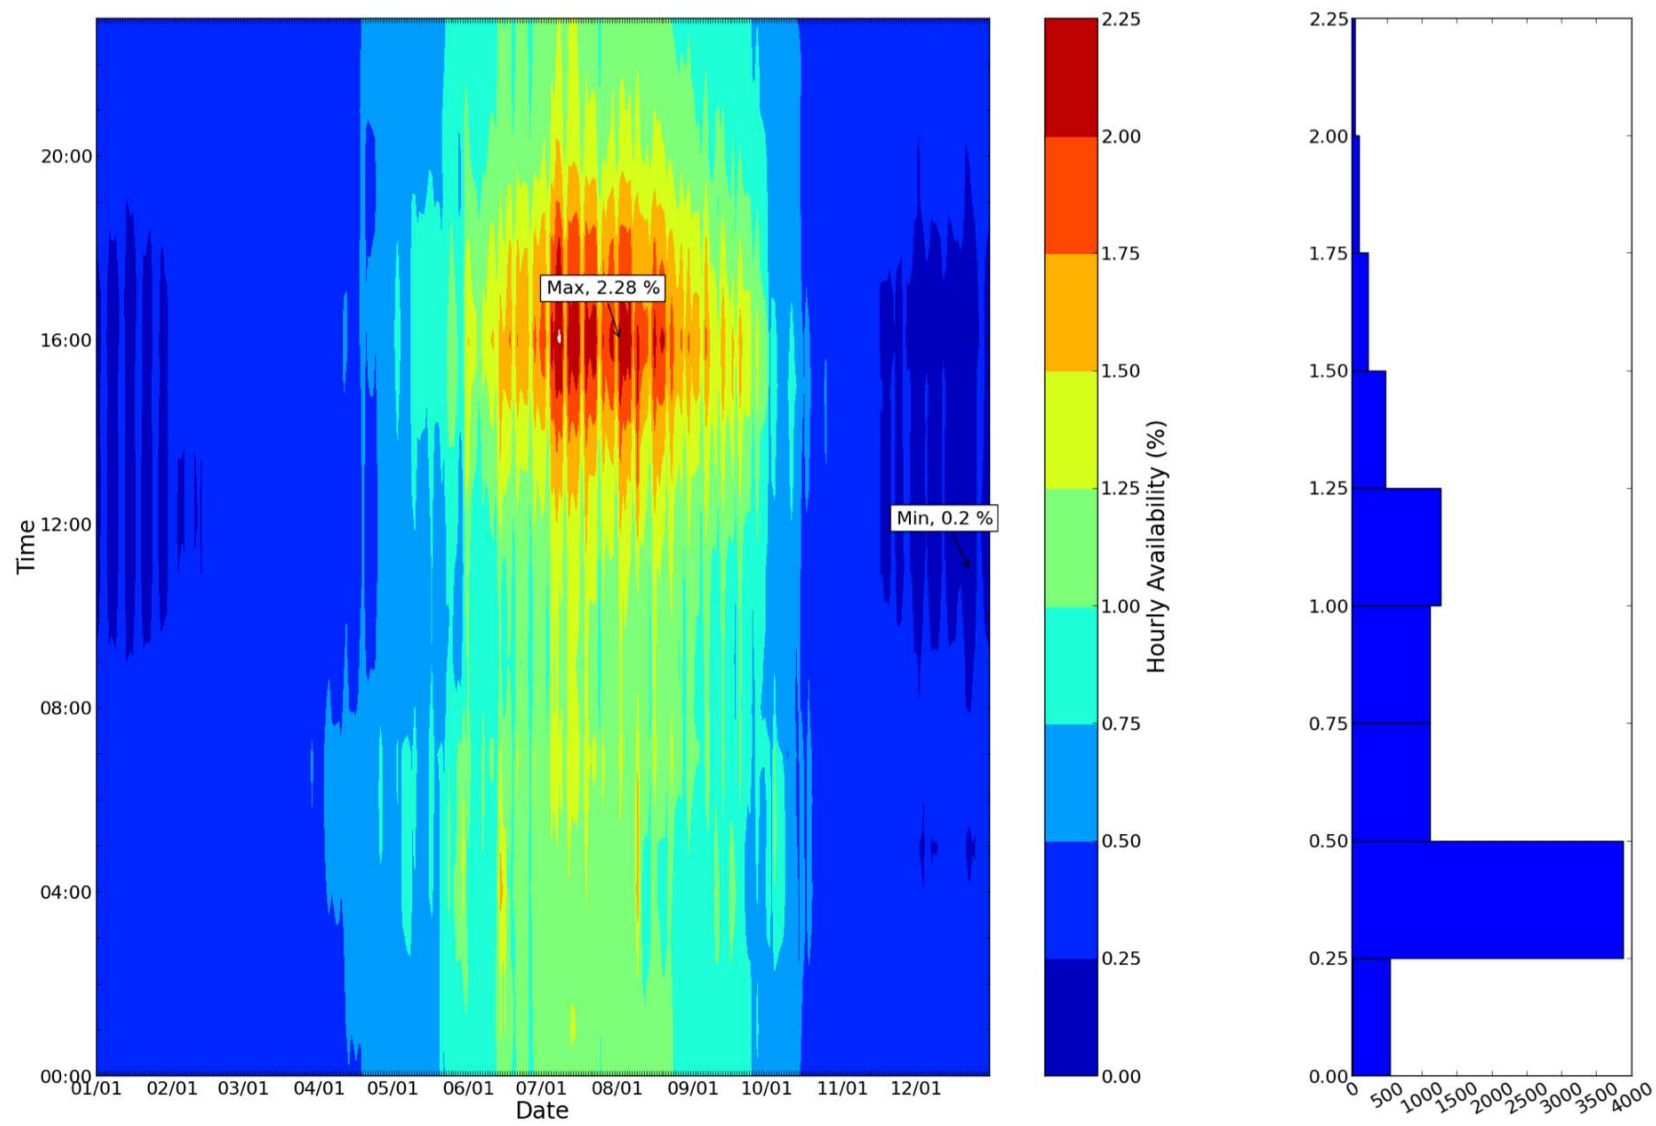


Availability of Capacity from Demand Response Resources - Relative to Total Load

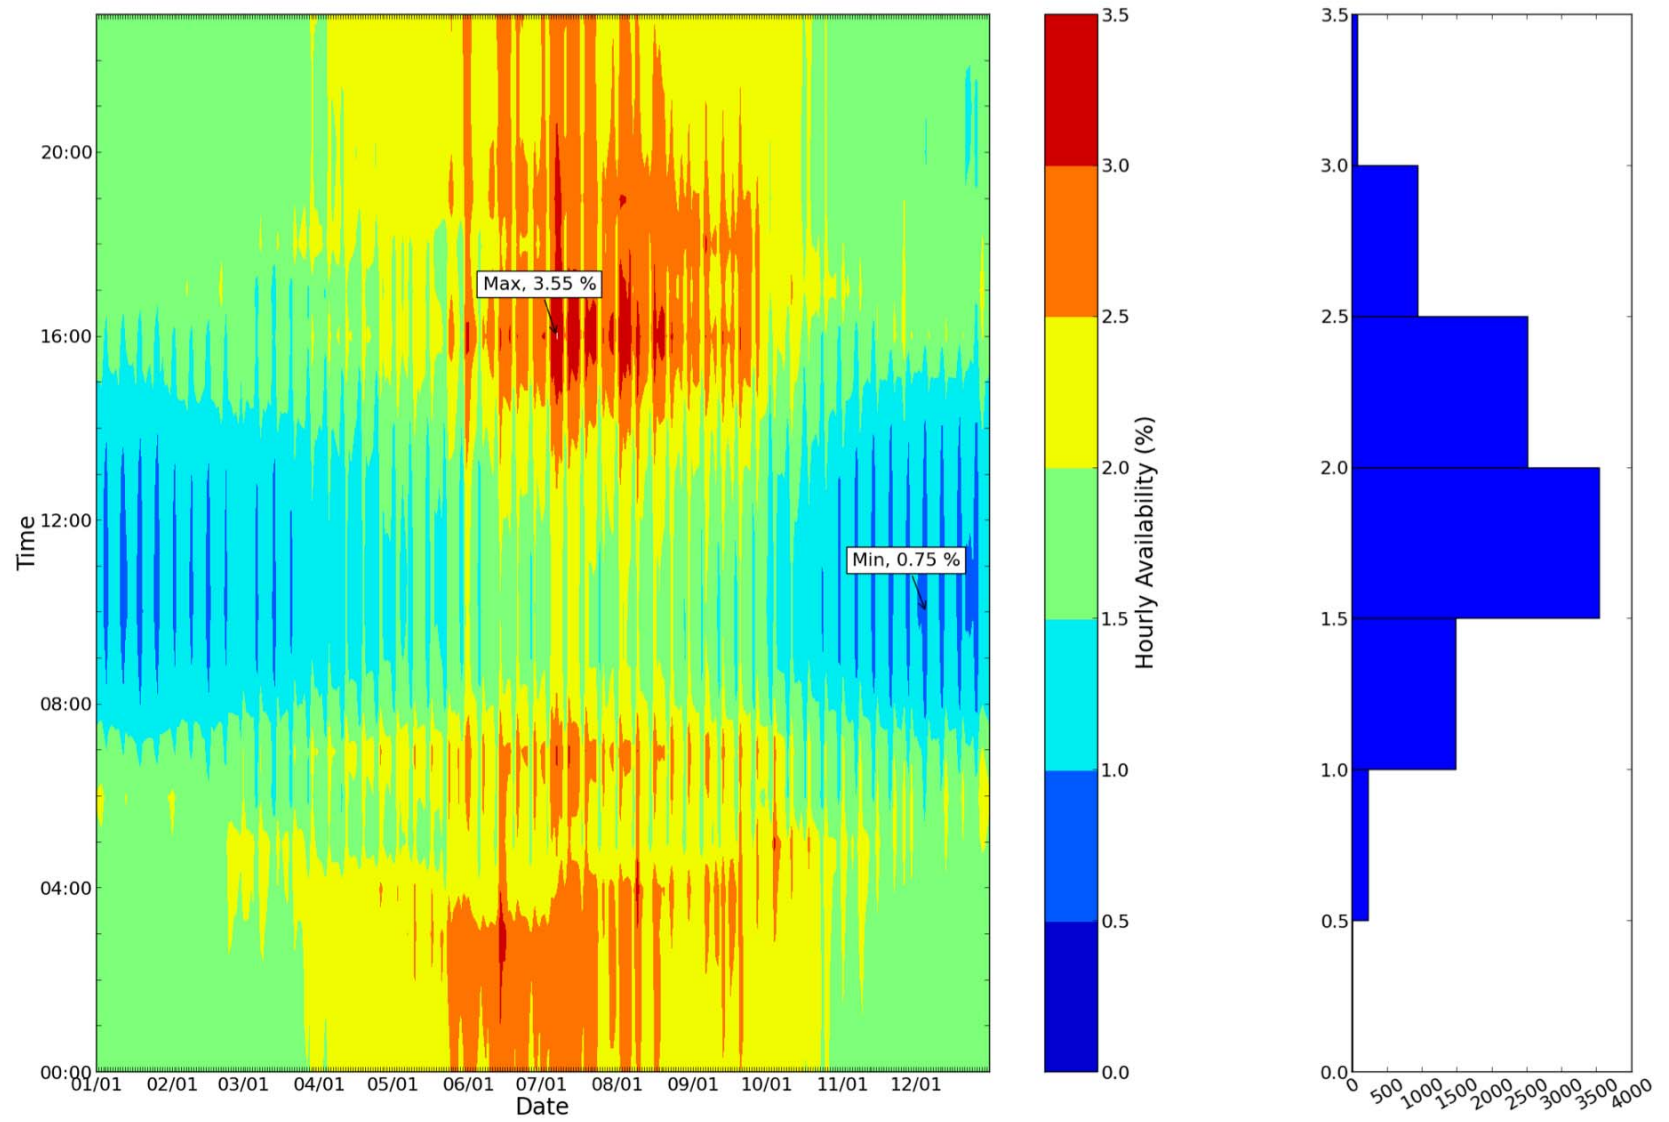


Technical Potential Relative to Total Load


Projected Theoretical Availability of Regulation from Demand Response Resources - Relative to Total Load

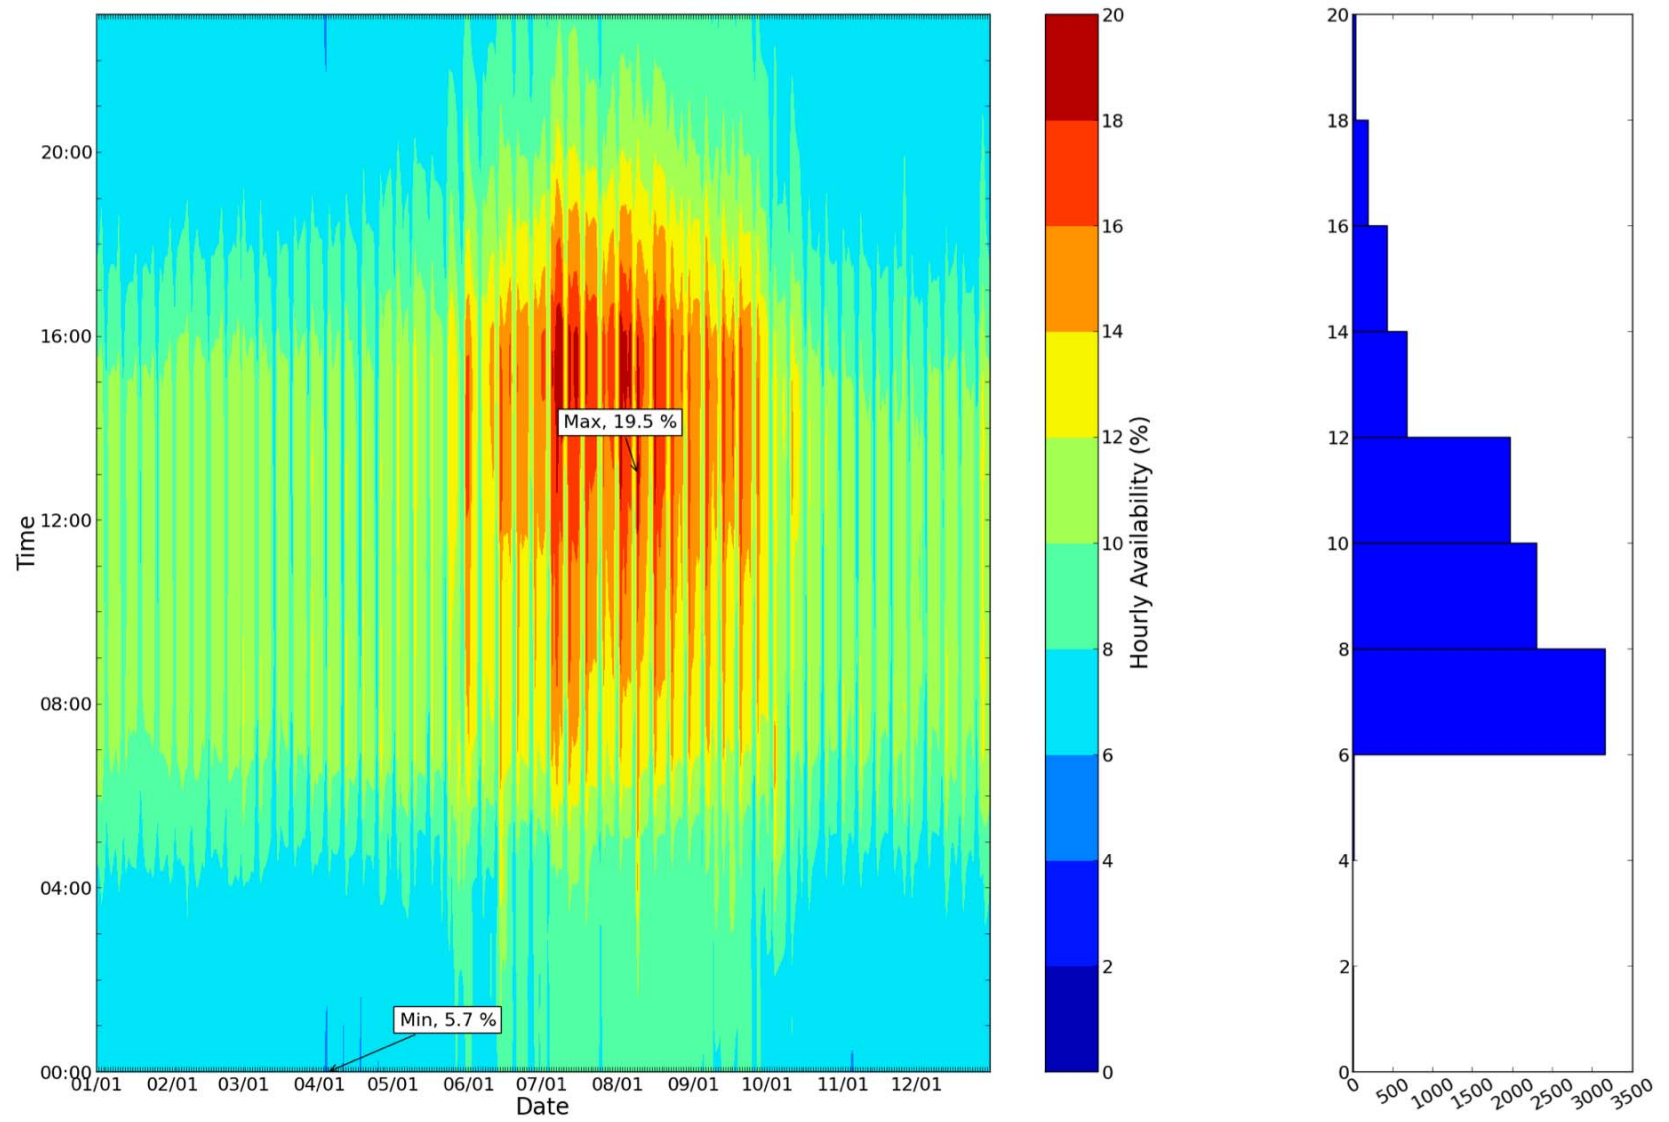


Projected Theoretical Availability of Flexibility from Demand Response Resources - Relative to Total Load

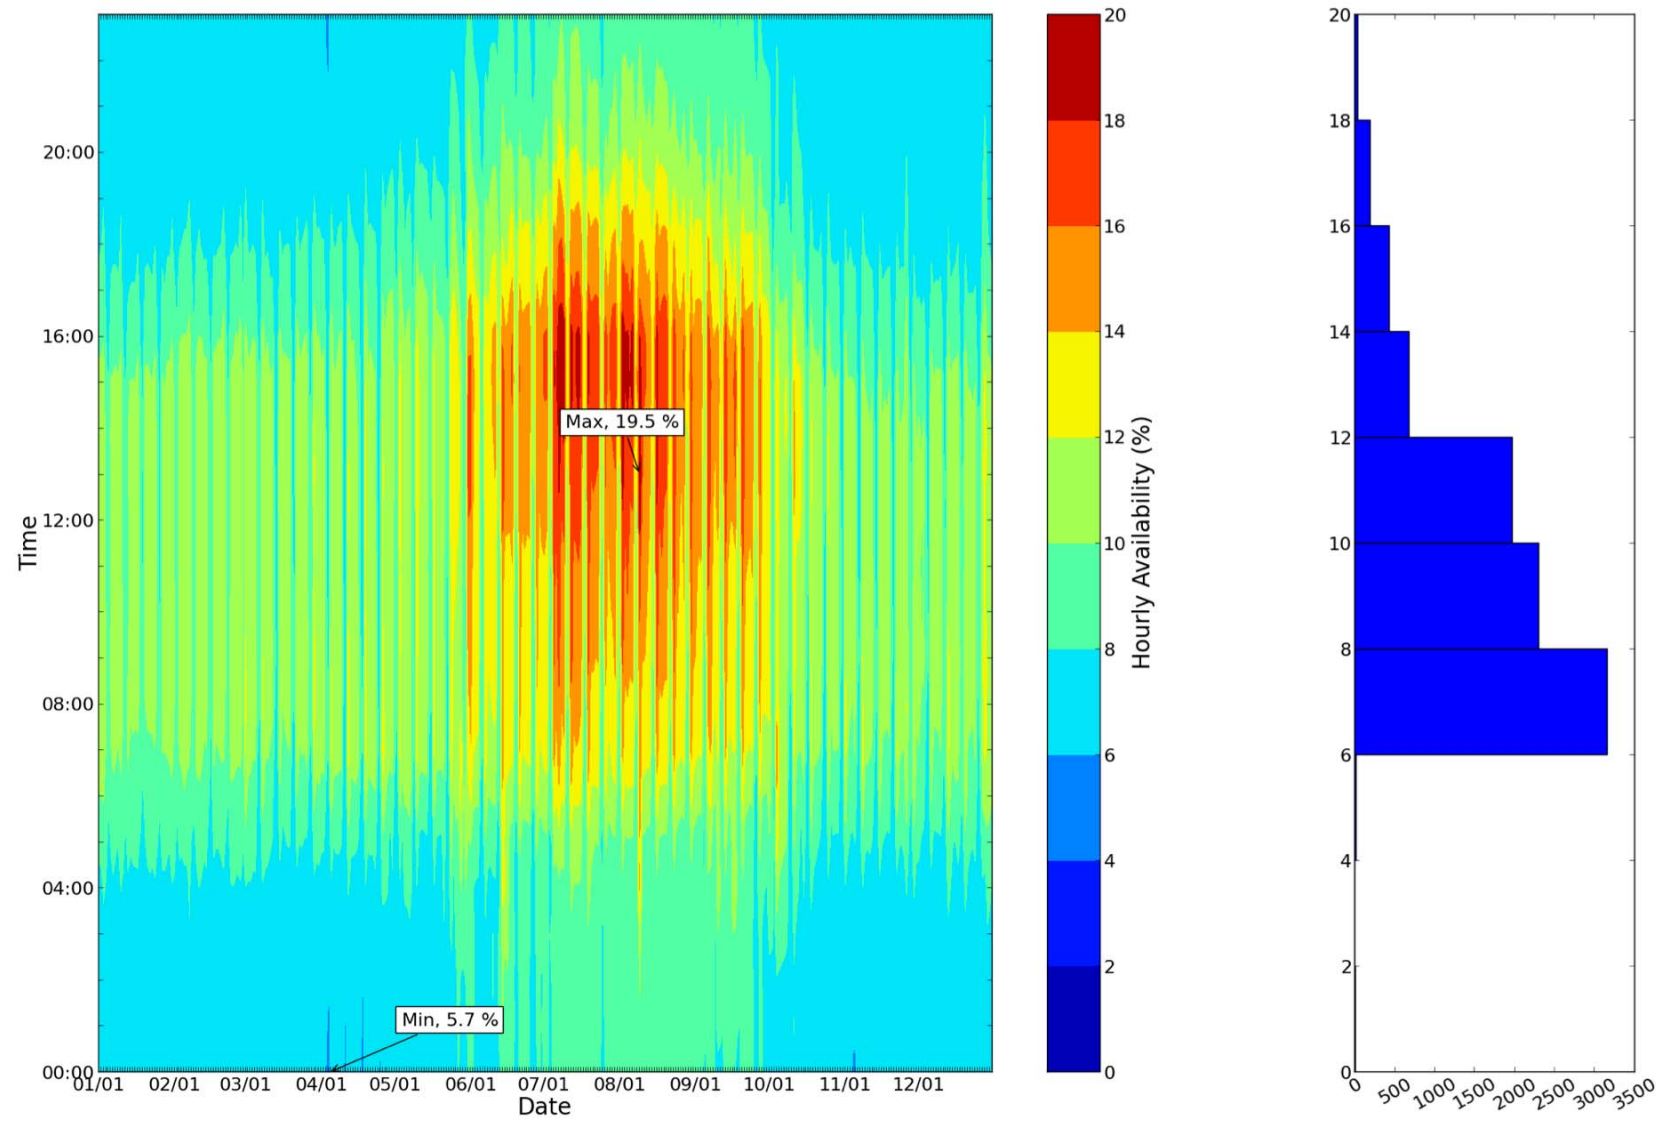


Projected Theoretical Availability of Contingency from Demand Response Resources - Relative to Total Load


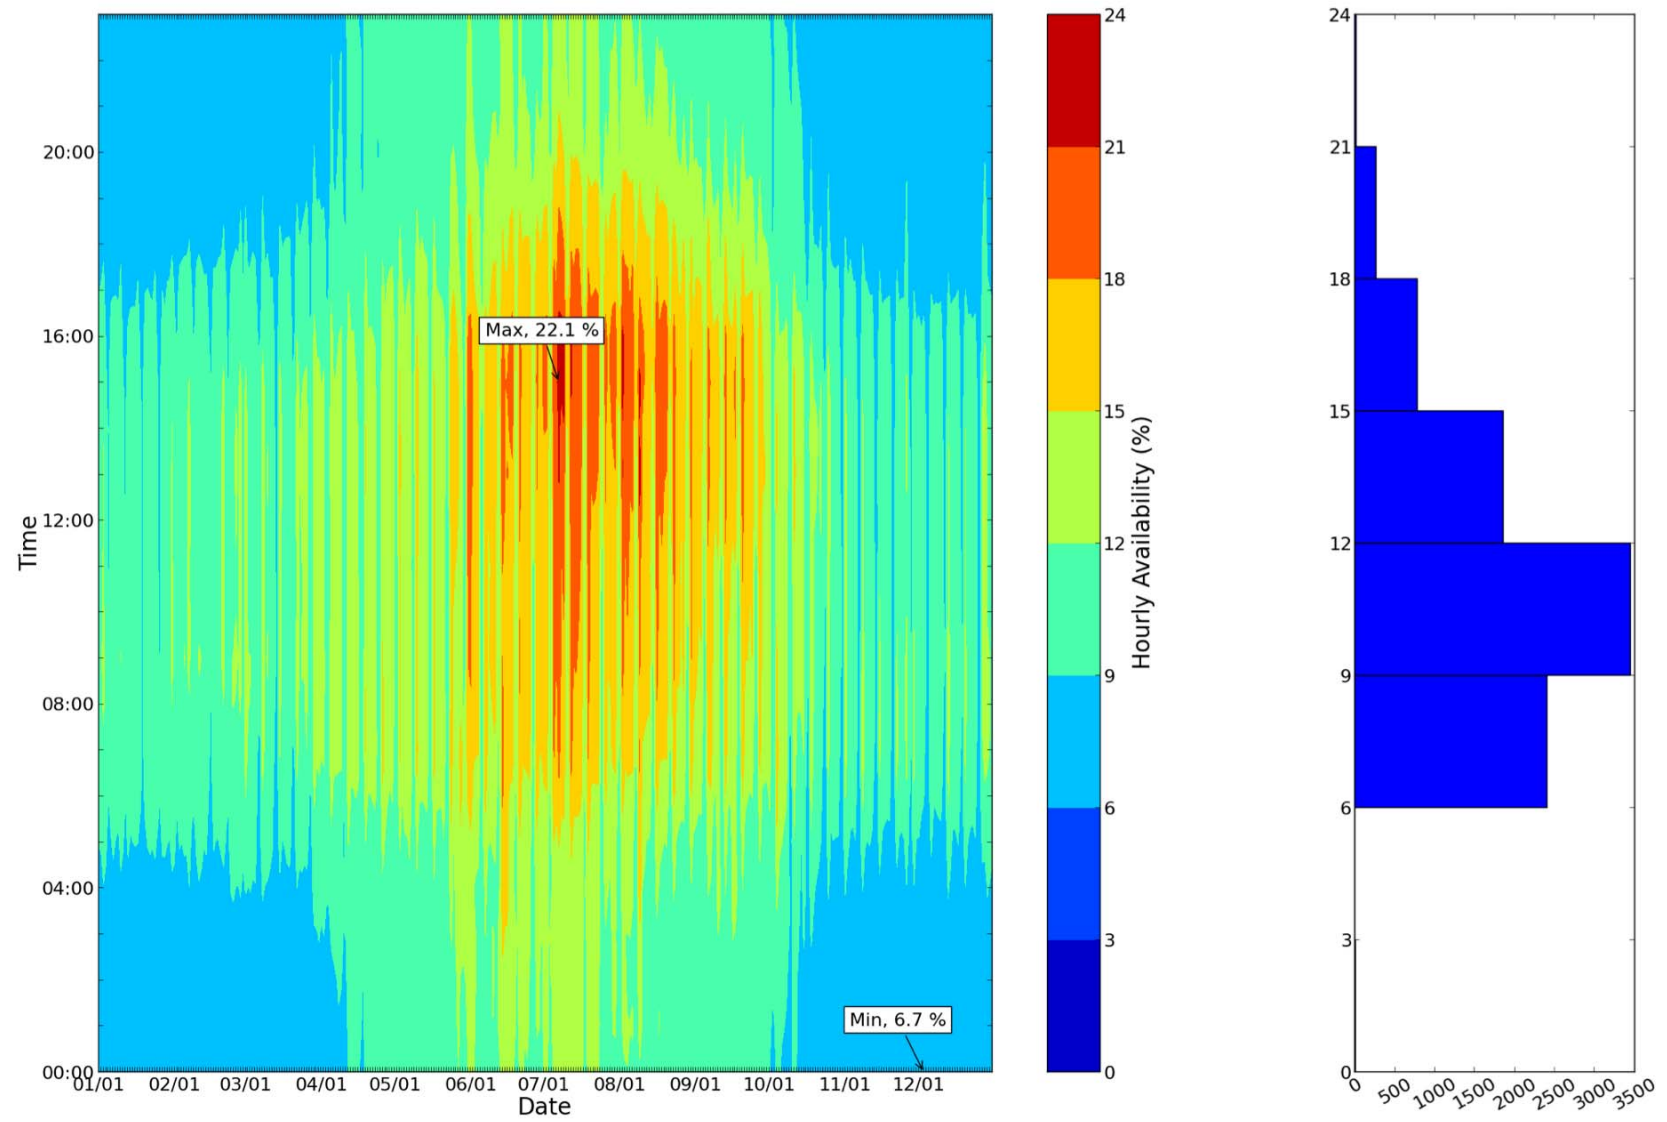




Projected Theoretical Availability of Energy from Demand Response Resources - Relative to Total Load


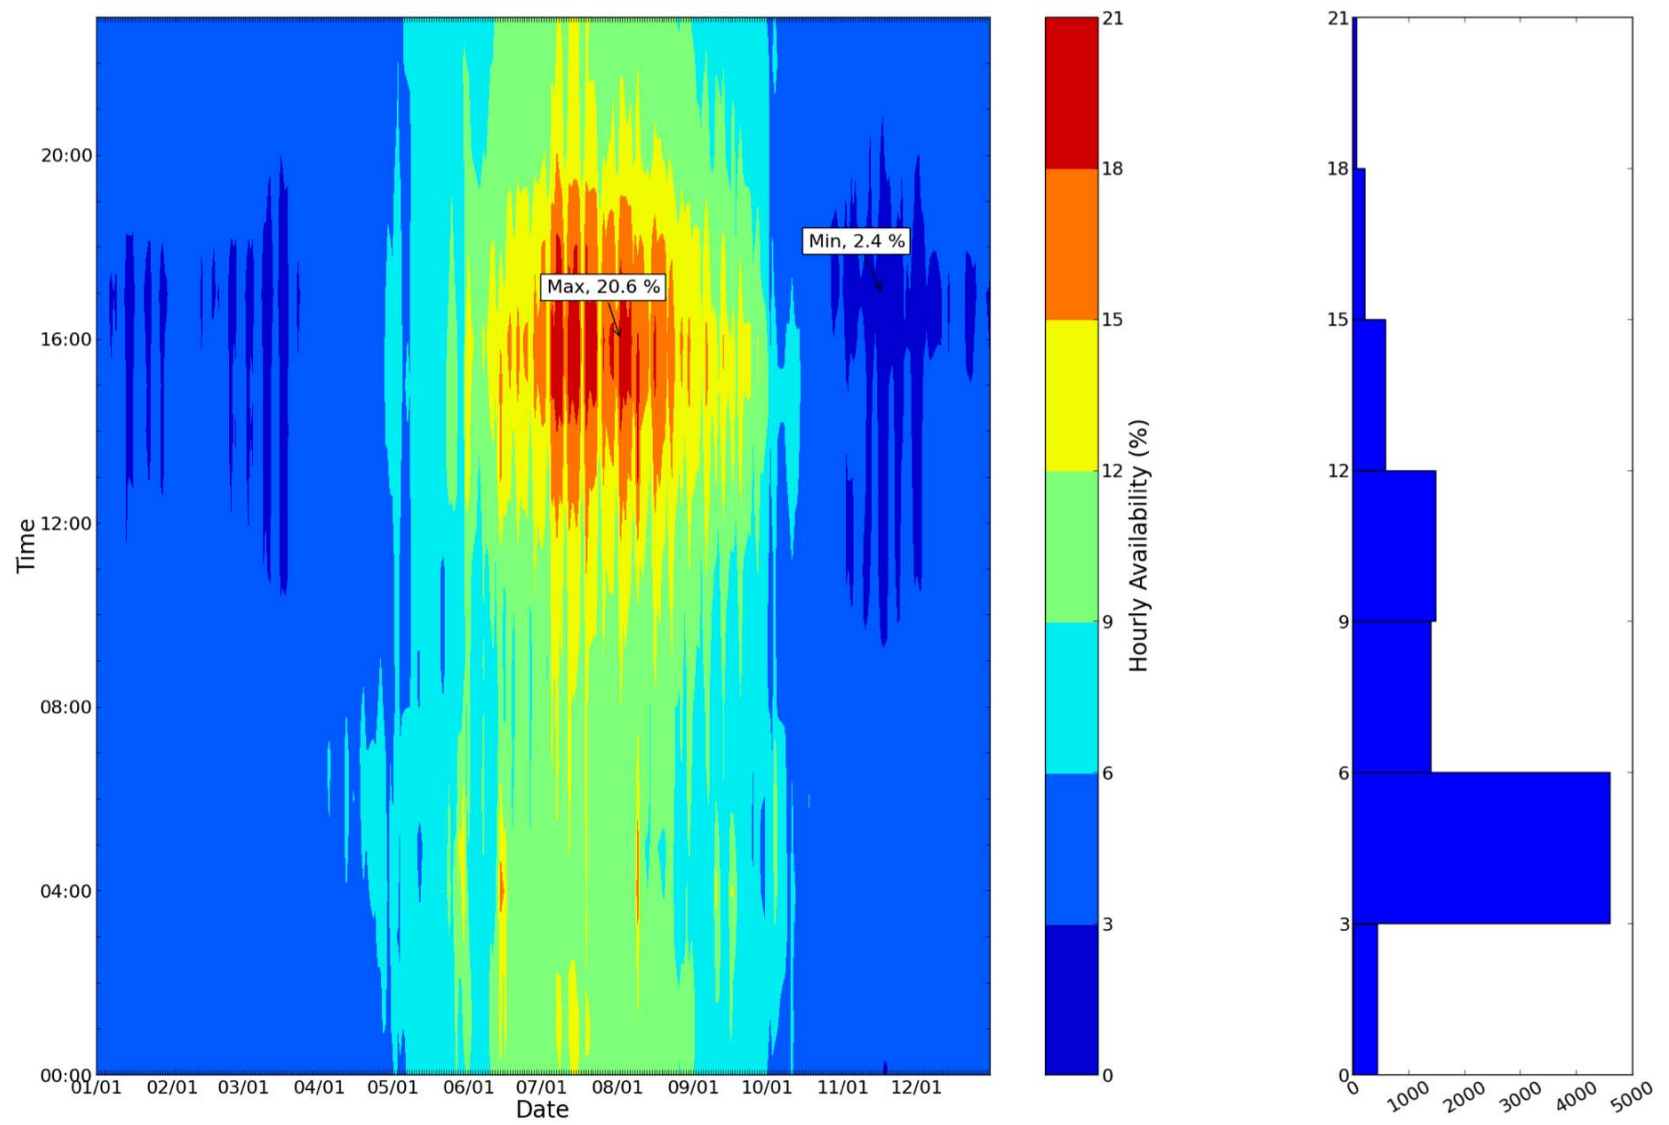



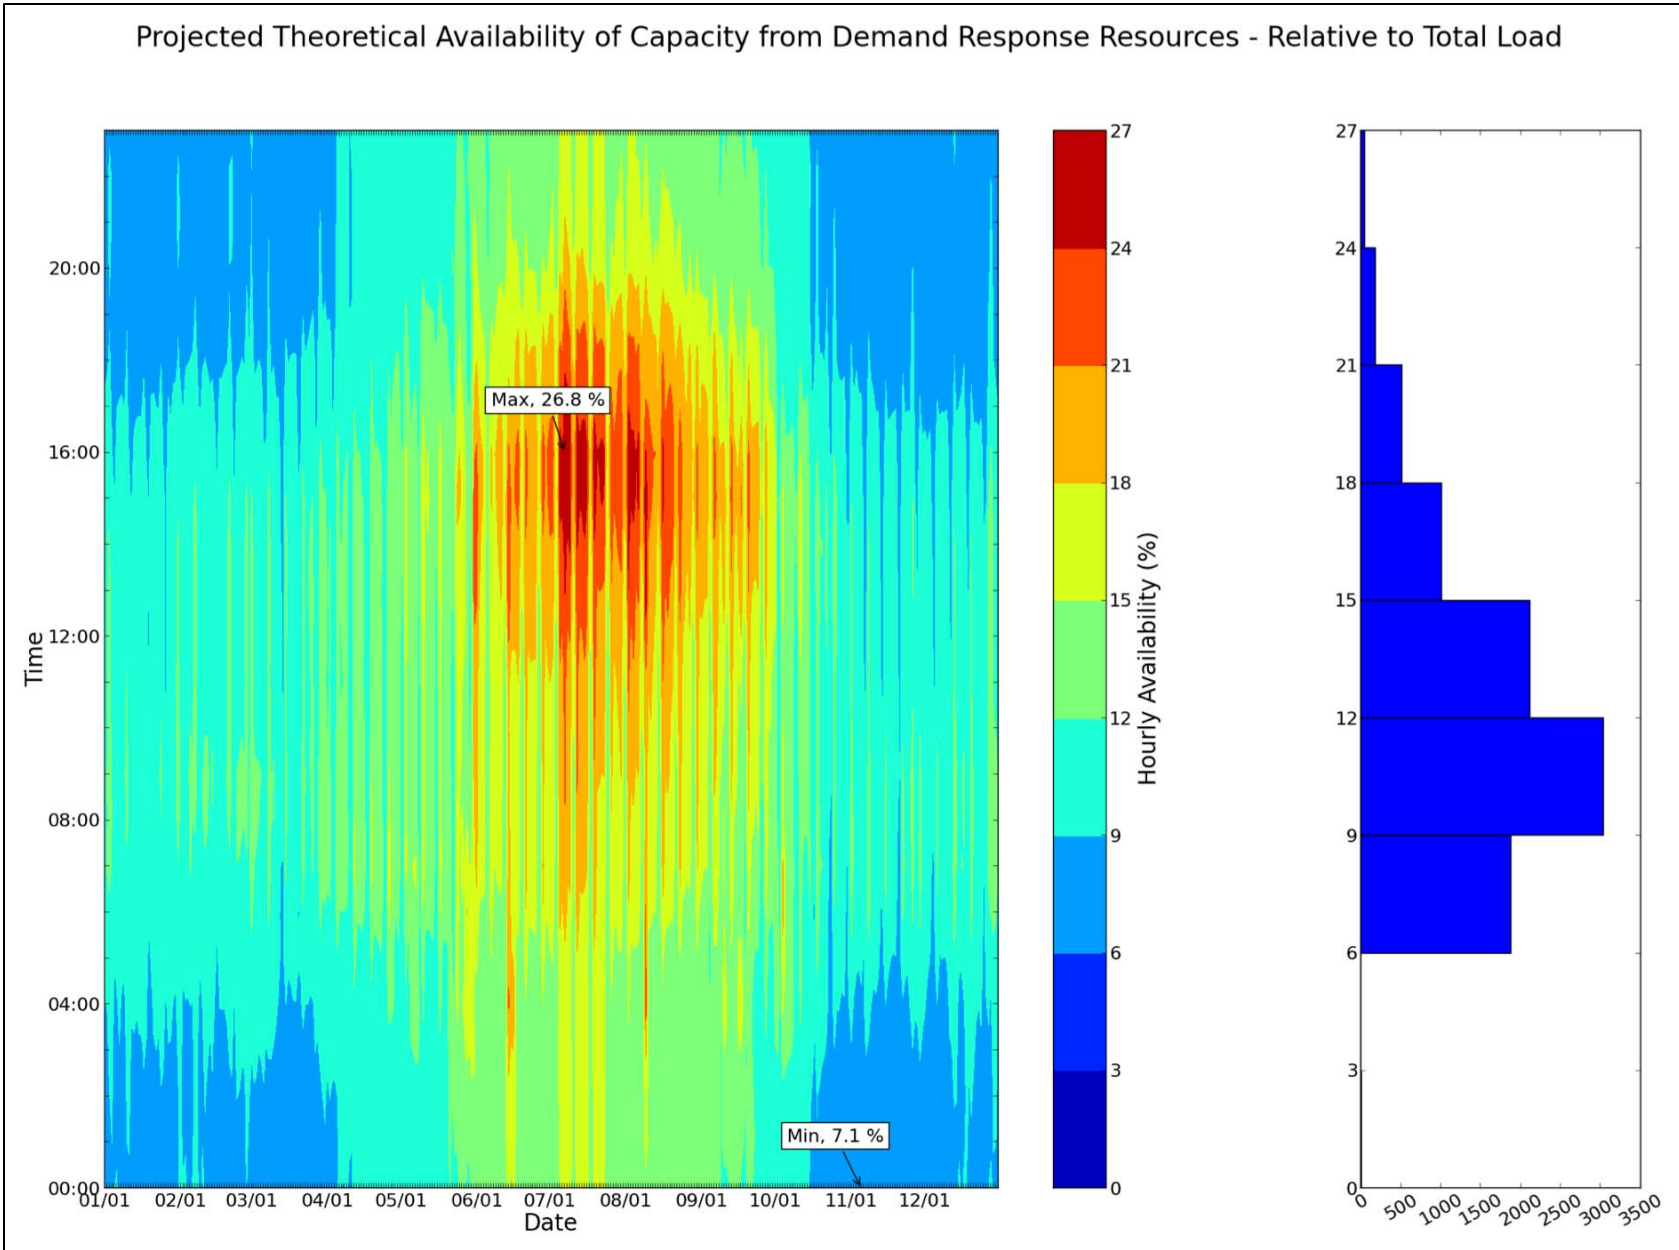


Appendix D – Resource Load Profiles

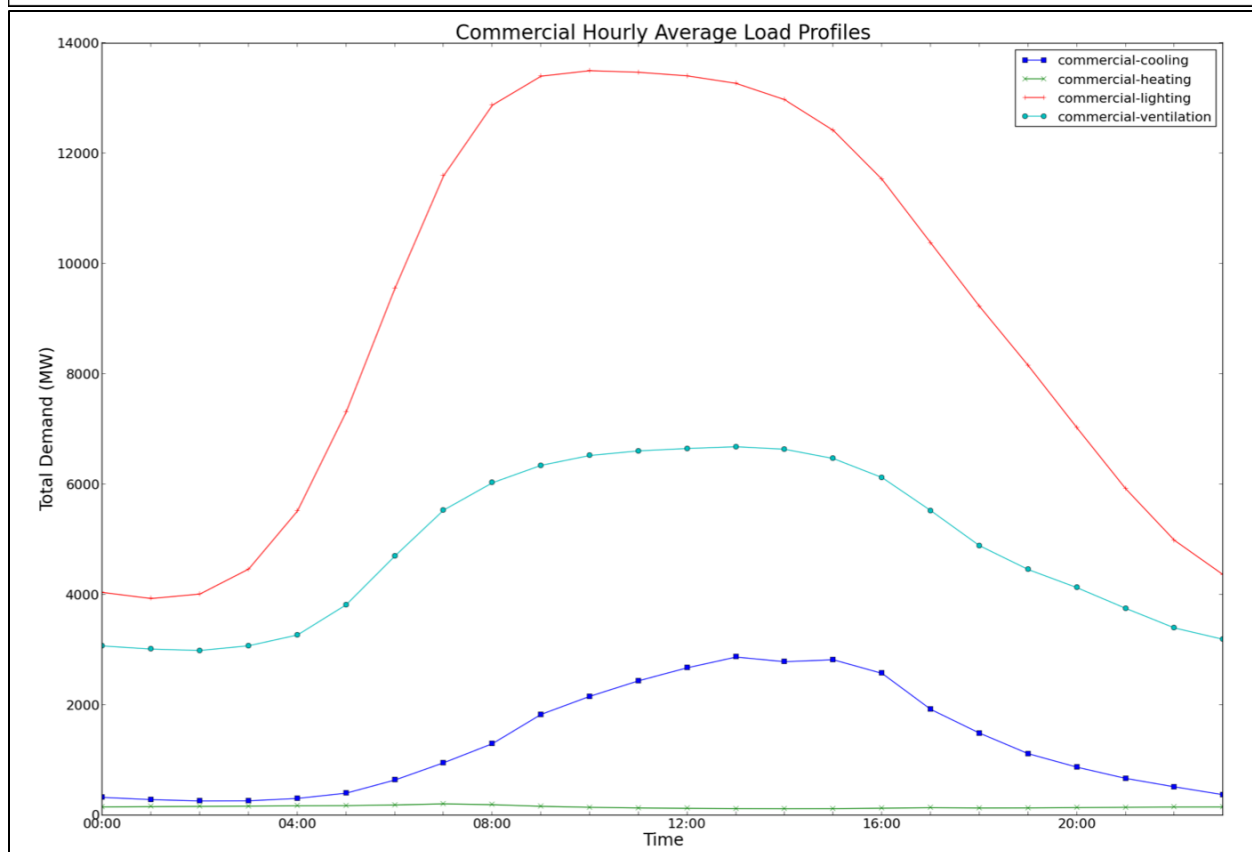
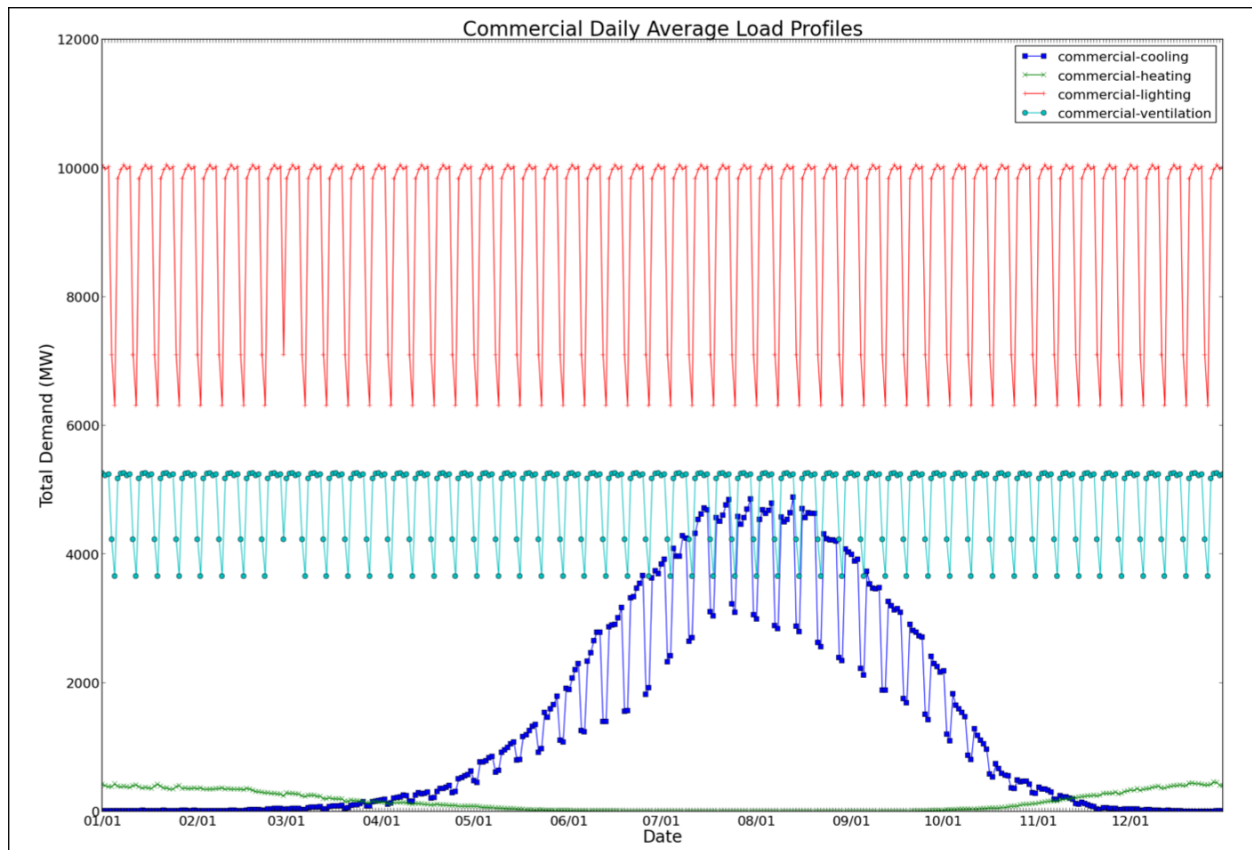


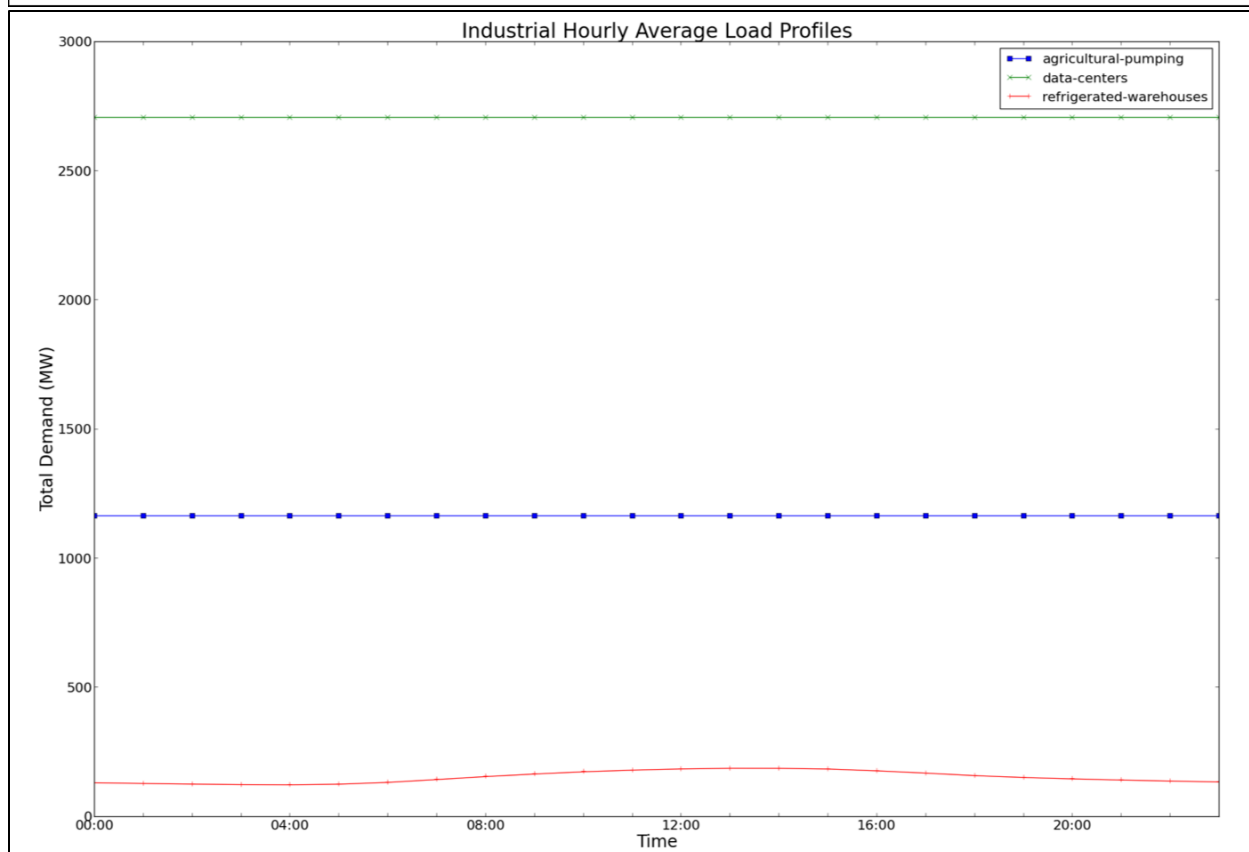
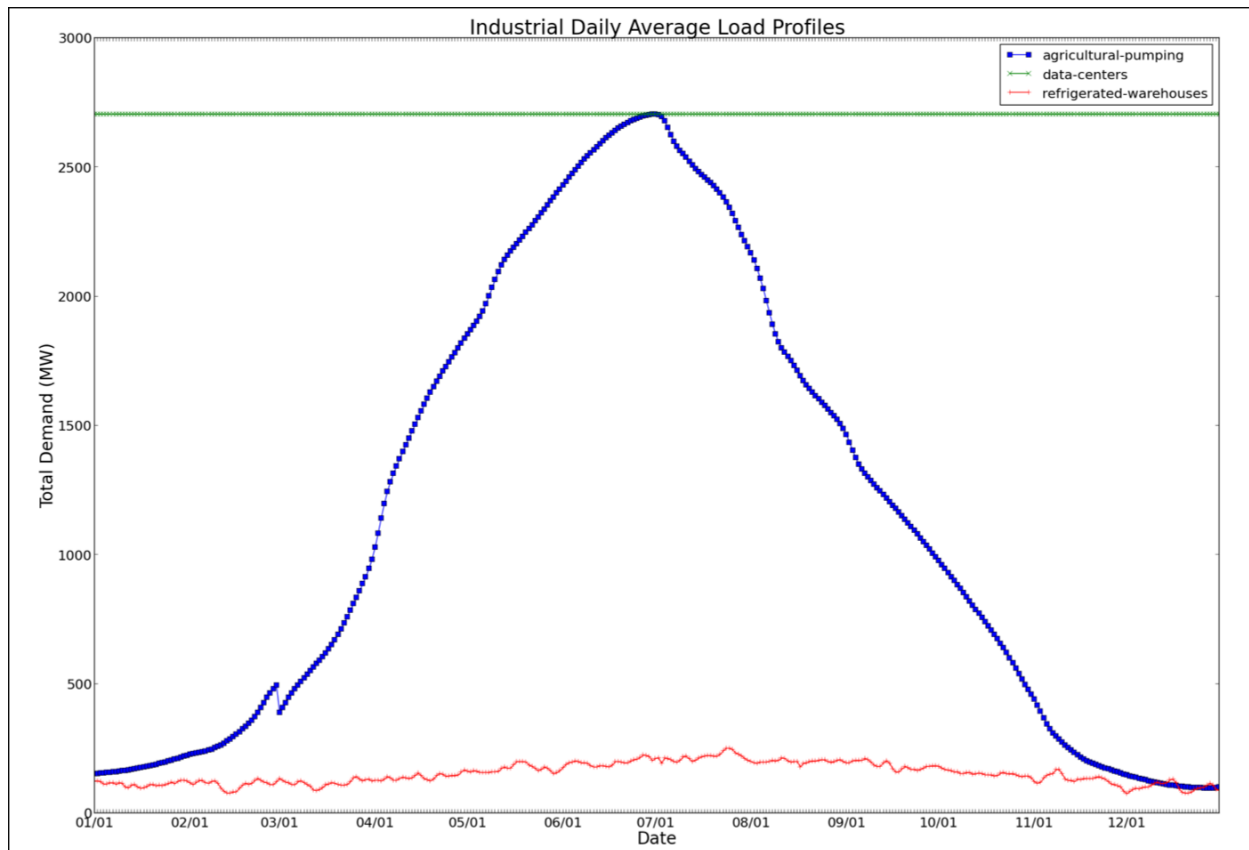


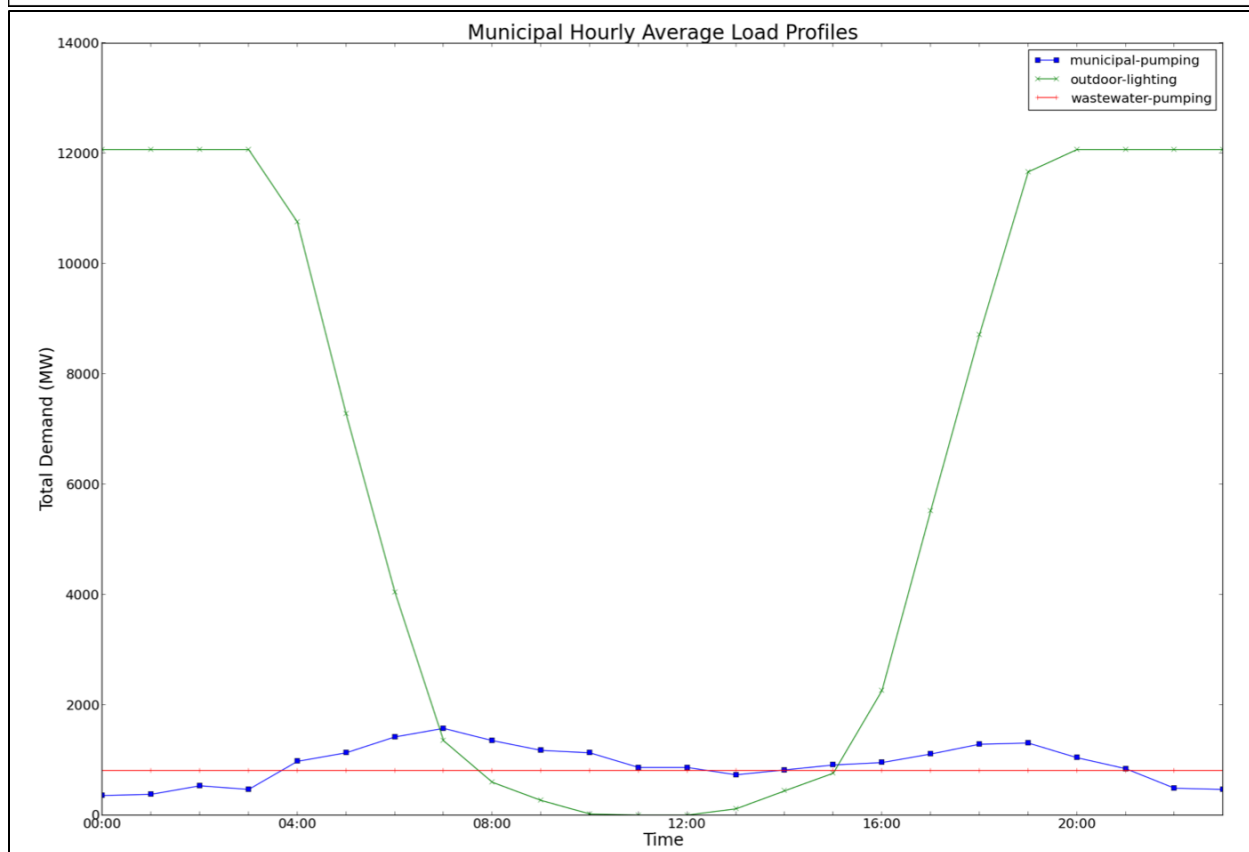
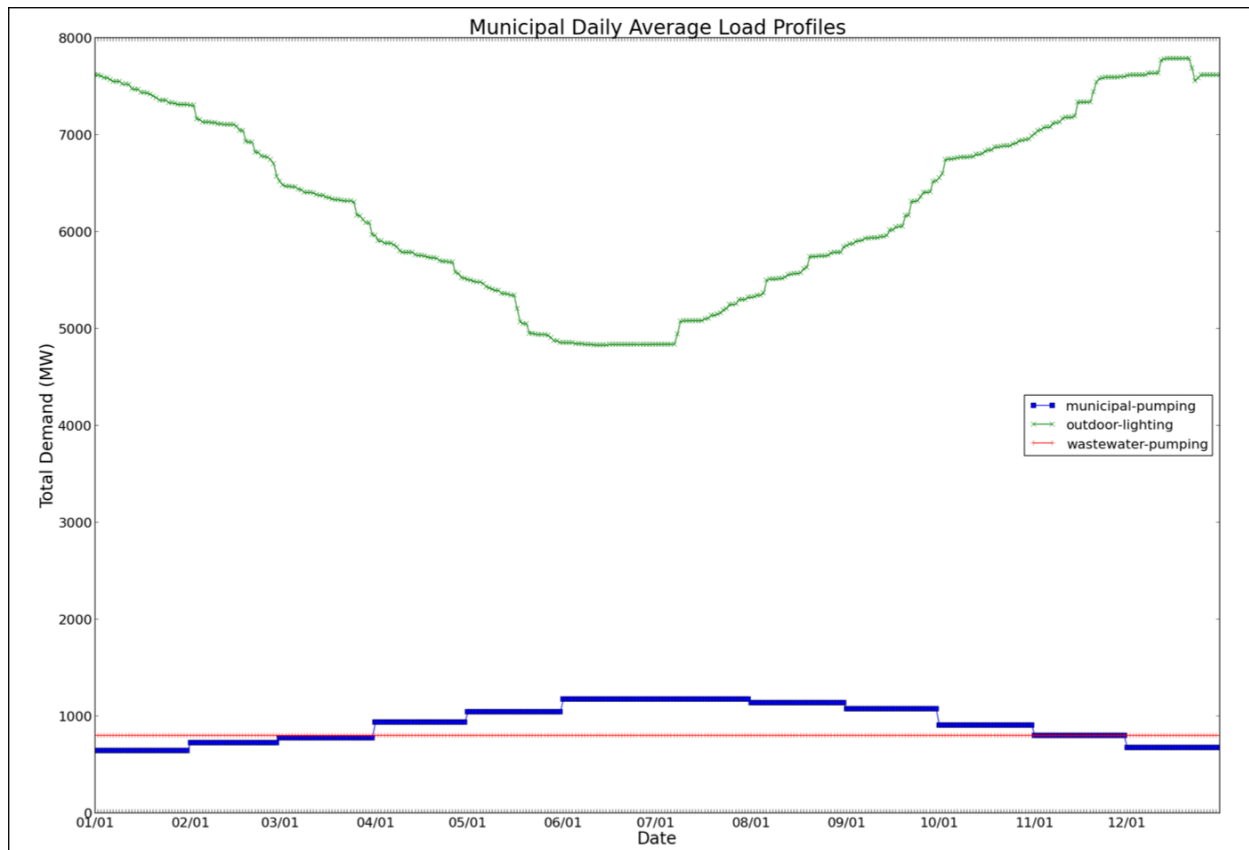


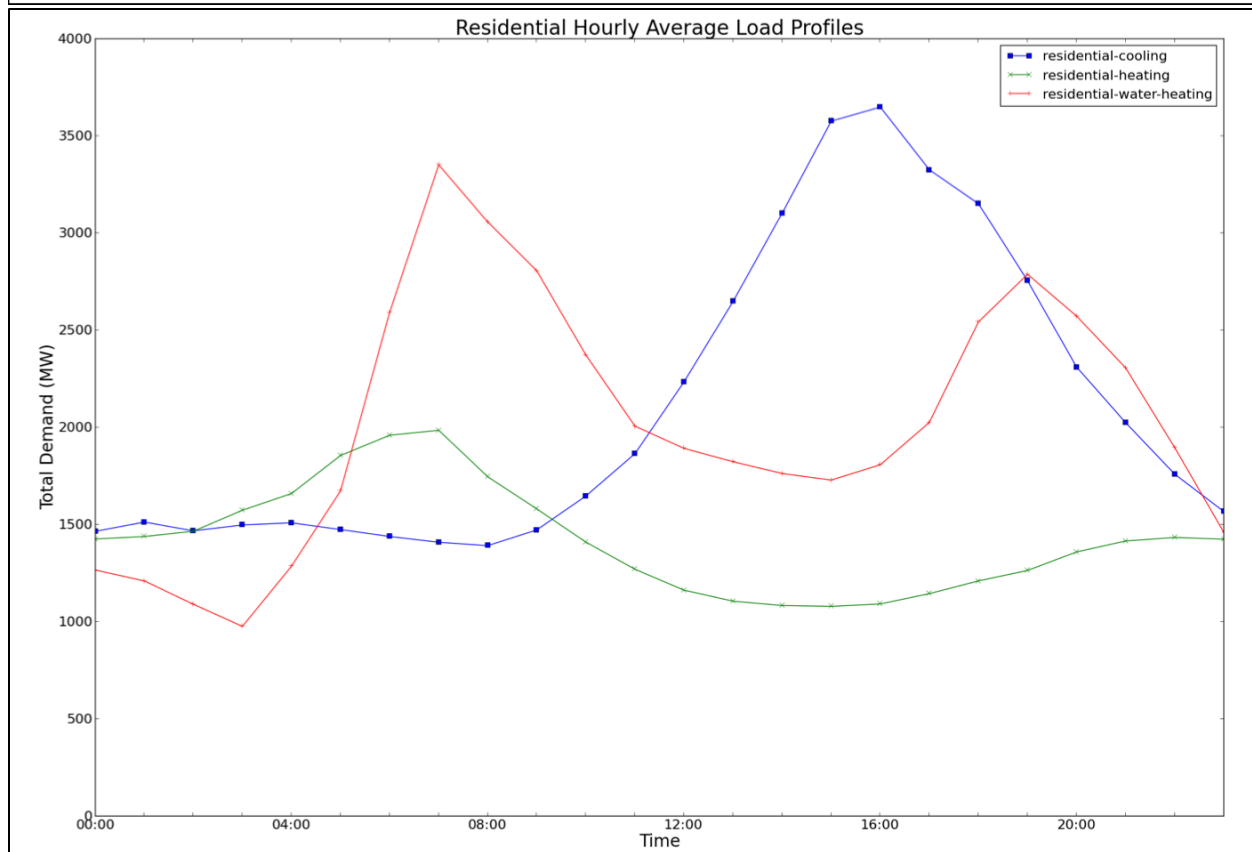
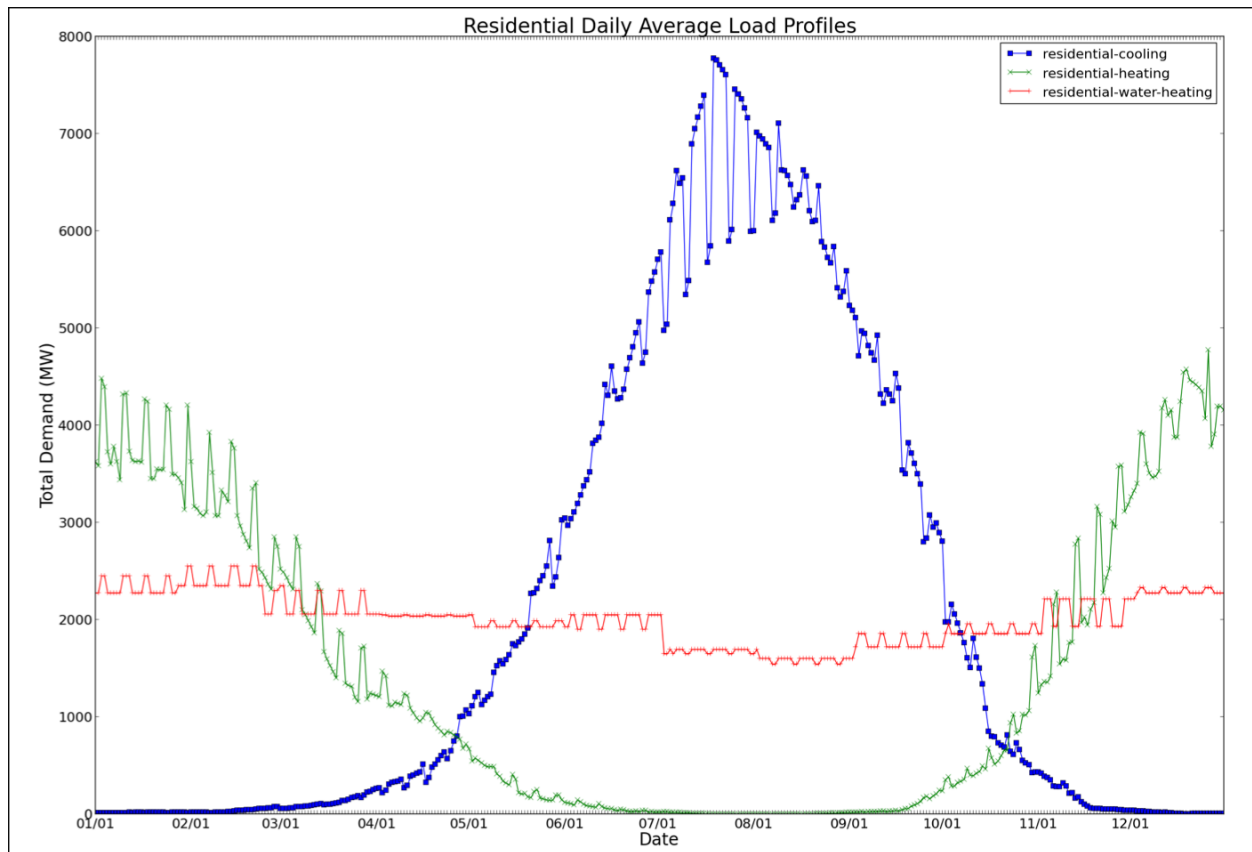




Appendix E – Resource Contributions to Products

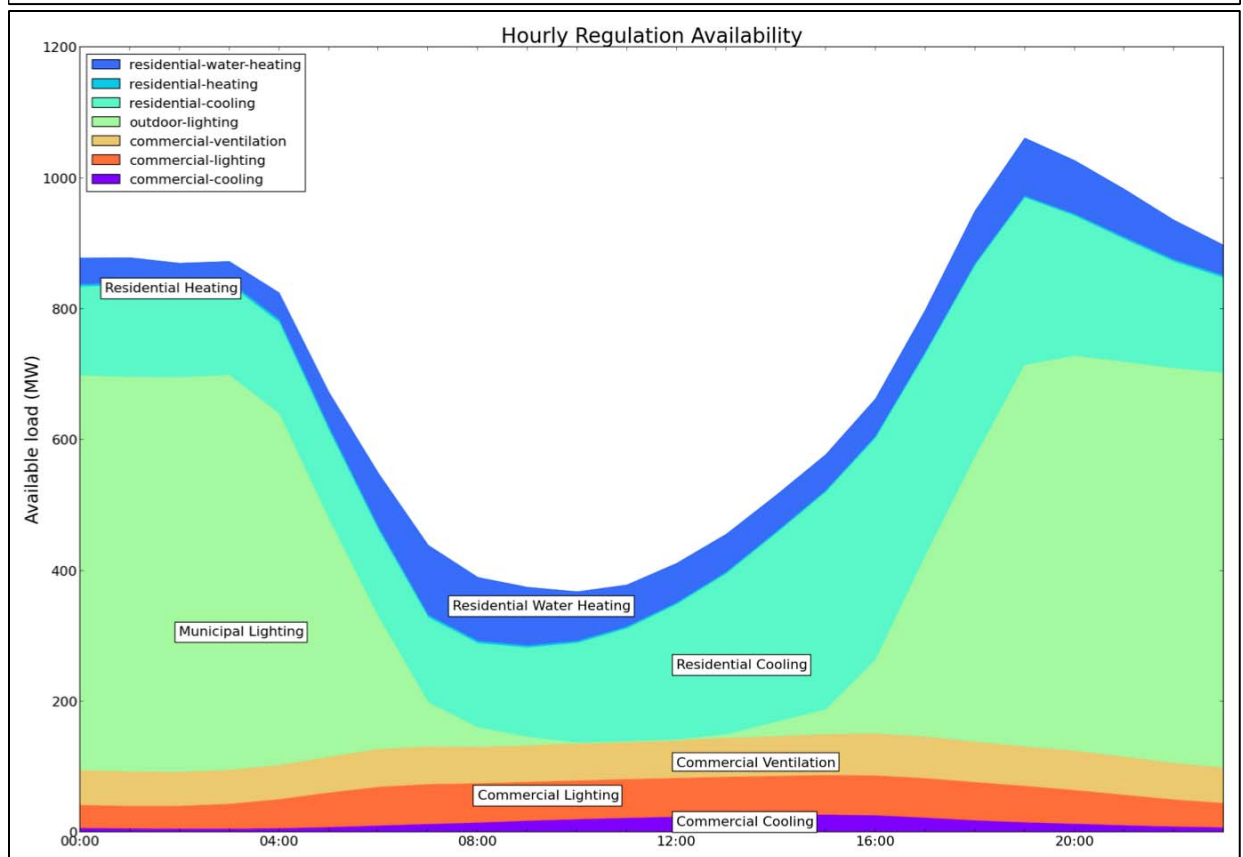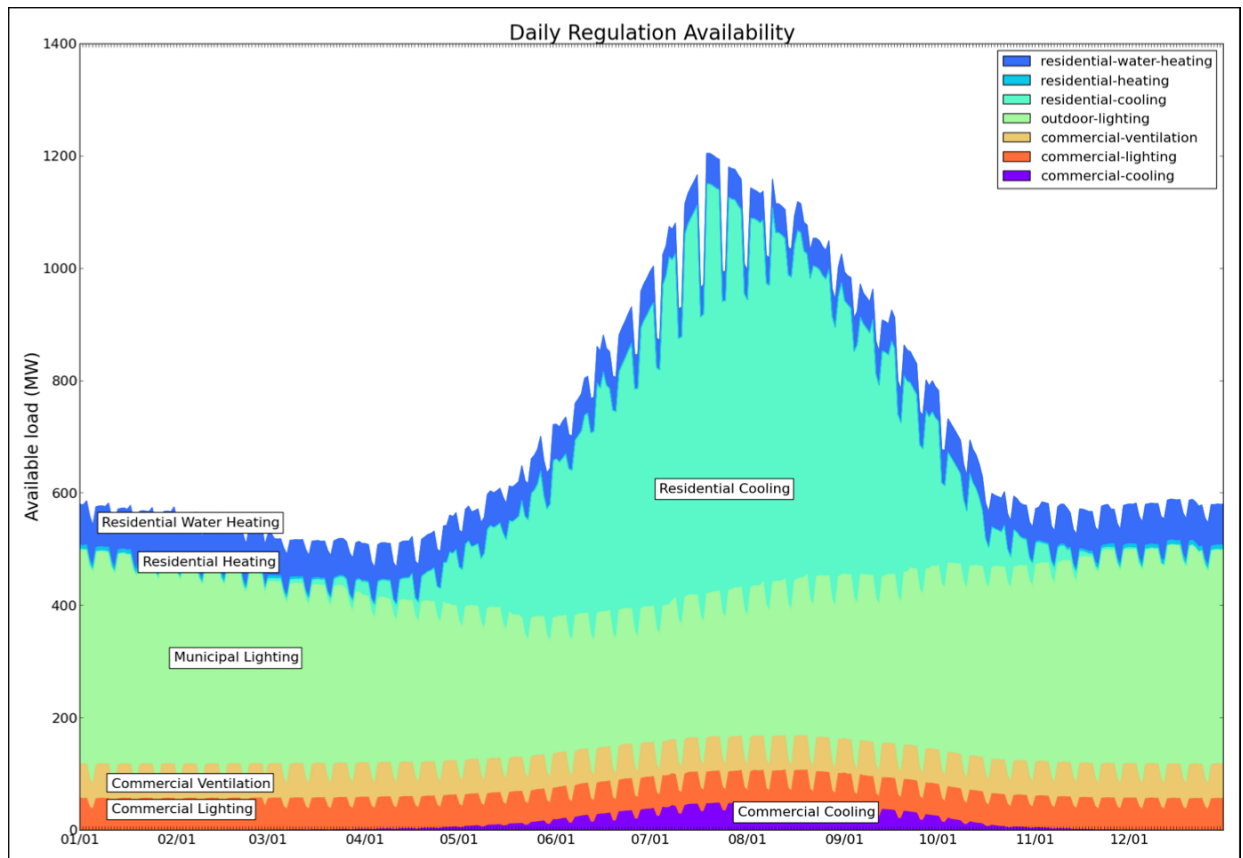

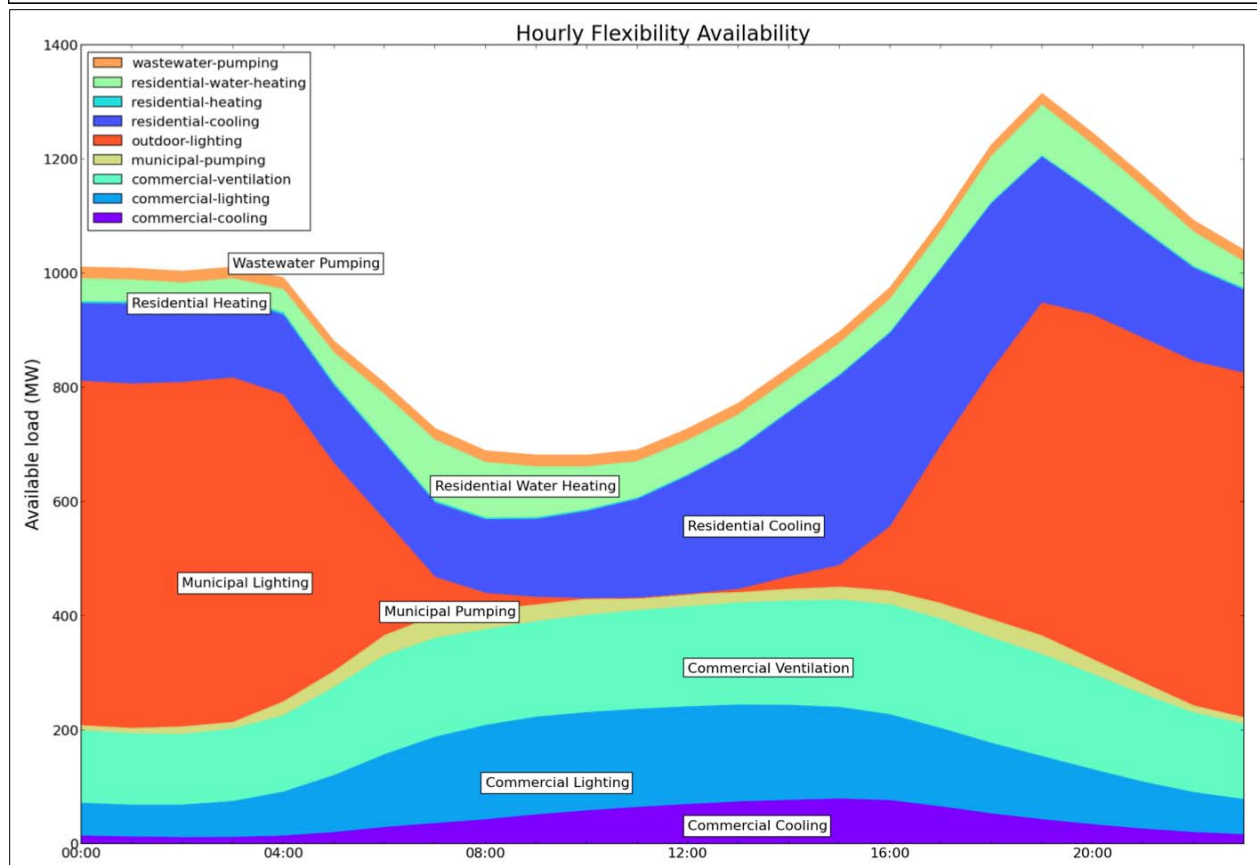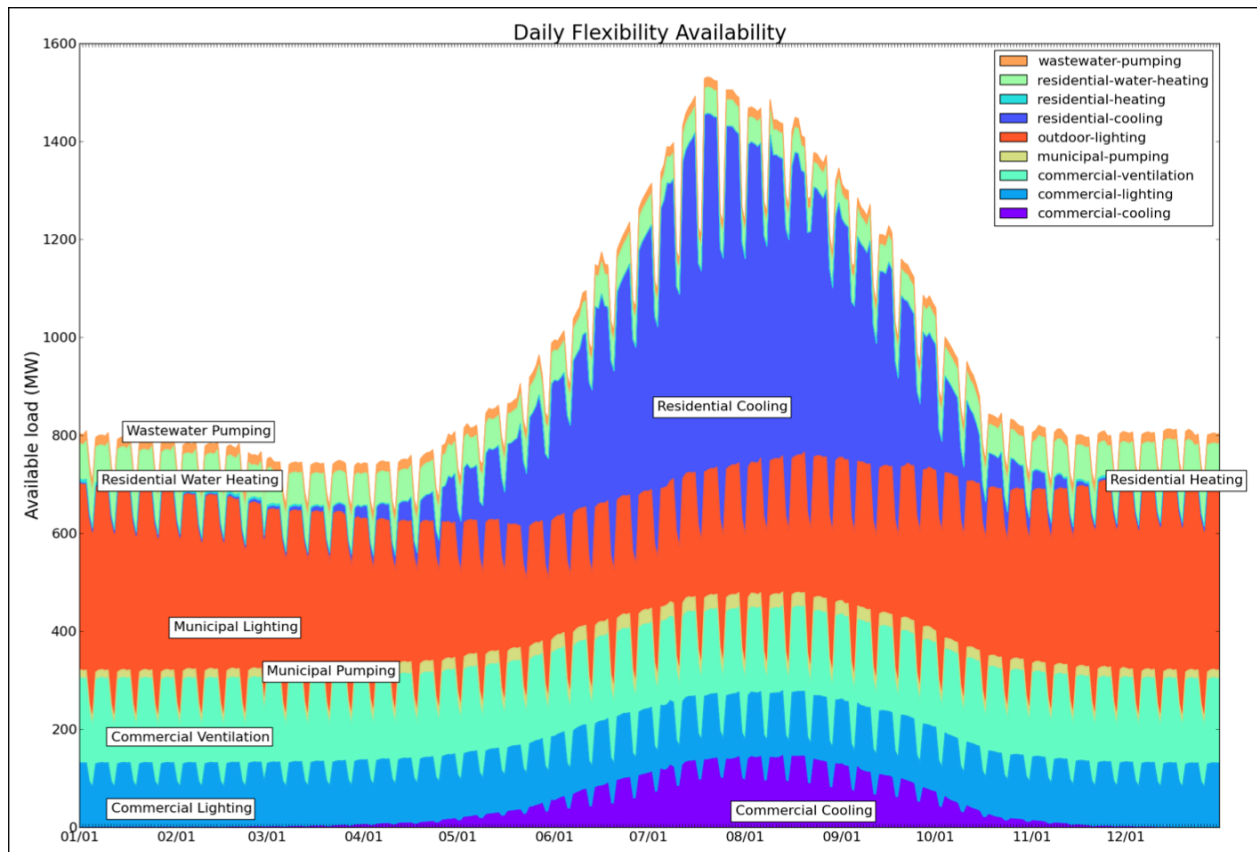

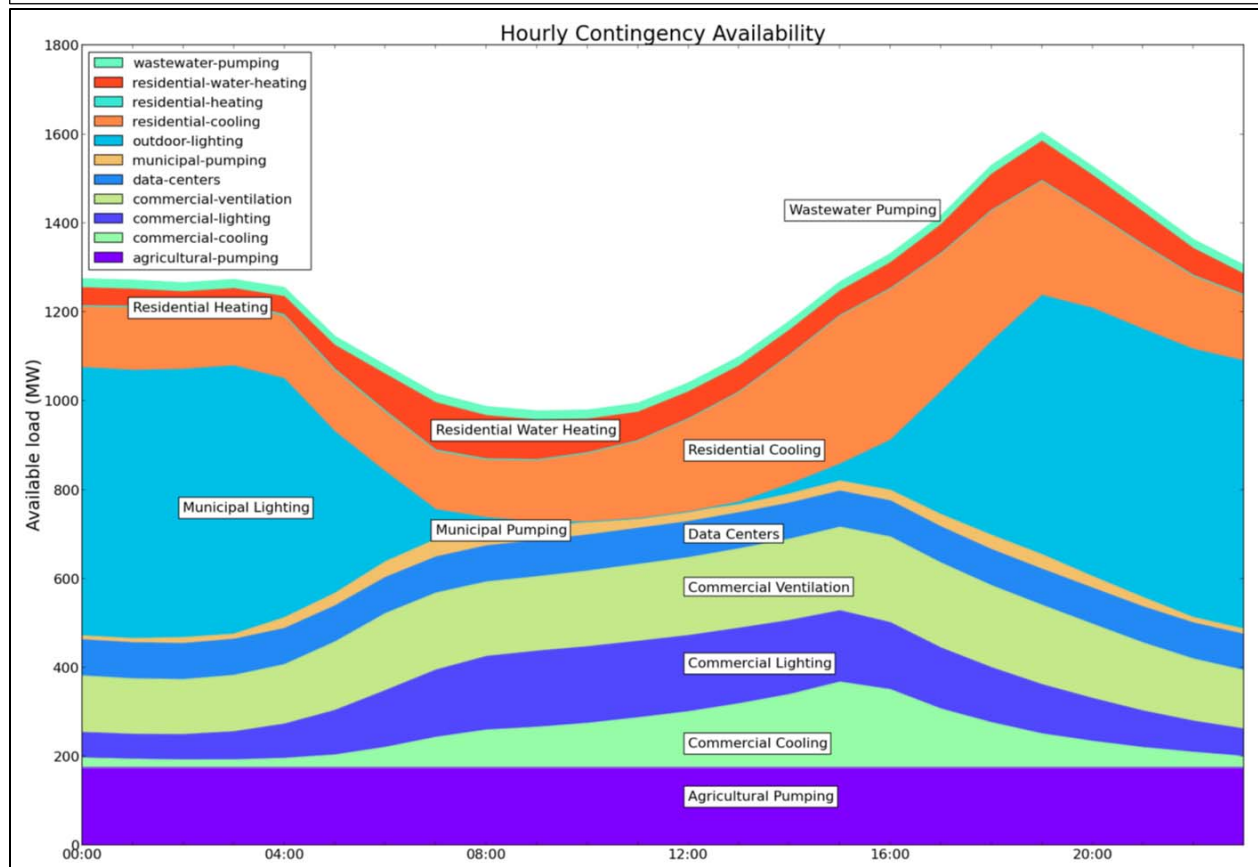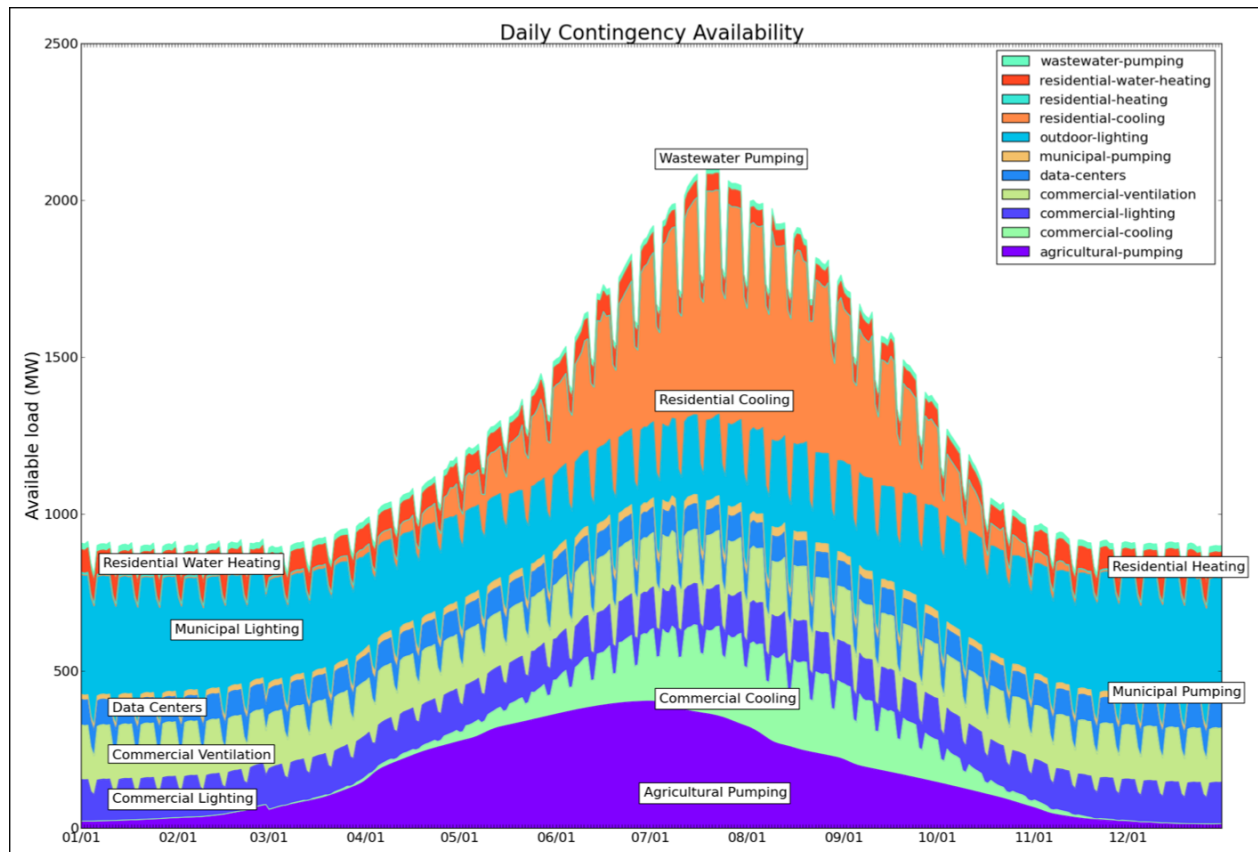

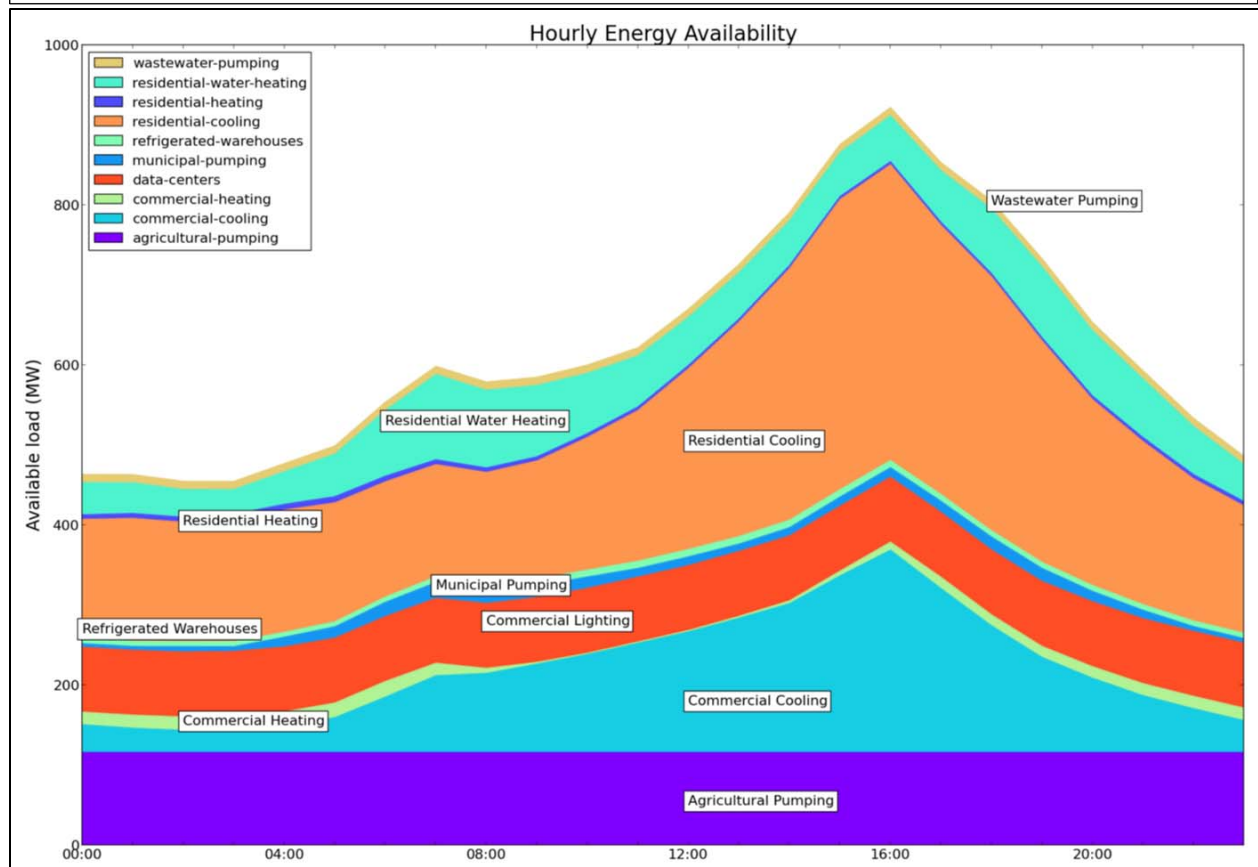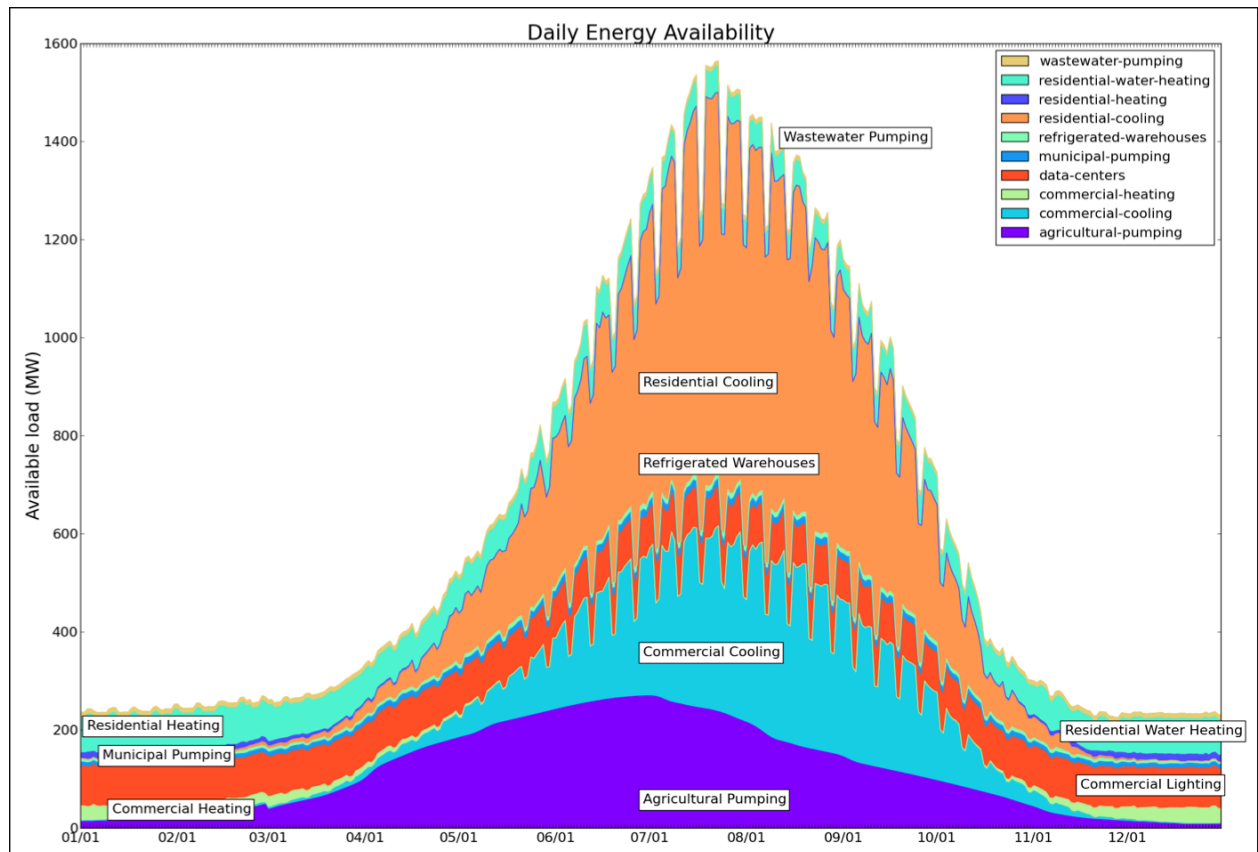

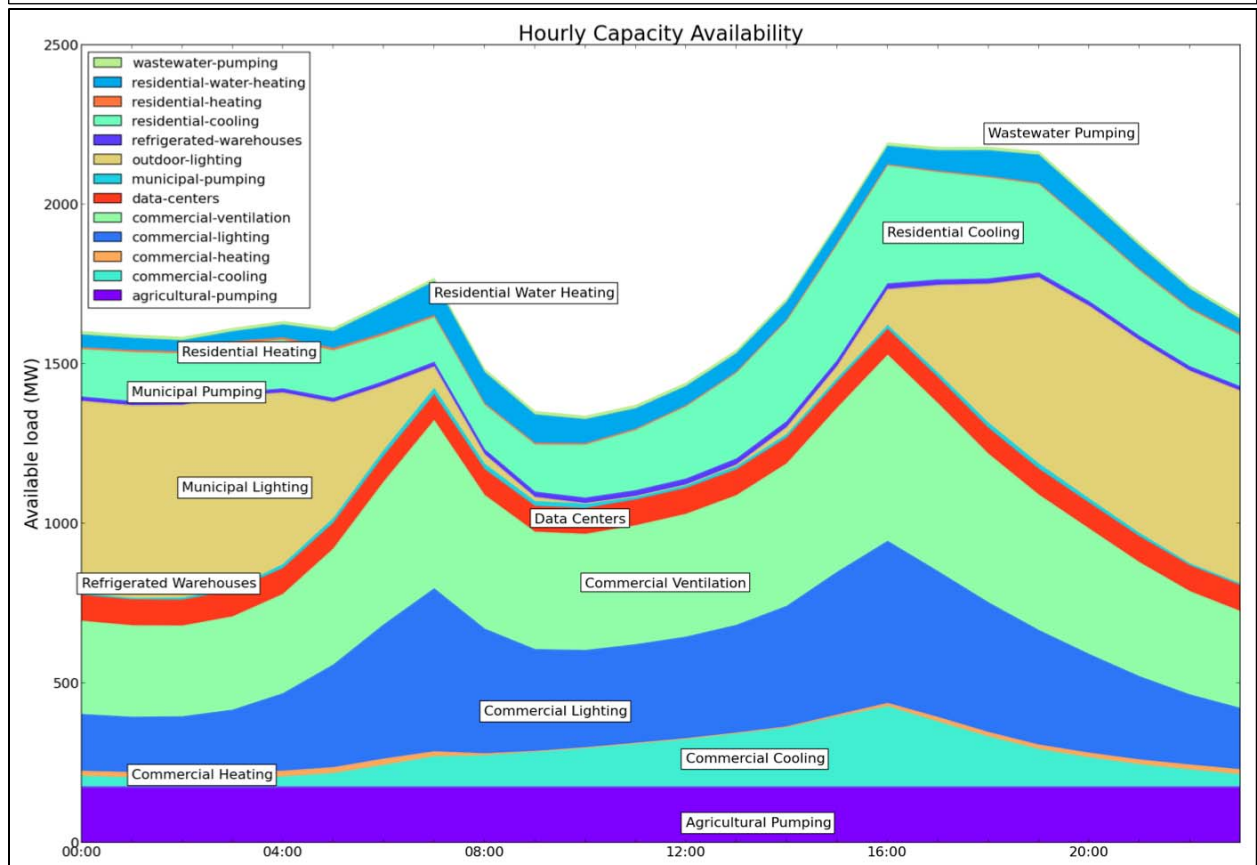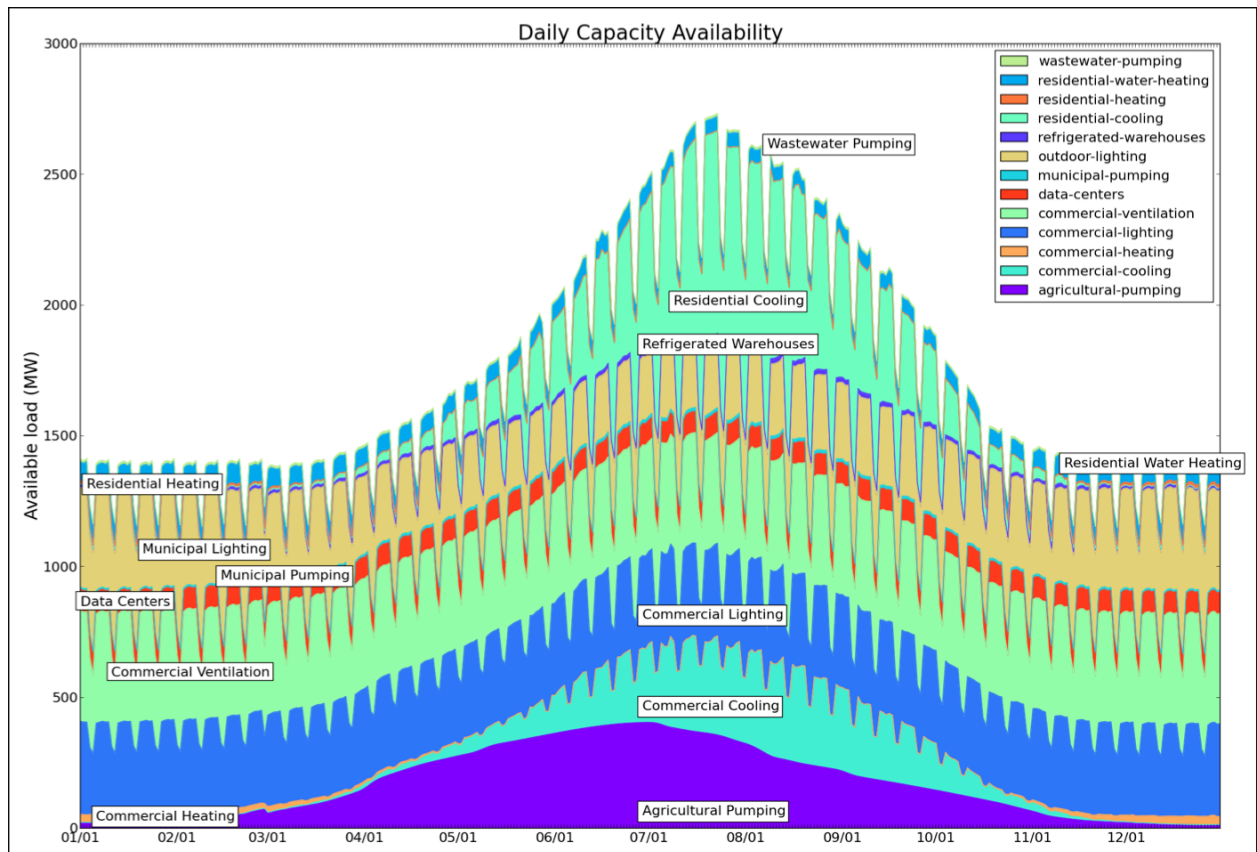

Appendix F – Geographic Dispersion of Resource Availability

