

# Lawrence Berkeley National Laboratory

## Recent Work

### Title

NEUTRON PRODUCTION BY HIGH-ENERGY PARTICLES

### Permalink

<https://escholarship.org/uc/item/87m6q995>

### Authors

Crandall, Walter E.  
Millburn, George P.

### Publication Date

1954-09-29

DECLASSIFIED

UCRL2706

~~SECRET~~

UNIVERSITY OF  
CALIFORNIA

# Radiation Laboratory

~~RESTRICTED DATA~~

This document contains restricted data as defined in the Atomic Energy Act of 1946. Its transmission contents in any person is prohibited.

**For Reference**  
Not to be taken from this room

BERKELEY, CALIFORNIA

~~SECRET~~

**Special Review of  
Declassified Reports**

Authorized by USDOE JK Bratton

Unclassified TWX P182206Z May 79

**REPORT PROPERLY DECLASSIFIED**

  
Authorized Derivative Classifier

AUG 21 1979  
Date

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

UNIVERSITY OF CALIFORNIA  
Radiation Laboratory

Cover Sheet  
Do not remove

INDEX NO. UCRL-2706  
This document contains 29 pages  
This is copy 98 of 126 series A  
Date 9-29-54

**DECLASSIFIED**

Issued to INFORMATION DIVISION

~~SECRET~~

Classification

Each person who receives this document must sign the cover sheet in the space below.

| Route to           | Noted by      | Date              | Route to | Noted by | Date |
|--------------------|---------------|-------------------|----------|----------|------|
| <i>EO Lawrence</i> |               | ✓                 |          |          |      |
|                    | <i>M Ruby</i> | <i>Sep 29, 55</i> |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |
|                    |               |                   |          |          |      |

**DECLASSIFIED**

**SECRET**

UCRL-2706

Classified Physics and Mathematics

Special Review of Declassified Reports

Authorized by USDOE JK Bratton

Unclassified TWX P182206Z May 79

**REPORT PROPERLY DECLASSIFIED**

|                                  |                |
|----------------------------------|----------------|
| <u>J. N. Green</u>               | <u>8-21-79</u> |
| Authorized Derivative Classifier | Date           |
| <u>G. Cohen</u>                  | <u>8-22-79</u> |
| By                               | Date           |

UNIVERSITY OF CALIFORNIA

Radiation Laboratory  
Berkeley, California

Contract No. W-7405-eng-48

**CLASSIFICATION CANCELLED**

BY AUTHORITY OF THE SAN MTA  
DOCUMENT REVIEW COMMITTEE.

2-28-57

B. Frost

DATE

SIGNATURE

NEUTRON PRODUCTION BY HIGH-ENERGY PARTICLES

Walter E. Crandall and George P. Millburn

September 29, 1954

**RESTRICTED DATA**

This document contains restricted data as defined in the Atomic Energy Act of 1946. Its transmittal or the disclosure of its contents in any manner to an unauthorized person is prohibited.

Printed for the U. S. Atomic Energy Commission

**SECRET**

Standard Distribution: Series ACopy No.

|  |       |
|--|-------|
| A. F. Plant Representative, Burbank                    | 1     |
| A. F. Plant Representative, Seattle                    | 2     |
| A. F. Plant Representative, Wood-Ridge                 | 3     |
| American Machine and Foundry Company                   | 4     |
| ANP Project Office, Fort Worth                         | 5     |
| Argonne National Laboratory                            | 6-13  |
| Armed Forces Special Weapons Project (Sandia)          | 14    |
| Army Chemical Center                                   | 15    |
| Atomic Energy Commission, Washington                   | 16-18 |
| Babcock and Wilcox Company                             | 19    |
| Battelle Memorial Institute                            | 20    |
| Bendix Aviation Corporation                            | 21    |
| Brookhaven National Laboratory                         | 22-24 |
| Bureau of Ships  | 25    |
| Carbide and Carbon Chemicals Company (C-31 Plant)      | 26    |
| Carbide and Carbon Chemicals Company (K-25 Plant)      | 27-28 |
| Carbide and Carbon Chemicals Company (ORNL)            | 29-34 |
| Chicago Patent Group                                   | 35    |
| Chief of Naval Research                                | 36    |
| Columbia University (Havens)                           | 37    |
| Commonwealth Edison Company                            | 38    |
| Department of the Navy--Op-362                         | 39    |
| Detroit Edison Company                                 | 40    |
| Directorate of Research (WADC)                         | 41    |
| duPont Company, Augusta                                | 42-44 |
| Duquesne Light Company                                 | 45    |
| Foster Wheeler Company                                 | 46    |
| General Electric Company (ANPD)                        | 47-49 |
| General Electric Company (APS)                         | 50    |
| General Electric Company, Richland                     | 51-54 |
| Goodyear Atomic Corporation                            | 55-56 |
| Hanford Operations Office                              | 57    |
| Iowa State College                                     | 58    |
| Kirtland Air Force Base                                | 59    |
| Knolls Atomic Power Laboratory                         | 60-63 |
| Los Alamos Scientific Laboratory                       | 64-65 |
| Monsanto Chemical Company                              | 66    |
| Mound Laboratory                                       | 67-69 |
| National Advisory Committee for Aeronautics, Cleveland | 70    |
| National Bureau of Standards                           | 71    |
| Naval Medical Research Institute                       | 72    |
| Naval Research Laboratory                              | 73-74 |
| New Brunswick Laboratory                               | 75    |
| Newport News Shipbuilding and Dry Dock Company         | 76    |
| New York Operations Office                             | 77    |
| North American Aviation, Inc.                          | 78-80 |
| Nuclear Development Associates, Inc.                   | 81    |
| Nuclear Metals, Inc.                                   | 82    |

Standard Distribution: Series A (continued)Copy No.

|  |         |
|--|---------|
| Pacific Northwest Power Group                            | 83      |
| Patent Branch, Washington                                | 84      |
| Phillips Petroleum Company (NRTS)                        | 85-88   |
| Powerplant Laboratory (WADC)                             | 89      |
| Pratt & Whitney Aircraft Division (Fox Project)          | 90      |
| RAND Corporation   | 91      |
| Sandia Corporation                                       | 92      |
| Tennessee Valley Authority (Dean)                        | 93      |
| USAF-Headquarters  | 94      |
| U. S. Naval Radiological Defense Laboratory              | 95      |
| UCLA Medical Research Laboratory                         | 96      |
| University of California Radiation Laboratory, Berkeley  | 97-99   |
| University of California Radiation Laboratory, Livermore | 100-102 |
| University of Rochester                                  | 103-104 |
| Vitro Engineering Division                               | 105     |
| Walter Kidde Nuclear Laboratories, Inc.                  | 106     |
| Westinghouse Electric Corporation                        | 107-110 |
| Yale University  | 111     |
| Technical Information Service, Oak Ridge                 | 112-126 |



~~SECRET~~

UCRL-2706  
Classified Physics and Mathematics

## NEUTRON PRODUCTION BY HIGH-ENERGY PARTICLES

Walter E. Crandall and George P. Millburn

Radiation Laboratory, Department of Physics  
University of California, Berkeley, California

September 29, 1954

### ABSTRACT

From neutron-yield measurements made with a  $\text{MnSO}_4$  detecting solution, the average number of neutrons produced per inelastic event is determined for a series of elements from lithium to uranium for 340-Mev protons, 190- and 315-Mev deuterons, 490-Mev  $\text{He}^3$  ions, and 90- and 160-Mev neutrons. The results are analyzed in an attempt to understand the total yield measurements for thick targets and to explain the variation of yield with the atomic number of the target.

---

### I. INTRODUCTION

In attempting to explain the yield of neutrons from targets bombarded by high-energy particles,<sup>1</sup> information concerning the number of neutrons produced per inelastic event,  $\bar{N}$ , and the cross section for the production of one neutron,  $\sigma_{1N}$ , is needed. These two quantities have been determined for a variety of elements for 340-Mev protons, 90-Mev neutrons, 160-Mev neutrons, 190-Mev deuterons, 320-Mev deuterons, and 490-Mev  $\text{He}^3$  particles.

The measurements were made by detecting the neutrons in a tank of  $\text{MnSO}_4$  solution.<sup>1</sup> The targets were equal to or less than the range of the charged particles in most cases.

Inelastic cross sections for the various particles were taken from

~~SECRET~~

California Research and Development Co. Report LRL-85, by Birnbaum et al. (see also Phys. Rev. 95, 1268 (1954)).

In general the values of  $\bar{N}$  and  $\sigma_{1N}$  increase rapidly with increasing atomic weight, whereas the increase with particle energy is much slower.

## II. MEASUREMENTS

### 1. Neutron Yields

The number of neutrons emitted from a target,  $N_n$ , for  $P_n$  incident particles was measured in a  $MnSO_4$  solution contained in a large tank.<sup>1</sup> Eighteen inches of solution surrounded the 1-foot-square tunnel in which the targets were placed. The plug at the rear of the tunnel was removed when the targets were less than a range thick, and for all targets in the neutron beams. The solution was calibrated by placing a calibrated neutron source (Ra-Be) in the tunnel. The activity induced in the manganese was counted by two sets of thin-walled Geiger counters. For further details concerning the method, UCRL-2063 should be consulted. The relative error in measurement is estimated to be 3 percent, but because of the uncertainty in the neutron-source calibration, the absolute error is about 10 percent.

### 2. Beam Monitors

The number of charged particles incident on the target was measured by a parallel-plate ionization chamber operated so as to render negligible the effects of recombination.<sup>1</sup> The ionization chamber was calibrated against a Faraday cup. The charges collected were determined by measuring the voltage produced across a calibrated condenser with a 100-percent inverse feedback electrometer. The condensers were calibrated against a "secondary standard"

condenser, which was calibrated by the National Bureau of Standards to 0.1 per cent. For further details, UCRL-2063 should be consulted. The relative error in measurement is estimated to be 1 percent, and the absolute error about 2 percent, or less.

The neutron beams used in this experiment were monitored by a scintillation counter telescope using the recoil protons from a  $\text{CH}_2$  target and the measured n-p differential cross sections. The monitor was "calibrated" by counting  $\text{CH}_2$ , C, and no targets. The relative error is estimated to be less than 1 percent, but the absolute error is about 10 percent, mainly because of the uncertainty in the n-p cross section. A more complete description of the telescope and its use will appear in a UCRL report by Whitehead and others concerning measurements of the energy distribution of the 160-Mev neutron beam and the measurement of  $\text{C}^{12}(\text{n}, 2\text{n})\text{C}^{11}$  cross sections.

### 3. Particles

The charged particles used which could be accelerated directly in the 184-inch synchrocyclotron (340-Mev protons, 190-Mev deuterons, and 490-Mev  $\text{He}^3$  particles) were very monoenergetic beams. In addition, deuterons of approximately 320 Mev were produced by stripping  $\text{He}^3$  particles in an internal target.<sup>2</sup> This beam had an energy spread of about 60 Mev at half maximum with a low-energy tail.<sup>2</sup>

The neutron beams used were produced by stripping 190-Mev deuterons and 490-Mev  $\text{He}^3$  particles in a 1/2-inch carbon target. The mean energies were 90 and 160 Mev, with energy spreads at half maxima of about 20 and 50 Mev respectively. Measurements could not be made with the 270-Mev neutron beam produced by 340-Mev protons because of the low intensity of the beam.

#### 4. Targets

The targets used included elements from lithium to uranium, but not all targets were used for all the above particles. In Table I we list the targets used for the various particles. Some of the data used in the calculations were three or four years old, and the thicknesses of these targets were known only in inches. The densities given in the Handbook of Chemistry and Physics, 34th Edition, 1952-1953, were used in such cases. Except for the 5/8-by-4-1/4-inch diameter, 2 x 2-and 3 x 3-inch targets, all uranium targets were of milled square bars of either 6 or 12 inches in length. The density of the bars was 18.6 g/cm<sup>3</sup>. One lithium target was contained in a stainless steel cylinder with 0.010-inch stainless steel windows on either end; a recent recalculation of the range of 190-Mev deuterons in lithium showed that this target was only half the range in thickness. Since the plug of MnSO<sub>4</sub> (18 inches thick) at the end of the tank tunnel<sup>1</sup> was not removed during bombardment, the measured value of N/P<sub>2</sub> is certainly too high because of further neutron production by deuterons in the plug. The measured value was corrected for the deuteron production in the MnSO<sub>4</sub> plug, and more recently another lithium target was used.

#### 5. Errors

The accuracy of the measurements will be discussed in terms of comparison of relative values for different targets and different beams. The absolute values may be in error by a further 10 percent because of inaccuracies in the neutron-source calibration. Corrections for possible systematic errors were not applied except as noted.

The values of N/P<sub>n</sub> for the directly accelerated charged-particle beams have a standard error of about 4 percent on a relative basis. The values of

the yield for the 320-Mev deuterons have a standard error of about 6 percent, with an additional uncertainty in interpreting the results because of the energy distribution of the beam. The error in  $N/P_n$  for the neutron beams is due almost entirely to the error in the n-p cross section and is about 10 percent. To compare the neutron data at the two energies, a relative error of about 3 percent may be used.

The combined errors in the cross section and the target thickness were estimated to be about 10 percent (i.e., the error in  $\sigma t$  was assumed to be 10 percent).

The errors in the quantities  $\bar{N}$  and  $\sigma_{1N}$  were calculated by the method of propagation of errors. The error in  $\sigma_{1N}$  due to an error in  $\sigma t$  tends to cancel for thin targets with the result that  $\sigma_{1N}$  is generally more accurate than  $\bar{N}$ .

### III. CALCULATIONS

#### 1. Definitions

The average number of neutrons emitted during an inelastic event may be defined as

$$\bar{N} = \frac{\eta}{1 - e^{-\sigma_n t}}, \quad (1)$$

where  $\eta = N/P_n$  corrected for background and secondary particle production,  $t$  is the thickness of the target, and  $\sigma_n$  is the inelastic cross section for a bombarding particle of  $n$  nucleons. The cross section for the production of one neutron may then be defined as

$$\sigma_{1N} = \sigma_n \bar{N} = \frac{\eta \sigma_n}{1 - e^{-\sigma_n t}} \quad (2)$$

For small values of  $t$  this reduces to  $\sigma_{1N} = \eta/t$ , which shows clearly that errors in  $\sigma_n$  tend to cancel in calculating  $\sigma_{1N}$ .

On the assumption that the nucleons in a multi-nucleon particle are independent at these high energies, the number of inelastic events for a particle with  $n$  nucleons may be taken as  $n(1 - e^{-\sigma_n t})$ , in which case

$$\bar{N}' = \frac{\eta}{n(1 - e^{-\sigma_n t})} \quad (3)$$

and taking  $\sigma_{1N}' = \sigma_1 \bar{N}'$ ,

$$\sigma_{1N}' = \frac{\eta \sigma_1}{n(1 - e^{-\sigma_1 t})} \quad (4)$$

These values of  $\sigma_{1N}'$  and  $\bar{N}'$  are calculated as well as those defined in Eqs. (1) and (2), and are referred to as the cross section per nucleon and average number of neutrons per inelastic event per nucleon.

## 2. Background

The yield for no target,  $(N/P_n)_0$ , was measured for all beams used. When the neutron beams were used, the neutrons passed through the tunnel in the  $MnSO_4$  tank and did not impinge on any concentration of material near the tank. Thus the yield is taken as

$$\frac{N}{P_n} - \left( \frac{N}{P_n} \right)_0$$

for the neutron beams.

When the charged-particle beams pass through the tunnel, the particles hit the back wall of the experimental enclosure<sup>1</sup> and produce neutrons which may then be detected by the tank. The "background" measured in this way may be

compared with the "background" measured with an absorber of slightly more than one range inserted in the far end of the 40-inch collimator;<sup>1</sup> for 340-Mev protons the yield in the first case is 20 times greater than in the second case; for 190-Mev deuterons, the ratio is about 5, but in this case the relatively high yield of stripped neutrons in the forward direction causes the measurement to be only an upper limit for the true background.

Thus the measured  $(N/P_n)_0$  can not be used directly as the background when charged-particle beams are used. Instead, the background was calculated by assuming

The yield of neutrons varies about as the square of the particle energy,<sup>1</sup>

The "true" background is zero,

The range of charged particles varies about as the square of the particle energy.

Then the yield should vary about as the range of the particles, and the background for targets less than a range in thickness is

$$\left(\frac{N}{P_n}\right)_{\text{Bgd}} = \left(\frac{N}{P_n}\right)_0 \frac{R_0 - t}{R_0} e^{-\sigma_n t}, \quad (5)$$

where  $R_0$  is the range of the particle. The background was less than 20 percent of the measured yield (see Table II).

### 3. Secondary Effects

For thick targets the high-energy particles produced in the target may undergo inelastic collisions and produce further neutrons. To correct for this effect, it is necessary to know the number, kind, and energies of the secondary particles and the average number of neutrons produced per secondary

collision. The corrections should be small and apply only to the high-energy particles produced. In the case of uranium, low-energy neutrons may cause further production by inducing fission; no attempt has been made to correct for this effect. Further, absorption of neutrons in the target has been neglected.

For deuterons incident on the targets, the secondary production was calculated only for the stripped neutrons produced. The known stripping cross sections,  $\sigma_{2s}$ , were used and the  $\bar{N}$  measured for 90-Mev neutrons was used. The secondary production is then

$$\int_0^t \sigma_1 \bar{N} dx \int_0^x e^{-\sigma_2 x} \sigma_{2s} e^{-\sigma(x-\lambda)} d\lambda,$$

and since  $\sigma_{2sp} = \sigma_2 - \sigma_1$ , the integrations give

$$\bar{N} \left[ (1 - e^{-\sigma_1 t}) - \frac{\sigma_1}{\sigma_2} (1 - e^{-\sigma_2 t}) \right]. \quad (6)$$

The corrections varied from zero for thin targets to 5 percent for a range thickness of uranium, the highest correction found. The correction is only a lower limit, but under the assumptions made above is certainly good to within a factor of 2. If a reasonable value of  $\bar{N}$  is used for 90-Mev protons, the correction for stripped proton production is negligible.

For the 90-Mev neutron beam the secondary production of the cascade neutrons produced has been calculated by assuming<sup>3</sup>

- (a) The cascade neutrons are emitted isotropically in the forward hemisphere only,
- (b) The mean effective energy for production of the cascade neutrons is about 50 to 60 Mev, giving an average of  $\bar{N} = 8$  neutrons per inelastic collision,



- (c) The mean number of cascade neutrons produced per inelastic collision is  $\alpha = 0.86$ .

The production due to the fast effect and the absorption of neutrons has again been neglected, as has the production caused by the cascade protons produced in the target. Then the secondary production  $\bar{N}_s$  is given by

$$\bar{N}_s = \sigma_1^2 \alpha \bar{N} \int_0^t dx \int_0^x f_x e^{-\sigma_1 \lambda} e^{-\sigma_1 \sqrt{(x-\lambda)^2 + a^2}} d\lambda, \quad (7)$$

where

$$f_x = \frac{2}{\pi} \tan^{-1} \frac{b}{(x - \lambda) \sqrt{(x - \lambda)^2 + c^2}} \quad (8)$$

is the solid-angle<sup>4</sup> effect due to the assumed angular distribution, and a, b, c are geometrical constants of the target.

For the 160-Mev neutron data,  $\alpha \bar{N}$  was taken equal to 10.

#### 4. Data and Results

The data used in this report are presented in Table II. The standard errors listed are those assigned from statistical variations of the data from several determinations, plus the errors listed in Sec. II5. No corrections were applied except as listed in the previous sections, and errors due to uncertainties in the applied corrections and neglected secondary effects were not included in the final error assigned, except in the case of Li(1) and Be.

The calculated values of  $\bar{N}$  and  $\sigma_{1N}$  defined according to Eqs. (1) and (2) are listed in Table III and plotted in Figs. 1 and 3. The values of  $\bar{N}'$  and  $\sigma_{1N}'$  calculated from the definitions of Eqs. (3) and (4) are listed in Table IV.  $\bar{N}'$  is plotted in Fig. 2 as a function of mean nucleon energy.

Previously, B. B. Kinsey<sup>5</sup> measured the number of neutrons produced per inelastic collision for 90-Mev neutrons. His results are shown in Fig. 1 for comparison. No measurements of the inelastic cross sections existed at the time of his work, and he used 0.36 of the measured total cross sections for  $\sigma_1$ . The small difference between the two values for uranium is completely removed upon recalculating Kinsey's data with our value of  $\sigma_1$ . The factor-of-two difference in  $\bar{N}$  for the medium-weight elements cannot be explained by the differences in the inelastic cross sections used in the two experiments.

#### IV. ANALYSIS OF RESULTS

The yield of neutrons from a target bombarded by charged particles may be expressed

$$\eta = \int_0^t \sigma_{1N} e^{-\sigma_n x} dx \quad (9)$$

if secondary events are neglected. In terms of the energy, Eq. (9) is

$$\eta = \int_{E_0}^E \sigma_{1N} e^{-\sigma_n x} \frac{1}{dE/dx} dE, \quad (10)$$

so that the quantity  $\sigma_{1N}(dE/dx)^{-1}$  gives a quick estimate of the manner in which the yield will vary with energy for different particles. If the stopping power,  $dE/dx$ , is expressed in the units  $\text{Mev} (\text{g}/\text{cm}^2)^{-1}$ , then  $(dE/dx)(A/A_0)$ , where  $A$  is the mass number of the element and  $A_0$  is Avogadro's number, is the stopping power in units of  $\text{Mev} (\text{nuclei}/\text{cm}^2)^{-1}$ . The quantity  $[\sigma_{1N}/(dE/dx)][A_0/A]$  is listed in Table IV and plotted in Fig. 4. The steep rise in the curve, which

begins near  $A = 230$ , is probably caused by the onset of fission; if the 2.5 neutrons per fission are subtracted from  $\bar{N}$  for 190-Mev deuterons on uranium, the value of  $[\sigma_{1N}/(dE/dx)][A_0/A]$  drops from 0.0248 to 0.0177; the latter value falls near a smooth curve through the other points. The anomalous behavior of the lithium and beryllium points is probably a reflection of the small number of particles in these nuclei and the fact that the predominant isotopes of these nuclei have one extra neutron.

It is important to note that since the stopping power decreases by almost a factor of two between carbon and uranium, the relative productivity of different elements is given more realistically in Fig. 4 than in Fig. 3.

The secondary processes in the targets may be important, particularly if the primary target is one range thick and backed by a uranium target. If the particles are deuterons, the total production in the primary target is given by

$$y = \int_0^R \sigma_{1N}(d) e^{-\sigma_2 x} dx + \int_0^R \sigma_{1N}(n) dx \int_0^x e^{-\sigma_2 \lambda} \sigma_{2S} e^{-\sigma_1(x-\lambda)} d\lambda \quad (11)$$

if the secondary production by stripped neutrons only is considered; here  $\sigma_{1N}(d)$  is the cross section for deuterons and  $\sigma_{1N}(n)$  is the cross section for neutrons of approximately half the deuteron energy. For a primary target backed by uranium of thickness  $t$ , the additional production is given by

$$y_s = \int_0^t \sigma_{1N}(n) e^{-\sigma_1 \lambda} d\lambda \int_0^R e^{-\sigma_2 x} \sigma_{2S} e^{-\sigma_1(R-x)} dx, \quad (12)$$

so the total production is

$$Y = y + y_s = \bar{N}(d)(1 - e^{-\sigma_2 R}) + \bar{N}(n)[(1 - e^{-\sigma_1 R}) - (\sigma_1/\sigma_2)(1 - e^{-\sigma_2 R})] \\ + \bar{N}(n)e^{-\sigma_1 R}(1 - e^{-\sigma_2 s R})(1 - e^{-\sigma_1 t}). \quad (13)$$

This expression neglects the angular distribution of the stripped neutrons, the secondary charged particles and knock-on neutrons (important for low-A elements), and the high-energy secondary particles produced in the second target. Its general form agrees with the empirical formula<sup>1</sup> from the external yield data. Table V lists the calculated and observed<sup>1</sup> yields for a one-range target with  $t = 0$  and  $t = \infty$ . The assumed values of  $\bar{N}$  were taken from Fig. 2 to correspond to deuterons of 130 and 210 Mev energies. The general agreement for 190 Mev is probably fortuitous. The discrepancy for one range of beryllium may be due in part to multiplication of the stripped neutrons in the  $MnSO_4$  plug at the rear of the tank; the corrected value ( $\eta = 0.74 \pm 0.17$ ) listed in Table II is probably a better estimate of  $y_{obs}$  and agrees with  $y_{calc} = 0.65$ .

As is evident from Eqs. (12) and (13), an estimate of the neutron production in the secondary target is best given in terms of  $\sigma_{2s}/(dE/dx)$  for deuterons. This is listed in Table VI. In order to compare the expected total yield as a function of the target material, the ratios  $\sigma_{2s}/(dE/dx)$  should be multiplied by  $\bar{N}(n)$ , and since the secondary target is usually uranium,  $\bar{N}(n)$  for uranium should be used. These numbers are given in Table VI together with the sum

$$\frac{\sigma_{2s}}{dE/dx} \bar{N}(n) + \frac{\sigma_{1N}}{dE/dx}.$$

The various ratios of the calculated and observed values are given in Table VIII. The calculated values  $[\sigma_{2s}/(dE/dx)]\bar{N}(n)$ ,  $[\sigma_{1N}/(dE/dx)]$ , and their sum are plotted as a function of the mass number of the primary target in Fig. 5.

The figure clearly shows that a target should be selected from either the heavy or the light elements. The calculated superiority of the light elements shown in Fig. 5 is not found experimentally as shown in Table VIII; the discrepancy may be due to the neglect of attenuation of the stripped neutrons (greatest in the light elements), or, more likely, may be due to the naivete of the calculations.

#### V. ACKNOWLEDGMENTS

This work was done under the general supervision of Dr. C. M. Van Atta and with the assistance of F. Adelman, W. Birnbaum, D. Hicks, J. Ise, Jr., R. Main, R. Pyle, L. Schechter and M. Whitehead. Similar measurements were first inaugurated by Prof. E. O. Lawrence and were further developed by Prof. H. York and others. All the measurements reported here were made at the 184-inch synchrocyclotron at Berkeley, except for the 230-Mev deuteron data, which were measured at the Institute for Nuclear Studies at the University of Chicago.

This work was performed under the auspices of the U. S. Atomic Energy Commission.

Table I  
Description of Basic Target Dimensions

| Designation  | Description (inches)             | Density (g/cm <sup>3</sup> ) |
|--------------|----------------------------------|------------------------------|
| Uranium U(1) | 4-1/4 dia. cylinder              | 18.6                         |
| U(2)         | 1/16 and 1/8 x 2 x 2 squares     |                              |
| U(3)         | 1/16 x 3 x 3 squares             |                              |
| U(4)         | 1/2 x 1/2 x 6 bars (milled)      |                              |
| U(5)         | 1 x 1 x 6 bars (milled)          |                              |
| U(6)         | 1-1/8 x 1-1/8 x 12 bars (milled) |                              |
| U(7)         | 1/2 x 1/2 x 12 bars (milled)     |                              |
| Thorium      | 4-1/4 dia. cylinder              | 11.3                         |
| Lead         |                                  | 11.35                        |
| Cadmium      |                                  | 8.65                         |
| Molybdenum   | 4 x 4 squares                    | 10.2                         |
| Copper       |                                  | 8.94                         |
| Aluminum     |                                  | 2.70                         |
| Carbon       |                                  | 1.8                          |
| Beryllium    | 4-1/4 dia. cylinder              | 1.95                         |
| Lithium (1)  | 2 x 2 squares (see pg. 4)        | 0.534                        |
| Lithium (2)  | 4 dia. cylinder                  |                              |

Table II  
Data and Results

| Target                          | Thickness               | $\frac{N}{F_n}$ | $\frac{N}{F_n}$ Bgd | $\eta$        | $\bar{N}$   | $\sigma_{1N}$ | $\bar{N}'$ | $\sigma_{1N}'$ | $\bar{E}$<br>Mev |
|---------------------------------|-------------------------|-----------------|---------------------|---------------|-------------|---------------|------------|----------------|------------------|
| <b>A. 190-Mev Deuteron Beam</b> |                         |                 |                     |               |             |               |            |                |                  |
| U(2)                            | 1/16 in.                | 0.332           | 0.066               | 0.266 ± 0.005 | 9.5 ± 1.0   | 36.2 ± 0.70   | 8.8 ± 0.9  | 17.9 ± 0.3     | 187              |
|                                 | 1/8 in.                 | 0.560           | 0.057               | 0.491 ± 0.011 | 8.9 ± 0.8   | 33.9 ± 0.8    | 8.2 ± 0.9  | 16.6 ± 0.4     | 180              |
|                                 | 1/4 in.                 | 1.08            | 0.040               | 1.01 ± 0.01   | 9.4 ± 0.9   | 35.8 ± 0.4    | 8.6 ± 0.9  | 17.5 ± 0.2     | 170              |
|                                 | 1/2 in.                 | 1.93            | 0.012               | 1.87 ± 0.02   | 9.1 ± 0.7   | 34.6 ± 0.4    | 8.2 ± 0.8  | 16.6 ± 0.2     | 140              |
| U(1)                            | 5/8 in.                 | 2.30            | 0                   | 2.20 ± 0.08   | 8.9 ± 1.1   | 33.9 ± 1.2    | 7.8 ± 0.9  | 15.8 ± 0.6     | 130              |
|                                 | 5/8 in.                 | 2.35            | 0                   | 2.25 ± 0.15   | 8.9 ± 1.0   | 33.9 ± 2.3    | 7.8 ± 1.3  | 15.8 ± 1.2     | 130              |
| U(3)                            | 5/8 in.                 | 2.34            | 0                   | 2.24 ± 0.07   | 9.0 ± 0.9   | 34.3 ± 1.1    | 7.9 ± 1.0  | 16.0 ± 0.5     | 130              |
|                                 | 12.07 g/cm <sup>2</sup> | 1.04            | 0.02                | 1.01 ± 0.05   | 9.2 ± 1.2   | 35.0 ± 1.7    | 8.4 ± 1.2  | 17.1 ± 0.9     | 170              |
| Th                              | 1.0 in.                 | 2.14            | 0                   | 2.05 ± 0.07   | 8.4 ± 0.9   | 31.7 ± 1.0    | 7.4 ± 0.9  | 14.8 ± 0.5     | 130              |
|                                 | 14.82 g/cm <sup>2</sup> | 1.12            | 0.02                | 1.08 ± 0.08   | 8.0 ± 0.9   | 30.2 ± 2.2    | 7.3 ± 1.3  | 14.6 ± 1.1     | 160              |
|                                 | 14.87 g/cm <sup>2</sup> | 1.15            | 0.03                | 1.10 ± 0.04   | 8.1 ± 0.8   | 30.8 ± 1.1    | 7.4 ± 0.9  | 14.8 ± 0.5     | 160              |
| Pb                              | 12.39 g/cm <sup>2</sup> | 0.756           | 0.032               | 0.713 ± 0.030 | 6.1 ± 0.6   | 21.0 ± 0.9    | 5.6 ± 0.6  | 10.2 ± 0.4     | 160              |
| Cd                              | 12.24 g/cm <sup>2</sup> | 0.622           | 0.020               | 0.585 ± 0.020 | 4.01 ± 0.30 | 9.6 ± 0.3     | 3.6 ± 0.4  | 4.5 ± 0.2      | 160              |
| Mo                              | 1.0 in.                 | 1.01            | 0                   | 0.98 ± 0.10   | 3.4 ± 0.3   | 7.5 ± 0.8     | 3.1 ± 0.7  |                | 130              |
| Cu                              | 11.48 g/cm <sup>2</sup> | 0.426           | 0.024               | 0.395 ± 0.018 | 2.30 ± 0.24 | 4.05 ± 0.19   | 2.3 ± 0.3  | 1.94 ± 0.09    | 160              |
|                                 | 11.74 g/cm <sup>2</sup> | 0.428           | 0.017               | 0.403 ± 0.020 | 2.26 ± 0.21 | 3.98 ± 0.20   | 2.2 ± 0.3  | 1.9 ± 0.1      | 160              |
|                                 | 1.0 in.                 | 0.78            | 0                   | 0.75 ± 0.08   | 2.4 ± 0.3   | 4.2 ± 0.4     | 2.3 ± 0.5  | 2.0 ± 0.2      | 130              |
| Al                              | 11.92 g/cm <sup>2</sup> | 0.306           | 0.015               | 0.286 ± 0.015 | 1.22 ± 0.09 | 1.22 ± 0.06   | 1.2 ± 0.2  | 0.56 ± 0.04    | 150              |
|                                 | 2-3/4 in.               | 0.46            | 0                   | 0.45 ± 0.05   | 1.3 ± 0.2   | 1.3 ± 0.1     | 1.3 ± 0.5  | 0.61 ± 0.06    | 130              |

MU-8373

Table II  
Data and Results (Cont.)

| Target                                    | Thickness               | $\frac{N}{F_n}$ | $\frac{N}{F_n}$ Bgd | $\eta$        | $\bar{N}$   | $\sigma_{1N}$ | $\bar{N}'$  | $\sigma_{1N}'$ | $\bar{E}$<br>Mev |
|---|-------------------------|-----------------|---------------------|---------------|-------------|---------------|-------------|----------------|------------------|
| <b>A. 190-Mev Deuteron Beam (Cont.)</b>   |                         |                 |                     |               |             |               |             |                |                  |
| C   | 7.67 g/cm <sup>2</sup>  | 0.187           | 0.023               | 0.158 ± 0.014 | 0.70 ± 0.09 | 0.47 ± 0.04   | 0.88 ± 0.09 | 0.215 ± 0.019  | 160              |
| Be  | 10.20 g/cm <sup>2</sup> | 0.455           | 0.017               | 0.427 ± 0.015 | 1.45 ± 0.12 | 0.73 ± 0.03   | 1.8 ± 0.1   | 0.333 ± 0.012  | 160              |
|   | 4 in.                   | 0.91            | 0                   | 0.74 ± 0.12   | 1.7 ± 0.3   | 0.88 ± 0.15   | 2.0 ± 0.3   | 0.37 ± 0.06    | 130              |
| Li(2)                                     | 4-1/2 in.               | 0.238           | 0.030               | 0.194 ± 0.012 | 0.89 ± 0.10 | 0.41 ± 0.03   | 1.0 ± 0.1   | 0.170 ± 0.011  | 170              |
| Li(1)                                     | 6 in.                   | 0.71            | ?                   | 0.42 ± 0.15   | 1.5 ± 0.4   | 0.70 ± 0.25   | 1.9 ± 0.7   | 0.32 ± 0.11    | 160              |
| <b>B. 230-Mev Deuteron Beam</b>           |                         |                 |                     |               |             |               |             |                |                  |
| U(1)                                      | 1.0 in.                 | 3.25            | 0                   | 3.00 ± 0.15   | 8.2 ± 0.8   | 31.2 ± 1.6    | 7.0 ± 1.0   | 14.0 ± 0.7     | 150              |
| <b>C. 330-Mev Deuteron Beam</b>           |                         |                 |                     |               |             |               |             |                |                  |
| U(7)                                      | 1/2 in.                 | 2.28            | 0.12                | 2.09 ± 0.10   | 10.2 ± 1.0  | 38.8 ± 1.9    | 9.2 ± 1.3   | 18.4 ± 0.9     | 300              |
|   | 1.0 in.                 | 4.55            | 0.05                | 4.21 ± 0.15   | 11.5 ± 1.0  | 43.8 ± 1.8    | 9.7 ± 1.2   | 19.4 ± 0.7     | 270              |
| <b>D. 490-Mev He<sup>3</sup> Ion Beam</b> |                         |                 |                     |               |             |               |             |                |                  |
| Cd  | 6.10 g/cm <sup>2</sup>  | 0.413           | 0.063               | 0.350 ± 0.04  | 4.2 ± 0.6   | 11.2 ± 1.1    | 3.0 ± 1.1   | 3.6 ± 0.4      | 450              |
|   | 12.24 g/cm <sup>2</sup> | 0.752           | 0.038               | 0.714 ± 0.07  | 4.5 ± 0.6   | 11.8 ± 1.2    | 3.1 ± 1.0   | 3.8 ± 0.4      | 400              |
| Ta  | 28.8 g/cm <sup>2</sup>  | 1.80            | 0                   | 1.8 ± 0.2     | 6.5 ± 0.9   | 23.4 ± 2.3    | 4.2 ± 1.5   | 7.2 ± 0.7      | 315              |
| U   | 54.15 g/cm <sup>2</sup> | 3.26            | 0                   | 3.0 ± 0.3     | 11.0 ± 1.4  | 48.4 ± 4.8    | 7.4 ± 2.3   | 15.9 ± 1.6     | 315              |

MU-8374

Table II  
Data and Results (Cont.)

| Target                        | Thickness               | $\frac{N}{P_n}$ | $\frac{N}{P_n}$ Bgd | $\eta$            | $\bar{N}$       | $\sigma_{1N}$   | $\bar{E}$<br>MeV |
|-------------------------------|-------------------------|-----------------|---------------------|-------------------|-----------------|-----------------|------------------|
| <b>E. 340-Mev Proton Beam</b> |                         |                 |                     |                   |                 |                 |                  |
| U(1)                          | 2-5/8 in.               | 7.30            | 0                   | 7.30 $\pm$ 0.30   | 16.0 $\pm$ 1.3  | 29.6 $\pm$ 1.2  | 220              |
| U(3)                          | 62.35 g/cm <sup>2</sup> | 4.42            | 0.041               | 4.38 $\pm$ 0.19   | 17.4 $\pm$ 1.7  | 32.2 $\pm$ 1.4  | 280              |
|                               | 94.4 g/cm <sup>2</sup>  | 6.48            | 0.08                | 6.40 $\pm$ 0.11   | 17.6 $\pm$ 1.4  | 33.4 $\pm$ 0.7  | 250              |
|                               | 47.2 g/cm <sup>2</sup>  | 3.95            | 0.24                | 3.71 $\pm$ 0.08   | 18.3 $\pm$ 1.7  | 34.8 $\pm$ 0.7  | 300              |
|                               | 23.6 g/cm <sup>2</sup>  | 2.17            | 0.38                | 1.79 $\pm$ 0.07   | 16.7 $\pm$ 1.7  | 31.8 $\pm$ 1.2  | 320              |
| Th                            | 32.45 g/cm <sup>2</sup> | 1.97            | 0.068               | 1.90 $\pm$ 0.10   | 13.3 $\pm$ 1.4  | 24.4 $\pm$ 1.3  | 320              |
|                               | 62.14 g/cm <sup>2</sup> | 3.87            | 0.041               | 3.83 $\pm$ 0.24   | 15.0 $\pm$ 1.6  | 27.4 $\pm$ 1.7  | 300              |
| Cd                            | 30.71 g/cm <sup>2</sup> | 1.17            | 0.063               | 1.11 $\pm$ 0.04   | 6.85 $\pm$ 0.68 | 7.33 $\pm$ 0.26 | 300              |
|                               | 61.43 g/cm <sup>2</sup> | 1.94            | 0.031               | 1.91 $\pm$ 0.10   | 6.44 $\pm$ 0.64 | 6.89 $\pm$ 0.36 | 270              |
| Cu                            | 29.93 g/cm <sup>2</sup> | 0.690           | 0.059               | 0.631 $\pm$ 0.040 | 3.41 $\pm$ 0.37 | 2.46 $\pm$ 0.16 | 300              |
|                               | 59.82 g/cm <sup>2</sup> | 1.20            | 0.026               | 1.17 $\pm$ 0.04   | 3.50 $\pm$ 0.30 | 2.52 $\pm$ 0.09 | 270              |
| Al                            | 28.8 g/cm <sup>2</sup>  | 0.381           | 0.053               | 0.328 $\pm$ 0.040 | 1.48 $\pm$ 0.22 | 0.58 $\pm$ 0.07 | 300              |
|                               | 57.5 g/cm <sup>2</sup>  | 0.684           | 0.018               | 0.666 $\pm$ 0.042 | 1.69 $\pm$ 0.17 | 0.66 $\pm$ 0.04 | 260              |

MU-8375

Table II  
Data and Results (Cont.)

| Target                         | Thickness   | $\frac{N}{P_n}$ | $\frac{N}{P_n}$ Bgd | $\eta$          | $\bar{N}$       | $\sigma_{1N}$   |
|--------------------------------|-------------|-----------------|---------------------|-----------------|-----------------|-----------------|
| <b>F. 90-Mev Neutron Beam</b>  |             |                 |                     |                 |                 |                 |
| U(4)                           | 1/2 in.     | 1.4             | 0.013               | 1.4 $\pm$ 0.4   | 12.4 $\pm$ 3.8  | 25 $\pm$ 8      |
|                                | 1/2 in.     | 1.26            | 0.03                | 1.23 $\pm$ 0.12 | 10.9 $\pm$ 1.5  | 21.8 $\pm$ 0.7  |
|                                | 1 in.       | 2.36            | 0.03                | 2.33 $\pm$ 0.24 | 11.0 $\pm$ 1.5  | 22.0 $\pm$ 0.8  |
| U(5)                           | 1 in.       | 2.46            | 0.03                | 2.37 $\pm$ 0.25 | 11.1 $\pm$ 1.5  | 22.2 $\pm$ 2.2  |
| U(6)                           | 1-1/8 in.   | 2.80            | 0.03                | 2.68 $\pm$ 0.28 | 11.4 $\pm$ 1.6  | 22.8 $\pm$ 0.4  |
|                                | 3-3/8 in.   | 7.35            | 0.03                | 6.84 $\pm$ 0.73 | 12.4 $\pm$ 1.6  | 24.8 $\pm$ 0.4  |
|                                | 6-3/4 in.   | 10.7            | 0.03                | 9.8 $\pm$ 1.1   | 12.2 $\pm$ 1.4  | 24.4 $\pm$ 0.3  |
|                                | 10-1/8 in.  | 12.2            | 0.03                | 11.1 $\pm$ 1.2  | 12.2 $\pm$ 1.4  | 24.4 $\pm$ 0.4  |
|                                | 14-5/8 in.  | 12.7            | 0.03                | 11.4 $\pm$ 1.3  | 11.8 $\pm$ 1.3  | 23.6 $\pm$ 0.8  |
| Cd                             | 1-3/8 in.   | 0.47            | 0.013               | 0.46 $\pm$ 0.05 | 2.6 $\pm$ 0.3   | 3.1 $\pm$ 0.3   |
| Cu                             | 2-5/8 in.   | 0.86            | 0.013               | 0.85 $\pm$ 0.09 | 2.2 $\pm$ 0.3   | 1.9 $\pm$ 0.2   |
|                                | 1-5/16 in.  | 0.426           | 0.013               | 0.41 $\pm$ 0.04 | 1.9 $\pm$ 0.3   | 1.6 $\pm$ 0.2   |
| Al                             | 4-1/4 in.   | 0.252           | 0.013               | 0.24 $\pm$ 0.02 | 0.91 $\pm$ 0.11 | 0.43 $\pm$ 0.04 |
| C                              | 6-13/16 in. | 0.303           | 0.013               | 0.29 $\pm$ 0.03 | 0.92 $\pm$ 0.12 | 0.22 $\pm$ 0.02 |
| <b>G. 160-Mev Neutron Beam</b> |             |                 |                     |                 |                 |                 |
| U(6)                           | 2-1/4 in.   | 6.6             | 0.4                 | 5.8 $\pm$ 0.04  | 14.2 $\pm$ 1.4  | 28 $\pm$ 3      |
|                                | 5 in.       | 11.2            | 0.4                 | 9.6 $\pm$ 1.1   | 13.9 $\pm$ 1.8  | 27 $\pm$ 3      |
|                                | 9 in.       | 16.4            | 0.4                 | 13.7 $\pm$ 1.6  | 15.6 $\pm$ 1.9  | 30 $\pm$ 3      |
|                                | 15-3/4 in.  | 17.9            | 0.4                 | 14.7 $\pm$ 1.8  | 15.1 $\pm$ 1.8  | 29 $\pm$ 3      |

MU-8376



Table III  
Average Values of  $\bar{N}$ ,  $\sigma_{1N}$ ,  $\bar{N}'$  and  $\sigma_{1N}'$

| Element   | Particle            | Incident Energy (Mev) | $\bar{N}$   | $\sigma_{1N}$ | $\bar{N}'$  | $\sigma_{1N}'$ |
|-----------|---------------------|-----------------------|-------------|---------------|-------------|----------------|
| Uranium   | Deuteron            | 190                   | 9.1 ± 0.3   | 34.9 ± 0.9    | 8.2 ± 0.4   | 16.7 ± 0.8     |
|           |                     | 230                   | 8.2 ± 0.8   | 31.2 ± 1.6    | 7.0 ± 1.0   | 14.0 ± 0.7     |
|           | Proton              | 320                   | 10.8 ± 1.0  | 41.3 ± 2.5    | 9.4 ± 1.2   | 18.9 ± 0.7     |
|           |                     | 340                   | 17.2 ± 0.8  | 33.0 ± 1.4    |             |                |
|           | He <sup>3</sup> Ion | 490                   | 11.0 ± 1.4  | 48.4 ± 4.8    | 7.4 ± 2.3   | 15.9 ± 1.6     |
|           | Neutron             | 90                    | 11.0 ± 1.5  | 22.0 ± 2.5    |             |                |
|           |                     | 160                   | 14 ± 2      | 27 ± 3        |             |                |
| Thorium   | Deuteron            | 190                   | 8.1 ± 0.8   | 30.5 ± 1.0    | 2.4 ± 1.0   | 14.8 ± 0.5     |
|           | Proton              | 340                   | 14.1 ± 1.2  | 25.9 ± 2.2    |             |                |
| Lead      | Deuteron            | 190                   | 6.1 ± 0.6   | 21.0 ± 0.9    | 5.6 ± 0.6   | 10.2 ± 0.4     |
| Tantalum  | He <sup>3</sup> Ion | 490                   | 6.5 ± 0.9   | 23 ± 2        | 4.2 ± 1.5   | 7.2 ± 0.7      |
| Cadmium   | Deuteron            | 190                   | 4.01 ± 0.30 | 9.6 ± 0.3     | 3.6 ± 0.4   | 4.5 ± 0.2      |
|           | Proton              | 340                   | 6.65 ± 0.6  | 7.1 ± 0.3     |             |                |
|           | He <sup>3</sup> Ion | 490                   | 4.4 ± 0.6   | 11.5 ± 1.0    | 3.0 ± 1.0   | 3.7 ± 0.4      |
|           | Neutron             | 90                    | 2.6 ± 0.4   | 3.1 ± 0.3     |             |                |
| Copper    | Deuteron            | 190                   | 2.28 ± 0.20 | 4.02 ± 0.20   | 2.3 ± 0.3   | 1.94 ± 0.09    |
|           | Proton              | 340                   | 3.5 ± 0.3   | 2.49 ± 0.08   |             |                |
|           | Neutron             | 90                    | 2.0 ± 0.3   | 1.7 ± 0.2     |             |                |
| Aluminum  | Deuteron            | 190                   | 1.22 ± 0.01 | 1.22 ± 0.06   | 1.2 ± 0.2   | 0.58 ± 0.04    |
|           | Proton              | 340                   | 1.59 ± 0.15 | 0.62 ± 0.04   |             |                |
|           | Neutron             | 90                    | 0.91 ± 0.15 | 0.43 ± 0.04   |             |                |
| Carbon    | Deuteron            | 190                   | 0.70 ± 0.09 | 0.47 ± 0.04   | 0.88 ± 0.09 | 0.215 ± 0.019  |
|           | Neutron             | 90                    | 0.92 ± 0.15 | 0.22 ± 0.02   |             |                |
| Beryllium | Deuteron            | 190                   | 1.45 ± 0.12 | 0.73 ± 0.03   | 1.8 ± 0.1   | 0.333 ± 0.012  |
| Lithium   | Deuteron            | 190                   | 0.89 ± 0.10 | 0.41 ± 0.03   | 1.0 ± 0.1   | 0.170 ± 0.011  |

MU-8377

Table IV

Ratio of  $\sigma_{IN}$  to Stopping Power of Charged Particles

| Element   | 190-Mev deuterons | 340-Mev protons | 320-Mev deuterons |
|-----------|-------------------|-----------------|-------------------|
| Uranium   | 0.0248            | 0.0509          | 0.0417            |
| Thorium   | 0.0222            | 0.0408          |                   |
| Lead      | 0.0168            |                 |                   |
| Cadmium   | 0.0116            | 0.0192          |                   |
| Copper    | 0.00746           | 0.0105          |                   |
| Aluminum  | 0.00455           | 0.0054          |                   |
| Carbon    | 0.0034            |                 |                   |
| Beryllium | 0.0076            |                 |                   |
| Lithium   | 0.0055            |                 |                   |

Table V

Calculated and Observed External Neutron Yields for Deuterons

| Target                      | $\bar{N}(d)$ | $\bar{N}(n)$ | $y_{calc}(t=0)$ | $y_{obs}$          | t<br>(in.) | $y_{calc}(t=\infty)$ | $y_{obs}$      |
|-----------------------------|--------------|--------------|-----------------|--------------------|------------|----------------------|----------------|
| <b>A. 190-Mev Deuterons</b> |              |              |                 |                    |            |                      |                |
| Uranium                     | 9.1          | 9.0          | 2.38            | $2.34 \pm 0.07$    |            | 3.35                 | 3.32           |
| Thorium                     | 8.1          | 7.8          | 2.15            | $2.14 \pm 0.06$    |            | 3.16                 | 2.95           |
| Copper                      | 2.28         | 1.6          | 0.72            | $0.78 \pm 0.08$    |            | 2.02                 | 1.90           |
| Aluminum                    | 1.22         | 0.7          | 0.42            | $0.46 \pm 0.05$    |            | 1.88                 | 1.90           |
| Carbon                      | 0.70         | 0.7          | 0.30            | ---                |            | 2.38                 | 2.3            |
| Beryllium                   | 1.45         | 0.7          | 0.65            | $0.91 \pm 0.09(?)$ |            | 2.88                 | 2.90           |
| <b>B. 320-Mev Deuterons</b> |              |              |                 |                    |            |                      |                |
| Uranium                     | 10.8         | 16           | 6.2             | $(6.7 \pm 0.2)$    | 8-1/2      | 11.1                 | $9.43 \pm 0.3$ |
| Carbon                      | 0.83         | 1.3          | 0.76            | $1.2 \pm 0.2$      | 10-1/8     | 7.5                  | $4.3 \pm 0.2$  |
| Beryllium                   | 1.72         | 1.3          | 1.5             | $1.9 \pm 0.2$      | 8-1/2      | 7.9                  | ---            |

Table VI

Ratio of Stripping Cross Section to Rate of Energy Loss for Deuterons

| Element   | $\sigma_{2s}$<br>(barns) | 190-Mev deuterons<br>$\sigma_{2s}/(dE/dx)$ | 320-Mev deuterons<br>$\sigma_{2s}/(dE/dx)$ |
|-----------|--------------------------|--|--|
| Uranium   | 1.78                     | 0.00127                                    | 0.00274                                    |
| Thorium   | 1.76                     | 0.00128                                    |  |
| Lead      | 1.63                     | 0.00130                                    |  |
| Cadmium   | 1.16                     | 0.00140                                    |  |
| Copper    | 0.91                     | 0.00172                                    |  |
| Aluminum  | 0.53                     | 0.00197                                    |  |
| Carbon    | 0.42                     | 0.00306                                    |  |
| Beryllium | 0.32                     | 0.00332                                    |  |
| Lithium   | 0.30                     | 0.00402                                    |  |

Table VII

Ratio of Stripping Cross Section to Stopping Power of 190-Mev Deuterons Multiplied by  $\bar{N}(n)$  for Uranium

| Element   | $\frac{\sigma_{2s}}{dE/dx} \bar{N}(n)$ | $\frac{\sigma_{1N}}{dE/dx} + \frac{\sigma_{2s}}{dE/dx} \bar{N}(n)$ |
|-----------|--|--|
| Uranium   | 0.0140                                 | 0.0388   |
| Thorium   | 0.0141                                 | 0.0363   |
| Lead      | 0.0143                                 | 0.0311   |
| Cadmium   | 0.0154                                 | 0.0280   |
| Copper    | 0.0189                                 | 0.0264   |
| Aluminum  | 0.0217                                 | 0.0263   |
| Carbon    | 0.0337                                 | 0.0371   |
| Beryllium | 0.0366                                 | 0.0442   |
| Lithium   | 0.0443                                 | 0.0498   |

Table VIII  
 Calculated and Observed Ratios of Yields for 190-Mev Deuterons

| Element   | $\frac{\sigma_{1N}}{dE/dx}$ | Observed<br>Primary<br>Target Yield | $\frac{\sigma_{2s}}{dE/dx}$ | Observed<br>Secondary<br>Target Yield | Sum   | Observed Total<br>External Yield |
|-----------|-----------------------------|-------------------------------------|-----------------------------|---------------------------------------|-------|----------------------------------|
| Uranium   | 1.000                       | 1.000                               | 1.00                        | 1.00                                  | 1.000 | 1.000                            |
| Thorium   | 0.895                       | 0.915                               | 1.01                        | 0.85                                  | 0.935 | 0.89                             |
| Lead      | 0.676                       | ---                                 | 1.02                        | --                                    | 0.801 | --                               |
| Cadmium   | 0.468                       | ---                                 | 1.10                        | --                                    | 0.721 | --                               |
| Copper    | 0.301                       | 0.334                               | 1.35                        | 1.35                                  | 0.680 | 0.57                             |
| Aluminum  | 0.183                       | 0.196                               | 1.55                        | 1.69                                  | 0.677 | 0.45                             |
| Carbon    | 0.137                       | ---                                 | 2.41                        | --                                    | 0.955 | 0.57                             |
| Beryllium | 0.306                       | 0.389                               | 2.62                        | 2.02                                  | 1.140 | 0.87                             |
| Lithium   | 0.222                       | ?                                   | 3.16                        | ?                                     | 1.283 | ?                                |

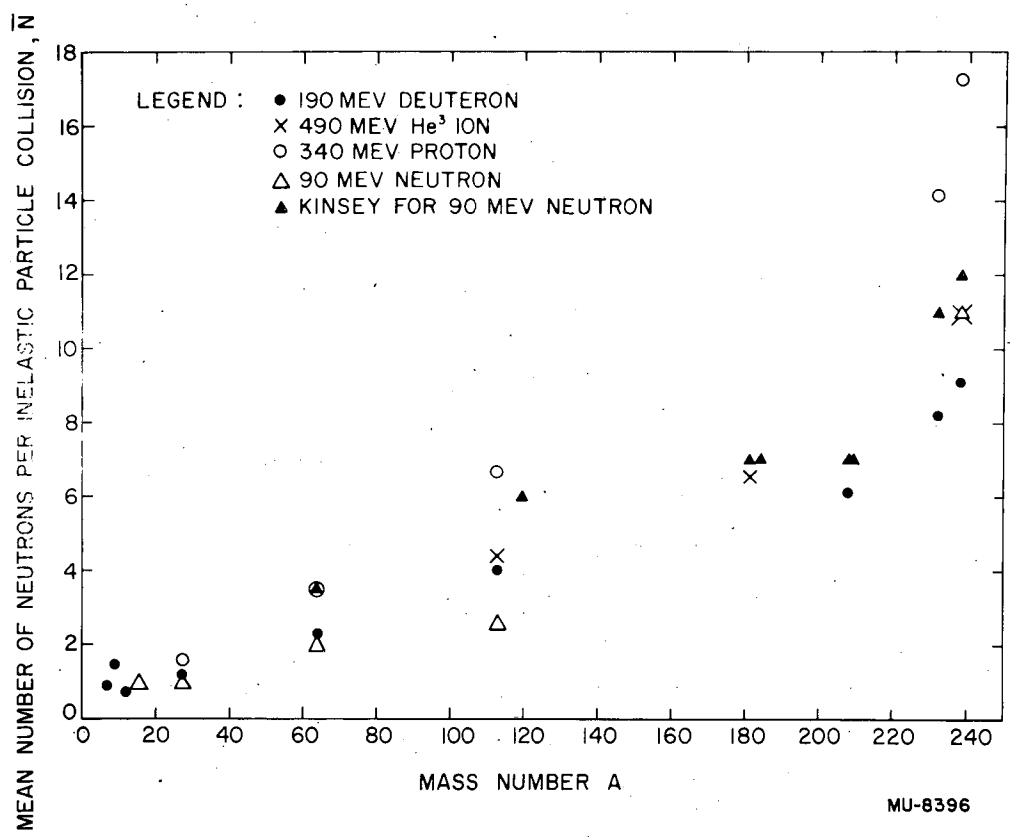


Figure 1

The mean number of neutrons produced per inelastic collision of an incident particle as given by Eq. (1) of the text vs. mass number A of the target. The values of  $\bar{N}$  for 90-Mev neutrons from this report and Kinsey's experiment are not directly comparable because different inelastic cross sections were used; correcting his cross section for uranium brings his value down to 11 but does not remove the discrepancy at copper and the apparent discrepancy near A = 110.

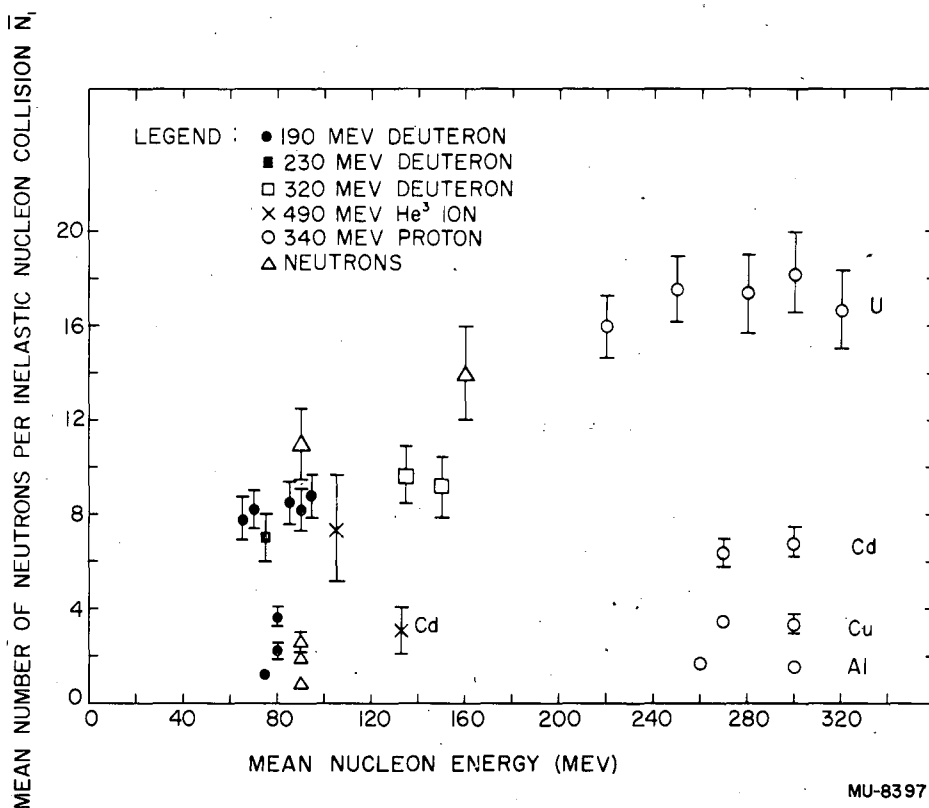


Figure 2

The mean number of neutrons produced per inelastic collision of an incident nucleon as given by Eq. (3) of the text vs. mean nucleon energy. Points are shown for uranium, cadmium, copper and aluminum targets. The mean energy was taken to be the energy of the nucleon (particle energy divided by number of nucleons in the particle) at the middle of the target. The variation of energy for the same particle is the result of using targets of different thicknesses. The data for the low-A elements from 90-Mev neutrons appear to be systematically low as compared with the trend for uranium.

DECLASSIFIED


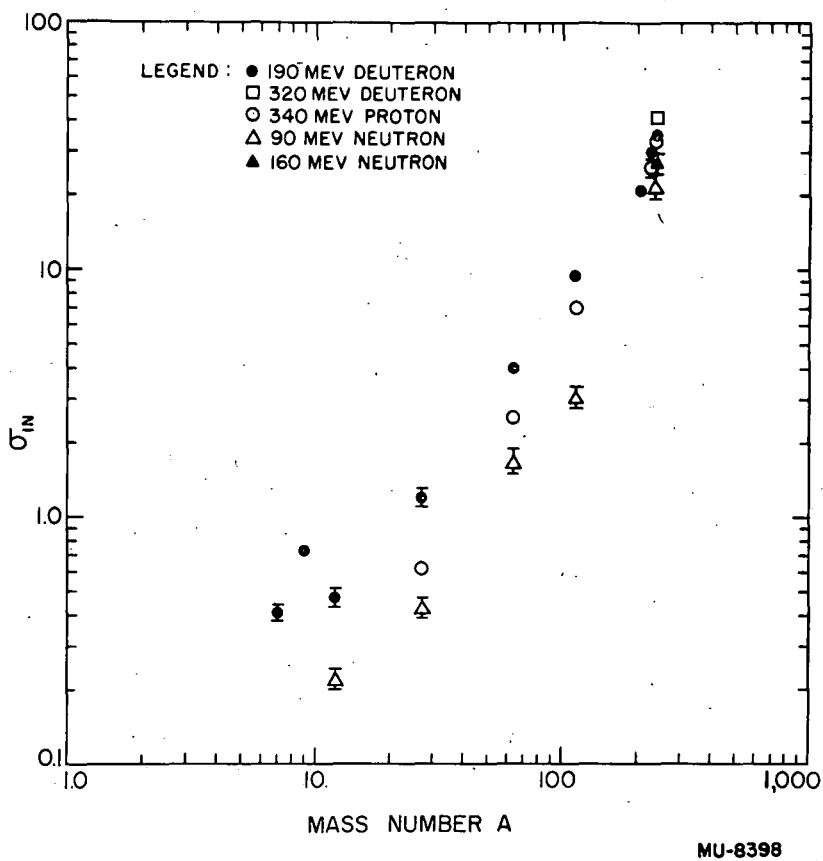


Figure 3

The cross section for producing one neutron as given by Eq. (2) of the text vs. mass number A of the target.

DECLASSIFIED

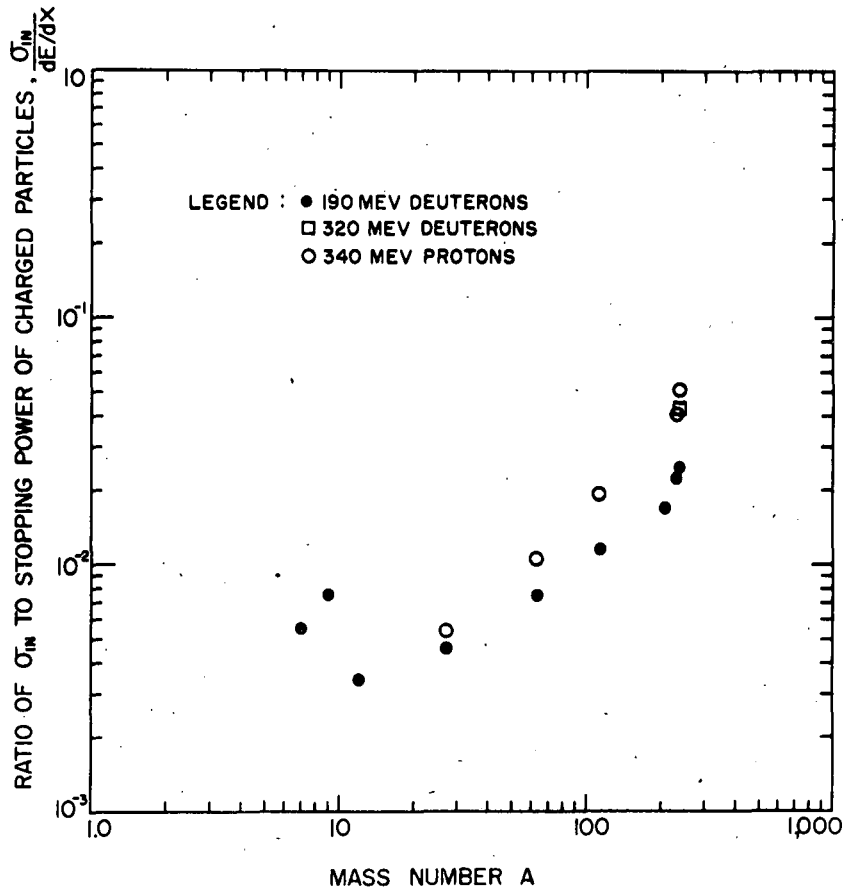


MU-8399

Figure 4

The ratio of  $\sigma_{in}$  to stopping power per atom for charged particles as a function of the target mass number. The points should be roughly proportional to the neutron yield from targets of one range or less thickness.



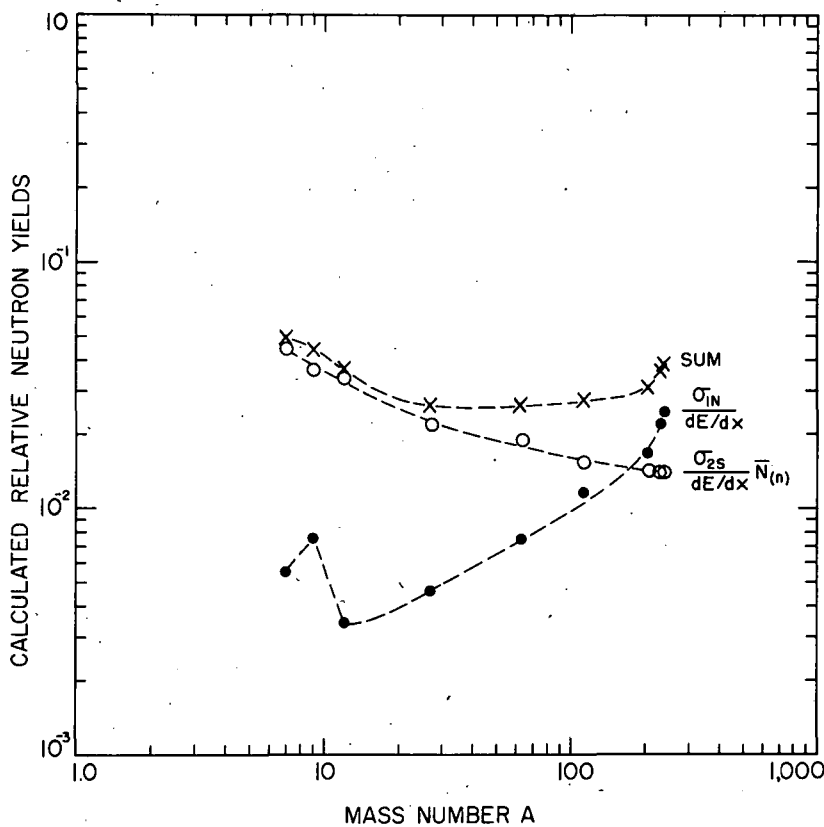

MU-8400

Figure 5

The quantities  $[\sigma_{1N}/(dE/dx)]$ ,  $[\sigma_{2S}/(dE/dx)]\bar{N}(n)$ , and their sum for 190-Mev deuterons as a function of the target mass number. The solid dots are  $\sigma_{1N}/(dE/dx)$  and should be roughly proportional to the yield from targets up to one range thick; the open dots are  $[\sigma_{2S}/(dE/dx)]\bar{N}(n)$  (where  $\bar{N}(n)$  is the average number of neutrons produced when a 60-Mev neutron has an inelastic event in uranium) and should be roughly proportional to the yield from a primary target of mass number A backed by a thick uranium secondary target. For comparison with observed results, see Table VIII.

DECLASSIFIED  
~~SECRET~~

DECLASSIFIED

-29-

UCRL-2706

REFERENCES

1. W. E. Crandall and G. P. Millburn, Total Neutron Yield from Targets Bombarded by Deuterons and Protons, University of California Radiation Laboratory Report No. UCRL-2063.
2. J. Ise, Jr., R. Pyle, D. Hicks, and R. Main, The Production of 320-Mev Deuterons by He<sup>3</sup> Stripping, University of California Radiation Laboratory Report No. UCRL-2319 (2nd rev.); see also Rev. Sci. Instr. 25, 437 (1954).
3. We are indebted to Prof. E. O. Lawrence, who supplied copies of Monte Carlo calculations communicated to him by H. Mc Manus and W. Sharp.
4. Frank S. Crawford, Jr., Rev. Sci. Instr. 24, 552 (1953).
5. B.B. Kinsey, unpublished.

DECLASSIFIED

~~SECRET~~

~~SECRET~~

DECLASSIFIED

~~SECRET~~