

# UC Berkeley

## Planning & Evaluation

### Title

Public Health Benefits Of End-Use Electrical Energy Efficiency In California: An Exploratory Study

### Permalink

<https://escholarship.org/uc/item/8xx955x2>

### Authors

McKone, Thomas E.  
Lobscheid, Agnes B.

### Publication Date

2006-06-01

# **PUBLIC HEALTH BENEFITS OF END-USE ELECTRICAL ENERGY EFFICIENCY IN CALIFORNIA: AN EXPLORATORY STUDY**

*Prepared For:*  
**California Energy Commission**  
Public Interest Energy Research Program

*Prepared By:*  
**E. O. Lawrence Berkeley National  
Laboratory**



Arnold Schwarzenegger  
*Governor*

**PIER DRAFT PROJECT  
REPORT**

June 2006  
CEC-500-2006-xxx



***Prepared By:***

E. O. Lawrence Berkeley National Laboratory  
Dr. Thomas E. McKone, Principal Investigator  
Dr. Agnes B. Lobscheid, Principal Research Associate  
Berkeley, California

Contract No. 500-02-004  
Work Authorization MR-035

***Prepared For:***

California Energy Commission  
Public Interest Energy Research (PIER) Program

Gina Barkalow,  
***Contract Manager***

Kelly Birkinshaw,  
***Program Area Team Lead***

Martha Krebs, Ph.D.  
***Deputy Director***  
**ENERGY RESEARCH AND DEVELOPMENT  
DIVISION**

B. B. Blevins  
***Executive Director***

**DISCLAIMER**

This report was prepared as the result of work sponsored by the California Energy Commission. It does not necessarily represent the views of the Energy Commission, its employees or the State of California. The Energy Commission, the State of California, its employees, contractors and subcontractors make no warrant, express or implied, and assume no legal liability for the information in this report; nor does any party represent that the uses of this information will not infringe upon privately owned rights. This report has not been approved or disapproved by the California Energy Commission nor has the California Energy Commission passed upon the accuracy or adequacy of the information in this report.

## Preface

The Public Interest Energy Research (PIER) Program supports public interest energy research and development that will help improve the quality of life in California by bringing environmentally safe, affordable, and reliable energy services and products to the marketplace.

The PIER Program, managed by the California Energy Commission (Energy Commission) conducts public interest research, development, and demonstration (RD&D) projects to benefit the electricity and natural gas ratepayers in California. The Energy Commission awards up to \$62 million annually in electricity-related RD&D, and up to \$12 million annually for natural gas RD&D.

The PIER program strives to conduct the most promising public interest energy research by partnering with RD&D organizations, including individuals, businesses, utilities, and public or private research institutions.

PIER funding efforts are focused on the following RD&D program areas:

- Buildings End-Use Energy Efficiency
- Industrial/ Agricultural/Water End-Use Energy Efficiency
- Renewable Energy Technologies
- Environmentally Preferred Advanced Generation
- Energy-Related Environmental Research
- Energy Systems Integration

*Public Health Benefits of End-Use Electrical Energy Efficiency in California: An Exploratory Study* is the final report for the Public Health Benefits of End-Use Electrical Energy Efficiency in California project (contract number 500-02-004) conducted by Lawrence Berkeley National Laboratory. The information from this project contributes to PIER's Energy-Related Environmental Research program.

For more information on the PIER Program, please visit the Energy Commission's Web site at [www.energy.ca.gov/pier](http://www.energy.ca.gov/pier) or contact the Energy Commission at (916) 654-5164.

## Table of Contents

Preface .....	i
Abstract .....	vi
Executive Summary .....	1
1.0 Introduction .....	4
1.1. Background and Overview .....	4
1.2. Project Objectives .....	5
1.3. Report Organization .....	6
2.0 Project Approach and Methods .....	6
2.1. Scope of the Analysis .....	7
2.1.1. Framework definition—concept and approach .....	8
2.1.2. Portfolio of energy production technologies .....	9
2.1.3. Energy end-use reduction technologies .....	9
2.1.4. Pollutant categories and human exposure .....	9
2.1.5. Health effects categories .....	10
2.1.6. Boundaries for the time and spatial scale of health impacts .....	10
2.2. Location and Relative Magnitude of Emissions .....	10
2.3. Dispersion, Exposure and Intake of Emissions to Air .....	13
2.3.1. Calculations of environmental dilution .....	15
2.3.2. Human exposure and intake .....	16
2.4. Estimating and Expressing Disease Burden .....	17
2.4.1. The effect factor ( $EF_x$ ) for cancer .....	18
2.4.2. The effect factor ( $EF_x$ ) for non-cancer effects .....	19
2.5. The Magnitude and Uncertainty of Any Added or Averted Disease Burden .....	21
2.5.1. Energy and emissions reductions resulting from residential fiberglass attic insulation .....	21
2.6. Emissions from Fiberglass Manufacturing .....	24
3.0 Project Results .....	26
3.1. Magnitude and Location of Emissions .....	26
3.2. Levels of Human Exposure .....	30
3.3. Results for the Disease Burden Calculations .....	31
3.3.1. Effect factors ( $EF_x$ ) for cancer and non-cancer diseases .....	31
3.3.2. Human damage factors (HDFs) for cancer and non-cancer diseases .....	33
3.4. Estimates of Disease Burden Added or Averted: Residential Attic Insulation Case Study .....	34
3.4.1. Energy savings and resulting emissions and disease burden reductions .....	34
3.4.2. Emissions and energy analysis for fiberglass insulation manufacturing .....	38
4.0 Conclusions and Recommendations .....	42
4.1. Conclusions .....	42

4.1.1. Providing a roadmap to organize a health benefits study for energy efficiency .....	42
4.1.2. Demonstrating use of life-cycle impact assessment tools to fill in this roadmap.....	42
4.1.3. Providing an informative case study to illustrate how one can construct and evaluate a health benefits study for energy efficiency improvements in California.....	43
4.2. Commercialization Potential (not applicable) .....	44
4.3. Recommendations.....	44
4.4. Benefits to California .....	45
5.0 References.....	46
6.0 Glossary and List of Acronyms.....	50
Appendix A: Tables of Data Used to Estimate Pollutant Emissions per MWe-y.....	54
Appendix B: Intermediate Results for the Individual Intake Fraction and Effect Factors Used to Calculate Human Damage Functions (HDFs) .....	67
Attachment I: List of (A) Urban and (B) Rural Power Plants and Their Associated Fuel Type and Technology and Online MWe Sorted By County Of Location .....	74

**List of Figures**

Figure 1. Typical applications and phases of a life-cycle analysis (adapted from Pennington et al., 2004 and based on ISO 14040, 1997) .....	5
Figure 2. The conceptual framework and key elements of this study .....	8
Figure 3. Fuel type contribution to total online-MWe (62,264 MWe) produced and consumed in California <sup>a</sup> .....	11
Figure 4. The elements of the CalTOX multimedia fate and exposure model .....	14
Figure 5. Materials and processes involved in the manufacture of fiberglass insulation (adapted from: EPA, 1985).....	25

**List of Tables**

Table 1. Physical-chemical properties of pollutants included in this report .....	15
Table 2. The population and total area (land & water) of the study regions.....	16
Table 3. Assumptions and conversion factors used to calculate the cancer EF <sub>x</sub> .....	19
Table 4. Distribution of attic (and cathedral ceiling for those housing units built after 1992) insulation R-values [ft <sup>2</sup> -hr °F/Btu] for electricity heated homes from the 2001 DEER study (Energy Commission, 2001).....	22
Table 5: Median Area <sub>roof</sub> [ft <sup>2</sup> ] of single-family housing units in California from DEER 2001 (Energy Commission, 2001).....	22

Table 6. ΔEnergy associated with increased insulation per single-family home [Btu/yr] .....	23
Table 7. Distribution of electricity heated homes for the Western region of the US <sup>a</sup> .....	23
Table 8. Emissions estimates [kg/MWe-y] from coal, natural gas, oil, and WTE primary fuel powered electricity generating plants in a) urban and b) rural regions of California.....	28
Table 9. Median values of the <i>iFi</i> [-] for each pollutant in each region.....	31
Table 10. The E <sub>Fx</sub> estimates for each pollutant .....	32
Table 11. Chemical specific HDFs (DALYs/kg emitted) for cancer, non-cancer and premature mortality health effects in the population of regions of California .....	33
Table 12. Ranges of total emission savings [kg] over 50-year assumed lifetime of fiberglass insulation in urban and rural regions [kg], respectively. ....	36
Table 13. DALYs saved per Mt insulation installed. Values shown represent the midpoint of the value range based on the range of emissions given in Table 12. ....	37
Table 14. Estimated emissions from manufacturing 1.1 Mt of residential attic insulation compared to emissions eliminated by reduced electricity production over 50 years .....	39
Table 15. Summary of the Characteristic Travel Distance (CTD), area, population size and DALYs/Mt insulation manufactured. ....	40

## Acknowledgements Page

This work was supported by the California Energy Commission (Energy Commission) Public Interest Research Environmental Research Program (PIER). The authors are grateful to the Energy Commission for this research support. This work was also supported in part by the US Environmental Protection Agency National Exposure Research Laboratory through Interagency Agreement #DW-89-93058201-1. All the work on this study and report was carried out at Lawrence Berkeley National Laboratory through the US Department of Energy under Contract Grant No. DE-AC02-05CH11231.

All spreadsheets used in this report are available upon request from the author(s).

## Citation

Lobscheid, Agnes B. and Thomas E. McKone 2006. *Public Health Benefits of End-Use Electrical Energy Efficiency in California: An Exploratory Study*. Lawrence Berkeley National Laboratory report LBNL-59669. California Energy Commission, PIER. XXX-XX-XXX.



## Abstract

This study assesses for California how increasing end-use electrical energy efficiency from installing residential insulation impacts exposures and disease burden from power-plant pollutant emissions. Installation of fiberglass attic insulation in the nearly 3 million electricity-heated homes throughout California is used as a case study. The pollutants nitrous oxides (NO<sub>x</sub>), sulfur dioxide (SO<sub>2</sub>), fine particulate matter (PM<sub>2.5</sub>), benzo(a)pyrene, benzene, and naphthalene are selected for the assessment. Exposure is characterized separately for rural and urban environments using the CalTOX model, which is a key input to the US Environmental Protection Agency (EPA) Tool for the Reduction and Assessment of Chemicals and other environmental Impacts (TRACI). The output of CalTOX provides for urban and rural populations emissions-to-intake factors, which are expressed as an individual intake fraction (*iFi*). The typical *iFi* from power plant emissions are on the order of 10<sup>-13</sup> (g intake per g emitted) in urban and rural regions. The cumulative (rural and urban) product of emissions, population, and *iFi* is combined with toxic effects factors to determine human damage factors (HDFs). HDF are expressed as disability adjusted life years (DALYs) per kilogram pollutant emitted. The HDF approach is applied to the insulation case study. Upgrading existing residential insulation to US Department of Energy (DOE) recommended levels eliminates over the assumed 50-year lifetime of the insulation an estimated 1000 DALYs from power-plant emissions per million tonne (Mt) of insulation installed, mostly from the elimination of PM<sub>2.5</sub> emissions. In comparison, the estimated burden from the manufacture of this insulation in DALYs per Mt is roughly four orders of magnitude lower than that avoided.

# Executive Summary

## Introduction

In 2004, more than 62 gigawatts (GW) of installed generating capacity produced electric energy for consumption in California. Methods of life-cycle impact assessment are applied in this study to assess for the California region how increasing energy efficiency from installing residential insulation impacts population exposures to air pollutants and the associated disease burden. For both the current mix of electrical energy producing technologies and for insulation manufacturing the locations, emissions, and disease burdens associated with insulating new and existing residences are considered.

## Purpose

The purpose of this report is to confront the problem of quantifying both the public health hazards avoided and those substituted by increasing end-use efficiency of electricity use in California. The generation, transmission, and use of electricity have all been demonstrated to have adverse impacts on the environment. Increasing the efficiency of electricity use provides public health benefits by reducing emissions from fuel combustion on other energy system components. But efficiency gains have cost implications and their own set of potential health risks. There is clearly a need for consumers, businesses and decision makers to have better information on the relative health benefits of using energy more efficiently. But there is a need for research to move beyond a qualitative understanding of this issue by specifically quantifying the changes in both emissions and source-to-dose relationships for energy-related pollutants in a large and well-characterized market such as California.

## Objectives

This report describes a definition study rather than a comprehensive life-cycle-assessment. In this context, the objectives of this project are to

- provide the roadmap to organize a health benefits study for energy efficiency;
- demonstrate the use of life-cycle impact assessment tools such as the US Environmental Protection Agency (EPA) TRACI/CalTOX system (Bare et al. 2002) to fill in this road map; and
- provide an informative case study to illustrate how one can construct and evaluate a health benefits study for a energy-efficiency improvements in California.

To meet these project objectives the research team employed standard life-cycle impact assessment (LCIA) methods that have been developed for evaluating and allocating the health and environmental impacts of energy technologies.

The key elements of the framework used to quantify life-cycle benefits and impacts of energy efficiency are the conceptual model; the computational models and how they are applied; and the sources, types, and values of data used as model inputs. The conceptual framework for allocating impacts is derived from the methods of life-cycle assessment and comparative risk assessment. US EPA and Energy Commission databases are used for determining emissions locations and magnitude. Exposure assessments are based on regional mass-balance models for

criteria pollutants and regional multimedia fate models for hazardous air pollutants. Exposure is used to calculate intake, which is the basis for calculating disease burden. Disability adjusted life years (DALYs) provide the measure of disease burden in the comparative calculations. The subsections below provide details on how these elements are combined to evaluate energy efficiency. The focus is on technology-specific reductions in energy production in California corresponding to increasing insulation use and on how these reductions impact exposure to a portfolio of pollutants and reduce disease burden.

## **Outcomes**

The study focuses on nitrous oxides (NO<sub>x</sub>), sulfur dioxide (SO<sub>2</sub>), fine particulate matter (PM<sub>2.5</sub>), benzo(a)pyrene (BaP), benzene, and naphthalene emissions from electricity generating plants in California. Exposure is characterized separately for rural and urban environments using the CalTOX model, which was employed for exposure assessment in the US EPA Tool for the Reduction and Assessment of Chemicals and other environmental Impacts (TRACI). The output from CalTOX provides for urban and rural populations emissions-to-intake factors, which are expressed as an individual intake fraction (*iFi*). The cumulative (rural and urban) product of emissions, population, and *iFi* is combined with toxic effects factors to determine human damage factors (HDFs). HDFs are expressed in disability adjusted life years (DALYs) per kilogram pollutant emitted. As a case study, this report quantifies changes in emissions and disease burden from installation of fiberglass attic insulation in the nearly 3 million electricity-heated homes throughout California. These estimates are compared with disease burden from insulation manufacturing.

In urban regions of California, estimated typical individual intake fractions (*iFi*) from power plant emissions are on the order of 10<sup>-13</sup> (10<sup>-15</sup> for BaP) in urban and rural regions. HDFs are dominated by premature mortality due to inhalation of PM<sub>2.5</sub>. HDFs for PM<sub>2.5</sub> are roughly two orders of magnitude greater than inhalation exposure HDFs of the other five chemicals. Upgrading existing residential insulation to US Department of Energy (DOE) recommended levels eliminates over the estimated 50-year lifetime of the insulation approximately 1000 DALYs from power-plant emissions per million metric ton (Mt) of insulation installed, mostly from the elimination of PM<sub>2.5</sub>, and to a lesser extent NO<sub>x</sub>, emissions. In comparison, the manufacture of this insulation results in an estimated DALY per Mt that is roughly four orders of magnitude less than DALY avoided.

## **Conclusions**

This study was successful in organizing the roadmap, data, and computational tools needed to assess both disease burden and health benefits from changes in energy production/consumption in California. The framing of this problem produced a repository of important information that will be useful for future comparative studies.

The researchers demonstrated the use of the and LCIA approach (TRACI/CalTOX) to determine how atmospheric emissions from electricity generating plants distribute in the environment and what populations are impacted. Overall, this study was successful in demonstrating the use of the TRACI/CalTOX-type framework in assessing pollutant emissions from electricity producing plants in California and the associated non-cancer and cancer disease burdens.

The research team was able to construct a case study on the disease burdens averted due to the installation of approximately 1.1 million metric tons (Mt) of additional fiberglass attic insulation to reach DOE recommended levels, in California residences. Based on a 50-year assumed lifetime of the installed insulation, the avoided disease burden is approximately  $10^3$  DALYs from power-plant emissions per Mt of insulation installed, mostly from the elimination of PM<sub>2.5</sub> and to a lesser extent, NO<sub>x</sub>, emissions. When compared with the disease burden associated with the manufacture of this additional insulation, this study concludes that the DALYs per Mt of fiberglass insulation manufactured are four orders of magnitude less than those avoided.

### **Recommendations**

The demonstrated utility of the LCIA framework for this study supports the need to evaluate the utility of this approach for other comparative health benefits studies. For example, this framework could also be used to assess the health benefits of fuel efficiency in the transportation sector.

The successful application of the TRACI-CalTOX-type of LCIA approach reveals the value of exploring whether and how this system could be applied to life-cycle studies of other energy production and energy efficiency technologies. Because existing LCIA methods have been developed for generic applications in life-cycle assessment, there is a need for research to expand, test, and support use of LCIA methods for comparative energy assessments in California.

Estimates of PM<sub>2.5</sub> emissions and disease burden resulting from the manufacture of fiberglass insulation are so limited by uncertainty that a formal uncertainty analysis is needed to confirm conclusions about net health benefits of fiberglass insulation. Also, there is a need to consider a broader range of pollutant emissions, such as secondary aerosols, to assure that the PM<sub>2.5</sub> is indeed the dominant contributor to disease burden.

### **Benefits to California**

By including energy efficiency in comparative assessments for the current mix of energy technologies, the results and, in particular, the methods and data of this study, provide benefits to energy planning for California. Among the key benefits are:

- a potential tool for more informed decision making, based on the ability to aggregate and systematically evaluate information on potential environmental implications of alternative energy systems in the context of energy efficiency choices;
- an example of how this tool could be used to make decisions about improvement options for environmental quality by identifying optimal areas for reducing emissions/effluents, etc., on the basis of a comparative assessment of population disease burden associated with alternative supply and end-use management options; and
- an example of a more systematic approach for consideration of potential environmental and human health effects within the broader decision making process.

## **1.0 Introduction**

### **1.1. Background and Overview**

Over recent decades, there has been extensive research to assess and compare the health risks of electrical energy production, but little effort to use these studies to determine the benefits of increasing end-use efficiency. No existing research has confronted the more specific question of the net public health benefits that accrue from increasing end-use efficiency in California or nationally. The goal of this exploratory project is to construct and evaluate a framework to calculate exposure reductions and the corresponding health benefits of increasing the end-use efficiency of electric energy in California. Examples of recent studies on the impacts of electricity production are the United Nations International Atomic Energy Agency (IAEA) study on the comparative health and environmental impacts of electricity generation systems (IAEA 1999) and the ExternE project (ExternE 2004). These studies take a fuel cycle approach, where impacts from fuel acquisition through waste disposal are estimated. The results provide useful insights and help promote further studies of impacts for many more technologies, sites and regions. However, because these comparative studies have to date excluded energy efficiency in the mix of technologies considered, there remains an important gap in the information available to policy makers for making well-informed decisions on energy choices for California. The focus of this study is emissions, environmental fate, human exposure and indicators of public health impact that apply to end-use efficiency.

The subject area of the report is the problem of quantifying both public health hazards and health risks avoided and those substituted by increasing end-use efficiency in California. The generation, transmission, and use of electricity have all been demonstrated to have adverse impacts on the environment (ORNL 1992; Ontario Hydro 1993; Dincer 1999; IAEA 1999; ExternE 2004; Bare et al. 2002). Increasing the efficiency of electricity use provides public health benefits by reducing emissions from fuel combustion on other energy system components. But efficiency gains have cost implications and their own set of potential health risks. There is clearly a need for consumers, businesses and decision makers to have better information on the relative health benefits of using energy more efficiently. Often end-use reduction technologies are evaluated only in terms of their relative cost savings based on the financial cost of equipment purchase and deployment. Environmental health scientists recognize that there are clear health benefits to reduced energy production. But there is a need for research to move beyond a qualitative understanding of this issue by specifically quantifying the changes in both emissions and source-to-dose relationships for energy-related pollutants in a large and well-characterized market such as California.


The research goal of this project is to quantify the energy-related environmental and public health benefits of efficiency using comparative health assessments. These assessments are designed to capture differences in impact among alternative production and efficiency technologies. By including energy efficiency in the mix of technologies encompassed in comparative assessments, the results of this study will contribute to more informed decision making. This exploratory study therefore provides more complete information on potential environmental and health implications of alternative energy systems in the context of energy efficiency choices.

## 1.2. Project Objectives

Fuel cycles for energy production technologies can be characterized in terms of an upstream phase (resource extraction, component manufacture, fuel extraction, etc), a production phase (the actual electricity production facility), and a waste-management phase. Similarly, technologies for the efficient end-use of electricity have upstream, use, and disposal phases. To quantify cumulative health impacts for all these stages requires a life-cycle approach. Given the limited timeframe and budget for exploratory grants, this report describes a definition study rather than a comprehensive life-cycle assessment. In this context, the objectives of this project are to

- provide the roadmap to organize a health benefits study for energy efficiency;
- demonstrate the use of life-cycle impact assessment tools such as the US Environmental Protection Agency (EPA) TRACI/CalTOX system (Bare et al. 2002) to fill in this road map; and
- provide an informative case study to illustrate how one can construct and evaluate a health benefits study for a energy-efficiency improvements in California.

To meet these project objectives, the research team employed standard life-cycle impact assessment (LCIA) methods that have been developed for evaluating and allocating the health and environmental impacts of energy technologies (Guinée and Heijungs 1993; Guinée et al. 1996; Hertwich et al. 1998 and 2001; Hoffstetter 1998; IAEA 1999; Huijbregts et al. 2000; Bare et al. 2002; ExternE 2004). These methods provide a quantitative assessment of the contribution of life-cycle inventory data to environmental impacts, including human health effects. As shown by Figure 1, LCIA is a key phase in any LCA. Because this LCIA study primarily focuses on potential health benefits, it does not have an economic or epidemiological focus.

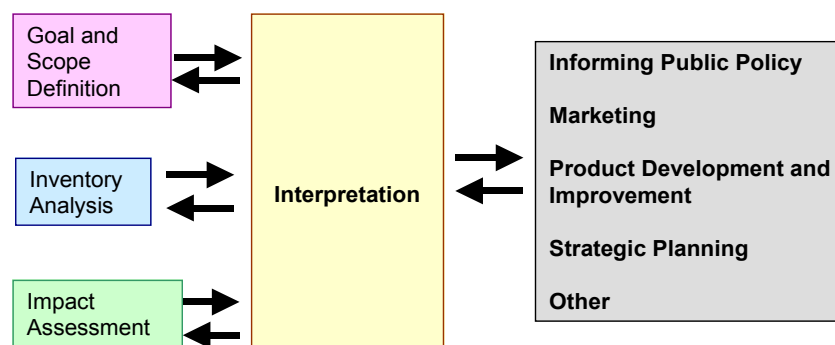

**Figure 1. Typical applications and phases of a life-cycle analysis (adapted from Pennington et al., 2004 and based on ISO 14040, 1997)**

In the overall benefits framework, health impacts for energy production fuel cycles are based on criteria air pollutants, hazardous air pollutants, and hazardous substances released to water or transferred to disposal sites. Because these substances give rise to both cancer and non-cancer health endpoints, this exploratory assessment employs a single measure of potential harm by translating all health impacts into a single measure of disease burden—the disability or disease adjusted life years (i.e., DALYs). A substantial benefit to the DALY approach is that the chemicals with different health endpoints can be compared with each other on the same scale of health damage.

To demonstrate the framework for assessing net efficiency benefits for California, this report describes an initial case study based on particulate matter (PM 2.5), nitrous oxides (NO<sub>x</sub>), SO<sub>2</sub>, and toxic air pollutants (TAPs) including benzene and two polycyclic aromatic hydrocarbons, benzo(a)pyrene (BaP) and naphthalene. The current mix of energy technologies employed to produce electricity in California provides the emissions baseline used to estimate the net health benefits of increasing the use of insulation in California residences. In this exploratory, first-tier scoping study, the case study addresses the use of fiberglass attic insulation in existing residences. Therefore, the primary life-cycle inventory data used in this report is restricted to atmospheric emissions of selected pollutants from electricity generating power plants and from the manufacturing of energy efficient end-use technologies. This study does not focus on indoor sources of exposure or on the associated health effects from the indoor exposure to the chemicals considered in this study as releases to ambient air. Additionally, this research does not consider the economic impacts or other implications of installing the fiberglass insulation in California residences.

### **1.3. Report Organization**

The remainder of this report is organized into three major sections—approach and methods, project results, and conclusions and recommendations. The approach and methods section provides information on the conceptual framework for the LCIA calculations, the models used, and the sources of data for these models. Emphasis here is placed on pollutant emissions, pollutant transport, human exposure, and resulting health effects from energy production in California. There is also an emphasis in the methods section on how one defines emissions and release locations for the current mix of technologies used to produce energy in California. Separate attention is given to insulation manufacture and use—with a focus on both energy saved and environmental emissions. Following the methods section is a results section that provides a detailed summary of quantitative findings along with an evaluation of these results. This is followed by a conclusions and recommendations section that summarizes for this study the key findings and the recommendations for energy technologies in California. This section also considers the benefits to California of implementing these recommendations.

### **2.0 Project Approach and Methods**

The key elements of the framework used to quantify life-cycle benefits and impacts of energy efficiency are the conceptual model; the computational models and how they are applied; and the sources, types, and values of data used as model inputs. The conceptual framework for allocating impacts is derived from the methods of life-cycle assessment and comparative risk assessment. US EPA and Energy Commission databases are used for determining emissions locations and magnitude. Exposure assessments are based on the output from multimedia,

multi-pathway models. These models typically estimate exposure based on the principle of mass balance, which matches emissions to both environmental dispersion and losses through transport and chemical transformation. LCIA relies primarily on regional multimedia models that are applicable over spatial scales from roughly 100 to 100,000 km<sup>2</sup>, to estimate human exposure to criteria and hazardous air pollutants. In LCIA it is commonplace to characterize exposures that are representative of an archetypal individual in a given region. Exposure is used to calculate human intake, which is the basis for calculating disease burdens in the population, through the use of the disability adjusted life years (DALYs) metric. DALYs provide the measure of disease burden in the comparative calculations. A substantial benefit to the DALY approach is that the chemicals can be compared with each other, on the same scale of harm.


The subsections below provide details on how these elements are combined to evaluate energy efficiency health benefits. The focus is on technology-specific reductions in energy production in California corresponding to increasing insulation use and on calculations of how the additional insulation changes exposures to a portfolio of pollutants and the corresponding reduction in disease burden.

## **2.1. Scope of the Analysis**

In setting the scope of this study, the researchers had to select the portfolio of energy production technologies, the portfolio of demand-side reduction technologies, pollution categories and data, pollutant transport models, assumptions about human exposure to these pollutants, and the health effects categories. To facilitate these selections, the proposed framework is organized around an area of application. The area of application is population exposure to air pollutants attributable to both energy production and demand reduction technologies. The goal is to characterize disease burdens avoided as a result of reduced electricity generation, specifically due to the installation of fiberglass attic insulation in single-family residential units in California.

The scope of the analysis includes a definition of the conceptual framework; quantification of the amount of electricity generated for consumption in California; the location of this generating capacity; emissions associated with generating capacity; and allocation of the health benefits from emissions reductions attributable to greater energy efficiency. Figure 2 provides a summary illustration of both the scope and key elements of the approach.



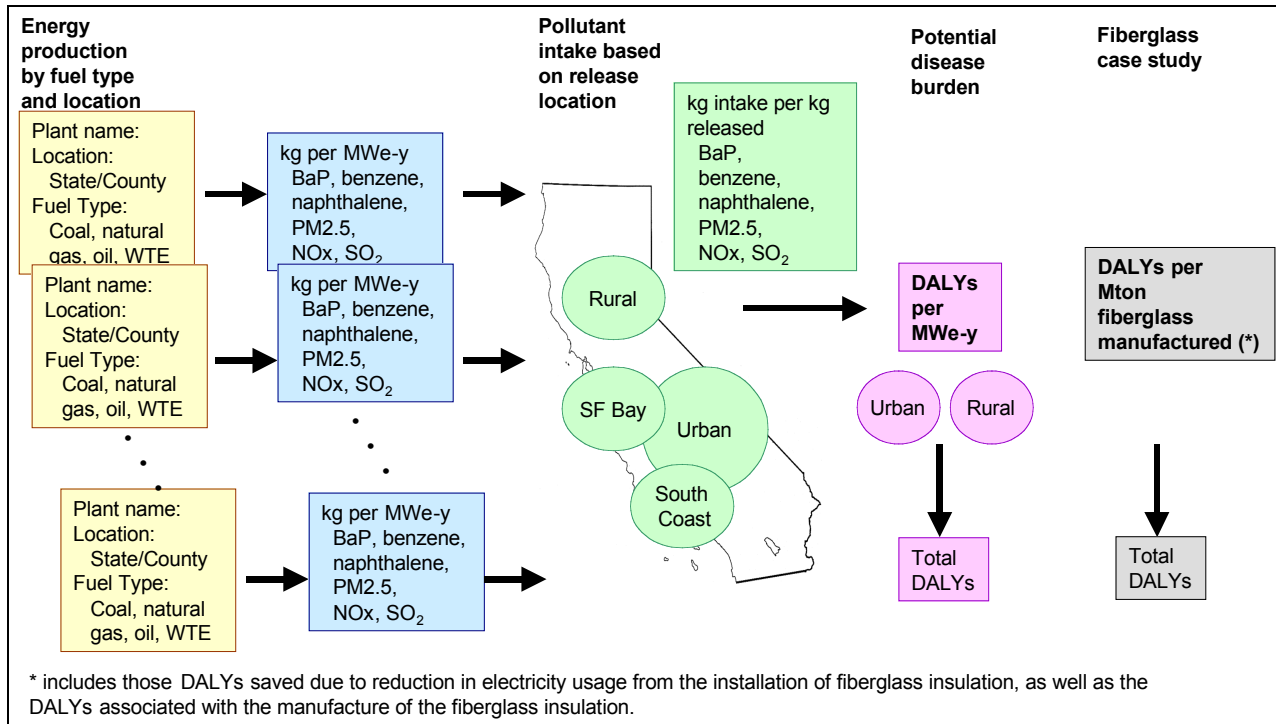

**Figure 2. The conceptual framework and key elements of this study**

### 2.1.1. Framework definition—concept and approach

Comparisons between impacts of various energy production systems and those associated with technologies to improve end-use efficiency must use a consistent framework for assessing environmental transport, human exposure, and health risks. The framework appropriate for addressing this comparison must address the following questions:

- What are the emission rates per unit (GWe-year) of electricity production?
- Which pollutants to select?
- Where are these emissions released?
- How are these emissions distributed in the environment?
- What populations are impacted and what is the level of human exposure?
- Where and how to set boundaries in terms of populations, time, and spatial scale for the assessment?
- What are the potential toxic effects of these exposures and the resulting health burden for California and other populations?

- What are the uncertainties in defining and quantifying disease burden and how do we include the model evaluation process needed to identify and characterize these uncertainties?

These questions apply to both the technologies used to produce electrical energy and the technologies used to increase the efficiency of energy use. These questions require source-to-dose assessments that locate all points of chemical release to the environment, characterize mass-balance relationships, and track the contaminants through the entire environmental system to exposure of individuals or populations.

The key challenge for this task is to define a framework that includes sufficient fidelity to the real systems to make reliable classifications about the health impacts of energy systems but to avoid more detail than can be accommodated by existing theory and data. The researchers elected to use methods in the US EPA Tool for the Reduction and Assessment of Chemical and other environmental Impacts (TRACI) (Bare et al. 2002). In particular, this project relied on the CalTOX multimedia model, which is a key element of the TRACI system (Hertwich et al. 2001).

### **2.1.2. Portfolio of energy production technologies**

Information available from the Energy Commission is used to establish the mix of energy technologies that provide the major fraction of electricity for California. Each technology is characterized according to (a) the type of fuel-technology combination (natural gas, coal, hydroelectric, nuclear, etc); (b) the location (county) of the production facilities within each type category; (c) the fraction of California energy provided at each combination of location/technology; and (d) pollutant emissions per megawatt electric (MWe) provided by that technology.

### **2.1.3. Energy end-use reduction technologies**

The impacts of any technology used to reduce energy consumption must also be considered. For this project, the important attributes of an end-use technology include (a) type of technology (insulation, lighting, appliances, cool roofs, commercial HVAC, etc); (b) location of any production facilities linked to each technology; (c) fraction of California energy demand reduction provided at each combination of location/technology; and (d) energy save (MWe-years) for per functional unit (i.e., kilogram (kg) insulation) of technology used; and (e) pollutant emissions per functional unit (i.e., kg pollutant emitted per kg insulation manufactured). In this exploratory effort, the case study addresses the use of fiberglass attic insulation in existing residences.

### **2.1.4. Pollutant categories and human exposure**

Quantifying human exposure begins with selecting pollutants that are important contributors to potential human health hazards. For atmospheric releases, the research team developed emissions estimates for coal, natural gas, oil, and waste-to-energy (WTE) fired electricity generating power plants located in California. Emissions factors were also developed for insulation manufacturing—expressing pollutant emissions per tonne of manufactured insulation. The resulting list of pollutants includes:

- NO<sub>x</sub>

- SO<sub>2</sub>
- particulate matter with a 2.5 μm or lower aerodynamic diameter (PM<sub>2.5</sub>)
- benzo(a)pyrene
- benzene
- naphthalene

The atmospheric emissions estimates were used to characterize exposure levels for different geographical population subgroups in California. For the case study here, the state was divided into urban and rural populations. Then the research team used fate and transport modeling to obtain generic *urban* and *rural* exposure factors (emission-to-intake factor) for each pollutant emission. Then power plant emissions were allocated to either an urban or rural population based on the location of the facility. The emission-to-intake factor expresses the ratio of the typical exposure within a defined population per unit mass emitted, that is kg/d intake/person per kg/d released. The CalTOX model, which provides fate and exposure factors for TRACI (Bare et al., 2002), was used to calculate this ratio, which is referred to as the individual intake fraction (*iFi*) (Bennett et al. 2002a).

#### **2.1.5. Health effects categories**

Disease burden estimates attributable to pollutant exposures were based on the human damage functions (HDFs) (Crettaz et al., 2002; Huijbregts et al., 2005). For each of the pollutants listed above, the HDF expresses the disability adjusted life years lost in the population for each increase of intake, that is DALYs per mg intake.


#### **2.1.6. Boundaries for the time and spatial scale of health impacts**

The atmospheric emissions estimates and resulting disease burden analysis of this study were allocated by dividing the state into urban and rural counties. There were also separate illustrative analyses of the San Francisco Bay Area (SFBA) air basin and South Coast air basin. The analysis was carried out county by county. The power plants were assigned to a county, and the exposure modeling was carried out under either an urban or rural scenario based on the population density of the county. A rural county has a population density of less than 35 persons/km<sup>2</sup> and any county above that density is urban (Lobscheid and McKone 2004). The SFBA air basin is comprised of nine counties, including Alameda, Contra Costa, Marin, Napa, San Francisco, San Mateo, Santa Clara, Solano, and Sonoma counties. The South Coast Air Basin is comprised of four counties including, Los Angeles, Orange, Riverside, and San Bernardino (only half of the latter two are actually in the South Coast Air Basin, but for the purposes of this study, information on the whole county is included).

### **2.2. Location and Relative Magnitude of Emissions**

In order to characterize the impact of emissions reductions due to energy efficiency, this study required a method for allocating emissions changes among the large number of power plants that supply electrical energy in California. The approach used considers installed capacity as a means of ranking the emissions burden by geographic location. Installed capacity for each facility and emissions factors for the fuel and technology used in each facility provide the basis

for this calculation. In 2004, there was a total of 62.3 gigawatts electric (GWe) of installed production capability that generated electrical energy for consumption in California (Energy Commission, 2004). This capacity was derived from a number of fuel sources. Based on primary fuel sources reported by the Energy Commission (2004), the percent contribution of each of the fuel sources to electricity generation capacity in California is shown in Figure 3. This figure reveals that half of the electricity capacity in California is from natural gas technologies. Although 3771 MWe (or 6%) of electricity generation capacity comes from coal-fired power plants (including coal plants that burn, as their primary fuel, lignite, and petroleum coke and/or crude oil), 86% of this generation capacity is outside of California, i.e., 43% in Utah (Intermountain 1&2) and 43% in Nevada (Mohave Generating Station, bordering California, in Clark County). Of the remaining 13% of coal derived generating capacity, close to half (47%) is generated from coal plants that burn coal (bituminous, sub-bituminous, and lignite) exclusively. The other half use coal alternatives such as petroleum coke and/or crude oil within the state of California (amounting to less than 0.5% of the total MWe online generated in California). The allocations in Figure 3 are based on the assumption that the same efficiencies apply to all distribution systems upstream of the production plant. This study characterizes the emissions resulting from electrical energy power production within California for use in California. In addition, this study includes the emissions from the Mohave Generating Station in Clark County, Nevada because of its close proximity to the California border and large contribution of energy to California.

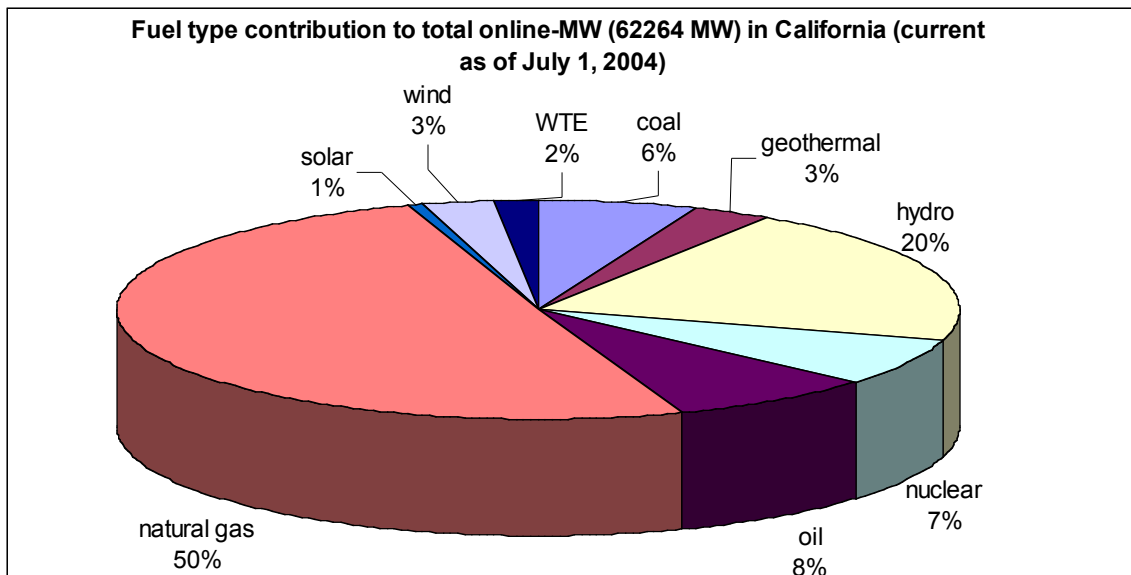

**Figure 3. Fuel type contribution to total online-MWe (62,264 MWe) produced and consumed in California<sup>a</sup>**

<sup>a</sup>An exception to the production in California is the Mohave coal-fired power plants located in Clark County Nevada, bordering California, and operated by Southern California Edison.

To characterize the allocation of emissions avoided due to efficiency-driven reductions in electrical power generation in California, the following two databases were combined:

1. *The Energy Commission's (2004) database that includes all power plants in California that are one-tenth (0.1) megawatt capacity or larger.* This database provides the following information for each plant: the plant name, county of location, owner, operator, the facility type (coal, oil, natural gas, or waste-to-energy, or WTE), the general fuel, primary fuel, and the technology employed to generate the reported online MWe for each plant. This information is current as of July 1, 2004. Attachment I to this report provides the full list of plants considered for this study, along with county location, whether or not cogeneration technologies are used, the MWe online, and the classification of the plant's location as "urban" or "rural."
2. *Chemical-specific emission factors (EFs) from the US EPA's AP-42 report (EPA 1995-2000).* These data provide consistent, typical and transparent emission factors from oil and natural gas-fired plants, coal-fired plants as well as those plants burning waste-to-energy (WTE) fuels, such as agricultural and wood waste, landfill gas, and municipal solid waste and electricity generated from natural gas at redeveloped sites that have had the presence or potential presence of a toxic contaminant, that is *Brownfields* (developed sites) and *Greenfields* (undeveloped sites).

The data sets above were used to develop an emissions factor for each generating facility. The primary, as opposed to general, fuel use reported in the Energy Commission's database (2004) was used to generate emissions estimates. In the cases where more than one primary fuel was listed, it was assumed that there is an equal contribution from each fuel type to the total MWe capacity. Emission estimates [kg/(MWe-y)] for each chemical  $i$  and plant  $j$  are based on the following equation:

$$Emissions_{i,j} = \left( \frac{MWt}{MWe} \right)_j \times \frac{EF_{i,j}}{HV_{fuel}} \times CF_{fuel} \times CF_1 \times CF_2 \times CF_3 \quad (Eq. 1)$$

where,

$i$  designates the pollutant of interest;

$j$  designates the plant generating electricity from a specific fuel-technology combination;

$(MWt/MWe)_j$  is thermal output (MW) of plant  $j$  divided by its electrical output (MW) and equal to  $1/\eta_e$ , with  $\eta_e$  equal to the efficiency of plant  $j$ . Values for  $\eta_e$  are provided in Appendix A, Table A-1. This analysis did not distinguish between the  $\eta_e$  of the lower heating value (LHV) or higher heating value (HHV) of the fuel. In general,  $\eta_e$  values based on HHV were approximately 5-10% higher than LHV (EPA 2001). In addition, unless otherwise noted, efficiencies were the electrical, not thermal, efficiency;

$EF_{i,j}$  is the chemical specific emission factor for chemical  $i$  from plant type  $j$ , kg pollutant unit quantity of fuel consumed. Table A-2(a-f) in Appendix A, lists  $EF_{i,j}$ s, (in lb/ton coal, lb/1000 gal oil and lb/10<sup>6</sup> scf (standard cubic feet of gas) along with their EF rating (A-E; for details on the ratings see the introduction in AP 42,

<http://www.epa.gov/ttn/chief/ap42/c00s00.pdf>). For coal  $EF_{i,j}$  we used the average of the bituminous and sub-bituminous EF reported;

$HV_{fuel}$  is the heating value of the specific fuel, expressed as Btu/lb coal, Btu/gal oil, Btu/scf natural gas, Btu/scf digester gas, or Btu/scf landfill gas. HVs are given in Appendix A, Table A-3;

$CF_{fuel}$  is the conversion factor for fuels ( $5 \times 10^{-4}$  ton per lb of coal,  $10^{-3}$  lb/gal per lb/1000 gal for oil, and  $10^{-6}$  lb/scf per lb/10<sup>6</sup> scf for gas).

$CF_1$  is the conversion factor for MWe to Btu ( $3.413 \times 10^6$  Btu/h per MWe);

$CF_2$  is the conversion factor for hours to years (8760 h/y); and

$CF_3$  is the conversion factor for lb pollutant to kg pollutant (0.455 kg/lb).


Because the Energy Commission power plant database does not distinguish between bituminous coal and sub-bituminous coal, emission estimates were either based on an average EF value from the reported EFs from each fuel, where available in the AP 42, or the bituminous EFs. Furthermore, because  $EF_{i,j}$ s relevant to petroleum coke and crude oil were not available, the  $EF_{i,j}$  for coal and the  $\eta_e$  of coal plants was applied to these fuel sources.

In those cases where two or more conversion technologies were reported, e.g., steam and gas turbine, it was assumed that an equal portion of the MWt output was generated from each, based on available  $EF_{i,j}$ . With respect to EFs from natural-gas fired plants, where the technology of the power plants was not reported, steam turbine technology was assumed (these emit less chemicals than the stationary gas turbine plants).

For certain fuel-technology combinations,  $EF_{i,j}$  values were not available in the AP 42. These included plants relying on enhanced oil recovery (EOR), and NO<sub>x</sub> and SO<sub>2</sub> from digester gas technologies and NO<sub>x</sub>, SO<sub>2</sub>, and benzene from landfill gas fuel technologies. Estimated emissions of these fuel-technology combinations were not accounted for in this report.

### **2.3. Dispersion, Exposure and Intake of Emissions to Air**

In this study, the CalTOX model was used to characterize the transport, fate, exposure, and uptake for each pollutant released to the atmosphere of either urban or rural environments from electricity generating facilities used to provide energy for California. This approach was also used to assess impacts from insulation manufacturing. This exposure assessment translates emissions to intake for the populations proximate to electrical generating stations. Rather than a site-specific assessment for each power plant, generic urban and rural environments were used. This study made use of CalTOX version 4.4 (<http://eetd.lbl.gov/ied/era/>), which was developed at the University of California, Berkeley, and provides fate and exposure assessments for TRACI (Bare et al., 2002). As illustrated in Figure 4, CalTOX is a multimedia, multi-pathway exposure model that tracks the dispersion and dilution of pollutants emitted to air, water, and/or soil. CalTOX has been widely used in the past for chemical classification and multimedia risk assessment. The parameters in the version of CalTOX used in this study have been validated in numerous studies and CalTOX itself has been evaluated using empirical data in field case studies for various chemicals, including BaP (Lobscheid and McKone, 2004).

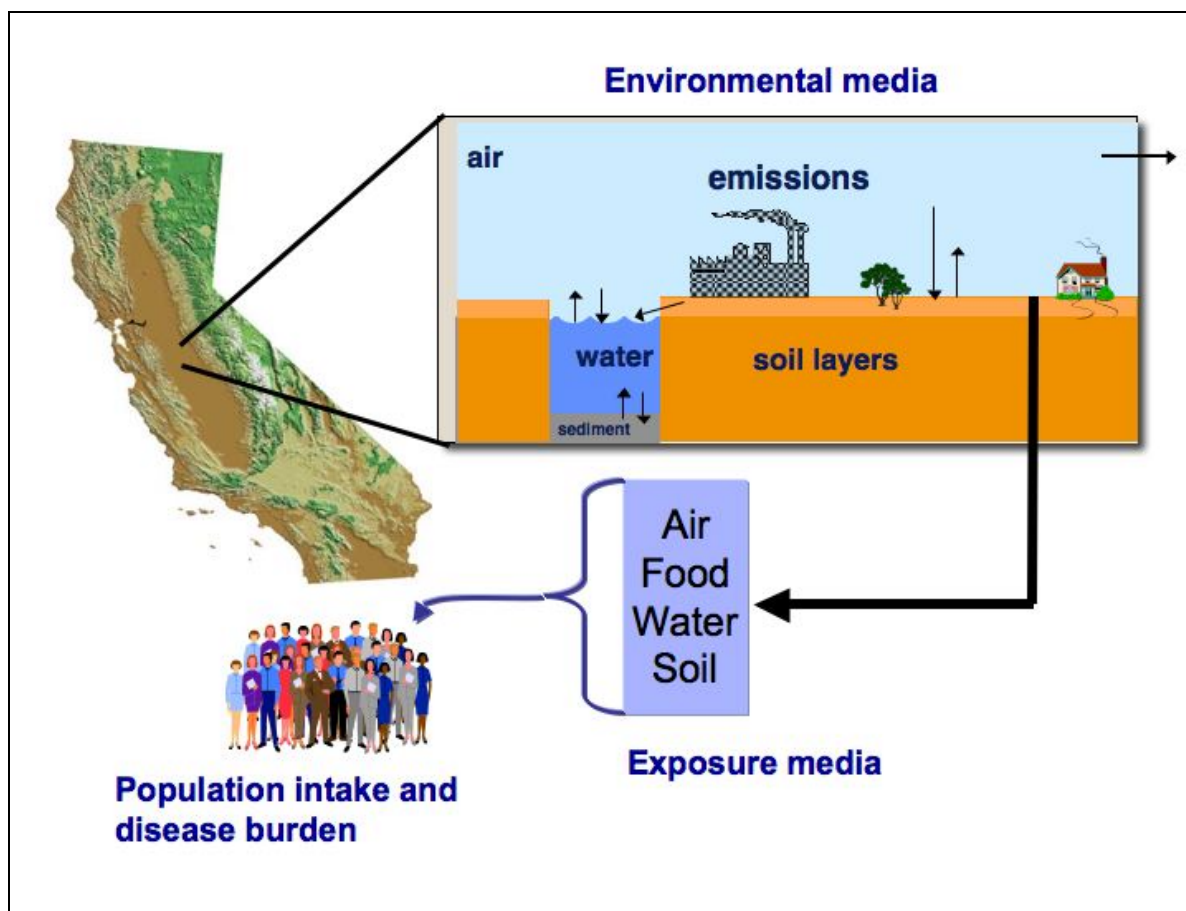

**Figure 4. The elements of the CalTOX multimedia fate and exposure model**

In general, multimedia fate and exposure models synthesize information about partitioning, reaction, and intermedia-transport properties of a chemical in a representative or generic environment with information about the typical individuals exposed. This information is used to assess impacts, such as health risk (McKone and MacLeod, 2004). In these models, the environment is treated as a set of compartments that are homogeneous subsystems exchanging water, nutrients, and chemical contaminants with other adjacent compartments. There are two basic features that make compartment models suitable for an integrated model of transport and transformation in multimedia environments: (a) each compartment forms a unit in which one can balance gains and losses attributable to air emissions, transfers to and from other compartments, and chemical transformations and (b) each compartment forms a unit in which chemical partitioning can be evaluated against equilibrium criteria. A cumulative multi-pathway exposure assessment for humans relates contaminant concentrations in multiple environmental media to concentrations in the media with which a human population has contact (for example; personal air, tap water, foods, household dusts, and soils). The potential for harm is assessed either as the average daily intake or uptake rate or as time-averaged contact concentration. Multimedia contaminant fate and exposure models have been useful to

decision makers because these models provide an appropriate quantitative framework to evaluate our understanding of the complex interactions between chemicals and the environment. The greatest challenge for multimedia models is to provide useful information without creating overwhelming demands for input data and producing outputs that cannot be evaluated.

In the CalTOX model, the fate of a chemical emitted to the environment depends, among other factors, on its physical-chemical properties. Table 1 summarizes physical-chemical properties of the six pollutants that are the subject of this study. These properties include the molecular weight (MW), octanol-water partition coefficient ( $K_{ow}$ ), which is the lipid-to-water-solubility ratio, vapor pressure ( $P_{vap}$ ), water solubility ( $S_{water}$ ), and diffusion constants in air and water ( $D_{air}$  and  $D_{water}$  respectively).

**Table 1. Physical-chemical properties of pollutants included in this report**

Chemical	MW [g/mol]	$K_{ow}$	$P_{vap}$ [Pa]	$S_{water}$ [mol/m <sup>3</sup> ]	$D_{air}$ [m <sup>2</sup> /d]	$D_{water}$ [m <sup>2</sup> /d]
Benzene	78.1	151	$1.3 \times 10^4$	22.5	0.76	$9.6 \times 10^{-5}$
Benzo(a)pyrene	252	$2.2 \times 10^6$	$7.1 \times 10^{-7}$	$1.0 \times 10^{-5}$	0.44	$5.3 \times 10^{-5}$
Naphthalene	128	$2.39 \times 10^3$	12.9	$2.4 \times 10^{-1}$	0.51	$7.4 \times 10^{-5}$
NO <sub>x</sub> <sup>a</sup>	46	$2.63 \times 10^{-1}$	$1.0 \times 10^5$	$2.2 \times 10^4$	0.61	$6.9 \times 10^{-5}$
SO <sub>2</sub>	64	$6.31 \times 10^{-3}$	$1.0 \times 10^5$	$1.7 \times 10^3$	0.61	$6.9 \times 10^{-5}$
PM <sub>2.5</sub> <sup>b</sup>	400	0	0	1	0.64	$1.3 \times 10^{-4}$

<sup>a</sup> Assumes physical-chemical properties of NO<sub>2</sub>

<sup>b</sup> In addition to the listed assumptions in this table, separate analyses assuming the partition coefficients in the ground soil layer ( $Kd_s$ ), vadose zone layer ( $Kd_v$ ), aquifer layer ( $Kd_q$ ) and in surface water sediments ( $Kd_d$ ) are  $10^6$  and  $10^7$  were run.

### 2.3.1. Calculations of environmental dilution

The generic and modular format of the comparative assessment here requires that the dilution calculation provide a dilution factor that expresses the ratio of the long-term average concentration to the emission, [(mg/m<sup>3</sup>)/(kg/y)]. The multimedia fate and exposure model CalTOX was configured to calculate dilution factors for power plants located in each of the four regions listed in Table 2.

As is commonplace in LCIA, the researchers assigned releases to generic landscapes that represent archetypal regions but do not necessarily replicate any specific region. In this approach, environmental concentrations were characterized for six cases: (1) the total land area of the urban counties of California, (2) the total land area of the urban counties of California that have at least one electricity generating station, (3) the total land area of the rural counties of California, (4) the total land area of the rural counties of California that have at least one electricity generating station, (5) the South Coast air basin, and (6) the SFBA air basin. Dividing



California into these six regions provided a process for assessing sensitivity of the results to how the emissions are allocated.

**Table 2. The population and total area (land & water) of the study regions**

Region	Total Area [m <sup>2</sup> ]		Population	
	Counties with power plants	All counties	Counties with power plants	All counties
Urban area	1.9 × 10 <sup>11</sup>	2.0 × 10 <sup>11</sup>	3.3 × 10 <sup>7</sup>	3.3 × 10 <sup>7</sup>
Rural area	1.2 × 10 <sup>11</sup>	2.2 × 10 <sup>11</sup>	2.2 × 10 <sup>6</sup>	2.6 × 10 <sup>6</sup>
South Coast air basin		8.5 × 10 <sup>11</sup>		1.7 × 10 <sup>7</sup>
SFBA air basin		2.1 × 10 <sup>11</sup>		7.0 × 10 <sup>6</sup>

### 2.3.2. Human exposure and intake

To make the link from emission to intake, the “intake fraction,” or *iF* concept, was applied (Bennett et al., 2002a, 2002b). Intake fraction is the fraction of material released from a source that is eventually inhaled or ingested by the human population in a defined geographic region. For environmental contaminants, the *iF* is the simplest possible expression of the source-to-intake relationship, which is often a complicated function of the attributes of the chemical, the environment, and the population. Bennett et al. (2002a) have suggested a standard formalism for expressing the concept. Here, the individual intake fraction *iFi* is employed. This is the intake fraction for a single representative individual within a defined region. The link between source emissions and intake is the product of the dilution factor obtained and the intake factor that expresses the contact a representative individual has with a diluted concentration in air, water, soil, etc.

The CalTOX model quantifies the source-to-exposure relationship for a system comprised of a pollutant defined by its chemical properties and release scenario, the environment within which it disperses, and the potentially exposed population. The nature and extent of multimedia exposures depends largely on human factors and the concentrations of a chemical substance in the contact media. Human factors include all behavioral, sociological, and physiological characteristics of an individual that directly or indirectly affect his or her contact with the substances of concern. Important factors in this regard are contact rates with air, water, food, soils, drugs, etc. Activity patterns, which are defined by an individual's allocation of time spent at different activities and locations, are also significant because they directly affect the magnitude of inhalation exposures to substances present in different indoor and outdoor environments.

The exposure models in CalTOX encompass twenty-three exposure pathways that relate contaminant concentrations in the multimedia model compartments to concentrations in media with which the human population has contact (i.e., personal air, tap water, foods, household

dusts, soils, etc.). Average daily pollutant intake is calculated as the product of the exposure concentrations in these media and an intake factor for inhalation and ingestion that relates the concentration intake for a typical member of the population. For PM<sub>2.5</sub> only, inhalation exposures were considered; for the other pollutants in this case study, multiple routes of exposure were allowed.

#### 2.4. Estimating and Expressing Disease Burden

Disease burden is a metric that reflects the total amount of healthy life lost within a population due to all diseases found in that population. The calculation of disease burden attributable to pollutant exposures makes use of metrics that have been developed for LCIA, i.e., the human damage functions (HDFs). HDFs express the likelihood of a health consequence (e.g., cancer and/or non-cancer disease burden) resulting from the emission of a particular pollutant (Crettaz et al. 2002). The units of the HDF are effective years of life lost per kg pollutant emitted. Huijbregts et al. (2005) refer to HDFs as characterization factors ( $CF_x$ ). The general approach for calculating an HDF for a substance  $x$ , is:

$$HDF_x = EF_x \times FF_x \quad (Eq. 2)$$

$EF_x$  is a severity-based effect factor characterizing both the potential disease burden associated with a lifetime exposure to chemical  $x$ , expressed as an equivalent loss of years [i.e., statistical years lost per mg intake of  $x$ ].  $FF_x$  is the fate factor, or the population intake per unit of emission. The  $FF_x$  [ $\text{kg}(\text{intake})/\text{y}$  per  $\text{kg}(\text{emission})/\text{y}$ ] is equal to the  $iFi$ , multiplied by the population from Table 2 for which that  $iFi$  applies. The  $iFi$  is discussed in the previous section. The effect factor requires consideration of the type of disease, the probability of having that disease following exposure, and the measure of severity of the disease in terms of the equivalent years of life lost as a result of having that disease. In the paragraphs below, this process is reviewed for two major disease categories—cancer and non-cancer diseases. It is important to note here that cancer and non-cancer endpoints were explicitly evaluated for each chemical with the exception of PM<sub>2.5</sub>. This is because PM<sub>2.5</sub> has reliable premature-mortality health data available that incorporates both non-cancer and cancer health endpoints. Therefore PM<sub>2.5</sub> was not evaluated separately for these health endpoints. Furthermore, because morbidity endpoints, such as cardiovascular disease and respiratory function, attributable to outdoor air PM<sub>2.5</sub> exposures tend to be available only for susceptible populations, such as Medicare enrollees (Dominici et al., 2006), this report focuses on the mortality endpoints. The methodology for PM<sub>2.5</sub> is presented following the non-cancer and cancer health endpoint methodologies.

### 2.4.1. The effect factor (EF<sub>x</sub>) for cancer

Both Crettaz et al. (2002) and Huijbregts et al. (2005) have proposed methods to determine EF<sub>x</sub> for cancer. Crettaz et al. (2002) propose:

$$EF_x(\text{cancer}) = \beta_{ED10-x} \times DALY_p \quad (\text{Eq. 3})$$

$\beta_{ED10-x}$  is the linear low dose response slope factor [individual lifetime risk of cancer per (mg/kg BW-day) intake] for chemical  $x$ , inducing a response over background of 10% for humans. It is obtained from the dose that gives 10% of a population a response (i.e., cancer) the  $ED10_{x,h}$  [mg/kg BW/day]. So  $\beta_{ED10,x} = 0.1/ED10_{x,h}$ .  $DALY_p$  is the sum of years of life lost due to death and disability from the cancer caused by  $x$  [years lost/incidence]. The default  $DALY_p$  for carcinogens is 6.7 y. Because BaP and benzene are also associated with specific cancers, lung cancer and leukemia, respectively, the specific  $DALY_p$  were also used. Therefore, in addition to the default  $DALY_p$  of 6.7 y, 13.0 and 14.6 y were used to estimate EF<sub>x</sub> for BaP and benzene, respectively based on the Crettaz et al., (2002) methodology. Additional assumptions are provided in Table 3. According to Huijbregts et al. (2005),

$$EF_x(\text{cancer}) = \frac{1}{ED50_{x,r}} \times p(d | \Delta TU) \times DALY_p \quad (\text{Eq. 4})$$

Here  $ED50_{x,r}$  is the lifetime dose (kg) of substance  $x$  from exposure route  $r$  affecting 50% of the exposed human population.  $ED50_{x,r}$  is estimated using the  $TD50_{x,a}$  from animal experiments, the daily dose rate [mg/kg(BW)-d] that induces tumors in half of the test animals that would have otherwise been tumor free at no dose.  $TD50_{x,a}$  values are available from the Cancer Potency Database (Gold et al. 2005). The animal dose to human dose conversion factors are provided in Table 3.  $p(d | \Delta TU)$  is the probability of occurrence of a disease,  $d$ , caused by a marginal change in the ambient toxic unit (TU) [-]. For carcinogens Huijbregts et al. (2005) use a default  $p(d | \Delta TU)$  value of 0.03. Huijbregts et al. (2005) use the same definition of  $DALY_p$  as Crettaz et al. (2002), but because Huijbregts et al. (2005) do not use disability age weighting and discounting, their default  $DALY_p$  for a carcinogen is 11.5 y lost as opposed to the 6.7 years used by Crettaz et al. (2002). Huijbregts et al. (2005) also report chemical-disease-specific  $DALY_p$  values, as given in Table B-1b.

**Table 3. Assumptions and conversion factors used to calculate the cancer EF<sub>x</sub>**

	Crettaz et al. (2002)	Huijbregts et al. (2005)
BW(human) [kg]	70	70
BW (rat) [kg]		0.25
BW (mouse) [kg]		0.03
BR (human) [m <sup>3</sup> /d]	20	20
Lifetime (human) [y]	70	75
CF_oral (rat → human)		4.1
CF_oral (mouse → human)		7.0

For chemicals which do not have an available TD50<sub>x,a</sub> value, Huijbregts et al. (2005) estimate ED50<sub>x</sub> from the q<sub>x</sub><sup>\*</sup>, the US EPA cancer potency factor:

$$ED50_x = 0.8 \times \frac{1}{q_x^*} \quad (Eq. 5)$$

As seen from Eq. 3, Crettaz et al. (2002) rely on the  $\beta_{ED10,x}$  that can easily be derived from the ED10<sub>x,h</sub>. But because ED10<sub>x,h</sub> values are not reported for the six chemicals in this study,  $\beta_{ED10,x}$  for these substances is estimated directly from the US EPA q<sub>1</sub><sup>\*</sup>, the 95<sup>th</sup>% upper confidence bound on the linearized multistage model slope factor q<sub>1</sub>, using a regression used by Crettaz et al. (2002):

$$\beta_{ED10} = 0.5 \times q_1^* \quad (r^2 = 0.95; n = 44) \quad (Eq. 6)$$

In cases where q<sub>1</sub><sup>\*</sup> is not available, Crettaz et al. (2002) have provided the following two equations for estimating ED10<sub>x,h</sub> from the TD50<sub>a(animal),x</sub>

$$ED10_{x,h} = \frac{TD50_{a,x}}{40} \quad (\text{theoretical; one-hit model of extra risk}) \quad (Eq. 7)$$

$$ED10_{x,h} = \frac{TD50_{a,x}}{25} \quad (\text{empirical; } r^2 = 0.75; n = 37) \quad (Eq. 8)$$

#### 2.4.2. The effect factor (EF<sub>x</sub>) for non-cancer effects

The effect factors, EF<sub>x</sub>, for non-cancer endpoints were obtained using the approach of Pennington et al. (2002) based on the ED10<sub>x,h</sub> for non-cancer endpoints and including threshold effects,

$$\beta_{ED10,x} = 0.1 / (ED10_{x,h} - Thr) \quad (Eq. 9)$$

*Thr* is the biological threshold level (mg/kg-BW/day) and other factors are as defined above.

Because BaP and naphthalene are primarily carcinogens and their overall EF and DALYs are dominated by the cancer EF, this report only accounts for non-cancer disease burdens of benzene, NO<sub>x</sub> and SO<sub>2</sub>. For benzene, the ED10<sub>h</sub> is derived from the benchmark dose computation (BMD, not BMDL) from the exposure-response data on decreased absolute lymphocyte count (ALC) reported by Rothman et al. (1996). Based on the US EPA benchmark dose software (v1.3.2), a BMD of 3.34 ppm (converted to an ED10<sub>h</sub> of 3.0 mg/kg-BW/d) is derived and used as an estimator of ED10<sub>h</sub>.

For NO<sub>x</sub> and SO<sub>2</sub> the ED10<sub>h</sub> is estimated from the following equation reported in Pennington et al. (2002):

$$ED10_h = 0.99 (RfD) + 1.8 \quad (r^2 = 0.88; n=12) \quad (Eq. 10)$$

The RfD is the US EPA reference dose, which is interpreted as a safe dose. For this study, RfD values for NO<sub>x</sub> and SO<sub>2</sub> are derived from the inhalation non-cancer risk values reported in the *Scorecard* database (Environmental Defense, 2006a and 2006b, respectively). The non-cancer inhalation risk value for NO<sub>2</sub> is assumed to apply to NO<sub>x</sub>.

Because RfD values do not permit inter-chemical comparisons, the ED10 approach proposed by Pennington et al. (2002) was used. The ED10 approach follows the approach to assess carcinogen health effects and is based on bioassay data. The factor of 10 difference between the three non-cancer disease categories proposed by Pennington et al. (2002) comes from the subjective scaling proposed by the International Life Science Institutes panel (Burke et al., 1996). Because cancer effects are also included in the Category 1 effects, the factor of 10 scaling was applied to 6.7 years per disease incidence to derive the Category 2 and 3 non-cancer DALYs. Therefore the default DALYp for a non-cancer substance falls into one of the following three categories:

- Category 1 (irreversible life-shortening effects, e.g., mutations, teratogenic effects, and reproductive effects) 6.7 y lost/incidence
- Category 2 (probably irreversible/life-shortening effects, including immunotoxicity, neurotoxicity, kidney damage, liver damage, heart disease, pulmonary disease) 0.67 y lost/incidence
- Category 3 (reversible/non-life shortening effects, including irritation and sensitization) 0.067 y lost/incidence

Because most of the known non-cancer health effects from exposures to benzene, NO<sub>x</sub>, and SO<sub>2</sub> likely fall into categories 2 or 3, this study used the EF<sub>x</sub>, and the resulting HDFs, from these disease categories.

## 2.5. The Magnitude and Uncertainty of Any Added or Averted Disease Burden

This section describes the methods to estimate the energy, emissions, and disease burden reductions resulting from a case study that postulates increased use of residential fiberglass attic insulation in California. These values are compared with the disease burden levels resulting from the manufacturing of the fiberglass insulation.

### 2.5.1. Energy and emissions reductions resulting from residential fiberglass attic insulation

According to the US DOE, up to 30% of a home's energy loss is due to improper or inadequate insulation (US DOE, 2006). Fiberglass insulation is commonly installed in attics and cathedral ceilings to combat this large heat loss and is therefore the energy efficiency technology considered here. Fiberglass insulation is mostly in rolls and batts, although loose-fill, which is blown into spaces, can also be made of fiberglass. This case study does not consider installation of rigid foam insulation, which is generally used in buildings requiring higher-R values or those buildings that have space limitations.

To estimate the emissions reductions and subsequent reductions in disease burden from installing additional fiberglass insulation in single-family homes in California, this study relied primarily on housing characteristics provided by the 2001 database for energy efficiency resources (DEER) Update Study (Energy Commission, 2001). As shown by the DEER study, single-family housing characteristics in California vary dramatically by age of house. Therefore, based on the DEER study data, the median values of housing characteristic from the following three vintages were used:

Pre-1978

1978-1992

1992-present

To account for the decreased emissions from power plants from increased fiberglass insulation in single-family residences, this study estimated the difference in energy consumption ( $\Delta\text{Energy}$  [Btu/yr]) between current insulation levels and increased levels recommended by the DOE in homes heated with electricity. The method used for calculating  $\Delta\text{Energy}$  is given by the following equation:

$$\Delta\text{Energy} = \left( \frac{1}{R_{\text{baseline}}} - \frac{1}{R_{\text{rec}}} \right) \left[ \frac{1}{\frac{^{\circ}\text{F} \times \text{ft}^2 \times \text{hr}}{\text{Btu}}} \right] \times \text{Area}_{\text{roof}} [\text{ft}^2] \times \text{HDD} \left[ \frac{^{\circ}\text{F} \times \text{d}}{\text{yr}} \right] \times \text{CF}_{d \rightarrow \text{hr}} \quad (\text{Eq. 11})$$

$R_{\text{baseline}}$  is the baseline R-values for homes heated with electricity reported in the 2001 DEER study and summarized in Table 4 and  $R_{\text{rec}}$  is the additional attic insulation needed to reach the latest DOE recommended insulation requirements.  $R_{\text{rec}}$  applies to "Zone 3" insulation zones (covering most of California) (DOE 2002) and are 49 [ft<sup>2</sup>-hr °F/Btu] for attic insulation in homes heated with electricity and 38 [ft<sup>2</sup>-hr °F/Btu] for cathedral ceilings in homes heated with electricity.  $\text{Area}_{\text{roof}}$  [ft<sup>2</sup>] is the median roof area summarized in Table 5. In addition, this case

**Table 4. Distribution of attic (and cathedral ceiling for those housing units built after 1992) insulation R-values [ft<sup>2</sup>-hr °F/Btu] for electricity heated homes from the 2001 DEER study (Energy Commission, 2001)**

Climate Zone	pre-1978	1978-1992	1992-1998	post-1998
North Coast	5.1	28	30	30
South Coast	5.9	21.5	30	30
South Inland	5.3	23.5	30	30
Central Valley	5.3	20.1	38	38
Desert	5.3	21.3	38	38
		<b>median</b>		
	pre 1978	5.3		
	1978-1992	21.5		
	1992- current	30		

**Table 5: Median Area<sub>roof</sub> [ft<sup>2</sup>] of single-family housing units in California from DEER 2001 (Energy Commission, 2001)**

Climate Zone	pre-1978	1978-1992	1992-1998	Post-1998
North Coast	1591	1904	2164	2296
South Coast	1528	2064	2270	2393
South Inland	1636	1811	2118	2423
Central Valley	1528	1704	2056	1949
Desert	1555	1741	1643	2161
		<b>Median</b>		
	<b>pre 1978</b>	1555		
	<b>1978-1992</b>	1811		
	<b>1992- current</b>	2163		

study included the cathedral ceiling area as part of the roof area. Cathedral ceilings are present in homes built after 1992 (Energy Commission, 2001), and their area is assumed to be 25% of the total footprint area, approximately 1,376 ft<sup>2</sup> (the median of the total footprint area in the climate zones in California reported in the DEER 2001 study with a range of 1,177 to 1,852 ft<sup>2</sup> (Energy

Commission, 2001). HDD is the heating degree days [ $^{\circ}\text{F}\cdot\text{d}$ ] for one year. The assumed value for HDD in this study is 2,700 (the median HDD (base 68) from the DEER 2001 report (Energy Commission, 2001).  $\text{CF}_{\text{d}\rightarrow\text{hrs}}$  is the conversion factor from day to hours. This study reports an estimate of the decrease in electrical energy demand resulting from the installation of fiberglass insulation with  $R_{\text{rec}}$  for each single-family home selected from a given house-age category. These  $\Delta\text{Energy}$  [BTU/yr] estimates are given in Table 6.

**Table 6.  $\Delta\text{Energy}$  associated with increased insulation per single-family home [Btu/yr]**

	Electricity heated
pre 1978	$1.7 \times 10^7$
1978-1992	$2.7 \times 10^6$
1992- current	$1.4 \times 10^6$ <sup>a</sup>

<sup>a</sup> Includes both attic and cathedral ceiling insulation.

The total energy reduction [Btu] for the entire housing stock in California was estimated based on the average of two housing stock distributions studies (US Census of Population and Housing 2000 and EIA 2005) for each house-age category, as shown in Table 7.

**Table 7. Distribution of electricity heated homes for the Western region of the US<sup>a</sup>**

pre 1978	34%
1978-1992	43%
1992- current	12%

<sup>a</sup>The Western region of the US includes Arizona, Colorado, Idaho, Montana, Nevada, New Mexico, Utah, Wyoming, Alaska, California, Hawaii, Oregon, and Washington (US Census Bureau, 2005).

For the state of California, the distribution of energy production in urban and rural counties, the reduction in energy generation due to insulation, and subsequent decreased emissions were assumed to track population distribution. Therefore, based on the cutoff between urban and rural counties (35 persons/km<sup>2</sup>), 7% of the total California housing stock was rural (CA DoF, 2005).

The distribution of fossil fuel electricity production was assumed to follow the current distribution of in-state sources of electricity generating capacity, as shown in Figure 2. Because coal generated electricity is mostly from the Mohave and Intermountain power plants, approximately 3% of pollutant emissions resulted from electricity generated from the “rural” region Mohave power plant that is located very close to the California-Nevada border.

The magnitude of emissions eliminated for each chemical  $i$ ,  $\Delta\text{emissions}_i$  (kg/y) as a result of increasing fiberglass attic insulation were estimated as:



$$\Delta emissions_i = \Delta Energy \times emissions_i \times t_{insulation} \times CF_{Btu \rightarrow MWe} \quad (Eq. 12)$$

where,  $\Delta Energy$  [Btu/y] is given by Eq 10 above;  $emissions_i$  are the total California emissions for each chemical  $i$ , per MWe, [kg/(MWe-y)] and obtained using the approach in Section 2.2;  $t_{insulation}$  [y] is the lifetime of the fiberglass insulation, assumed to be 50 years; and  $CF_{Btu \rightarrow MWe}$  is the conversion factor from Btu to MWe-y ( $3.345 \times 10^{-11}$  MWe-y per Btu).

The  $\Delta emissions$  were estimated separately for urban and rural electricity energy generating power plants in California. These estimates of emissions averted were then divided by the respective MWe from the fuel source in a given region, e.g., the total MWe generated from natural gas in urban regions.

The final step of the calculation was to report the DALYs saved over the lifetime of the fiberglass insulation, per Mt of insulation installed. This was based on the amount of insulation to reach  $R_{rec}$  levels, i.e., 1.04 Mt in urban and  $7.8 \times 10^{-2}$  Mt in rural electricity heated homes.

## 2.6. Emissions from Fiberglass Manufacturing


To complete the case study requires a quantification of both emissions from the manufacture of residential fiberglass insulation and emissions from energy required to manufacture this insulation. A preliminary analysis indicates that the emissions from energy needed to manufacture insulation are quite small compared to emissions from either the insulation manufacturing process or emissions from the energy saved. The electrical energy used to manufacture 1.1 Mt of insulation is approximately  $3.1 \times 10^{10}$  MJ (based on an estimate of 27.9 MJ/kg for the embodied energy of fiberglass materials reported by Franklin Associates (1991)). This amount is three orders of magnitude less than the  $6.0 \times 10^{13}$  MJ of electrical energy saved over the 50-y assumed lifetime of the insulation. Therefore the focus here is only on manufacturing emissions, and not on an explicit analysis of emissions added by electrical energy to produce insulation.

The emissions associated with manufacturing fiberglass insulation arise from the various steps outlined in Figure 5. Manufacturing emissions are estimated according to:

$$Emissions_{fiberglass,i} = EF_{fiberglass,i} \times \rho_{fiberglass} \times V_{insulation} \quad (Eq. 13)$$

where,  $EF_{fiberglass,i}$  is the emission factor of pollutant,  $i$  [kg pollutant/Mg insulation, finished product] as reported in the USEPA AP-42 (EPA 1985);  $\rho_{fiberglass}$  is the density of fiberglass (9 kg/m<sup>3</sup>; EPA, 1985);  $V_{insulation}$  is the volume of installed insulation needed to meet the DOE recommended R-values for insulation in California (i.e., a "Zone 3" region) (DOE 2002). The baseline R-values are given in Table 4. Table 5 displays the total surface area requiring insulation. This area was multiplied by an average R-value per inch of 3.25 corresponding with fiberglass batts and blankets.

The HDFs (DALYs per kg insulation manufactured) associated with the chemical emissions of the fiberglass insulation were also calculated using the same chemicals and methods described above for power plant emissions. The DALYs caused by the insulation manufacture were compared with the DALYs saved over the lifetime of the fiberglass insulation—estimated as 50 years.

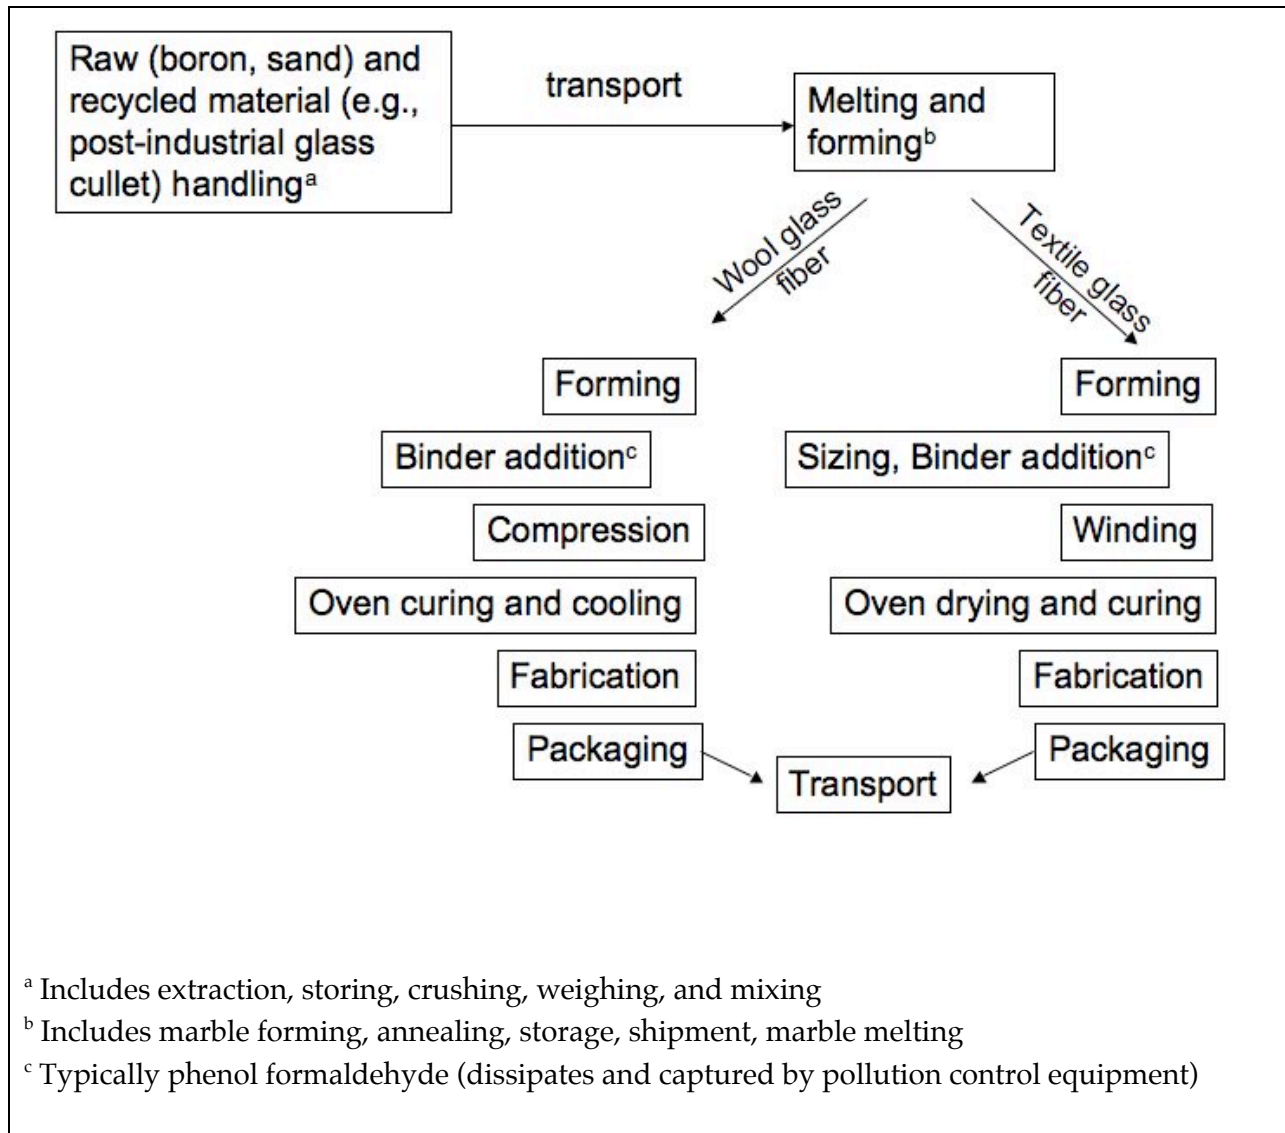

**Figure 5. Materials and processes involved in the manufacture of fiberglass insulation (adapted from: EPA, 1985)**

### 3.0 Project Results

The results of this project are presented in four steps. First, the magnitude and location of emissions for the pollutants of concern are presented as cumulative emissions to California urban and rural regions in kg/(MWe-y). Next, the two elements of the HDF are considered. Human exposure potential is presented as the individual intake fraction, that is the fraction of kg/(MWe-y) that is taken into the population. The effect factor is expressed as DALYs attributable to combined urban and rural emissions. Then this information is used to determine the reduction of emissions and disease burden attributable to increasing attic insulation in California. Finally, the disease burden attributable to the manufacture of the fiberglass insulation used is estimated and compared to the disease burden averted.

#### 3.1. Magnitude and Location of Emissions

A total of  $3.1 \times 10^4$  MWe and  $7.1 \times 10^3$  MWe are online, respectively, in urban and rural regions of California. The power plants supplying this electrical energy are listed in Attachment I to this report.

Table 8 lists for each candidate pollutant the estimated range of emissions for urban and rural regions in kg per MWe-y from California electricity generating plants. Ranges are provided to account for uncertainty in emissions due to variations in reported plant efficiencies (provided in Appendix A Table A-1). These ranges are within the same order of magnitude in each region for each pollutant from plants powered by a given fuel type. Because the San Francisco and South Coast Air Basins are characterized as urban regions, they have emissions estimates per MWe-y that are most similar to those estimated for urban regions. This is summarized in Table 8 (c and d).

The fact that the efficiencies of coal plants vary over a very small range (as can be seen in Table A-1) is reflected in the narrow range of the emissions per MWe-y in the urban regions (Table 8a,c and d). Because all of the coal-fired plants located in rural regions use cogeneration technologies and this study located only one efficiency for this fuel-technology combination (0.4, Table A-1), there is a single emissions value in place of a range for these plants in Table 8b.

The total emissions from electricity-producing power plants in California estimated in this report are most likely higher, not lower, than actual emissions. This conclusion is drawn from the fact that NO<sub>x</sub> and SO<sub>2</sub> emissions, which are available from the EPA's Emissions and Generating Resource Integrated Database (eGRID) (EPA, 2003) are 4.2 and 1.3 Mt per MWe-y respectively, for California for the year 2000. eGRID relies on AP-42 emission factors for power plants that do not report emissions. In comparison to the eGRID emissions, the median California-wide emissions of NO<sub>x</sub> and SO<sub>2</sub> estimated from the primary fuel/technology power plants in this report are 8.4 Mt of NO<sub>x</sub> and 2.5 Mt SO<sub>2</sub>, per MWe-y, for 2004. eGRID does not report emissions of other pollutants of interest in this study. However, for both NO<sub>x</sub> and SO<sub>2</sub>, the emissions estimated in this report are within a factor of two from eGRID, which is reasonable given the uncertainties inherent in these calculations. In addition, although this report relies on the assumption that installed capacity is equivalent to generation, the resulting total estimated MWe-y generated in California from each fuel-technology compares well with that reported in eGRID, i.e., within a factor of 2 for coal and WTE/other fossil, and within a factor of 3 for natural gas fueled technologies (EPA, 2003). The one exception is for oil fueled

power plant generation. The MWe generated from primarily oil fueled power plants estimated by the Energy Commission (2004) database is an order of magnitude greater than that reported in eGRID, i.e., 5000 MWe-y compared to 300 MWe-y (EPA, 2003). This is most likely due to fuel classification uncertainties. For example at least four electrical energy producing power plants (ranging between 560-2087 MWe-y capacity in the Energy Commission database, 2004 are labeled as 100% natural gas fired plants in eGRID, whereas the Energy Commission database (2004) reports distillate oil as their 'primary fuel.' These four plants--Alamitos, Etiwanda, Huntington Beach, and Mandalay—are included in Attachment I to this report. Because distillate oil combustion emits much more SO<sub>2</sub> and NO<sub>x</sub> than natural gas combustion, the result is higher estimates of SO<sub>2</sub> and NO<sub>x</sub> emissions per functional unit, MWe-y, than if these four plants were assumed to burn natural gas.

The authors of this report did not focus on specific power plants. But in order to assess the reliability of the emissions used in the study, the authors used the plant-specific emissions reported for the 1640 MWe-y large-scale Mohave coal-fired power plant for comparison. Environmental Defense (2005) reports SO<sub>2</sub> and NO<sub>x</sub> estimates of emissions from this plant of 39,100 and 19,200 tons per year, respectively. Additionally, the Clean Air Markets database available from the EPA's eGRID website also reports similar emissions for the Mohave coal plant in 2004, 43,600 tons of SO<sub>2</sub> and 20,900 tons of NO<sub>x</sub> (EPA, 2003). Based on the methods and data sources applied in this report, this facility released 41,000 tons of SO<sub>2</sub> and 30,000 tons of NO<sub>x</sub> in 2004. Although the emissions factors and methods vary in each of these approaches, they all provide very similar results and increase confidence about the reliability of the emissions estimates of this report. The slightly higher NO<sub>x</sub> emissions reported here are most likely due to the higher emissions factor data from the AP-42, 0.54 lbs/MMBtu (input) in comparison with 0.41 lbs NO<sub>x</sub>/MMBtu (input) specific to the Mohave coal plant, available from the eGRID database. Therefore, it is important to note that the ranges listed in Table 8 may not fully reflect the range of uncertainty in emissions factors.

**Table 8. Emissions estimates [kg/MWe-y] from coal, natural gas, oil, and WTE primary fuel powered electricity generating plants in a) urban and b) rural regions of California**

a) Urban regions

	Coal	Natural Gas	Oil <sup>a</sup>	WTE <sup>b</sup>
Benzo(a)pyrene	$2.97 \times 10^{-4}$ – $3.03 \times 10^{-4}$	$1.6 \times 10^{-2}$ - $2.7 \times 10^{-2}$	1.3 – 3.6	n/a
Benzene	1.5 – 1.7	$1.5 \times 10^{-1}$ - $2.6 \times 10^{-1}$	$9.8 \times 10^{-1}$ – 2.7	$5.2 \times 10^{-1}$ – 1.3
Naphthalene	$1.5 \times 10^{-2}$ – $1.7 \times 10^{-2}$	$2.1 \times 10^{-2}$ - $3.9 \times 10^{-2}$	$7.1 \times 10^{-1}$ – 1.9	n/a
NOx	$1.6 \times 10^4$ – $1.7 \times 10^4$	$4.0 \times 10^3$ - $7.7 \times 10^3$	$1.2 \times 10^4$ – $3. \times 10^4$	$4.2 \times 10^3$ – $1.1 \times 10^4$
PM2.5	$3.4 \times 10^3$ – $3.8 \times 10^3$	35.1 – 58.9	$1.8 \times 10^2$ – $4.5 \times 10^2$	n/a
SO <sub>2</sub>	$2.2 \times 10^4$ – $2.5 \times 10^4$	39.1 – 69.4	$6.6 \times 10^3$ – $1.6 \times 10^4$	$1.1 \times 10^3$ – $2.9 \times 10^3$

b) Rural regions

	Coal <sup>c</sup>	Natural Gas	Oil <sup>a</sup>	WTE <sup>b</sup>
Benzo(a)pyrene	$5.5 \times 10^{-5}$	$2.7 \times 10^{-2}$ - $5.0 \times 10^{-2}$	$9.8 \times 10^{-1}$ - 2.8	n/a
Benzene	1.9	$1.7 \times 10^{-1}$ - $3.1 \times 10^{-1}$	1.4 - 3.8	$3.4 \times 10^{-1}$ - $4.9 \times 10^{-1}$
Naphthalene	$1.9 \times 10^{-2}$	$2.1 \times 10^{-2}$ - $4.0 \times 10^{-2}$	$9.1 \times 10^{-1}$ - 2.5	n/a
NOx	$2.0 \times 10^4$	$3.8 \times 10^3$ - $7.2 \times 10^3$	$1.5 \times 10^4$ - $4.0 \times 10^4$	$2.3 \times 10^3$ - $3.3 \times 10^3$
PM2.5	$4.2 \times 10^3$	$8.2 \times 10^1$ - $1.5 \times 10^2$	$2.3 \times 10^2$ - $5.8 \times 10^2$	n/a
SO <sub>2</sub>	$2.0 \times 10^4$	$4.7 \times 10^1$ - $8.7 \times 10^1$	$7.7 \times 10^3$ - $1.9 \times 10^4$	$7.3 \times 10^2$ - $1.1 \times 10^3$

c) San Francisco Bay Area air basin

	Coal <sup>d</sup>	Natural Gas	Oil <sup>a</sup>	WTE <sup>b</sup>
Benzo(a)pyrene	$4.2 \times 10^{-5}$ – $5.0 \times 10^{-5}$	$2.0 \times 10^{-2}$ – $3.1 \times 10^{-2}$	1.3 – 3.6	n/a
Benzene	1.5 – 1.7	$1.4 \times 10^{-1}$ – $2.2 \times 10^{-1}$	1.3 – 3.6	$5.6 \times 10^{-1}$ – 1.2
Naphthalene	$1.5 \times 10^{-2}$ – $1.7 \times 10^{-2}$	$2.0 \times 10^{-2}$ – $3.3 \times 10^{-2}$	$9.0 \times 10^{-1}$ – 2.5	n/a
NOx	$1.2 \times 10^4$ – $1.4 \times 10^4$	$3.9 \times 10^3$ – $7.0 \times 10^3$	$1.4 \times 10^4$ – $4.1 \times 10^4$	$3.9 \times 10^3$ – $8.3 \times 10^3$
PM2.5	$3.2 \times 10^3$ – $3.8 \times 10^3$	42.6 – 65.4	$2.1 \times 10^2$ – $6.0 \times 10^2$	n/a
SO <sub>2</sub>	$2.1 \times 10^4$ – $2.5 \times 10^4$	38.6 – 62.4	$6.9 \times 10^3$ – $2.1 \times 10^4$	$1.2 \times 10^3$ – $2.6 \times 10^3$

d) South Coast air basin

	Coal	Natural Gas	Oil <sup>a</sup>	WTE <sup>b</sup>
Benzo(a)pyrene	$5.1 \times 10^{-5}$ – $5.5 \times 10^{-5}$	$1.4 \times 10^{-2}$ – $2.3 \times 10^{-2}$	1.3 – 3.6	n/a
Benzene	1.7 – 1.9	$1.1 \times 10^{-1}$ – $2.0 \times 10^{-1}$	0.9 – 2.6	0.4 – 1.2
Naphthalene	$1.7 \times 10^{-2}$ – $1.9 \times 10^{-2}$	$1.9 \times 10^{-2}$ – $3.7 \times 10^{-2}$	0.7 – 1.8	n/a
NOx	$1.9 \times 10^4$ – $2.1 \times 10^4$	$4.0 \times 10^3$ – $8.2 \times 10^3$	$1.1 \times 10^4$ – $2.9 \times 10^4$	$4.2 \times 10^3$ – $1.1 \times 10^4$
PM2.5	$3.8 \times 10^3$ – $4.2 \times 10^3$	31.1 – 51.6	$1.8 \times 10^2$ – $4.3 \times 10^2$	n/a
SO <sub>2</sub>	$2.5 \times 10^4$ – $2.8 \times 10^4$	43.3 – 78.8	$6.5 \times 10^3$ – $1.5 \times 10^4$	$9.9 \times 10^2$ – $2.7 \times 10^3$

n/a: “not available”, referring to emissions factors from primary fuel technology

<sup>a</sup> Distillate and diesel

<sup>b</sup> Digester, landfill, and natural gas only

<sup>c</sup> Same whether or not Mohave plant is included

<sup>d</sup> Petroleum and crude oil as primary fuel

### 3.2. Levels of Human Exposure

The levels of human exposure are characterized in terms of the individual intake fraction, *iFi*. The *iFis* have value ranges that reflect both the variability of emissions estimates [kg/y] in each region and the variability in human exposure factors used in CalTOX. The relationship between the variance of *iFi* estimates and input variances, which reflect uncertainty and variability, can be determined using one of a number of variance propagation methods (Morgan and Henrion, 1990). In this study, Monte Carlo sampling provided the method for propagating parameter variance into outcome (*iFi*) variance. In a standard Monte Carlo analysis, simple random sampling is used to select each member of the set parameter value realizations. Each model input parameter is represented by a probability-density function that defines both the range of values that the input parameters can have and the probability that the parameters are within any subinterval of that range. Each input is represented by a cumulative distribution function in which there is a one-to-one correspondence between a probability and values. A random number generator is used to select probability in the range of 0 to 1. This probability is then used to select a corresponding parameter value. Monte Carlo sampling was performed with the program Crystal Ball v 5.0. All variable parameters in CalTOX were run probabilistically and the source term to air was input as a Beta distribution with both shape parameters set to 2 and the range defined by the minimum and maximum of emissions derived from the fuel-plant efficiencies reported in Table A-1 of Appendix A. The full distributions of the *iFi* for each pollutant in each region are provided in Appendix B, Figures B-1 through B-6. The median values of the cumulative (all route) *iFi* distributions are used for the comparative assessments presented below. The median was selected because it is essentially the same as the geometric mean, which is more appropriate when input parameters have large and logarithmic variations. Because this study was concerned with an archetypal individual living in a given region, the median values are considered a more representative measure of intake.

Table 9 provides a summary of the pollutant and region-specific *iFi* values used for this study. For all six pollutants considered, with the exception of BaP, only the inhalation pathway is a significant contributor to overall intake. Therefore, the total (ingestion + ingestion) intake and inhalation only median *iFis* are presented separately for BaP in Table 9. For BaP in each region considered, the contribution to overall *iFi* due to inhalation intake was ~1.3% of the total intake (ingestion and inhalation) at the median result. For PM<sub>2.5</sub>, the *iFi* is sensitive to the soil/water distribution coefficient, ( $K_d$  [L/kg]) used for the surface soil layer. In Appendix B (Figure B-6), distributions based on  $K_d$  values of  $10^6$  and  $10^7$  are presented for completeness. However, the distributions based on the two  $K_d$  values are nearly identical. In Table 9, the median *iFi* values based on urban (all counties, and also for those counties with at least one power plant) and rural counties (all counties) are most similar. The *iFi* distributions for rural counties with power plants have slightly higher values than the urban and rural (all counties) regions because of the smaller spatial extent of these counties. Smaller spatial scale primarily explains why the *iFi* values are largest in the SFBA air basin.

**Table 9. Median values of the *iFi* [-] for each pollutant in each region**

	Urban <sup>a</sup>	Rural-all counties	Rural-counties with Power Plants	South Coast Air Basin	San Francisco Air Basin
BaP (total = ingestion + inhalation)	$4.2 \times 10^{-13}$	$3.6 \times 10^{-13}$	$6.7 \times 10^{-13}$	$9.5 \times 10^{-13}$	$3.7 \times 10^{-12}$
BaP (inhalation only)	$5.4 \times 10^{-15}$	$4.7 \times 10^{-15}$	$8.9 \times 10^{-15}$	$1.2 \times 10^{-14}$	$4.9 \times 10^{-14}$
Benzene	$2.9 \times 10^{-13}$	$2.6 \times 10^{-13}$	$4.0 \times 10^{-13}$	$5.2 \times 10^{-13}$	$1.3 \times 10^{-12}$
Naphthalene	$5.8 \times 10^{-14}$	$5.1 \times 10^{-14}$	$9.0 \times 10^{-14}$	$1.3 \times 10^{-13}$	$4.4 \times 10^{-13}$
PM2.5 <sup>b</sup>	$1.0 \times 10^{-13}$	$9.2 \times 10^{-14}$	$1.7 \times 10^{-13}$	$2.2 \times 10^{-13}$	$7.1 \times 10^{-13}$
NOx <sup>c</sup>	$1.1 \times 10^{-13}$	$9.7 \times 10^{-14}$	$1.6 \times 10^{-13}$	$2.3 \times 10^{-13}$	$7.3 \times 10^{-13}$
SO <sub>2</sub>	$2.1 \times 10^{-13}$	$1.9 \times 10^{-13}$	$3.2 \times 10^{-13}$	$4.1 \times 10^{-13}$	$1.2 \times 10^{-12}$

<sup>a</sup> Same *iFi* distributions result whether analysis considers only the population and area of urban counties with power plants, or all urban counties

<sup>b</sup> Same median *iFi* whether  $K_d$  of PM2.5 is  $10^6$  or  $10^7$  [L/kg]

<sup>c</sup> Estimated by NO<sub>2</sub>

### 3.3. Results for the Disease Burden Calculations

#### 3.3.1. Effect factors (EF<sub>x</sub>) for cancer and non-cancer diseases

For health effects associated with cancer, non-cancer, and PM2.5 premature mortality, both the Crettaz et al (2002) and Huijbregts et al. (2005) approaches were considered in order to select an effect factor used to characterize the HDF. The EF<sub>x</sub> from each method was calculated and converted to their logarithmic values. Then the log mean (midpoint of the maximum and minimum of the logarithms, divided by 2) was computed. With the exception of PM2.5, the EF<sub>x</sub> nearest to the computed log mean value was selected and is reported in Table 10. For PM2.5, only one value by each method was estimated and the midpoint is given in Table 10. Appendix B, Table B-1, provides the complete set of EF<sub>x</sub> derived by the Crettaz et al (2002) and Huijbregts et al. (2005) methods (Tables B-1a and B-1b, respectively). For carcinogens, because of the selection criteria for the appropriate EF<sub>x</sub> value, the values selected for BaP and benzene are based on the  $q_1^*$  and the default DALYp of 6.7 years, whereas for naphthalene, the EF<sub>x</sub> is based on the Huijbregts et al. (2005) methodology.



**Table 10. The EFx estimates for each pollutant**

	EFx derivation comment	EFx [DALYs/mg intake]
<b>Cancer</b>		
Benzene	Lower bound of range on $q_1^*$ (inhal-->oral); Crettaz et al. (2002) method.	$1.4 \times 10^{-8}$
BaP	Upper bound of $q_1^*$ (oral) reported in IRIS; Huijbregts et al. (2005) method.	$5.0 \times 10^{-6}$
Naphthalene	Specific DALYe and $p(d   \Delta TU)$ for stomach cancer (0.035, 13.6); Huijbregts et al. (2005) method.	$1.1 \times 10^{-8}$
<b>Non-cancer</b>		
Benzene	BMD from Rothman et al (1996) for decrease in absolute lymphocyte count	
	Category 2:	$1.2 \times 10^{-8}$
	Category 3:	$1.2 \times 10^{-9}$
NOx	ED10h estimated from the inhalation non-cancer risk values <sup>a</sup> of NO <sub>2</sub> ( $5.7 \times 10^{-3}$ mg/kg BW/d, Environmental Defense, 2006a)	
	Category 2:	$9.9 \times 10^{-8}$
	Category 3:	$9.9 \times 10^{-9}$
SO <sub>2</sub>	ED10 estimated from the inhalation non-cancer risk value <sup>a</sup> ( $1.9 \times 10^{-1}$ mg/kg BW/d, Environmental Defense, 2006b)	
	Category 2:	$3.1 \times 10^{-9}$
	Category 3:	$3.1 \times 10^{-10}$
<b>Premature mortality</b>		
PM2.5 <sup>b</sup>	based on $1 \mu\text{g} / \text{m}^3$ increase in annual PM2.5 mean concentrations leading to a 0.4% increase in premature deaths (Pope et al., 2002) ). The midpoint from methods of Crettaz et al. (2002) and Huijbregts et al. (2005).	$1.4 \times 10^{-5}$

<sup>a</sup> Assuming 70 kg body weight and breathing rate of  $20 \text{ m}^3/\text{d}$

<sup>b</sup>The PM2.5 EF reflects premature mortality, including cancer and other diseases.

Table 10 provides some insights of interest for making the HDF calculation. First, it reveals that when the EFx for non-cancer effects for benzene are based on Category 2 diseases, one obtains nearly the same value as for the cancer EFx. To obtain EFx for nitrogen dioxide and sulfur dioxide, the Huijbregts et al (2005) method requires either a no-observed effect level (NOEL) or the lowest-observed effect level (LOEL). But these are not reported for nitrogen dioxide and sulfur dioxide. So, a comparison of non-cancer HDFs with the Pennington et al (2002) analysis for these two chemicals was not possible.

### 3.3.2. Human damage factors (HDFs) for cancer and non-cancer diseases

The combined effect factors (EFx) for both cancer and non-cancer burden and the fate factor (FFx) are combined to obtain human damage factors expressed as DALYs/kg(emitted) for each pollutant. These results are summarized in Table 11. These HDF values result from combining the cancer and non-cancer (Category 2) EFx values given in Table 10 with the FFx, according to Eq. 2. For the FFx, the *iFi* values reported in Table 9 were converted to a population based *iF*, based on the populations given in Table 2.

**Table 11. Chemical specific HDFs (DALYs/kg emitted) for cancer, non-cancer and premature mortality health effects in the population of regions of California**

	Urban counties <sup>a</sup>	Rural-all counties	Rural-counties with power plants	South Coast Air Basin	San Francisco Bay Area Air Basin
<b>Cancer</b>					
Benzene	$1.3 \times 10^{-7}$	$9.8 \times 10^{-9}$	$1.3 \times 10^{-8}$	$1.3 \times 10^{-7}$	$1.3 \times 10^{-7}$
BaP (ingestion and inhalation)	$7.1 \times 10^{-5}$	$4.7 \times 10^{-6}$	$7.5 \times 10^{-6}$	$8.1 \times 10^{-5}$	$1.3 \times 10^{-4}$
BaP (inhalation only)	$9.1 \times 10^{-7}$	$6.2 \times 10^{-8}$	$1.0 \times 10^{-7}$	$1.0 \times 10^{-6}$	$1.7 \times 10^{-6}$
Naphthalene	$2.0 \times 10^{-8}$	$1.4 \times 10^{-9}$	$2.1 \times 10^{-9}$	$2.2 \times 10^{-8}$	$2.9 \times 10^{-8}$
<b>Non-Cancer</b>					
Benzene	$1.1 \times 10^{-7}$	$8.4 \times 10^{-9}$	$1.1 \times 10^{-8}$	$1.1 \times 10^{-7}$	$1.1 \times 10^{-7}$
NOx	$3.6 \times 10^{-7}$	$2.5 \times 10^{-8}$	$3.5 \times 10^{-8}$	$3.7 \times 10^{-7}$	$5.0 \times 10^{-7}$
SO <sub>2</sub>	$2.2 \times 10^{-8}$	$1.5 \times 10^{-9}$	$2.2 \times 10^{-9}$	$2.1 \times 10^{-8}$	$2.6 \times 10^{-8}$
<b>Premature Mortality</b>					
PM2.5	$4.6 \times 10^{-5}$	$3.3 \times 10^{-6}$	$4.9 \times 10^{-6}$	$5.1 \times 10^{-5}$	$6.8 \times 10^{-5}$

<sup>a</sup> Result is consistent whether or not the area and population of the region includes only counties with power plants, or all urban counties

Table 11 reveals a number of issues of interest. First, the HDF values are somewhat smaller than the researchers expected. But comparisons below with the work of other researchers confirms that this range of values is consistent with their findings. The HDFs for different regions fall within one order of magnitude for the SFBA air basin, South Coast air basin, and generic Urban regions. The latter two regions have the most similar HDFs, for each chemical emitted. The largest HDF values tend to be in the San Francisco Bay Area air basin, particularly for the cancer HDFs. This is primarily due to the relatively higher population density than any other region. The rural regions tend to have one to two orders of magnitude lower HDF values per chemical than HDFs in the San Francisco Bay Area air basin. The premature mortality HDF for PM2.5 is the highest among the HDFs considered for inhalation intake. NOx and benzene

have similar non-cancer HDFs, while the HDF non-cancer values for SO<sub>2</sub> are an order of magnitude lower.

It should be recognized that the E<sub>F</sub>x values as well as F<sub>F</sub>x values have significant uncertainty and variability. The E<sub>F</sub>x can range within an order of magnitude for each chemical (see Appendix B, Table B-1a and 2b ). This is not surprising, as others have found that E<sub>F</sub>x related data can be highly uncertain, due to lack of knowledge and true variability in the population of exposed persons. Nishioka et al (2002) reported that the “single most influential uncertainty is the uncertainty in the concentration-response function for premature mortality.” However, it is beyond the scope of this study to determine whether this is the case here, in particular to determine whether the emissions factor data are more uncertain than the premature mortality characterizations. They are both uncertain due to lack of true knowledge about their values. However, because multiple emissions factor data for certain fuel-technology power plants were available, this study was able to characterize a plausible range for the emissions estimates. In contrast, insufficient data from multiple studies was available to quantitatively characterize a range of plausible premature mortality values.

### **3.4. Estimates of Disease Burden Added or Averted: Residential Attic Insulation Case Study**

The addition of residential fiberglass attic insulation is used as a case study to illustrate an application of the health benefits methodology presented here. There are two components. First, with the assumption that all electricity-heated homes in California are brought into compliance with DOE standards for attic insulation, energy savings over the assumed 50-y lifetime of the insulation are determined. These energy savings are used to determine the resulting emissions and disease burden reductions in California. In the second component, the energy requirements, emissions, and disease burden from the manufacture of fiberglass insulation required to meet the energy savings goals are determined and compared to the disease burden reduction from the use of that insulation.

#### **3.4.1. Energy savings and resulting emissions and disease burden reductions**

Eq. 12 in Section 2.5.1 was used to determine for each pollutant the kg of pollutant emissions reduction for each additional mega-tonne (Mt) of insulation used in California. Table 12 presents a summary of the emissions eliminated in urban and rural regions, respectively, from state-wide electricity energy generating power plants due to the installation of additional fiberglass residential installation across the state. Ranges are given, due to variability in the plant efficiencies, as provided in Appendix A, Table A-1.

A number of issues arise from the results in Table 12. In the urban and rural regions, the emissions eliminated for each pollutant ranges roughly by a factor of two, depending on the power plant efficiencies assumed in the estimates. Because value ranges for efficiencies of coal-powered cogeneration plants are not provided by the database, the pollutant emissions eliminated in rural regions by upgrading insulation, are point-estimates (based on a coal plant efficiency of 0.4). As shown by Table 12, the savings from oil and WTE powered plants are at least two orders of magnitude greater in urban regions than in the rural regions. However, chemical emission saved from natural gas powered plants tend to be within the same order of magnitude in urban and rural regions. Exceptions to this are NO<sub>x</sub> and SO<sub>2</sub> emissions savings,

which tend to be more than an order of magnitude greater in urban regions. Savings of emissions from coal fired plants (including petroleum coke and crude oil fuel) are within an order of magnitude for BaP, PM<sub>2.5</sub> and SO<sub>2</sub>, but are an order of magnitude greater in rural than urban regions for benzene, naphthalene, and NO<sub>x</sub> emissions.

The emissions reductions in Table 12 correspond to energy savings of approximately  $4.7 \times 10^8$  MWe-h ( $1.7 \times 10^{18}$  J) over the assumed 50 year lifetime of the insulation. The savings from the different energy technologies over this 50 year period are approximately:  $2.6 \times 10^7$  MWe-h ( $9.2 \times 10^{16}$  J) from coal,  $3.8 \times 10^8$  MWe-h ( $1.4 \times 10^{18}$  J) from natural gas,  $6.3 \times 10^7$  MWe-h ( $2.3 \times 10^{17}$  J) from oil, and  $2.4 \times 10^6$  MWe-h ( $8.7 \times 10^{15}$  J) from WTE technologies. These savings are not dependent on the plant efficiency assumed, but depend on the current MWe output (Energy Commission 2004) of the fuel-technology power combination in the given region.

These results are consistent with those presented by Levy et al. (2003). They estimate that adding insulation to existing single family homes throughout the US to meet the International Energy Conservation Code (IECC 2000) would save approximately 800 TBtu/y ( $8.4 \times 10^{17}$  J/y) of primary energy (primarily in the southern region). For the Western US (Pacific and Mountain) region, the source savings is approximately 41 TBtu/y, or  $4.3 \times 10^{16}$  J/y (Levy et al. 2003). By the methods of the current study, California is estimated to save nearly  $3.4 \times 10^{16}$  J/y if insulation was upgraded to DOE recommended levels in homes heated with electricity.

Levy et al. (2003) also estimate that the energy savings from added insulation eliminates approximately 3,100 t of PM<sub>2.5</sub>, 190,000 t of SO<sub>2</sub> and 100,000 t of NO<sub>x</sub> per year over the entire contiguous US. In the Western US, they estimate that the quantity of these pollutants eliminated by insulation in homes heated with electricity, is approximately 210 t of PM<sub>2.5</sub>, 8300 t of SO<sub>2</sub>, and 7500 t of NO<sub>x</sub> per year. The current study estimates that approximately 318 t of PM<sub>2.5</sub>, 3600 t of SO<sub>2</sub> and 11,900 t of NO<sub>x</sub> are eliminated in California per year, assuming homes heated by electrical energy install DOE recommended levels of fiberglass attic insulation. The higher NO<sub>x</sub> and PM<sub>2.5</sub> savings found in this study most likely reflect methodological differences in assessing the housing stock requiring additional insulation and in characterizing the power plant emissions. For example, Levy et al. (2003) assume 63% of single family homes in each state had “adequate or poor insulation” and required additional insulation to meet the International Energy Conservation Code (IECC) 2000 levels, which to the authors knowledge are not as stringent as the DOE levels. This study’s approach was based on using information about existing electricity-heated single family homes (distributions of housing characteristics based on housing vintage). Additionally, Levy et al. (2003) relied solely on the eGRID to estimate emissions of NO<sub>x</sub>, PM<sub>2.5</sub> and SO<sub>2</sub> and their emissions assumptions resulted in “lower emission rates than a capacity-based allocation,” such as was used in this study. However, because of fewer coal-fired power plants in California, this study estimates lower levels of SO<sub>2</sub> are eliminated, in comparison with the Levy et al. (2003) analysis of the Western US.

**Table 12. Ranges<sup>a</sup> of total emission savings [kg] over 50-year assumed lifetime of fiberglass insulation in urban and rural regions [kg], respectively.**

a) Urban

	coal [kg]		natural gas [kg]		Oil [kg]		WTE [kg]	
	midpoint	range	midpoint	range	midpoint	range	midpoint	range
BaP	$1.43 \times 10^{-1}$	$1.41 \times 10^{-1} - 1.44 \times 10^{-1}$	$7.7 \times 10^2$	$5.7 \times 10^2 - 9.6 \times 10^2$	$1.8 \times 10^4$	$9.2 \times 10^3 - 2.6 \times 10^4$	n/a	n/a
benzene	$7.7 \times 10^2$	$7.3 \times 10^2 - 8.1 \times 10^2$	$7.4 \times 10^3$	$5.2 \times 10^3 - 9.5 \times 10^3$	$1.3 \times 10^4$	$7.0 \times 10^3 - 1.9 \times 10^4$	$2.5 \times 10^2$	$1.4 \times 10^2 - 3.6 \times 10^2$
naphthalene	7.7	7.3 - 8.1	$1.1 \times 10^3$	$7.5 \times 10^2 - 1.4 \times 10^3$	$9.6 \times 10^3$	$5.1 \times 10^3 - 1.4 \times 10^4$	n/a	n/a
NOx	$7.8 \times 10^6$	$7.4 \times 10^6 - 8.2 \times 10^6$	$2.1 \times 10^8$	$1.4 \times 10^8 - 2.8 \times 10^8$	$1.5 \times 10^8$	$8.3 \times 10^7 - 2.2 \times 10^8$	$2.0 \times 10^6$	$1.1 \times 10^6 - 2.9 \times 10^6$
PM2.5	$1.7 \times 10^6$	$1.6 \times 10^6 - 1.8 \times 10^6$	$1.7 \times 10^6$	$1.3 \times 10^6 - 2.1 \times 10^6$	$2.3 \times 10^6$	$1.3 \times 10^6 - 3.2 \times 10^6$	n/a	n/a
SO <sub>2</sub>	$1.15 \times 10^7$	$1.1 \times 10^7 - 1.2 \times 10^7$	$2.0 \times 10^6$	$1.4 \times 10^6 - 2.5 \times 10^6$	$7.9 \times 10^7$	$4.7 \times 10^7 - 1.1 \times 10^8$	$5.5 \times 10^5$	$3.1 \times 10^5 - 7.8 \times 10^5$

b) Rural

	coal <sup>b</sup> [kg]	natural gas [kg]		oil [kg]		WTE	
		midpoint	range	midpoint	range	midpoint	range
BaP	$1.3 \times 10^{-1}$	$2.9 \times 10^2$	$2.1 \times 10^2 - 3.7 \times 10^2$	$6.9 \times 10^1$	$3.7 \times 10^1 - 1.0 \times 10^2$	n/a	n/a
benzene	$4.3 \times 10^3$	$1.8 \times 10^3$	$1.3 \times 10^3 - 2.3 \times 10^3$	$9.6 \times 10^1$	$5.1 \times 10^1 - 1.4 \times 10^2$	1.1	$8.7 \times 10^{-1} - 1.3$
naphthalene	$4.3 \times 10^1$	$2.3 \times 10^2$	$1.6 \times 10^2 - 3.0 \times 10^2$	$6.4 \times 10^1$	$3.4 \times 10^1 - 9.4 \times 10^1$	n/a	n/a
NOx	$4.6 \times 10^7$	$4.1 \times 10^7$	$2.8 \times 10^7 - 5.4 \times 10^7$	$1.0 \times 10^6$	$5.5 \times 10^5 - 1.5 \times 10^6$	$7.1 \times 10^3$	$5.8 \times 10^3 - 8.4 \times 10^3$
PM2.5	$9.4 \times 10^6$	$8.6 \times 10^5$	$6.2 \times 10^5 - 1.1 \times 10^6$	$1.5 \times 10^4$	$8.5 \times 10^3 - 2.2 \times 10^4$	n/a	n/a
SO <sub>2</sub>	$6.3 \times 10^7$	$5.1 \times 10^5$	$3.6 \times 10^5 - 6.5 \times 10^5$	$5.0 \times 10^5$	$2.9 \times 10^5 - 7.1 \times 10^5$	$2.3 \times 10^3$	$1.9 \times 10^3 - 2.7 \times 10^3$

<sup>a</sup> Ranges are based on variable data on fuel-technology efficiencies

<sup>b</sup> Includes the Mohave electricity generating plant in Clarke County Nevada located on the border with California and because only one efficiency is used (0.4) no range is reported

With the emissions reductions provided by Table 12, the next element of this study was to determine the health benefits of insulation on a functional unit basis. The functional unit selected is the mass of insulation used. Table 13 presents the estimates from this study of

DALYs saved over an assumed lifetime of 50 years for the insulation per million metric tonne (Mt) of insulation installed. Based on the minimum and maximum emissions given in Table 12 and the uncertainty in the fuel-technology plant technology efficiencies, values in Table 13 provide the midpoint of the value range of DALYs saved per Mt. The resulting DALYs saved are between 914 – 1170 DALYs/Mt insulation over 50 years (the assumed lifetime of the

**Table 13. DALYs saved per Mt insulation installed. Values shown represent the midpoint of the value range based on the range of emissions given in Table 12.**

	Natural gas		Coal		Oil		WTE	
	Urban-all counties	Rural-all counties	Urban-all counties	Rural-counties with power plants	Urban-all counties	Rural-all counties	Urban-all counties	Rural-all counties
<b>Carcinogens</b>								
benzene	$9.5 \times 10^{-4}$	$2.2 \times 10^{-4}$	$1.0 \times 10^{-4}$	$7.0 \times 10^{-4}$	$1.7 \times 10^{-3}$	$1.2 \times 10^{-5}$	$3.2 \times 10^{-5}$	$1.3 \times 10^{-7}$
BaP-ingestion and inhalation	$5.2 \times 10^{-2}$	$1.8 \times 10^{-2}$	$9.7 \times 10^{-6}$	$1.2 \times 10^{-5}$	1.2	$4.2 \times 10^{-3}$	n/a	n/a
BaP-inhalation only	$6.7 \times 10^{-4}$	$2.3 \times 10^{-4}$	$1.3 \times 10^{-7}$	$5.5 \times 10^{-3}$	$1.5 \times 10^{-2}$	$5.6 \times 10^{-5}$	n/a	n/a
naphthalene	$3.3 \times 10^{-2}$	$4.2 \times 10^{-6}$	$1.5 \times 10^{-7}$	$1.2 \times 10^{-6}$	$1.8 \times 10^{-4}$	$1.2 \times 10^{-6}$	n/a	n/a
<b>Non-carcinogens</b>								
benzene	$8.4 \times 10^{-5}$	$1.9 \times 10^{-4}$	$8.5 \times 10^{-5}$	$6.0 \times 10^{-4}$	$1.9 \times 10^{-3}$	$1.0 \times 10^{-5}$	$2.7 \times 10^{-5}$	$1.1 \times 10^{-7}$
NOx	73	13	2.7	21	52	$3.3 \times 10^{-1}$	$6.9 \times 10^{-1}$	$2.3 \times 10^{-3}$
SO <sub>2</sub>	$4.1 \times 10^{-2}$	$1.0 \times 10^{-2}$	$2.3 \times 10^{-1}$	1.8	1.7	$9.8 \times 10^{-3}$	$1.1 \times 10^{-2}$	$4.5 \times 10^{-5}$
<b>Premature Mortality</b>								
PM2.5	75	37	75	588	100	$6.4 \times 10^{-1}$	n/a	n/a
Inhalation only	148	50	78	611	154	1.0	$7.0 \times 10^{-2}$	$2.3 \times 10^{-3}$

installed insulation). Due to inhalation intake, the best estimate of the DALYs saved per Mt insulation installed is 1043 DALYs (the sum of the values in the last row of Table 13). This is mostly attributable to elimination of PM<sub>2.5</sub> emissions. Because the total insulation required to meet DOE guidelines is approximately 1.1 Mt, up to 1147 DALYs could be averted.

Because the results in Table 13 are the first attempt at characterizing the hazardous-air-pollutant (benzene, benzo(a)pyrene, and naphthalene) DALYs saved from adding residential insulation, comparisons with other studies are not possible. It is possible, however, to compare the premature deaths eliminated due to the elimination of NO<sub>x</sub>, SO<sub>2</sub>, and PM<sub>2.5</sub> emissions from power plants attributable to the 1.1 Mt of insulation installed in California. Based on a published burden of disease analysis (Lvovsky 2001), approximately 10 DALYs are equivalent to 1 premature death in adults (older than 40 years of age). Thus, the results of this study indicate that approximately 115 premature deaths are averted, or 2.3 deaths per year over 50 years, due to installation of residential attic insulation in California. Approximately twenty premature deaths are attributable to reductions in NO<sub>x</sub> and approximately 96 are due to emissions reductions of PM<sub>2.5</sub>. As Table 13 displays, the most significant contribution to these health benefits are due to emissions averted from coal-powered electricity generating plants located in rural counties (primarily the Mohave coal power plant). By comparison, Levy et al. (2003), estimate that 7 premature deaths per year are averted in the Western region of the US because of emissions reductions in PM<sub>2.5</sub>, SO<sub>2</sub>, and NO<sub>x</sub>, due to the upgrading of existing insulation in electricity-heated single-family homes to levels recommended in the IECC 2000.

### **3.4.2. Emissions and energy analysis for fiberglass insulation manufacturing**

In order to address the net health benefits of end-use energy efficiency, the disease burden associated with the manufacture of the fiberglass insulation that would increase end-user efficiency was considered. This study considered both the emissions from the energy required to manufacture the insulation as well as the emissions for the insulation manufacturing process.

The electrical energy used to manufacture 1.1 Mt of insulation is approximately  $3.1 \times 10^{10}$  MJ (based on an estimate of 27.9 MJ/kg for the embodied energy of fiberglass materials reported by Franklin Associates (1991)). Because this amount is two orders of magnitude less than the  $1.7 \times 10^{12}$  MJ of electrical energy saved over the 50-y assumed lifetime of the insulation, it was not necessary to carry out an explicit analysis of the emissions added by electrical energy to produce insulation.

In calculating emissions from insulation manufacturing, there is significant uncertainty due to the lack of information about the emissions estimates from fiberglass manufacturing. Emissions factors used in the NO<sub>x</sub> and SO<sub>2</sub> estimates are required on material-manufactured basis, but they are reported on a material-processed basis in the AP-42 (EPA, 1985). Material manufactured refers to the amount of final product (insulation) produced. Material processed refers to the amount of raw material (silica-based glass) consumed in the production of final product (fiberglass insulation). For the purposes of this screening level study, it is necessary to assume these are equivalent.

For NO<sub>x</sub>, the following manufacturing processes shown in Figure 5 have EFs available: glass melting (wool and textile) and oven curing. However, for SO<sub>2</sub> emission factors are available for only glass melting (Wool and textile) processes. These emission factors are incorporated into the

emissions estimates. For the other processes outlined in Figure 5, no EF data for NO<sub>x</sub> and SO<sub>2</sub> is provided in the AP-42 database. Additionally, because there are almost no published emissions factors for PM<sub>2.5</sub> from glass-fiber manufacturing, AP-42 emission factors based on organic condensable PM emissions collected at the impinger portion of a PM sampling train were applied (EPA, 1995-2000, Table 11.13.1). However, for processes shown in Figure 5, with the exception of rotary spin wool glass manufacturing (SCC 3-05-012-04), the AP-42 reports ‘no data’ for emissions of organic condensable PM. Therefore, this report uses the midpoint of the R-19 and R-11 rotary spin wool glass manufacturing emission factors (3.7 kg organic condensable PM per Mg material processed) to estimate PM<sub>2.5</sub> emissions from fiberglass manufacturing.

In spite of the large uncertainties, preliminary estimates of emissions were obtained and compared to results from similar studies. This study assumed that emissions associated with fiberglass manufacturing were not limited to California, but were instead assigned to a generic “urban” region of the US. Table 14 provides the estimated emissions<sub>fiberglass,i</sub> from manufacturing the residential attic insulation and compares them to estimates of emissions saved from the equivalent reduction in electrical generating plant operations in California. As seen from Table 14, the magnitude of the California specific emissions eliminated are an order of magnitude greater for PM<sub>2.5</sub> and two orders of magnitude greater for NO<sub>x</sub> and SO<sub>2</sub>, than the estimated emissions from fiberglass manufacturing.

**Table 14. Estimated emissions from manufacturing 1.1 Mt of residential attic insulation compared to emissions eliminated by reduced electricity production over 50 years**

	Estimated Emissions <sub>fiberglass,i</sub> [kg]	Total emissions [kg] eliminated in CA <sup>a</sup>
Nox	$5.8 \times 10^{6b}$	$3.1 \times 10^8 - 6.1 \times 10^8$
PM2.5	$5.9 \times 10^{6c}$	$1.4 \times 10^7 - 1.8 \times 10^7$
SO <sub>2</sub>	$5.1 \times 10^{6b}$	$1.2 \times 10^8 - 1.9 \times 10^8$

<sup>a</sup> Based on urban and rural emissions ranges given in Table 12 (a and b)

<sup>b</sup> EFs given per Mg material processed, and it is assumed that these apply to the Mg of finished product

<sup>c</sup> PM<sub>2.5</sub> emissions are estimated from the organic condensable PM<sub>10</sub> (i.e., that collected in the impinger portion of a PM sampling train), and these EFs are reported for rotary spin wool glass manufacturing

To determine the size of the population exposed to the fiberglass emissions and the *iFi* for this population, this study assumed that all the fiberglass was manufactured in the contiguous US and assigned the exposure to a generic US region. The DALYs associated with pollutant emissions for each Mt of insulation manufactured were calculated based on Eq. 2. Table 10 provides the EFX used for NO<sub>x</sub>, PM<sub>2.5</sub>, and SO<sub>2</sub> emissions from fiberglass manufacturing. For the fate factor FFX, that is, population-based *iF*, a typical *iFi* of 10<sup>-13</sup> is used. To determine the population to which this *iFi* applies, the characteristic travel distance (CTD, km) of each pollutant was determined. The CTD is the radial distance from the source where the



concentration of a chemical falls to  $1/e$  (37%) of the concentration at the source (Bennett et al. 1998) and can be used to characterize the area with an exposed population. The formulation for the CTD is

$$\text{CTD} = u/k_{\text{eff}} \quad (\text{Eq. 15})$$

Where  $u$  is the long-term average wind speed [m/s], and  $k_{\text{eff}}$  is the effective reaction rate of a pollutant [ $s^{-1}$ ] in the environment.  $k_{\text{eff}}$  takes into consideration partitioning and degradation of a chemical in a multimedia and can be estimated with models such as CalTOX. There are no published estimates of  $k_{\text{eff}}$  for PM<sub>2.5</sub>. But BaP is strongly particle associated. So the CTD of BaP is used as a proxy for the PM<sub>2.5</sub> CTD, which is estimated at 30 km. For NO<sub>x</sub> and SO<sub>2</sub>, which partition completely to air and undergo irreversible deposition, the CTD is simply the ratio of long-term average wind speed and reaction/deposition rates. In much of the US, long-term average wind speed is on the order of 3-4 m/s or about 300 km/d. Removal by deposition reaction for these substances is about 3/d, so for both NO<sub>x</sub> and SO<sub>2</sub>, the CTD is assumed to be on the order of 100 km.

The area ( $\pi r^2$ ) corresponding with each of these CTDs is converted to an exposed population by using an assumed population density of 27.2 persons/km<sup>2</sup>, which is the average of the entire US (US Census Bureau, 1990). Table 15 summarizes the CTD, the area, the population size, and the resulting DALYs/Mt of insulation manufactured based on the emissions estimates from fiberglass manufacturing.

**Table 15. Summary of the Characteristic Travel Distance (CTD), area, population size and DALYs/Mt insulation manufactured.**

	CTD [km]	Area [km <sup>2</sup> ]	Population size <sup>a</sup>	DALYs/Mt manufactured
PM <sub>2.5</sub>	30 <sup>b</sup>	2,826	76,867	$5.6 \times 10^{-1}$
NO <sub>x</sub>	100 <sup>c</sup>	31,400	850,000	$4.3 \times 10^{-2}$
SO <sub>2</sub>	100 <sup>c</sup>	31,400	850,000	$1.2 \times 10^{-3}$

<sup>a</sup> Assuming a population density of 27.2 persons/km<sup>2</sup> (US Census Bureau, 1990)

<sup>b</sup> Assuming a CTD of BaP

<sup>c</sup> Realistic estimate of an exposure radius

The DALYs/Mt of insulation resulting from the manufacturing process as given in Table 15 are substantially lower (by four orders of magnitude) than the DALYs/Mt saved over 50 y from reduced power-plant emissions attributable to this quantity of insulation. Although there are uncertainties in both the emissions and exposure calculations for the manufacturing of fiberglass insulation, these numbers indicate that there is a likely net health benefit associated with the expanded use of fiberglass insulation. Much of the uncertainty in the estimate of net health benefit is due to the large uncertainty about the emission factors from fiberglass

manufacturing. However, others have also observed a net health benefit from the use of fiberglass insulation. In considering the premature mortality attributable to PM2.5 exposures, Nishioka et al. (2005) reported that adding insulation to new homes in the U.S. averts 60 premature deaths, or 1.2 premature deaths per year, over a 50-year period, due to reduced energy consumption (including residential combustion and power plant emissions). The primary health burden associated with supplying this insulation (approximately 0.3 Mt of insulation) was associated with PM2.5 emissions from the manufacturing of fiberglass (mineral wool). All supply chain processes resulted in a one-time health burden of approximately 14 premature deaths for one year of increased output (Nishioka et al., 2005).

## **4.0 Conclusions and Recommendations**

Conclusions and recommendations are presented here in the context of the objectives outlined in the introduction. This report describes a definition study with the following objectives:

- provide the roadmap to organize a health benefits study for energy efficiency;
- demonstrate the use of life-cycle impact assessment (LCIA) tools such as the US Environmental Protection Agency (EPA) TRACI/CalTOX system (Bare et al. 2002) to fill in this road map; and
- provide an informative case study to illustrate how one can construct and evaluate a health benefits study for a energy-efficiency improvements in California.

To meet these project objectives, the research team employed LCIA methods that have been developed for evaluating and allocating the health and environmental impacts of energy technologies.

### **4.1. Conclusions**

#### **4.1.1. Providing a roadmap to organize a health benefits study for energy efficiency**

This study was successful in organizing the roadmap, data, and computational tools needed to assess both disease burden and health benefits from changes in energy production and consumption in California. The framing of this problem produced a repository of important information that will be useful for future comparative studies. Among the information that has been gathered are: (1) a compilation of power plants that produce power for California along with their location and region, fuel technology, and relative contribution to power consumption; (2) emissions factors for a portfolio of energy production technologies used in California; (3) location specific emissions/exposure relationships (fate factors); and (4) a pollution-specific set of human damage functions for power plants in California.

Using this roadmap, this study characterized the current levels of atmospheric emissions and resulting health burden from six pollutants that are potential human health hazards. The magnitude and location of atmospheric emissions of NO<sub>x</sub>, SO<sub>2</sub>, PM<sub>2.5</sub>, benzo(a)pyrene, benzene and naphthalene were estimated for coal, natural gas, oil and waste-to-energy fired electricity generating plants in California.

Based on this portfolio of energy production technologies, emissions rates per unit (MWe-y) of electricity production were quantified for urban and rural regions of California, as well as for the San Francisco Bay Area and South Coast air basins. Based on these emissions, chemical-specific disease burdens were determined and compared with those averted through the introduction of an energy efficient technology. To make possible these characterizations and comparisons, relevant models and data were selected for defining the boundaries of the analysis, estimating and locating emissions, and quantifying disease burdens.

#### **4.1.2. Demonstrating use of life-cycle impact assessment tools to fill in this roadmap**

The researchers demonstrated the use of the LCIA tools, such as the TRACI/CalTOX approach to determine how atmospheric emissions from electricity generating plants distribute in the

environment and what populations are impacted. Instead of a site-specific assessment, this study allocated emissions to generic urban or rural regions. Urban and rural exposure factors (emission-to-intake factors) were characterized, in addition to those for the SFBA and South Coast air basins. The source-to-dose relationships for each of these regions were quantified based on the environmental dispersion, fate, exposure and subsequent intake of the airborne chemicals using the multimedia modeling framework of CalTOX. The archetypal individual intake fraction,  $iFi$ , for urban exposures tends to be slightly greater than the rural exposure factors. The  $iFi$ s estimated for the South Coast air basin also tracks the generic urban  $iFi$  levels while the SFBA air basin  $iFi$ s tend to be roughly an order of magnitude greater. The use of the CalTOX model with its ability to provide probabilistic results makes possible a process for addressing uncertainty and variability in future assessments.

Based on CalTOX, the typical (midpoint)  $iFi$  levels for urban and rural regions were converted to potential toxic effects through the human damage factor (HDF) metric. The HDF characterizes the population health burden, in units of disease affected life years (DALYs) per kg pollutant emitted. This study finds that inhalation HDFs resulting from electricity generating plants in California are dominated by PM<sub>2.5</sub> exposures. The PM<sub>2.5</sub> inhalation HDFs are at least two orders of magnitude greater than inhalation HDFs of the other chemicals.

Overall, this study was successful in demonstrating the use of the LCIA framework in assessing pollutant emissions from electricity producing plants in California and the associated non-cancer and cancer disease burdens.

#### **4.1.3. Providing an informative case study to illustrate how one can construct and evaluate a health benefits study for energy efficiency improvements in California**

The research team was able to construct a case study on the disease burdens averted due to the installation of approximately 1.1 million metric tons (Mt) of additional fiberglass attic insulation to reach DOE-recommended levels, in California residences. Based on a 50-year assumed lifetime of the installed insulation, the avoided disease burden is approximately 1000 DALYs from power-plant emissions per (Mt) of insulation installed, mostly from the elimination of PM<sub>2.5</sub> emissions. In terms of premature deaths averted, these DALYs translate to approximately 120 premature deaths averted. Approximately 20 premature deaths are attributable to reductions in NO<sub>x</sub> and approximately 100 are due to emissions reductions of PM<sub>2.5</sub>. When compared with the disease burden associated with the manufacture of this additional insulation within the LCIA framework, this study concludes that the DALYs saved per Mt insulation used are nearly four orders of magnitude greater than those associated with manufacturing the insulation.

The case study reveals the relatively significant disease burden associated with electricity generation in California through application of an LCIA framework for impact assessment. This is due in large part to emissions of NO<sub>x</sub> and PM<sub>2.5</sub> from coal, oil, and natural gas fueled electricity-generating plants. Although existing methods for fiberglass manufacturing are quite high in particulate-matter generation, these methods still yield PM<sub>2.5</sub> emissions far below those estimated in this report to be averted due to the addition of fiberglass insulation to existing homes in California to meet current DOE levels.

## 4.2. Commercialization Potential (not applicable)

## 4.3. Recommendations

The demonstrated utility of an LCIA framework, such as TRACI/CalTOX, for this study supports the need to evaluate the utility of LCIA for other comparative health benefits studies. For example, this approach could also be used to assess the health benefits of fuel efficiency in the transportation sector. There is new and ongoing research in the epidemiology field indicating a significant disease burden for populations living near major roadways (Jerrett, 2005). The framework used in this study provides methods for allocating disease burden in different geographic regions. This approach would likely be informative in transportation energy use planning. The framework used here could be adapted to transportation through a one-year study that focuses on populations living near roadways. The estimated cost for this type of study is \$100K to \$200K.

The successful application of LCIA methods reveals the value of exploring whether and how this approach could be applied to life-cycle studies of other energy production and energy efficiency technologies. Because the models and data for this report were developed for generic applications in life-cycle impact assessment, there is a need for research to expand, test, and support extensions of this exploratory study to other comparative energy assessments in California. This would be an ongoing support activity that could last for multiple years and would require financial support at a level of \$100K per year.

Estimates of PM<sub>2.5</sub> emissions and disease burden resulting from the manufacture of fiberglass insulation are so limited by uncertainty that a formal uncertainty analysis is needed to confirm conclusions about net health benefits of using fiberglass insulation. Also there is a need to consider a broader range of pollutant emissions to assure that the PM<sub>2.5</sub> is indeed the dominant contributor to disease burden. A formal treatment of uncertainty and variability using Monte Carlo methods could be used to establish confidence bounds around any comparative assessment. A probabilistic analysis using the existing framework would take from 1 to 2 years and cost from \$100K to \$200K.

Because PM<sub>2.5</sub> (primary fine particulate matter) dominates the potential health savings from the reduction in power plant emissions, the researchers suggest that, in addition to the uncertainty analysis recommended, priority should be given to investigating the health benefits resulting from reductions associated with secondary particulate matter, such as secondary aerosols and ozone. Research along these lines would provide much needed supplementary information to this exploratory study.

To summarize, the researchers provide the following list of potential future comparative assessment opportunities using an LCIA framework, including:

- Extending the use of the LCIA framework in this report to evaluate the health benefits due to increased end-use efficiencies and corresponding reductions of additional pollutants, such as additional PAHs, metals, ambient mercury, secondary air pollutants (NO<sub>x</sub>-ozone and NO<sub>x</sub>-nitrate and SO<sub>2</sub>-sulfate), and greenhouse gases;
- Extending this work to the health benefits associated with decreased residential combustion heating in addition to electrical end-use efficiency associated with additional fiberglass

insulation;

- Including morbidity in the calculation of disease burden for the general population and also to susceptible populations due to PM2.5 exposures;
- Extending this work to include health benefits to various sensitive subpopulations (in-utero, infants, elderly, asthmatics) due to reduced pollutant emissions;
- Consideration of how marginal energy use in California influences emissions reductions from end-use energy efficient technologies;
- Consideration of the economic and social costs associated with increasing end-use electricity efficient technologies;
- Consideration of the temporal potency of chemical exposure and finer spatial differences in exposure and associated health benefits;
- Comparison between traditional health risk assessment methods, such as using the RfD to assess non-cancer health effects, with estimates of the effect factor based on an ED10;
- Exploring the sources of variability and uncertainty in the input parameters for an LCIA and a systematic analysis of uncertainty in the CalTOX model structure and application. Differentiate and characterize between Type A (true variability or randomness) or B uncertainty (true variability or randomness versus lack of knowledge);
- Incorporating the LCIA methods demonstrated in this report into a full life-cycle analysis of electricity production and fiberglass manufacturing.

#### **4.4. Benefits to California**

By including energy efficiency in comparative assessments for the current mix of energy technologies, the results and, in particular, the methods and data of this study provide benefits to energy planning for California. Among the key benefits are

- A potential tool for more informed decision making, based on the ability to aggregate and systematically evaluate information on potential environmental implications of alternative energy systems in the context of energy efficiency choices;
- An example of how this tool could be used to make decisions about improvement options for environmental quality, by identifying optimal areas for reducing emissions/effluents, etc., on the basis of a comparative assessment of population disease burden associated with alternative supply and end-use management options; and
- An example of a more systematic approach for consideration of potential environmental and human health effects within the broader decision making process.

## 5.0 References

- Bare, J.C., Norris, G., Pennington, D.E. and McKone, T.E. (2002) "TRACI – The Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts," *Journal of Industrial Ecology* **6**(3-4):49-78.
- Bennett, D., McKone, T.E., Matthies, M., Kastenber, W. (1998) "General Formulation of Characteristic Travel Distance for Semivolatile Organic Chemicals in a Multimedia Environment," *Environmental Science and Technology* **32**(24): 4023-30.
- Bennett, D.H., McKone, T.E., Evans, J.S., Nazaroff, W.W., Margni, M.D., Jolliet, O. and Smith, K.R. (2002a) "Defining Intake Fraction," *Environmental Science & Technology* **36**:207A-211A.
- Bennett, D.H., Margni, M.D., McKone, T.E., and Jolliet, O. (2002b) "Intake Fraction for Multimedia Pollutants: A Tool for Life Cycle Analysis and Comparative Risk Assessment," *Risk Analysis* **22**(5): 905-918.
- Burke, T.A., Doull, J., McKone, T., Paustenbach, D. Scheuplein, R., Udo de Haes, H.A., and Young, J.S. (1996) Human health impact assessment. In *Life cycle assessment: Analysis by an expert panel*. Washington, D.C.: ILSI Health and Environmental Sciences Institute.
- CA DoF (2005) "California Statistical Abstract," California Department of Finance. Located at: [http://www.dof.ca.gov/html/fs\\_data/stat-abs/sec\\_B.htm](http://www.dof.ca.gov/html/fs_data/stat-abs/sec_B.htm). Last accessed January, 2006.
- Census of Population and Housing, 2000 [California]: Summary File 3 [California] [on-line data file]/ prepared by the California Digital Library, --Oakland, California: [producer and distributor], 2003. Generated by < Agnes Lobscheid > ; using Counting California; < <http://countingcalifornia.cdlib.org:80> >. YEAR STRUCTURE BUILT Table located specifically at: <http://countingcalifornia.cdlib.org/sas-bin/broker?program=prd.calcube.sas&study=sf32000&varMtx=H034sf32000&dtbl=H34&geo=cnty>.
- Crettaz, P., Pennington, D., Rhomberg, L., Brand, K., and Jolliet, O. (2002) "Assessing Human Health Response in Life Cycle Assessment Using ED10s and DALYs: Part 1- Cancer Effects," *Risk Analysis* **22**(5): 931-946.
- Dincer, I. (1999) "Environmental Impacts of Energy," *Energy Policy* **27**:845-854.
- Dominici, F., Peng RD, Bell M.L., Pham L., McDermott A., Zeger S.L., Samet J.M. (2006) "Fine Particulate Air Pollution and Hospital Admission for Cardiovascular and Respiratory Diseases," *Journal of American Medical Association* **295**(10):1127-34.
- DOE (2002) "Insulation Fact Sheet," Department of Energy, Assistant Secretary Energy Efficiency and Renewable Energy, DOE/CE-0180/ with Addendum 1. Prepared by the Oak Ridge National Laboratory, Oak Ridge, Tennessee 37831-6385. 19 pps.
- DOE (2006). Insulation and Air Sealing information sheet. Located at: <http://www.energy.gov/insulationairsealing.htm>. Last accessed January, 2006.
- EIA (2000) "The Market and technical potential for combined heat and power in the industrial sector". Prepared by ONSITE SYCOM Energy Corporation. 1010 Wisconsin Ave, NW Suite 340, Washington, D.C. Located at: <http://www.aceee.org/industry/Resources/techpoten.pdf>. Last accessed January, 2006.
- EIA (2002) "Energy Information Administration, State Electricity Profiles, 2002". Located at: [http://www.eia.doe.gov/cneaf/electricity/st\\_profiles/california.pdf](http://www.eia.doe.gov/cneaf/electricity/st_profiles/california.pdf). Last accessed January, 2006.
- EIA (2005) "Buildings Energy Data Book" (2.1 Residential Sector Characteristics). Located at: <http://buildingsdatabook.eren.doe.gov/>. Last accessed January, 2006.

Energy Commission (2001) "2001 Database for Energy Efficiency Resources (DEER) Update Study" (Final Report). Prepared for The California Energy Commission (Contract Number 300-99-008). Prepared by XENERGY Inc. Oakland, California. Located at: <http://www.calmac.org/publications/2001%20DEER%20UPDATE%20Study.pdf> . Last accessed January, 2006.

Energy Commission (2004) "2004 Database of California Power Plants," Located at: <http://www.energy.ca.gov/database/index.html#powerplants>. Last accessed May, 2005.

Environmental Defense (2005) "Clearing California's Coal Shadow from the American West." Written in cooperation with the Center for Energy Efficiency and Renewable Technologies and Western Resource Advocates. Located at: <http://www.ceert.org/Reports/coalreport.pdf>. Last accessed January, 2006.

Environmental Defense (2006a) NO<sub>x</sub> RELs

Environmental Defense (2006b) SO<sub>2</sub> RELs

EPA (1985) "AP 42, Fifth Edition," Volume I, Chapter 11: Mineral Products Industry, Section 11.13 Glass Fiber Manufacturing, September 1985. Located at: [www.epa.gov/ttn/chief/ap42/ch11/final/c11s13.pdf](http://www.epa.gov/ttn/chief/ap42/ch11/final/c11s13.pdf). Last accessed January, 2006.

EPA (1995-2000) "AP 42, Fifth Edition, Compilation of Air Pollutant Emission Factors," Volume 1: Stationary Point and Area Sources. Located at: <http://www.epa.gov/ttn/chief/ap42/>. Last accessed January, 2006.

EPA (2001) "Review of Potential Efficiency Improvements at Coal-Fired Power Plants." Located at: [www.epa.gov/airmarkets/fednox/126noda/heatrate\\_rpt\\_april17.pdf](http://www.epa.gov/airmarkets/fednox/126noda/heatrate_rpt_april17.pdf). Last accessed January, 2006.

EPA (2003) Emissions and Generating Resource Integrated Database (eGRID v 2.01). US EPA Office of Atmospheric Programs. Prepared by E.H. Pechan and Associates, Inc., May 2003.

ExternE (2004) Externalities of Energy, A research project of the European Commission. Reports on methods and findings are available at: <http://externe.jrc.es/index.html>. Last accessed January, 2006.

Franklin Associates Ltd. (1991) "Comparative Energy Evaluation of Plastic Products and their Alternatives for the Building and Construction and Transportation Industries." Prepared for the Society of the Plastics Industry.

Gold, L.S., Slone, T.H., Manley, N.B., Garfinkel, G.B. and Ames, B.N. (2005) "The Carcinogenic Potency Database (CPDB)." Located at: <http://potency.berkeley.edu/cpdb.html> . Last accessed January, 2006.

Guinée J., and Heijungs R. (1993) "A Proposal for The Classification of Toxic Substances Within the Framework of Life Cycle Assessment of Products," *Chemosphere* **26**:1925-1944.

Guinée B.J., Heijungs R., van Oers L.F.C.M, Sleswijk A., van de Meent D., Vermeire T., Rikken M. (1996) "Inclusion of Fate in LCA Characterization of Toxic Releases Applying USES 1.0" *Int. J. LCA* **1**:133-118.

Gulf Coast (2005) Gulf Coast Combined Heating and Power (CHP) Application Center Information. Located at <http://www.gulfcoastchp.org/chp/Markets/TechPower.aspx>. Last accessed June, 2005.

Hertwich E.G., Pease W.S., McKone T.E. (1998) "Evaluating Toxic Impact Assessment Methods: What Works Best?" *Environ. Sci. Technol.* **32**:A138-A144.



Hertwich, E.G., S.F. Mateles, W.S. Pease, T.E. McKone (2001) "Human Toxicity Potentials for Life Cycle Analysis and Toxics Release Inventory Risk Screening," *Environmental Toxicology and Chemistry* **20**:928-939.

Hofstetter P. (1998) *Perspectives in Life Cycle Impact Assessment: A Structured Approach to Combine Models of the Technosphere, Ecosphere and Valuesphere*, Kluwer, Boston.

Huijbregts M.A.J., Thissen U., Guinee J.B., Jager T., Kalf D., van de Meent D., Ragas A.M.J., Wegener Sleeswijk A, Reijnders L. (2000) Priority Assessment of Toxic Substances in LCA I: Calculation of Toxicity Potentials for 181 Substances," *Chemosphere* **41**:575-588.

Huijbregts, M.A.J., Rombouts, L.J.A., Ragas, M.J., van de Meent, D. (2005) "Human-Toxicological Effect and Damage Factors of Carcinogenic and Noncarcinogenic Chemicals for Life Cycle Impact Assessment," *Integrated Environmental Assessment and Management* **1**(3): 181-244.

IAEA (1999) International Atomic Energy Agency, "Health and Environmental Impacts of Electricity Generation Systems: Procedures for Comparative Assessment," the International Atomic Energy Agency, Vienna, Austria.

ISO 14040 (1997). Environmental management- life cycle assessment- principles and framework. Geneva, Switzerland: International Standards Organisation (ISO).

Jerrett, M., Burnett, R.T., Ma, R., Pope, C.A., Krewski, D., Newbold, K.B., Thurston, G., Shi, Y., Finkelstein, N., Calle, E.E., and Thun, M.J. (2005) "Spatial Analysis of Air Pollution and Mortality in Los Angeles," *Epidemiology* **16**(6): 727-736.

Khrushch, M., Worrell, E., Price, L., Martin, N., Einstein, D (1999) "Carbon Emissions Reduction Potential in the US Chemicals and Pulp and Paper Industries by Applying CHP Technologies," Energy Analysis Program, Lawrence Berkeley National Laboratory, June 1999. Located at: <http://www.aceee.org/industry/Resources/khrushch.pdf>. Last accessed January, 2006.

Levy, J.I., Nishioka, Y., and Spengler, J.D. (2003) "The Public Health Benefits of Insulation Retrofits in Existing Housing in the United States," *Environmental Health: A Global Access Science Source* **2**(4): 16 pps. Located at: <http://www.ehjournal.net/content/2/1/4>. Last accessed January, 2006.

Lobscheid, A.B. and McKone, T.E. (2004) "Constraining Uncertainties about the Sources and Magnitude of Polycyclic Aromatic Hydrocarbon (PAH) Levels in Ambient Air: The State of Minnesota as a Case Study," *Atmospheric Environment* **38**: 5501-5515.

Lvovsky, K (2001) "Environment Strategy Papers No. 1: Health and Environment," World Bank, October 2001.

McKone, T.E. and MacLeod, M. (2004) "Tracking Multiple Pathways of Human Exposure to Persistent Multimedia Pollutants: Regional, Continental, and Global Scale Models," *Annual Reviews of Environment and Resources* **28**:463-492.

Morgan, G. M.; Henrion, M. (1990) *Uncertainty: A Guide to Dealing with Uncertainty in Quantitative Risk and Policy Analysis*, Cambridge University Press, New York .

Nishioka, Y., Levy, J.I., Norris, G.A., Wilson, A., Hofstetter, P., and Spengler, J.D. (2002) "Integrating Risk Assessment and Life Cycle Assessment: A case Study of Insulation," *Risk Analysis* **22**(5): 1003-1017.

Nishioka, Y., Levy, J., Norris, G.A., Bennett, D., and Spengler, J. (2005) "A Risk Based Approach to Health Impact Assessment for Input-Output Analysis, Part 2: Case Study of Insulation," *The International Journal of Life Cycle Assessment* **10**(4): 255-262.

- Ontario Hydro (1993) "Full-Cost Accounting for Decision Making," report available from Ontario Hydro, Toronto, Ontario.
- ORNL (1992) Oak Ridge National Laboratory and Resources for Future, "U.S.–EC Fuel Cycle Study: Background Document to the Approach and Issues," Rep. No. 1, Oak Ridge National Lab., TN.
- Pennington, D., Crettaz, P., Tauxe, A., Rhomberg, L., Brand, K., and Jolliet, O. (2002) "Assessing Human Health Response in Life Cycle Assessment Using ED10s and DALYS: Part 2- Noncancer Effects," *Risk Analysis* **22**(5): 947-963.
- Pennington, D.W., Potting, J., Finnveden, G., Lindeijer, E., Jolliet, O., Rydberg, T., and Rebitzer, G. (2004). Life cycle assessment Part 2: Current impact assessment practices. *Environment International* **30**: 721-739.
- Pope, C.A., Burnett R.T., Thun, M.J., Calle E.E., Krewski D., Ito K. and Thurston G.D. (2002). "Lung Cancer, Cardiopulmonary Mortality, and Long-Term Exposure to Fine Particulate Air Pollution." *Journal of American Medical Association* **287** (9): 1132-1141.
- Rothman, et al., (1996). As given in the Toxicological Review of benzene (Noncancer effects). CAS No. 71-43-2. In support of Summary information on the IRIS. October 2002, US EPA EPA/635/R-02/001F. Data from p 119.
- US Census Bureau (1990). Population, Housing Units, Area Measurements, and Density: 1790 to 1990. Population and Housing Unit Counts.
- US Census Bureau (2004) "2004 Characteristics of New Housing," series C25 Annual. Types of Heating Fuel Used in New one-family Houses completed. Located at: <http://www.census.gov/const/C25Ann/c25ann.pdf>. Last accessed January, 2006.

## 6.0 Glossary and List of Acronyms

ALC: absolute lymphocyte count

BaP: benzo(a)pyrene

BMD: benchmark dose

BW: body weight [kg]

BR: breathing rate [m<sup>3</sup>/d]

CF<sub>oral</sub> (rat → human): oral ingestion conversion factor from rat to humans

CF<sub>oral</sub> (mouse → human): oral ingestion conversion factor from mouse to human

CF<sub>Btu→MWe</sub>: conversion factor from Btu to MWe-y ( $3.345 \times 10^{-11}$  MWe-y per Btu)

CF<sub>x</sub>: characterization factor

CHP: combined heat and power

Cogen: cogeneration plant

CTD: characteristic travel distance [km]

D<sub>air</sub>: diffusion coefficient in air

D<sub>water</sub>: diffusion coefficient in water

DALY: disability adjusted life year

$DALY_p$ : the sum of years of life lost due to death and disability from the cancer caused by  $x$  [years lost/incidence]

DEER: database for energy efficiency resources (Energy Commission, 2001)

DOE: US Department of Energy

$ED50_{x,r}$ : the lifetime dose [kg] of chemical  $x$  from exposure route  $r$  affecting 50% of the exposed human population.  $ED50_{x,r}$  can be estimated using the  $TD50_{x,a}$  from animal experiments

EF: emission factor

EF<sub>fiberglass<sub>i</sub></sub>: emission factor of pollutant,  $i$ , from the manufacture of fiberglass [kg pollutant/Mg insulation, finished product]

EF<sub>x</sub>: effect factor [statistical years of life lost per mg intake of chemical *x*]

EIA: US Energy Information Agency

EOR: enhanced oil recovery

EPA: US Environmental Protection Agency

ESP: electrostatic precipitator

FF<sub>*x*</sub>: fate factor, or the population intake of chemical *x* per unit of emission of chemical *x* [kg(intake)/y per kg(emission)/y]

gal: gallon

GW: gigawatt

HDD: annual heating degree days [°F-d]

HDF: human damage factor

HHV: higher heating value of fuel

HV: heating value of fuel

HVAC: heating, ventilation and air conditioning

IAEA: International Atomic Energy Agency

IECC: International Energy Conservation Code

IC: internal combustion

IECC: International Energy Conservation Code

iFi: individual intake fraction

J: Joule

K<sub>d,d/q/s/v</sub>: soil-water partition coefficient in sediment (d)/aquifer (q)/ground-soil (s)/vadose-zone soil (v) layer

kg: kilogram

K<sub>ow</sub>: octanol-water partition coefficient

LCA: life-cycle assessment or analysis

LCIA: life-cycle impact assessment

LHV: lower heating value of fuel

LOEL: lowest-observed effect level

MDL: method detection limit

MMBtu: million Btu

Mt: million metric tonne

MWe: mega-watt electric

MWt: thermal mega-watt

NOEL: no-observed effect level

NOx: nitrous oxides

NSPS: New Source Performance Standards

PC: pulverized coal

$p(d | \Delta TU)$ : the probability of occurrence of a disease,  $d$ , caused by a marginal change in the ambient toxic unit (TU) [-]

PM<sub>2.5</sub>: particulate matter with aerodynamic diameter less than 2.5  $\mu\text{m}$

$P_{\text{vap}}$ : vapor pressure [Pa]

$q_1^*$ : the 95<sup>th</sup>% upper confidence bound on the linearized multistage model slope factor  $q_1$

$R_{\text{baseline}}$ : the baseline R-values for homes heated with electricity reported in the 2001 DEER study

$R_{\text{rec}}$ : additional attic insulation needed to reach the latest DOE recommended insulation requirements

RfD: US EPA reference dose [mg/kg-BW/d]

$S_{\text{bituminous}}$ : sulfur content of bituminous coal

scf: standard cubic feet

$S_{\text{diesel}}$ : sulfur content of diesel fuel

$S_{\text{distillate}}$ : sulfur content of distillate oil

SFBA: San Francisco Bay Area

$\text{SO}_2$ : sulfur dioxide

$S_{\text{subbituminous}}$ : sulfur content of subbituminous coal

$S_{\text{water}}$ : solubility

TAPs: toxic air pollutants

TD50: daily dose rate [mg/kg(BW)-d] that induces tumors in half of the test animals that would have otherwise been tumor free at no dose

$t_{\text{insulation}}$ : lifetime of the fiberglass insulation [y]

TRACI: Tool for the Reduction and Assessment of Chemicals and other environmental Impacts

$V_{\text{insulation}}$  : volume of installed insulation

WTE: waste-to-energy

$\alpha$ : parameter (in addition to  $\beta$ ) used to define the scaling in the beta distribution

$\beta$ : parameter (in addition to  $\alpha$ ) used to define the scaling in the beta distribution

$\beta_{ED10-x}$ : the linear low dose response slope factor [individual lifetime risk of cancer per (mg/kg BW-day) intake] for chemical x, inducing a response over background of 10% for humans

$\eta_e$  : electrical efficiency [-]

$\rho_{\text{fiberglass}}$  : density of fiberglass (9 kg/m<sup>3</sup>)

## **Appendix A: Tables of Data Used to Estimate Pollutant Emissions per MWe-y**

**Table A-1:** Ranges of electrical efficiencies ( $\eta_e$ ) of power plants, by fuel and technology type. These ranges were used to define beta distributions (with  $\alpha=2$ ;  $\beta=2$ ) to estimate emissions.

Primary fuel	Simple cycle	CHP/cogen/ Combined cycle
Coal	0.33-0.39 <sup>a</sup>	0.4 <sup>b</sup>
Natural gas		
Gas turbine	0.15-0.42 <sup>c</sup>	0.58-0.84 <sup>d</sup>
Steam turbine or boiler	0.10-0.35(<250 MW) <sup>e</sup> 0.25-0.45(>250 MW) <sup>f</sup>	n/a <sup>g</sup>
IC or reciprocating engine <sup>h</sup>	0.25-0.50 <sup>i</sup>	0.70-0.80 <sup>j</sup>
Oil <sup>k</sup>		
gas turbine	0.15-0.42 <sup>c</sup>	0.58-0.84 <sup>d</sup>
Steam turbine or boiler	0.10-0.35(<250 MW) <sup>e</sup> 0.25-0.45(>250 MW) <sup>f</sup>	n/a <sup>g</sup>
IC or reciprocating engine <sup>h</sup>	0.30-0.50 <sup>m</sup>	n/a <sup>n</sup>
WTE <sup>o</sup>		
gas turbine	0.15-0.42 <sup>c</sup>	0.58-0.84 <sup>d</sup>
steam turbine or boiler	0.10-0.35(<250 MW) <sup>e</sup> 0.25-0.45(>250 MW) <sup>f</sup>	n/a <sup>g</sup>
IC or reciprocating engine <sup>h</sup>	0.25-0.50 <sup>i</sup>	0.70-0.80 <sup>j</sup>

n/a: not applicable

<sup>a</sup> Minimum efficiency reported in EPA (2001) as 0.33-0.34 of subcritical systems, with a maximum of 5% higher efficiency with specific improvements (listed in Table 2 of EPA, 2001).

<sup>b</sup> Maximum efficiency reported in coal fired power plants (Polk Power Plant) with integrated gasification combined cycle (EPA, 2001).

<sup>c</sup> Range of simple cycle  $\eta_e$  given by AP42 (EPA, 1995-2000). Values from other references for  $\eta_e$  are within this range (Khrushch, et al, 1999; EIA, 2000; Gulf Coast, 2005).

<sup>d</sup> Range of combined cycle, or cogeneration,  $\eta_e$ s reported. Minimum and maximum are reported here (Khrushch, et al., 1999 and AP42, EPA, 1995-2000, respectively). Values from EIA (2000) and Gulf Coast (2005) fall within this range.

<sup>e</sup> Range of smaller steam turbines used at smaller plants which make electricity as a byproduct of delivering steam to processed or district heating systems, and smaller steam turbines used in industry or backpressure (non-condensing) turbines (EIA, 2000 and Gulf Coast, 2005). Assume these are plants with < 250MWe output.



<sup>f</sup> Range of upper end steam (condensing) turbines designed for large electric utility plants (EIA, 2000 and Gulf Coast, 2005) . Assume these are plants with > 250MWe output.

<sup>g</sup> Assumes that CHP/cogeneration/combined cycle refers primarily to gas turbines with steam turbines, not vice versa. If a steam turbine or boiler was reported as a cogeneration facility, assume it is a gas turbine with CHP/cogen/combined cycle technology and the associated  $\eta_e$  value.

<sup>h</sup> Reported as  $\eta_e$  for reciprocating engines (spark ignition uses natural gas as preferred fuel and compression ignition uses diesel or other heavy fuel). Assume that these  $\eta_e$ s apply to the plants, which report internal combustion (IC) engines as technology to generate electricity, because, like rotary engines, reciprocating engines are another class of IC engines.

<sup>i</sup> Range of natural gas fired spark ignition engine (EIA, 2000 and Gulf Coast, 2005). Low end applies to smaller stoichiometric engines, which require 3-way catalyst after treatment, and high end refers to lean burn natural gas engines.

<sup>j</sup> Range of natural gas fired reciprocating engine operating in CHP mode (Gulf Coast, 2005).

<sup>k</sup> Applies to both distillate and diesel fueled plants.

<sup>m</sup> Range of diesel fueled compression engine  $\eta_e$  s (EIA, 2000 and Gulf Coast, 2005).

<sup>n</sup>  $\eta_e$  s were not located. No plants in the Energy Commission database (Energy Commission, 2004) list cogeneration together with reciprocating engine technologies fueled by oil (either diesel or distillate oil).

<sup>o</sup> Natural gas, methane, digester or landfill gas. For those plants that are reported as having brownfield or greenfield technologies (all happen to be 'peakers' i.e., constructed to supply peak electricity demand), assume the simple cycle gas turbine plant  $\eta_e$ s apply (the individual web sites of the plants support this assumption).

**Table A-2(a-f):** Chemical emission factors used to estimate emissions from electricity generation from California power plants.

**A-2a) Emission factors for SO<sub>2</sub> emissions**

Primary Fuel	Technology	Emission Factor		
		Value	Units	Rating
Coal	Bottoming cycle, topping cycle, steam turbine, fluidized boiler, or not reported			
Bituminous		$38 \times S_{\text{bituminous}}$ (=19.0) <sup>a,b</sup>	lb/ton	A or B
Subbituminous		$35 \times S_{\text{subbituminous}}$ (=17.5) <sup>a,c</sup>	lb/ton	A or B
Oil				
Distillate	Combustion or gas turbine	28.3 <sup>f</sup>	lb/1000 gal oil	B
	Steam turbine			
	MW > 30	$157 \times S_{\text{distillate}}$ (= 31.4) <sup>e</sup>		A
	MW < 30	$142 \times S_{\text{distillate}}$ (= 28.4) <sup>e</sup>		A
Diesel		$142 \times S_{\text{diesel}}$ (=56.8) <sup>d</sup>	lb/1000 gal oil	A
Natural Gas	Combustion or gas turbine	3.5 <sup>h</sup>	lb/10 <sup>6</sup> scf	B
	Steam turbine	0.6 <sup>g</sup>	lb/10 <sup>6</sup> scf	A
	Reciprocating engine	0.62 <sup>g,j</sup>	lb/10 <sup>6</sup> scf	A
WTE				
Digester gas	Gas turbine, combined cycle, or internal combustion	3.9 <sup>i</sup>	lb/10 <sup>6</sup> scf	D
Landfill gas	Brownfield, greenfield, active flare/LFGTE, gas turbine, steam turbine, methane gas, internal combustion, or reciprocating engines.	1.8 <sup>i</sup>	lb/10 <sup>6</sup> scf	C

<sup>a</sup> It is assumed that the sulfur content of bituminous coal ( $S_{\text{bituminous}}$ ) and subbituminous ( $S_{\text{subbituminous}}$ ) is 0.5% (EIA, 2002), expressed as 0.5.

<sup>b</sup> Expressed as SO<sub>2</sub>, SO<sub>3</sub> and gaseous sulfates. On average, 95% of fuel sulfur in bituminous coal is emitted as SO<sub>2</sub>, and only 0.7% as SO<sub>3</sub> and gaseous sulfate. Value reported is the same for all firing configurations reported, including PC dry-bottom wall-fired firing configurations (pre-NSPS, pre-NSPS with low-NOx burner, and NSPS); PC dry bottom cell burner fired configurations; PC dry bottom tangentially fired (pre-

NSPS, pre-NSPS with low-NO<sub>x</sub> burner, and NSPS); PC wet-bottom wall-fired (pre NSPS); PC wet-bottom tangentially fired (NSPS); cyclone furnaces; spreader stokers; and overfeed stokers.

<sup>c</sup> Expressed as SO<sub>2</sub>, SO<sub>3</sub> and gaseous sulfates. Similar to bituminous coal emissions, we assume over 95% of coal is emitted as SO<sub>2</sub>. Value reported is average from all firing configurations reported, including PC dry-bottom wall-fired firing configurations (pre-NSPS and NSPS); PC dry bottom cell burner fired configurations; PC dry bottom tangentially fired (both pre-NSPS and NSPS); PC wet-bottom wall fired; cyclone furnaces; spreader stokers; and overfeed stokers.

<sup>d</sup> Because diesel is a distillate fuel, it is assumed that equivalent EFs. This EF applies only if input MW < 30, which seems to be the case for the power plants burning diesel in the Energy Commission database. Based on sulfur content of diesel of 0.4% by weight ( $S_{\text{diesel}} = 0.4$ )

<sup>e</sup> Sulfur weight content of distillate oil is 0.2% ( $S_{\text{distillate}} = 0.2$ ).

<sup>f</sup> Uncontrolled turbines (including simple cycle, regenerative cycle, cogeneration cycles and combined cycle plants) operating at greater than or equal to 80% load. EFs in the AP-42 are given on a lb/MMBtu basis and are multiplied by the heating value of distillate fuel (**Table 3**), assuming a sulfur content of 0.2% by weight ( $S_{\text{distillate}} = 0.2$ ).

<sup>g</sup> Based on 100% conversion of fuel sulfur to SO<sub>2</sub> and assuming sulfur content of 2000 grains/10<sup>6</sup> scf.

<sup>h</sup> Based on plants operating at or above 80% load. Because the weight content of sulfur in natural gas is not available, AP 42 recommends 3.4 E-03 lb/MMBtu multiplied by the heating value of natural gas, 1035 Btu/scf.

<sup>i</sup> Based on plants operating at or above 80% load.

<sup>j</sup> Based on the average of the EFs for uncontrolled 2 stroke lean burn, 4-stroke lean and 4-stroke rich burn reciprocating engines (SCC = 2-02-002-52, 2-02-002-54, and 2-02-002-53, respectively) in AP42 (Section 3.2). EFs reported on lb/MMBtu basis and converted to lb/10<sup>6</sup>scf using heating value of natural gas (1020 Btu/scf).

**A-2b) Emission factors for NO<sub>x</sub> emissions**

Primary Fuel	Technology	Emission Factors		
		Value	Units	Rating
Coal	Bottoming cycle, topping cycle, steam turbine, fluidized boiler, or not reported			
Bituminous		16.2 <sup>a</sup>	lb/ton	A-E
Subbituminous		11.9 <sup>b</sup>	lb/ton	A-E
Oil				
Distillate	Combustion or gas turbine	78.4 <sup>e</sup>	lb/1000 gal	B & C
	Steam turbine	20 <sup>d</sup>	lb/1000 gal	A
Diesel		20 <sup>c,d</sup>	lb/1000 gal	A
Natural Gas	Combustion or gas turbine	189.4 <sup>h</sup>	lb/10 <sup>6</sup> scf	A,D
	Steam turbine			
	MW > 30	177.5 <sup>f</sup>	lb/10 <sup>6</sup> scf	A,D
	MW < 30	60.7 <sup>g</sup>	lb/10 <sup>6</sup> scf	B,C,D
	Reciprocating engine	2.5x10 <sup>3j</sup>	lb/10 <sup>6</sup> scf	A,B,C
WTE				
Digester gas	Gas turbine, combined cycle, or internal combustion	96 <sup>i</sup>	lb/10 <sup>6</sup> scf	D
Landfill gas	Brownfield, greenfield, active flare/LFGTE, gas turbine, steam turbine, methane gas, internal combustion, or reciprocating engines.	56 <sup>i</sup>	lb/10 <sup>6</sup> scf	A

<sup>a</sup> Average of all boiler types reported with the exception of overfeed and underfed stokers and hand-fed units. Boiler types included are: PC dry-bottom wall-fired firing configurations (pre-NSPS and NSPS); PC dry bottom cell burner fired configurations; PC dry bottom tangentially fired (both pre-NSPS and NSPS); PC wet-bottom wall fired; cyclone furnaces; spreader stokers; overfeed stokers; and circulating bed and bubbling bed FBC.

<sup>b</sup> Average of all boiler types reported with the exception of overfeed and underfed stokers and hand-fed units. Boiler types included are: PC dry-bottom wall-fired firing configurations (pre-NSPS and NSPS); PC dry bottom cell burner fired configurations; PC dry bottom tangentially fired (both pre-NSPS and NSPS); PC wet-bottom wall fired; cyclone furnaces; spreader stokers; and circulating bed and bubbling bed FBC.

<sup>c</sup> Because diesel is a distillate oil, the same EF for distillate oil fired steam turbine was used. This is based on NO<sub>2</sub>.

<sup>d</sup> EF is expressed as NO<sub>2</sub>, even though "over 95% of emitted NO<sub>x</sub> is in the form of nitrogen oxide (NO)" Section 1.3, p3 of AP-42.

<sup>e</sup> Average of uncontrolled and water-steam injection (including simple cycle, regenerative cycle, cogeneration cycles and combined cycle plants) operating at greater than or equal to 80% load. EFs in the AP-42 are given on a lb/MMBtu basis and are multiplied by the heating value of distillate fuel (**Table 3**).

<sup>f</sup> Expressed as NO<sub>2</sub>. EFs are the average of uncontrolled (both pre-NSPS and post-NSPS) and controlled (low-NOx burner and flue gas recirculation units) large wall-fired steam boilers with greater than 30MW heat input.

<sup>g</sup> Expressed as NO<sub>2</sub>. EFs are the average of uncontrolled and controlled (low NOX burner and flue gas recirculation) small boilers burning less than 30 MW heat input.

<sup>h</sup> Based on plants operating at or above 80% load. The average of three natural gas fired turbines (uncontrolled, water steam injection and lean-premix). EFs are reported on a lb/MMBtu basis and converted to lb/10<sup>6</sup> scf based on heating value of natural gas.

<sup>i</sup> Based on plants operating at or above 80% load.

<sup>j</sup> Based on the average of the EFs of all of the 90-105% load and <90% load EFs for NOx (none reported for unreported load conditions) from reciprocating engines including, 2 stroke lean burn, 4-stroke lean and 4-stroke rich burn reciprocating engines (SCC = 2-02-002-52, 2-02-002-54, and 2-02-002-53, respectively in AP-42 (Section 3.2). EFs are reported on lb/MMBtu basis and converted to lb/10<sup>6</sup>scf using heating value of natural gas (1020 Btu/scf).

A-2c) Emission factors for PM2.5 emissions

Primary Fuel	Technology	Emission Factors		
		Value	Units	Rating
Coal	Bottoming cycle, topping cycle, steam turbine, fluidized boiler, or not reported			
Bituminous		0.91 <sup>a</sup>	lb/ton	C,D,E
Subbituminous		0.10 <sup>b</sup>	lb/ton	C,D,E
Oil				
Diesel		0.54 <sup>c,d</sup>	lb/1000 gal	D & E
Distillate	Steam turbine	0.54 <sup>d</sup>	lb/1000 gal	D & E
	Combustion and gas turbine	1.01 <sup>e</sup>	lb/1000 gal	C
Natural Gas	Combustion or gas turbine	4.9 <sup>f</sup>	lb/10 <sup>6</sup> scf	C
	Steam turbine	negligible		
	Reciprocating engines	12.8 <sup>g</sup>	lb/10 <sup>6</sup> scf	C,D,E
WTE				
Digester gas	Gas turbine, combined cycle, or internal combustion	n/a		
Landfill gas	Brownfield, greenfield, active flare/LFGTE, gas turbine, steam turbine, methane gas, internal combustion, or reciprocating engines.	n/a		

<sup>a</sup> Average of EFs from technologies reported burning bituminous coal, including PC, dry-bottom, wall-fired firing configurations (for uncontrolled plants as well as plants with either multiple cyclone, scrubber, ESP, or baghouse); PC, dry bottom, tangentially fired plants which are either uncontrolled plants as well as plants with either multiple cyclone, scrubber, ESP, or baghouses); PC, wet-bottom, wall-fired and tangentially fired plants that are either uncontrolled, with multiple cyclones or with ESP technology; spreader stokers which are either uncontrolled or have multiple cyclone, ESP or baghouse technology; and overfeed stokers which are either uncontrolled or have multiple cyclone technology.

<sup>b</sup> Average of EFs from technologies reported burning subbituminous coal, including PC, dry-bottom, wall-fired firing configurations (for uncontrolled plants as well as plants with either multiple cyclone, scrubber, ESP, or baghouse) and PC, dry bottom, tangentially fired plants which are either uncontrolled plants as well as plants with either multiple cyclone, scrubber, ESP, or baghouses.

<sup>c</sup> Because diesel is a distillate oil, the same EF as for PM2.5 from distillate oil fired steam turbine was used. This is based on NO<sub>2</sub>.

<sup>d</sup> The average of commercial and industrial boilers.

<sup>e</sup> Uncontrolled turbines including simple cycle, regenerative cycle, cogeneration cycles and combined cycle plants, operating at or above 80% load.

<sup>f</sup> Based on condensable PM emissions from water-steam injection gas-fired turbines. Assumes plants operate at or above 80% load.

<sup>g</sup> EFs are the average of the reported filterable (< 1mm aerodynamic diameter) and condensable PM<sub>2.5</sub> from three types of reciprocating engines, including 2 stroke lean burn, 4-stroke lean and 4-stroke rich burn reciprocating engines (SCC = 2-02-002-52, 2-02-002-54, and 2-02-002-53, respectively) from the AP-42. However, for the condensable PM<sub>2.5</sub>, there is no EF data available from 2-stroke lean and 4-stroke rich engines, therefore the EFs reflect emissions from 4SLB engines. Condensable PM<sub>2.5</sub> EFs from 4-stroke lean refers to inorganic and organic PM condensable emissions. EFs are reported on lb/MMBtu basis and converted to lb/10<sup>6</sup>scf using heating value of natural gas (1020 Btu/scf).

**A-2d) Emission factors for BaP emissions**

Primary Fuel	Technology	Emission Factors		
		Value	Units	Rating
Coal	Bottoming cycle, topping cycle, steam turbine, fluidized boiler, or not reported			
Bituminous		3.8E-08 <sup>a</sup>	lb/ton	D
Subbituminous		3.8E-08 <sup>a</sup>	lb/ton	D
Oil				
Diesel		0.006 <sup>b</sup>	lb/1000 gal	C
Distillate	Steam turbine	0.006 <sup>b</sup>	lb/1000 gal	C
	Combustion or gas turbine	0.006 <sup>c</sup>	lb/1000 gal	C
Natural Gas	Combustion or gas turbine	2.28E-03 <sup>e</sup>	lb/10 <sup>6</sup> scf	C
	Steam turbine	1.2E-06 <sup>d</sup>	lb/10 <sup>6</sup> scf	E
	Reciprocating engine	5.9E-06 <sup>f</sup>	lb/10 <sup>6</sup> scf	D
WTE				
Digester gas	Gas turbine, combined cycle, or internal combustion	n/a		
Landfill gas	Brownfield, greenfield, active flare/LFGTE, gas turbine, steam turbine, methane gas, internal combustion, or reciprocating engines.	n/a		

<sup>a</sup> EF based on plants that are either PC, dry-bottom, wall-fired and cell-burner firing configurations and Cyclone furnaces. Bituminous and subbituminous distinction not reported.

<sup>b</sup> EFs are not reported in the AP-42 for diesel nor distillate oil fired steam turbine power plants. Assume that the gas-fired stationary turbines for which there are EFs are applicable. Note however, that in general, EFs from steam turbines tend to be less than half of the EFs from distillate oil gas turbine plants.

<sup>c</sup> EF reported for "PAH" and we assume that this applies to BaP (Table 3.1.4 in AP 42). Further, EFs estimated from uncontrolled turbines including simple cycle, regenerative cycle, cogeneration cycles and combined cycle plants, operating at or above 80% load.

<sup>d</sup> The method detection limit (MDL). The EF is either at or below MDL.

<sup>e</sup> EFs are given for "PAH" in general (Table 3.1.3 of the AP 42) and it is assumed that this applies to BaP. EFs are based on uncontrolled gas-fired turbines operating at or above 80% load.

<sup>f</sup> Only EFs for uncontrolled 2-stroke lean burn engines (SCC 2-02-002-52) are reported in the AP42, Section 3.2. EFs are reported on lb/MMBtu basis and converted to lb/10<sup>6</sup>scf using heating value of natural gas (1020 Btu/scf).



**A-2e) Emission factors for benzene emissions**

Primary Fuel	Technology	Emission Factors		
		Value	Units	Rating
Coal	Bottoming cycle, topping cycle, steam turbine, fluidized boiler, or not reported			
Bituminous		1.3E-03 <sup>a</sup>	lb/ton	A
Sub-bituminous		1.3E-03 <sup>a</sup>	lb/ton	A
Oil				
Diesel		2.14E-04 <sup>b</sup>	lb/1000 gal	C
Distillate	Steam turbine	2.14E-04 <sup>b</sup>	lb/1000 gal	C
	Combustion and gas turbine	7.7E-03 <sup>c</sup>	lb/1000 gal	C
Natural gas	Combustion or gas turbine	1.24E-02 <sup>d</sup>	lb/10 <sup>6</sup> scf	A
	Steam turbine	2.10E-03	lb/10 <sup>6</sup> scf	B
	Reciprocating engine	1.4 <sup>f</sup>	lb/10 <sup>6</sup> scf	A & B
WTE				
Digester gas	Gas turbine, combined cycle, or internal combustion	n/a		
Landfill gas	Brownfield, greenfield, active flare/LFGTE, gas turbine, steam turbine, methane gas, internal combustion, or reciprocating engines.	8.4E-03 <sup>e</sup>	lb/10 <sup>6</sup> scf	B

<sup>a</sup> EF based on plants that are either PC, dry-bottom, wall-fired and cell-burner firing configurations and cyclone furnaces. Bituminous and sub-bituminous distinction not reported.

<sup>b</sup> Reported for residual oil (Table 1.3-9 in AP 42) and we assume this applies for diesel and distillate oil.

<sup>c</sup> Uncontrolled turbines including simple cycle, regenerative cycle, cogeneration cycles and combined cycle plants, operating at or above 80% load.

<sup>d</sup> EFs are given for uncontrolled natural gas gas-fired turbines and are converted from lb/MMBtu. The EF assumes that a plant operates at or above 80% load.

<sup>e</sup> For plants operating at or above 80% load.

<sup>f</sup> Average EF reported for three types of reciprocating engines, including 2 stroke lean burn, 4-stroke lean and 4-stroke rich burn reciprocating engines (SCC = 2-02-002-52, 2-02-002-54, and 2-02-002-53, respectively) from the AP-42. EFs are reported on lb/MMBtu basis and converted to lb/10<sup>6</sup>scf using heating value of natural gas (1020 Btu/scf).

A-2f) Emission factors for naphthalene emissions

Primary Fuel	Technology	Emission Factors		
		Value	Units	Rating
Coal	Bottoming cycle, topping cycle, steam turbine, fluidized boiler, or not reported			
Bituminous		1.3E-05 <sup>a</sup>	lb/ton	C
Subbituminous		1.3E-05 <sup>a</sup>	lb/ton	C
Oil				
Diesel		1.13E-03 <sup>b</sup>	lb/1000 gal	C
Distillate	Steam turbine	1.13E-03 <sup>b</sup>	lb/1000 gal	C
	Combustion or gas turbine	4.9E-03 <sup>c</sup>	lb/1000 gal	C
Natural gas	Combustion or gas turbine	1.35E-03 <sup>d</sup>	lb/10 <sup>6</sup> scf	C
	Steam turbine	6.10E-04	lb/10 <sup>6</sup> scf	E
	Reciprocating engine	9.2E-02 <sup>e</sup>	lb/10 <sup>6</sup> scf	C,E
WTE				
Digester gas	Gas turbine, combined cycle, or internal combustion	n/a		
Landfill gas	Brownfield, greenfield, active flare/LFGTE, gas turbine, steam turbine, methane gas, internal combustion, or reciprocating engines.	n/a		

<sup>a</sup> EF based on plants that are either PC, dry-bottom, wall-fired and cell-burner firing configurations and cyclone furnaces. Bituminous and subbituminous distinction not reported.

<sup>b</sup> Reported for residual oil (Table 1.3-9 in AP 42) and we assume this applies for diesel and distillate oil.

<sup>c</sup> Uncontrolled turbines including simple cycle, regenerative cycle, cogeneration cycles and combined cycle plants, operating at or above 80% load.

<sup>d</sup> EFs are given for uncontrolled natural gas gas-fired turbines and are converted from lb/MMBtu. The EF assumes that a plant operates at or above 80% load.

<sup>e</sup> Average EF reported for three types of reciprocating engines, including 2 stroke lean burn, 4-stroke lean and 4-stroke rich burn reciprocating engines (SCC = 2-02-002-52, 2-02-002-54, and 2-02-002-53, respectively) from the AP-42. EFs are reported on lb/MMBtu basis and converted to lb/10<sup>6</sup>scf using heating value of natural gas (1020 Btu/scf).

**Table A-3:** Heating value (HV) of the fuel types

Fuel	HV	Units	Reference
Coal			
Bituminous <sup>a</sup>	13,000	Btu/lb	App A, AP 42
Subbituminous	11,900	Btu/lb	EIA, 2002
Lignite	7200	Btu/lb	App A, AP 42
Oil			
Diesel	137,000	Btu/gal	App A, AP 42
Distillate	140,000	Btu/gal	App A, AP 42
Natural gas	1035	Btu/scf	AP 42 <sup>b</sup>
WTE			
Digester gas	600	Btu/scf at 60 °F	AP 42, Section 3.1
Landfill gas	400	Btu/scf at 60 °F	AP 42, Section 3.1
Crude Oil	19,000 <sup>c</sup>	Btu/lb	<a href="http://www.eppo.gov.th/ref/UNIT-OIL.html">http://www.eppo.gov.th/ref/UNIT-OIL.html</a>
Petroleum coke	13,300 <sup>d</sup>	Btu/lb	App A, AP 42


<sup>a</sup> Assumes bituminous coal burned in California

<sup>b</sup> Average of two values reported in Appendix A (p 5) and Chapter 1.4 of AP 42


<sup>c</sup> Approximately 15% greater heating value than coal

<sup>d</sup> Assumes 'coke, byproduct' heating value.


**Appendix B: Intermediate Results for the Individual Intake Fraction and Effect Factors  
Used to Calculate Human Damage Functions (HDFs)**

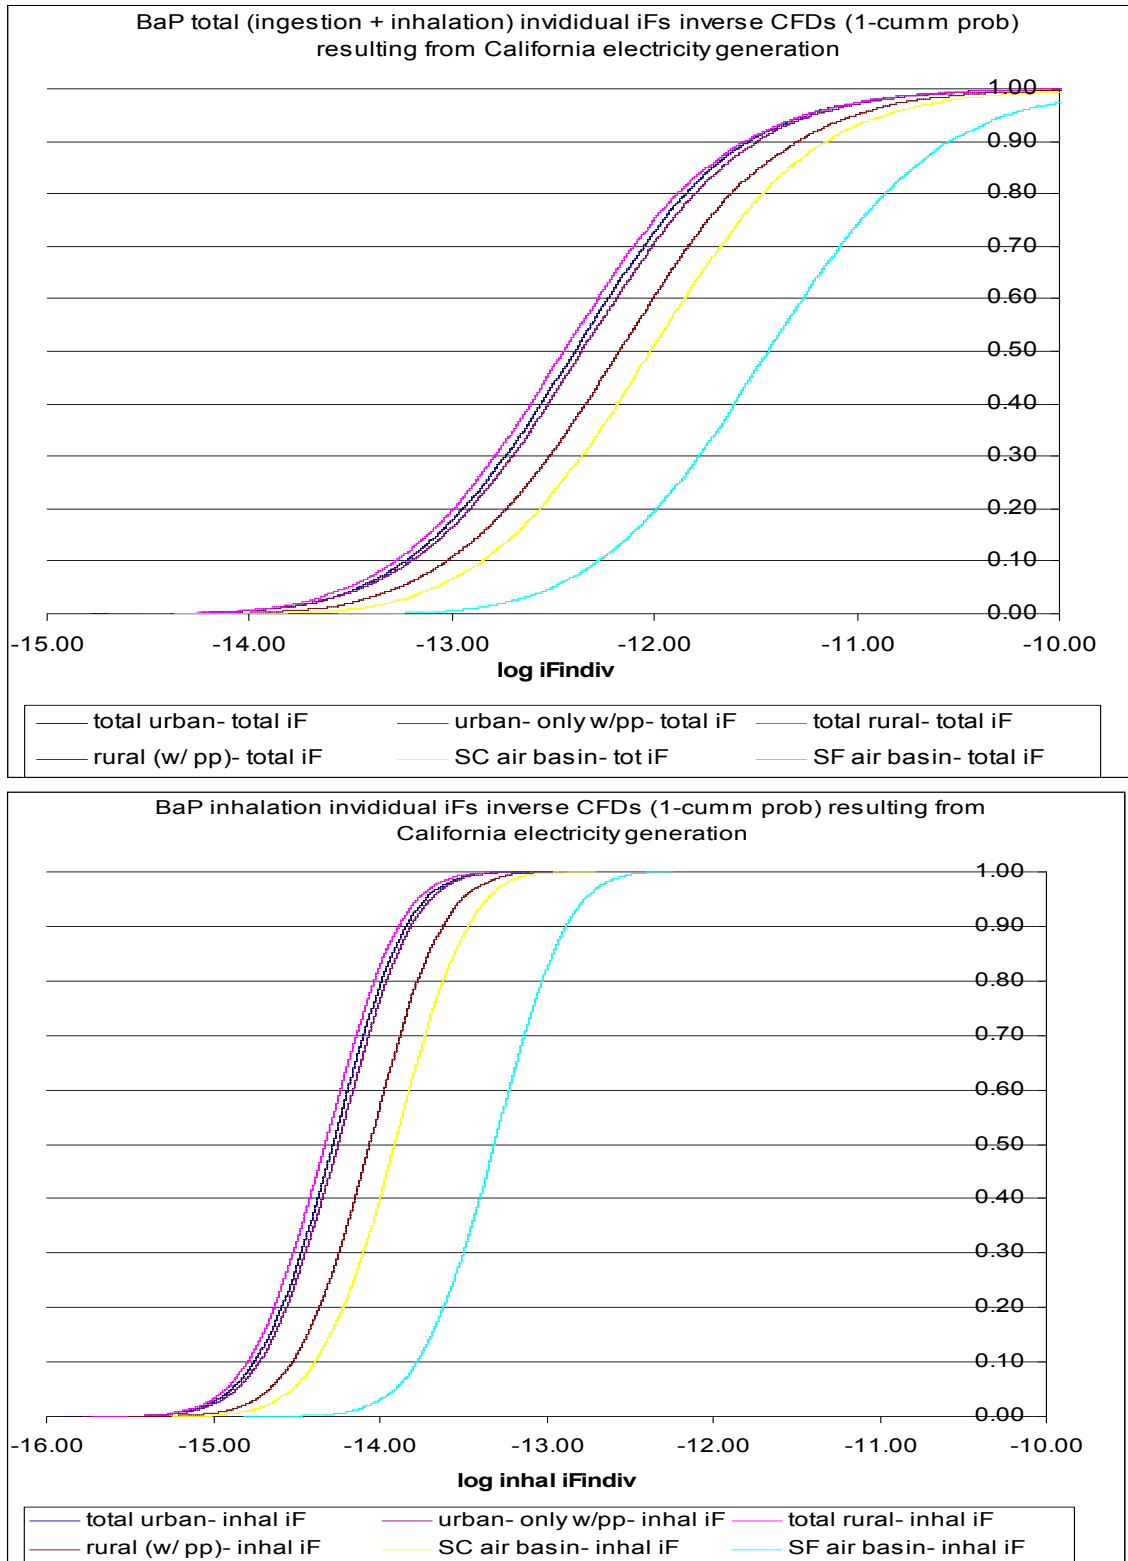


**Figure B-1. Distribution of individual intake fraction (*iFi*) for BaP based on total (ingestion and inhalation) intake (upper chart) and intake and only inhalation intake (lower chart)**

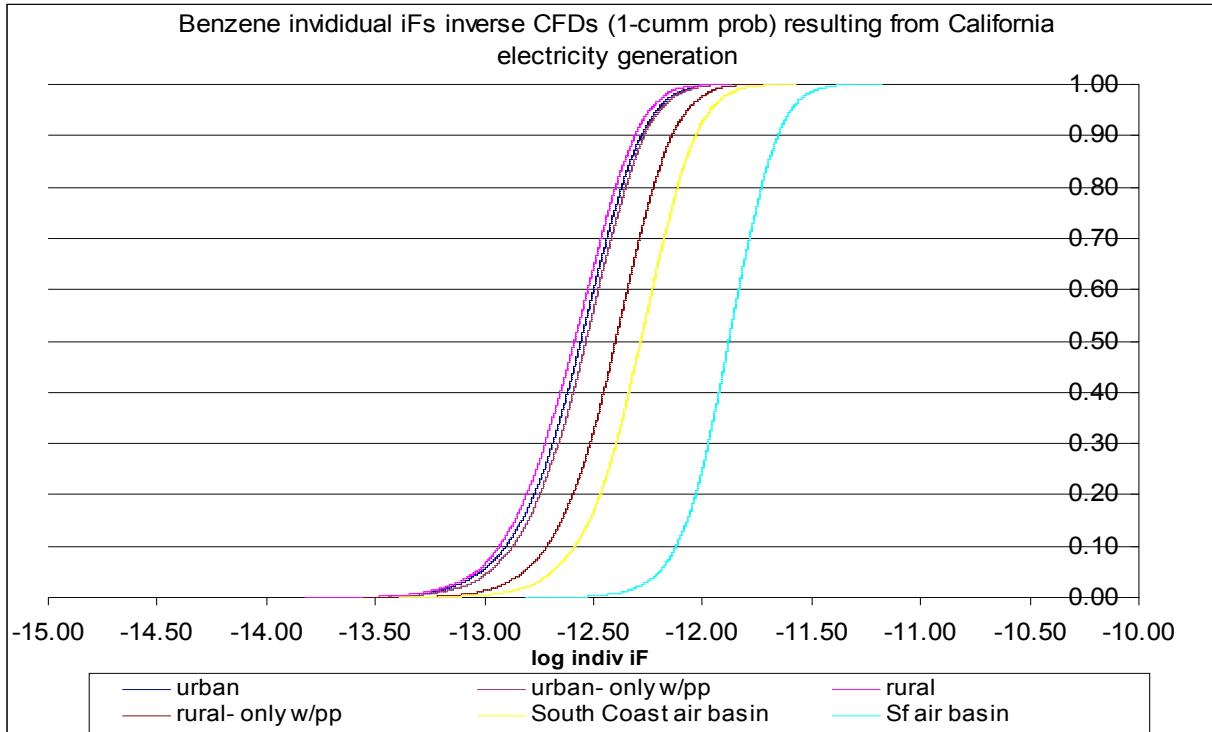


**Figure B-2. Benzene *iFi* distributions**

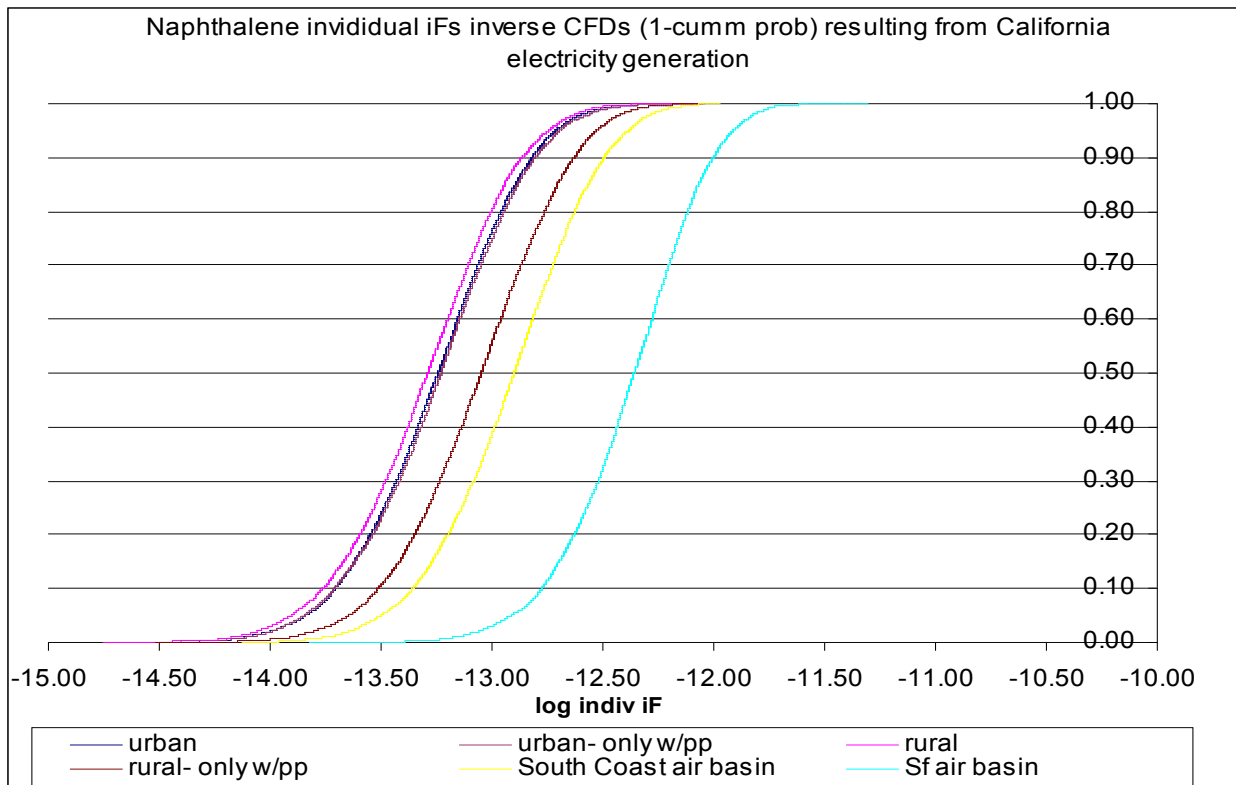

**Figure B-3. Naphthalene *iFi* distributions**

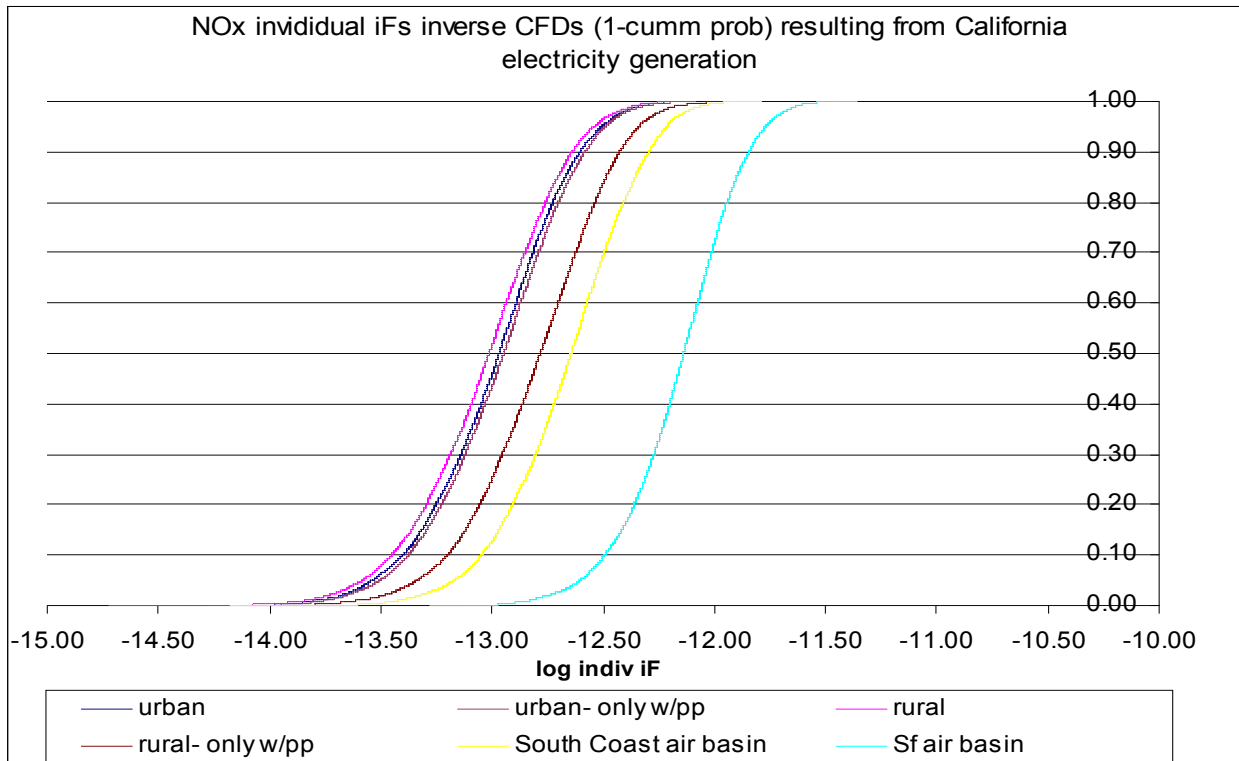

**Figure B-4. NOx *iFi* distributions**

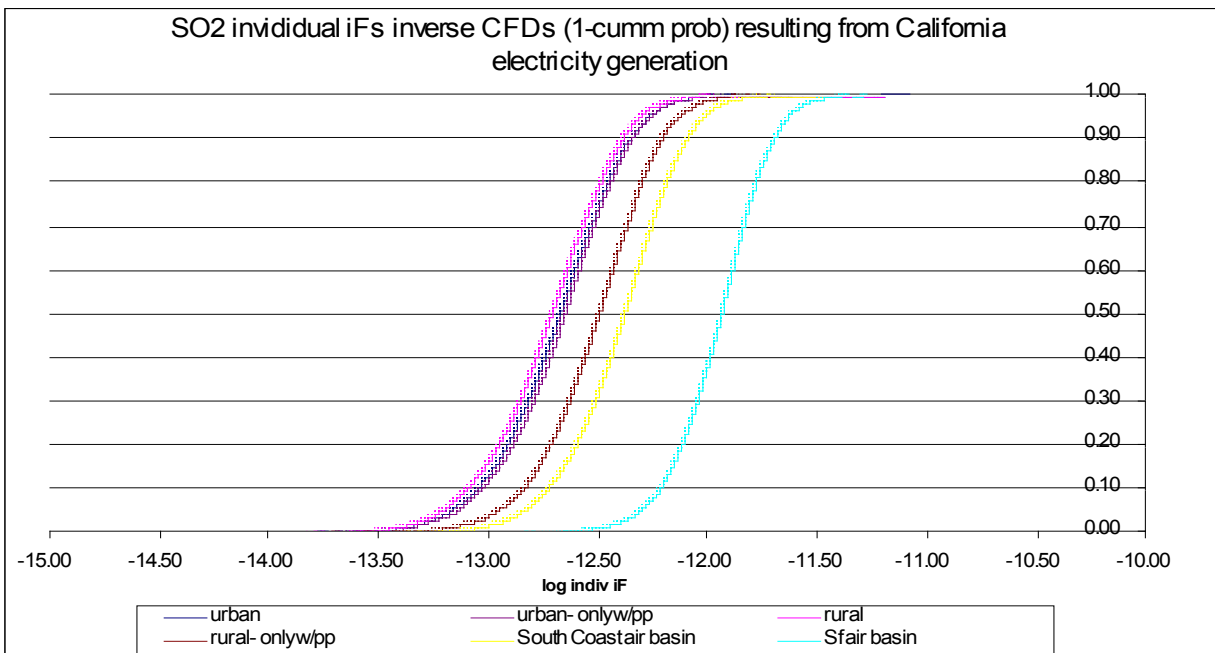

**Figure B-5. SO<sub>2</sub> *iFi* distributions**

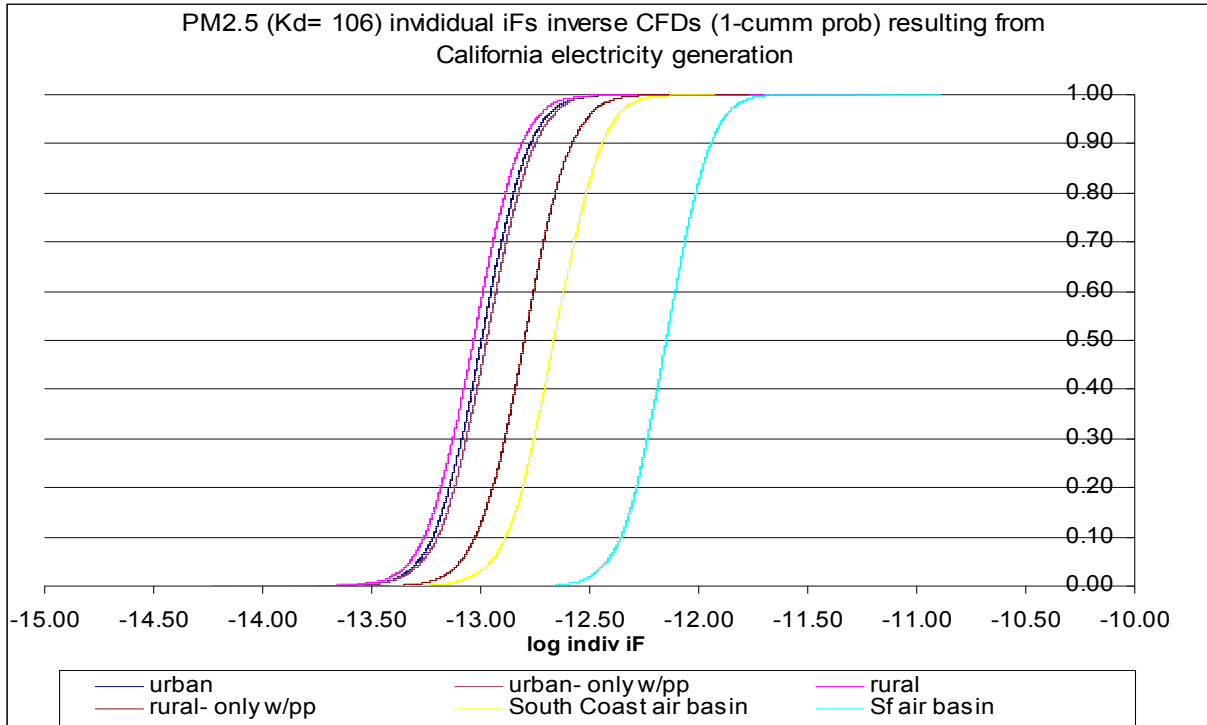


Figure B-6a. PM2.5 *iFi* distributions, assuming  $K_d= 10^6$

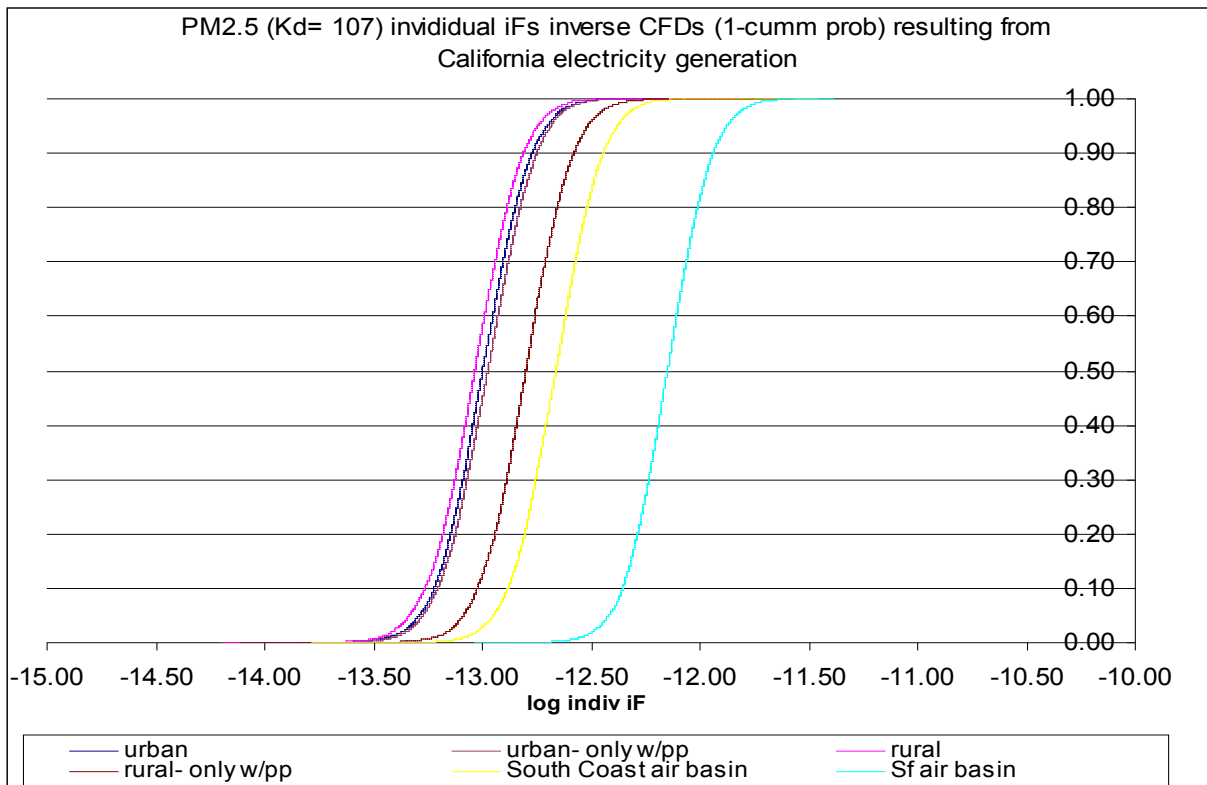


Figure B-6b: PM2.5 *iFi* distributions, assuming  $K_d= 10^7$



**Table B-1 (a&b):** The carcinogenic effect factor, EFx, for each chemical x, derived based on the methodology of a) Crettaz et al. (2002) and b) Huijbregts et al. (2005).

**Table B-1a.** EFx estimates based on Crettaz et al. (2002) methods using default DALYp of 6.7 y. The EFx based on specific cancer endpoint is given in parentheses (i.e., DALYp= 13.0 for lung cancer associated with BaP exposure, and 14.6 for leukemia associated with benzene exposure)

	$\beta_{ED10h}$ risk/(mg/kg BW/d)	$\beta_{ED10h}$ derivation comment	EFx [DALY/mg intake]
benzene	$3.9 \times 10^{-3}$	Lower bound of range on q1* (inhalation → oral)	$1.4 \times 10^{-8}$ ( $3.1 \times 10^{-8}$ )
	$1.4 \times 10^{-2}$	Upper bound of range on q1* (inhalation → oral)	$5.1 \times 10^{-8}$ ( $1.1 \times 10^{-7}$ )
	$2.4 \times 10^{-2}$	ED10h from TD50a (rat); theoretical estimation	$8.9 \times 10^{-8}$ ( $1.9 \times 10^{-7}$ )
	$1.5 \times 10^{-2}$	ED10h from TD50a (rat) empirical regression	$5.5 \times 10^{-8}$ ( $1.2 \times 10^{-7}$ )
B(a)P	2.3	Lower bound of range on q1* (oral)	$8.4 \times 10^{-6}$ ( $1.6 \times 10^{-5}$ )
	5.9	Upper bound of range on q1* (oral)	$2.2 \times 10^{-5}$ ( $4.3 \times 10^{-5}$ )
	4.2	ED10h from TD50a (rat); theoretical estimation	$1.6 \times 10^{-5}$ ( $3.0 \times 10^{-5}$ )
	2.6	ED10h from TD50a (Rat); empirical regression	$9.8 \times 10^{-6}$ ( $1.9 \times 10^{-5}$ )
Naphthalene	$2.5 \times 10^{-2}$	ED10h from TD50a (mouse); theoretical estimation	$9.2 \times 10^{-8}$
	$1.5 \times 10^{-2}$	ED10h from TD50a (mouse); empirical regression	$5.7 \times 10^{-8}$
PM2.5	8.8	based on 1 ug/m <sup>3</sup> increase in annual PM2.5 mean concentrations leading to a 0.4% increase in premature deaths (Pope et al., 2002)	$3.1 \times 10^{-5}$

**Table B-1b.** EFx estimates based on the methods of Huijbregts et al. (2005).

	ED50 <sub>x,r</sub> [kg]	Effect Factor derivation comment	EF <sub>x</sub> [DALY/mg intake]
benzene	79.2	using specific DALYe and p(d   ΔTU) for trachea, bronchus, and lung cancer 0.026, 16.5	$5.4 \times 10^{-9}$
		using default DALYe and p(d   ΔTU) for cancer	$4.4 \times 10^{-9}$
	103.9	using lower bound of q* (inhal) reported in IRIS	$3.3 \times 10^{-9}$
	29.3	using upper bound of q* (inhal) reported in IRIS	$1.2 \times 10^{-8}$
B(a)P	0.4	using specific DALYe and p(d   ΔTU) for stomach cancer (0.035, and 13.6)	$1.1 \times 10^{-6}$
		using default DALYe and p(d   ΔTU) for cancer	$7.7 \times 10^{-7}$
	0.2	using lower bound of q* (oral) reported in IRIS	$1.9 \times 10^{-6}$
	0.1	using upper bound of q* (oral) reported in IRIS	$5.0 \times 10^{-6}$
Naphthalene	44.9	using specific DALYe and p(d   ΔTU) for stomach cancer (0.035, 13.6)	$1.1 \times 10^{-8}$
		using default DALYe and p(d   ΔTU) for cancer	$7.7 \times 10^{-9}$
PM2.5	$4.6 \times 10^{-2}$	using default DALYe and p(d   ΔTU) for cancer	$6.0 \times 10^{-6}$

**Attachment I: List of (A) Urban and (B) Rural Power Plants and Their Associated Fuel Type and Technology and Online MWe Sorted By County Of Location**

**a) Urban power plants**

PLANTNAME	PRIMARY FUEL	TECHNOLOGY	COGEN	COUNTY	ONLINE MW
Oakland	Distillate Oil	Gas Turbine	Not Cogen	Alameda	165
Alameda	Natural Gas	Combustion Turbine	Not Cogen	Alameda	51.65
Stanford Energy Group	Natural Gas		Cogen	Alameda	0.115
Borden Chemical	Natural Gas		Cogen	Alameda	0.2
Summit Medical Cogen	Natural Gas		Cogen	Alameda	2.86
Continental Can - White Cap	Natural Gas		Not Cogen	Alameda	0.6
PE – Berkeley Inc.	Natural Gas, Distill	Combined Cycle	Cogen	Alameda	28.5
Altamont Gas Recovery	Landfill Gas	Active -Flare/Lfgte	Not Cogen	Alameda	7
Gas Recovery Systems - Fremont	Msw	Landfill Gas	Not Cogen	Alameda	3.75
Oroville Cogen	Natural Gas	Gas Turbine	Cogen	Butte	8.05
Pacific Oroville Power Inc.	Ag. & Woodwaste		Not Cogen	Butte	18.75
Nichols Road Power Plant	Pet Coke, Crude Oil	Fluidized Boiler	Not Cogen	Contra Costa	19
Wilbur West Power Plant	Pet Coke, Crude Oil	Fluidized Boiler	Not Cogen	Contra Costa	19
Loveridge Road Power Plant	Pet Coke, Crude Oil	Fluidized Boiler	Not Cogen	Contra Costa	19
East Third Street Power Plant	Pet Coke, Crude Oil	Fluidized Boiler	Not Cogen	Contra Costa	19
Wilbur East Power Plant	Pet Coke, Crude Oil	Steam Turbine	Not Cogen	Contra Costa	19

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Los Medanos Energy Center	Natural Gas	Cogeneration, Steam To Uss-Posco	Not Cogen	Contra Costa	555
Delta Energy Center	Natural Gas	Combined Cycle Cogeneration Steam To Dow	Cogen	Contra Costa	861
Mobile Gt	Natural Gas	Gas Combustion Turbine	Not Cogen	Contra Costa	45
Chevron - Concord	Natural Gas	Gas Turbine	Cogen	Contra Costa	3
Foster-Wheeler Martinez Cogen L.P.	Natural Gas	Gas Turbine	Cogen	Contra Costa	113.5
Crockett Cogen	Natural Gas	Gas Turbine	Cogen	Contra Costa	247.4
Riverview Energy Center	Natural Gas	Gas Turbine		Contra Costa	47.3
Richmond Cogen	Natural Gas	Gas Turbine Turbine	Cogen	Contra Costa	125.28
Martinez Refining Co.	Natural Gas	Gas Turbine, Steam Turbine	Cogen	Contra Costa	99
Rhone-Poulenc - Stauffer Chemical	Natural Gas	Gas Turbine/Heat Recovery Steam Generatr	Cogen	Contra Costa	4
Brookside Hospital	Natural Gas	Internal Combustion	Cogen	Contra Costa	0.949
C & H Sugar	Natural Gas	Steam Turbine, Waste Heat	Cogen	Contra Costa	9.5
Contra Costa	Natural Gas	Steam Turbine	Not Cogen	Contra Costa	672
Pittsburg	Natural Gas	Steam Turbine	Not Cogen	Contra Costa	1332
City Of Concord	Natural Gas		Cogen	Contra Costa	0.105
Tosco Sfar Carbon	Natural Gas		Cogen	Contra Costa	27.38
San Francisco Refinery	Natural Gas		Cogen	Contra Costa	49.9

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Calpine Pittsburg	Natural Gas, Hydro	Gas Turbine	Cogen	Contra Costa	74
Nove Power Plant	Landfill Gas	Internal Combustion	Not Cogen	Contra Costa	3
Fresno Cogen	Natural Gas	Combined Cycle	Cogen	Fresno	25
Saint Agnes Hospital	Natural Gas	Gas Turbine	Cogen	Fresno	2.325
Al Resources	Natural Gas	Gas Turbine/Heat Recovery Steam Generatr	Cogen	Fresno	8.5
Coalinga	Natural Gas	Gas Turbine/Heat Recovery Steam Generatr	Cogen	Fresno	20.7
Fresno Cogen Partners Lp Pkr	Natural Gas		Cogen	Fresno	21.3
Sanger Power & Feed	Natural Gas		Cogen	Fresno	39.8
Roy Sharp Jr.	Natural Gas		Not Cogen	Fresno	0.1
Wellhead Power Gates, Llc	Natural Gas		Not Cogen	Fresno	46.5
Wellhead Power Panoche, Llc	Natural Gas		Not Cogen	Fresno	49.9
Calpeak Power Panoche, Llc	Natural Gas			Fresno	49.615
Pe - Kes Kingsburg Llc	Natural Gas, Distill		Cogen	Fresno	34.5
Coalinga Cogen Co.	Natural Gas/Eor	Gas Turbine	Cogen	Fresno	38
Rio Bravo Fresno	Woodwaste	Steam Turbine	Not Cogen	Fresno	24.3
Mendota Biomass Power Ltd	Woodwaste	Steam Turbine, Cfb	Cogen	Fresno	25
Hanford	Petroleum Coke,	Fluidized Boiler	Cogen	Kings	24

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
	Crud				
Kings County State Prison	Natural Gas		Cogen	Kings	5.2
Gwf Henrietta	Natural Gas		Not Cogen	Kings	96
Gwf Hanford Peaker	Natural Gas	Brown Field	Not Cogen	Kings	95
Dinuba Energy Inc.	Ag. & Woodwaste		Cogen	Kings	12
Arco Wilmington Calciner	Petroleum Coke	Coal Fired Bottoming Cycle	Cogen	Los Angeles	35.8
Pebble Beach	Diesel	Internal Combustion	Not Cogen	Los Angeles	9.4
Diesels	Diesel		Not Cogen	Los Angeles	26
Alamitos Generating Station	Distillate Oil	Steam Turbine, Gas Turbine	Not Cogen	Los Angeles	2087
Cotija Cheese	Natural Gas	Xeration	Cogen	Los Angeles	0.12
Linde Wilmington	Natural Gas	Combined Cycle	Cogen	Los Angeles	28
Harbor	Natural Gas	Combined Cycle, Gas Turbine	Cogen	Los Angeles	472
Lundy - Thagard Oil	Natural Gas	Combined Cycle/Topping Cycle	Cogen	Los Angeles	1.4
N.P. Cogen Inc.	Natural Gas	Combined Cycle/Topping Cycle	Cogen	Los Angeles	24.7
San Gabriel Cogen	Natural Gas	Combined Cycle/Topping Cycle	Cogen	Los Angeles	36
Glenarm	Natural Gas	Combustion Turbine	Not Cogen	Los Angeles	60.8
Long Beach	Natural Gas	Combustion Turbine, Steam Turbine	Not Cogen	Los Angeles	577

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
St. John's Hospital And Health Center	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Los Angeles	1.08
Pomona Power Facility	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Los Angeles	3.3
Jefferson Smurfit Corp.	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Los Angeles	40
Coldgen - Sunlaw Cogen #1	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Los Angeles	56
Coldgen - Sunlaw Cogen #2	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Los Angeles	56
Santa Monica Bay Hotel	Natural Gas	Ct/Industrial Topping Cycle	Cogen	Los Angeles	0.95
Vanguard - Electronic Plating	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	Los Angeles	0.1
Whittier Uhsd - La Serna Hs	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	Los Angeles	0.1
The Forum #1	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	Los Angeles	0.115
The Episcopal Home	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	Los Angeles	0.2
Southern California Gas	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	Los Angeles	0.55
Great Western Malting Co.	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	Los Angeles	0.75
Biola University	Natural Gas	Gas Turbine	Cogen	Los Angeles	1.2
Smurfit Pomona Mill	Natural Gas	Gas Turbine	Cogen	Los Angeles	16.3
Pitchess Cogen	Natural Gas	Gas Turbine	Cogen	Los Angeles	28.3
Norwalk Energy	Natural Gas	Gas Turbine	Cogen	Los Angeles	30.75
UCLA Cogen	Natural Gas	Gas Turbine	Cogen	Los Angeles	43



**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Los Angeles Refinery	Natural Gas	Gas Turbine	Cogen	Los Angeles	68.5
Harbor Cogen	Natural Gas	Gas Turbine	Cogen	Los Angeles	81.7
Texaco Los Angeles Refinery	Natural Gas	Gas Turbine	Not Cogen	Los Angeles	60
Anderson Litograph Co.	Natural Gas	Gas Turbine Combined Cycle	Cogen	Los Angeles	5
Civic Center Cogen	Natural Gas	Gas Turbine, Steam Turbine	Cogen	Los Angeles	34.5
O'brien California Cogen	Natural Gas	Gas Turbine, Steam Turbine	Cogen	Los Angeles	34.5
Carson Cogen Co.	Natural Gas	Gas Turbine, Steam Turbine	Cogen	Los Angeles	49.5
Torrance Refinery	Natural Gas	Gas Turbine, Steam Turbine	Cogen	Los Angeles	222.7
Watson Cogen	Natural Gas	Gas Turbine, Steam Turbine	Cogen	Los Angeles	398
Aes Placerita	Natural Gas	Gas Turbine/Steam Turbine	Cogen	Los Angeles	150
Micro Utility - Safe Planting	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.1
Micro Utility - Foss Planting	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.1
Xic - Erne Sanitarium	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.1
Micro Utility - Quaker	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.1
Cal Poly University - Pomona	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.115
La Canada Usd - La Canada School	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.12

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Mt. San Antonio Gardens	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.12
City Of Long Beach - Belmont Plaza Pool	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.12
Bixby Knolls Towers	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.124
Cerritos College	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.15
Csu Long Beach - Dorm	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.15
Csu Long Beach - Pool	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.2
Claremont Tennis Club	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.2
Metal Surfaces	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.35
Henry Mayo Newhall Memorial Hospital	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.45
Presbyterian Intercommunity Hospital	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.48
Petrominerals Corp.	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.5
Pomona Valley Community Hospital	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	0.8
Queen Mary	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	1
Paper Pak Products	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Los Angeles	1.4
Placerita Unit I	Natural Gas	I.C. Topping Cycle	Cogen	Los Angeles	21.76

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Placerita Unit Ii	Natural Gas	I.C. Topping Cycle	Cogen	Los Angeles	21.76
Los Angeles Cold Storage	Natural Gas	Internal Combustion	Cogen	Los Angeles	1.35
Vernon	Natural Gas	Internal Combustion	Not Cogen	Los Angeles	30.6
Dex	Natural Gas	Natural Gas	Cogen	Los Angeles	0.5
Bentley Mills	Natural Gas	Photovoltaic Engine	Cogen	Los Angeles	0.8
Rhone-Poulenc - Dominguez Plant	Natural Gas	Process Steam Plant/Bottoming Cycle	Cogen	Los Angeles	4.9
Lake One	Natural Gas	Reclaimed Water	Not Cogen	Los Angeles	47
Grayson	Natural Gas	Steam & Combustion Turbine, Comb. Cycle	Not Cogen	Los Angeles	272.5
Arco Petroleum Products Co.	Natural Gas	Steam Turbine	Cogen	Los Angeles	13.5
Broadway	Natural Gas	Steam Turbine	Not Cogen	Los Angeles	162
El Segundo	Natural Gas	Steam Turbine	Not Cogen	Los Angeles	708
Magnolia	Natural Gas	Steam Turbine, Combined Cycle	Not Cogen	Los Angeles	81.7
California Institute Of Technology	Natural Gas	Steam Turbine, Gas Turbine	Cogen	Los Angeles	5.3
Olive	Natural Gas	Steam Turbine, Gas Turbine	Not Cogen	Los Angeles	152.5
Valley	Natural Gas	Steam Turbine, Natural Gas	Not Cogen	Los Angeles	517
Scattergood	Natural Gas	Steam Turbine, Natural Gas	Not Cogen	Los Angeles	803
Haynes	Natural Gas	Steam Turbine, Natural	Not	Los Angeles	1570

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
		Gas	Cogen		
St. Luke Medical Center	Natural Gas		Cogen	Los Angeles	1
Techni-Cast Corp.	Natural Gas		Cogen	Los Angeles	1.063
Cbs Studios	Natural Gas		Cogen	Los Angeles	1.4
Ucla Cogen	Natural Gas		Cogen	Los Angeles	43
Redondo Beach Generating Stat	Natural Gas		Not Cogen	Los Angeles	1317
Southern California Gas - Scaqmd	Oil/Gas	Fuel Cell/Wasteheat Recovery	Cogen	Los Angeles	0.2
Wilmington	Waste Heat	Steam Turbine	Not Cogen	Los Angeles	31.9
Total Energy Facility	Digester Gas	Gas Turbine Combined Cycle	Cogen	Los Angeles	25
Puente Hills Recovery	Landfill Gas	Gas Turbine	Not Cogen	Los Angeles	7.8
Palos Verdes Gas To Energy Facility	Landfill Gas	Reciprocating Engine	Not Cogen	Los Angeles	13
Spadra Landfill Gas To Energy	Landfill Gas	Steam Turbine	Not Cogen	Los Angeles	9.9
Mm West Corvina Llc	Msw	Landfill Gas Recovery, Steam Turbine	Not Cogen	Los Angeles	3.25
Southeast Resource Recovery	Msw	Municipal Solid Waste	Not Cogen	Los Angeles	34.6
Penrose	Msw	Reciprocating Engine	Not Cogen	Los Angeles	9.25
Toyon	Msw	Reciprocating Engine	Not Cogen	Los Angeles	9.3
Mm Lopez Energy Llc	Msw	Reciprocating Engine	Not Cogen	Los Angeles	6.6

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Commerce Refuse To Energy	Msw	Steam Turbine	Not Cogen	Los Angeles	11.5
San Joaquin Power Co.	Natural Gas		Cogen	Merced	10.75
J.R. Woods Inc.	Msw	Landfill Gas	Cogen	Merced	1.05
Calpine King City Cogen	Natural Gas	Combined Cycle	Cogen	Monterey	130
Sargent Canyon Cogen	Natural Gas	Gas Turbine	Cogen	Monterey	38
Salinas River Cogen	Natural Gas	Gas Turbine	Cogen	Monterey	49.6
Moss Landing	Natural Gas	Steam Turbine	Not Cogen	Monterey	2545
Asilomar	Natural Gas		Cogen	Monterey	0.55
Soledad State Prison	Natural Gas		Cogen	Monterey	2.2
Monterey Power Co.	Natural Gas		Cogen	Monterey	6
Calpine King Energy Center	Natural Gas	Brown Field	Not Cogen	Monterey	50
Monterey Regional Water Pollution Control Cogen	Msw	Digester Gas	Cogen	Monterey	1.74
Salinas	Msw	Internal Combustion	Not Cogen	Monterey	1.4
Marina Landfill Gas	Msw	Landfill Gas	Not Cogen	Monterey	5.4
Napa State Hospital	Natural Gas	Gas Turbine	Cogen	Napa	1.6
Yountville Cogen	Natural Gas	Gas Turbine	Cogen	Napa	3
American Canyon Power Plant	Landfill Gas	Reciprocating Engine	Not Cogen	Napa	1.76
Huntington Beach	Distillate Oil	Steam Turbine, Gas Turbine	Not Cogen	Orange	880

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Chiquita Water Reclamation	Methane	Recipocating Engine	Not Cogen	Orange	0.27
Unocal Research	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Orange	3.623
Southern California Gas - Hyatt Regency	Natural Gas	Fuel Cell/Wasteheat Recovery	Cogen	Orange	0.2
Turbine Tech	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	Orange	0.15
American Mcgaw #2	Natural Gas	Gas-Turbine	Cogen	Orange	6.1
Anaheim Gas Turbine	Natural Gas	Gas Turbine, Natural Gas	Not Cogen	Orange	45.55
Pca Metal Finishing	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Orange	0.1
American Cornerstone - Holiday Inn	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Orange	0.15
All Metals Processing	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Orange	0.175
Royalty Carpet Mills	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Orange	0.425
Red Lion Inn	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Orange	0.46
Orange County Sanitation District Plant 1	Natural Gas	Gas-Fueled reciprocating Engine	Cogen	Orange	4.5
American Mcgaw	Natural Gas	Steam Turbine & Gas Turbine	Cogen	Orange	8.6
Aliso Water Management Agency	Digester Gas	Digester Gas/Municipal	Not Cogen	Orange	1.2
Plant No. 2	Digester Gas	Digester Gas/Other	Not Cogen	Orange	18

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Mm Prima Deschecha Energy Llc	Landfill Gas	Reciprocating Engine	Not Cogen	Orange	6.1
Coyote Canyon	Landfill Gas	Steam Turbine	Not Cogen	Orange	20
Brea Power Partners Lp	Msw	Reciprocating Engine	Not Cogen	Orange	5.4
Kings Beach	Diesel	Internal Combustion	Not Cogen	Placer	16.2
Roseville	Natural Gas	Combustion Turbine	Not Cogen	Placer	53.75
Spi- Lincoln	Woodwaste	Steam Turbine	Cogen	Placer	13
Rio Bravo Rocklin	Woodwaste	Steam Turbine	Not Cogen	Placer	24.4
Coachella	Natural Gas	Combustion Turbine, Natural Gas	Not Cogen	Riverside	80
Municipal Cogen	Natural Gas	Gas Turbine	Cogen	Riverside	1.3
Corona Cogen	Natural Gas	Gas Turbine	Cogen	Riverside	47
Springs Generation Project	Natural Gas	Gas Turbine	Not Cogen	Riverside	40
Eua/Frcii - Monterey Country Club	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Riverside	0.115
Eua/Frcii - Palm Valley Country Club	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Riverside	0.41
Ces Energy Alberhill	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Riverside	0.56
Ces Energy Corona - Pacific Clay	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Riverside	0.6
Eua/Frcii - Vintage Country Club	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Riverside	0.6
City Of Palm Springs - Sunrise Plaza	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Riverside	0.641

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Wildflower - Indigo	Natural Gas	Green Field	Not Cogen	Riverside	135
Mecca Plant	Ag. & Woodwaste	Steam Turbine, Cfb	Not Cogen	Riverside	47
Corona Landfill	MSW	Landfill Gas Recovery	Not Cogen	Riverside	0.6
Carson Cogen	Natural Gas	Combustion Turbine With Waste Heat	Cogen	Sacramento	97
Spac	Natural Gas	Combustion Turbine With Waste Heat	Cogen	Sacramento	146
Proctor & Gamble - Smud	Natural Gas	Combustion Turbine With Waste Heat	Cogen	Sacramento	193.4
Mcclellan	Natural Gas	Combustion Turbine, Natural Gas	Not Cogen	Sacramento	49
Kiefer Landfill Gas To Energy Facility	Landfill Gas	Methane Gas		Sacramento	8.3
Century	Natural Gas		Not Cogen	San Bernadino	40
Txi Riverside Cement Power House	Coal	Coal Fired Bottoming Cycle	Cogen	San Bernardino	17
Argus Cogen Plant	Coal	Coal-Fired Topping Cycle	Cogen	San Bernardino	55
Ace Xeration	Coal	Coal-Fired Topping Cycle	Not Cogen	San Bernardino	108
Etiwanda	Distillate Oil	Steam Turbine, Gas Turbine	Not Cogen	San Bernardino	770
High Desert Power Plant Project	Natural Gas	Combined Cycle	Not Cogen	San Bernardino	750
Westend	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	San Bernardino	15



**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Victor Valley Community Hospital	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	San Bernardino	0.135
Transamerican Plastics	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	San Bernardino	0.34
Indeck Ontario	Natural Gas	Gas Turbine	Cogen	San Bernardino	12
Ontario Mill	Natural Gas	Gas Turbine	Cogen	San Bernardino	34
Loma Linda University	Natural Gas	Gas Turbine, Steam Turbine, Internal Com	Cogen	San Bernardino	13.4
Rialto Usd	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	San Bernardino	0.1
Rimrock Village Partership	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	San Bernardino	0.12
Micro Utility - Lake Arrowhead Hilton	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	San Bernardino	0.28
San Antonio Hospital	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	San Bernardino	1.8
Mcanally Egg Ranch	Natural Gas	Natural Gas	Cogen	San Bernardino	0.12
Riverside Canal Power	Natural Gas	Steam Turbine	Not Cogen	San Bernardino	160
Mountainview Power Co. - San Bernardino	Natural Gas	Stream Turbine	Not Cogen	San Bernardino	126
Coolwater	Natural Gas	Steam Turbine, Combined Cycle	Not Cogen	San Bernardino	726.3
Chino Nug	Natural Gas, Distill	Combined Cycle/Topping Cycle	Cogen	San Bernardino	27.6
Drews	Natural Gas	Brown Field	Not Cogen	San Bernardino	40
Division	Distillate Oil	Gas Turbine	Not Cogen	San Diego	13
El Cajon	Distillate Oil	Gas Turbine	Not	San Diego	13

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
			Cogen		
Chula Vista Cogen	Natural Gas	Combined Cycle	Cogen	San Diego	9
Miramar	Natural Gas	Combustion Turbine	Not Cogen	San Diego	33
Ntc Central	Natural Gas	Combustion Turbine With Waste Heat	Cogen	San Diego	16
Naval Station	Natural Gas	Combustion Turbine With Waste Heat	Cogen	San Diego	26
Va Hospital	Natural Gas	Gas Trubine	Cogen	San Diego	0.85
Hotel Del Coronado	Natural Gas	Gas Turbine	Cogen	San Diego	0.8
Palomar Hospital	Natural Gas	Gas Turbine	Cogen	San Diego	1.3
Children's Hospital	Natural Gas	Gas Turbine	Cogen	San Diego	1.5
Grossmont Hospital	Natural Gas	Gas Turbine	Cogen	San Diego	1.6
Medical Center Hospital	Natural Gas	Gas Turbine	Cogen	San Diego	2.4
Qualcomm	Natural Gas	Gas Turbine	Cogen	San Diego	2.4
Sdsu Main	Natural Gas	Gas Turbine	Cogen	San Diego	3
Union-Tribune Publishing Co.	Natural Gas	Gas Turbine	Cogen	San Diego	3
R.J. Donovan Correctional Facility	Natural Gas	Gas Turbine	Cogen	San Diego	3.13
Sea World	Natural Gas	Gas Turbine	Cogen	San Diego	3.5
Nutra Sweet Kelco.	Natural Gas	Gas Turbine	Cogen	San Diego	24
North Island Energy Facility	Natural Gas	Gas Turbine	Cogen	San Diego	38.55
Goal Line	Natural Gas	Gas Turbine	Cogen	San Diego	51.4
Solar Turbines Inc.	Natural Gas	Gas Turbine	Not Cogen	San Diego	8.9

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
North Island	Natural Gas	Gas Turbine	Not Cogen	San Diego	34
Kearny	Natural Gas	Gas Turbine	Not Cogen	San Diego	207
Naval Station/ Navaltraining Center	Natural Gas	Gas Turbine, Steam Turbine	Cogen	San Diego	49.9
Trw	Natural Gas	Gas Turbine/Internal Combustion	Cogen	San Diego	1.3
Bf Goodrich Xeration Plant	Natural Gas	Internal Combustion	Cogen	San Diego	9.495
El Conquistador	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.1
The Wave	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.12
Grossmont Community College	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.2
939 Coast Management	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.23
Alliant Food Service Inc.	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.29
Pomerado Hospital	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.35
Le Meridien Hotel I	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.6
Hunter Industries	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.69
Mercy Hospital Ii	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.8
Mariott Hotel & Marina Ii - South	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.8
Mariott Hotel & Marina I - North	Natural Gas	Reciprocating Engine	Cogen	San Diego	0.8
Southwest Marine	Natural Gas	Reciprocating Engine	Cogen	San Diego	1.3
Salk Institute	Natural Gas	Reciprocating Engine	Cogen	San Diego	1.3

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Encina Water Pollution Control	Natural Gas	Reciprocating Engine	Cogen	San Diego	1.425
Ucsd	Natural Gas	Reciprocating Engine	Cogen	San Diego	1.5
San Diego Power & Cooling Co.	Natural Gas	Reciprocating Engine	Cogen	San Diego	1.6
Navy Reg. Data Automation Center	Natural Gas	Reciprocating Engine	Cogen	San Diego	2.6
Kyoceraproject	Natural Gas	Reciprocating Engine	Cogen	San Diego	3.2
South Bay Regional Center	Natural Gas	Steam Turbine	Cogen	San Diego	0.6
South Bay	Natural Gas	Steam Turbine, Gas Turbine	Not Cogen	San Diego	706
Encina	Natural Gas	Steam Turbines & Gas Turbine	Not Cogen	San Diego	971
Csc Western Center Cogen	Natural Gas	Turbine	Cogen	San Diego	3.5
Holiday Inn Embarcadero	Natural Gas		Cogen	San Diego	0.297
Pacific Bell	Natural Gas		Not Cogen	San Diego	6.42
Calpeak Border, Llc Phase I	Natural Gas		Not Cogen	San Diego	49.5
Calpeak Escondido	Natural Gas		Not Cogen	San Diego	49.5
Calpeak Power El Cajon, Llc	Natural Gas			San Diego	48.68
Ntc/Mcrd Energy Facility	Steam & Natural Gas	Combined Cycle	Cogen	San Diego	25.6
Wildflower -Larkspur	Natural Gas	Green Field	Not Cogen	San Diego	90
Gas Utilization	Digester Gas	Internal Combustion	Not	San Diego	6.8

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Facility			Cogen		
San Marcos	Landfill Gas	Gas Turbine	Not Cogen	San Diego	1.8
Sycamore San Diego	Landfill Gas	Gas Turbine	Not Cogen	San Diego	1.8
Mm San Diego Llc - Miramar	Landfill Gas	Internal Combustion	Not Cogen	San Diego	6.5
Mm San Diego Llc - North City	Landfill Gas	Landfill Gas	Not Cogen	San Diego	3.8
Otay	Landfill Gas	Reciprocating Engine	Not Cogen	San Diego	3.87
Southeast Digester Gas Cogen	Digester Gas	Internal Combustion	Cogen	San Francisco	2.1
Hunters Point	Distillate Oil	Gas Combustion Turbine, Steam Turbine	Not Cogen	San Francisco	215
Usf	Natural Gas	Gas Turbine	Cogen	San Francisco	1.5
Potrero	Natural Gas	Gas Turbine	Cogen	San Francisco	362
J.R. Simplot Company	Waste Heat	Steam Turbine, Waste Heat/Sulfuric Acid	Not Cogen	San Joaquin	4
Port Of Stockton District Energy Facility	Distillate Oil	Steam Turbine	Cogen	San Joaquin	49.9
Stockton Cogen Co.	Natural Gas	Steam Turbine, W/Steam	Cogen	San Joaquin	55.1
Lodi	Natural Gas	Combustion Turbine	Not Cogen	San Joaquin	26.45
Gianera	Natural Gas	Combustion Turbine	Not Cogen	San Joaquin	32.31
Ncpa Stig	Natural Gas	Combustion Turbine	Not Cogen	San Joaquin	49
Corn Products	Natural Gas	Gas Turbine	Cogen	San Joaquin	2.812

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Byron Power Co.	Natural Gas	Gas Turbine	Cogen	San Joaquin	6.5
Ripon Mill	Natural Gas	Gas Turbine	Cogen	San Joaquin	49.5
Fisher Nursery	Natural Gas		Cogen	San Joaquin	0.1
Stockton Wwtp	Natural Gas		Cogen	San Joaquin	1.35
San Joaquin Cogen	Natural Gas		Cogen	San Joaquin	49.9
Gwf Tracy Peaker	Natural Gas	Brown Field	Not Cogen	San Joaquin	169
Diamond Walnut	Ag. Waste	Steam Turbine, Grate	Cogen	San Joaquin	4.5
Tracy Biomass Plant	Woodwaste	Steam Turbine, Grate	Not Cogen	San Joaquin	23
Sri International	Natural Gas	Gas Turbine	Cogen	San Mateo	6
United Cogen Inc.	Natural Gas	Gas Turbine, Steam Turbine	Cogen	San Mateo	31
Marsh Road Power Plant	Landfill Gas	Reciprocating Engine	Not Cogen	San Mateo	2
Ellwood	Distillate Oil	Combustion Turbine	Not Cogen	Santa Barbara	54
Santa Ynez	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Santa Barbara	49.3
Santa Barbara County Jail	Natural Gas	Fuel Cell/Wasteheat Recovery	Cogen	Santa Barbara	0.2
Santa Maria Cogen	Natural Gas	Gas Turbine	Cogen	Santa Barbara	9.5
Gaviota	Natural Gas	Gas Turbine	Cogen	Santa Barbara	14
Santa Barbara Cottage Hospital	Natural Gas		Cogen	Santa Barbara	6.4
O'brien Energy Systems - Santa Maria	Natural Gas		Cogen	Santa Barbara	43

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Southern California Gas - Ucsb	Oil/Gas	Fuel Cell/Wasteheat Recovery	Cogen	Santa Barbara	0.2
Mm Tajiguas Energy Llc	Landfill Gas	Reciprocating Engine	Not Cogen	Santa Barbara	3.1
Gilroy Cogen	Natural Gas	Combined Cycle	Cogen	Santa Clara	123.4
City Of Santa Clara	Natural Gas	Combustion Turbine With Waste Heat	Cogen	Santa Clara	5.8
San Jose Convention Center	Natural Gas	Gas Turbine	Cogen	Santa Clara	1.5
San Jose Cogen	Natural Gas	Gas Turbine	Cogen	Santa Clara	6
Cardinal Cogen	Natural Gas	Gas Turbine, Steam Tubine	Cogen	Santa Clara	52.9
Jefferson Smurfit	Natural Gas	Gas Turbine, Steam Turbine	Cogen	Santa Clara	26.8
Los Esteros Energy Center	Natural Gas	Steam Turbine	Not Cogen	Santa Clara	180
Agnews	Natural Gas		Cogen	Santa Clara	36.1
Gilroy Energy Center	Natural Gas	Brown Field	Not Cogen	Santa Clara	135
Santa Clara	Landfill Gas	Internal Combustion	Not Cogen	Santa Clara	1.5
Newby Island 2	Landfill Gas	Recipocating Engine	Not Cogen	Santa Clara	3.3
Newby Land 1	Landfill Gas	Reciprocating Engine	Not Cogen	Santa Clara	2
Byxbee Park Sanitary Landfill	Landfill Gas	Reciprocating Engine	Not Cogen	Santa Clara	2
Guadalupe Power Plant	Landfill Gas	Reciprocating Engine	Not Cogen	Santa Clara	2.6
Watsonville Cogen	Natural Gas	Steam Turbine, Gas Turbine	Cogen	Santa Cruz	31

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Water Street Jail	Natural Gas		Cogen	Santa Cruz	0.18
Uc Santa Cruz Sports Facility	Natural Gas		Cogen	Santa Cruz	0.29
Owl Companies	Natural Gas		Cogen	Santa Cruz	0.6
Santa Cruz Wwtp	Natural Gas		Cogen	Santa Cruz	0.65
Santa Cruz Cogen	Natural Gas		Cogen	Santa Cruz	2.635
Solano Cogen	Natural Gas	Gas Turbine	Cogen	Solano	1.45
Lambie Energy Center	Natural Gas	Gas Turbine		Solano	48.1
Wolfskill Energy Center	Natural Gas	Gas Turbine		Solano	48.1
Creed Energy Center	Natural Gas	Gas Turbine		Solano	48.1
Goose Haven Energy Center	Natural Gas	Gas Turbine		Solano	48.1
City Of Vacaville - Community Center	Natural Gas		Cogen	Solano	0.45
City Of Fairfield	Natural Gas		Cogen	Solano	0.775
California Medical Facility	Natural Gas		Cogen	Solano	1.5
Calpeak Power Vaca Dixon, Llc	Natural Gas			Solano	49.95
Valero Unit 1 & 2	Natural Gas	Combustion Turbine, Brown Field	Not Cogen	Solano	47.7
Laguna Plant Co-Gen Facility	Natural Gas	Internal Combustion	Not Cogen	Sonoma	2.7
Central Lf (Sonoma) Phase I	Landfill Gas	Internal Combustion Engine	Not Cogen	Sonoma	3.2
Central Lf (Sonoma) Phase Ii	Landfill Gas	Internal Combustion Engine	Not Cogen	Sonoma	3.2



**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Mcclure	Distillate Oil	Combustion Turbine	Not Cogen	Stanislaus	117
Almond	Natural Gas	Combined Cycle	Not Cogen	Stanislaus	49.5
Woodland I & II	Natural Gas	Combustion Turbine With Waste Heat, Cc	Cogen	Stanislaus	129.4
Walnut	Natural Gas	Gas-Fueled Turbine	Not Cogen	Stanislaus	48.5
Hershey Chocolate	Natural Gas	Internal Combustion	Cogen	Stanislaus	6.2
Modesto Energy	Msw	Steam Turbine	Not Cogen	Stanislaus	14
Stanislaus Resource Recovery Facility	Msw	Steam Turbine	Not Cogen	Stanislaus	22.5
Sutter Power Project	Natural Gas	Xeration, Steam To Uss-Posco	Not Cogen	Sutter	540
Yuba City Energy Center	Natural Gas	Gas Turbine	Cogen	Sutter	48.1
Yuba City Cogen	Natural Gas	Gas Turbine	Cogen	Sutter	49
Greenleaf Unit Two	Natural Gas	Gas Turbine	Cogen	Sutter	49.5
Feather River Energy Center	Natural Gas	Gas Turbine		Sutter	48.1
Greenleaf Unit One	Natural Gas	Gas Turbine, Steam Tubine	Cogen	Sutter	61.4
Yuba City Wwtp	Natural Gas		Cogen	Sutter	0.14
Mandalay	Distillate Oil	Steam Turbine, Gas Turbine	Not Cogen	Ventura	560
Camarillo Nug	Natural Gas	Combined Cycle/Topping Cycle	Cogen	Ventura	28.04
Sithe Energies	Natural Gas	Combined Cycle/Topping Cycle	Cogen	Ventura	48.5

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Us Government, Naval Engineering Command	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Ventura	0.8
Vintage Petroleum	Natural Gas	Combustion Turbine/Topping Cycle	Cogen	Ventura	3.3
Oxnard I	Natural Gas	Gas Turbine	Cogen	Ventura	19.295
Hueneme Paper Mill	Natural Gas	Gas Turbine	Cogen	Ventura	25
Oxnard Ii	Natural Gas	Gas Turbine	Cogen	Ventura	49.5
Oxnard Wwtp	Natural Gas	Gas Turbine Combined Cycle	Cogen	Ventura	1.5
Oxnard Hs	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Ventura	0.12
Doubletree Hotel	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Ventura	0.2
City Of Ventura - Eastside Wtr Renovation	Natural Gas	Gas-Fueled Reciprocating Engine	Cogen	Ventura	0.548
Rockwell Intl. - Kalina	Natural Gas	Miscellaneous/Bottoming Cycle	Cogen	Ventura	3.5
Rockwell Intl.	Natural Gas	Miscellaneous/Bottoming Cycle	Cogen	Ventura	28
Ormond Beach	Natural Gas	Steam Turbine	Not Cogen	Ventura	1492
Unocal Rincon Cogen	Natural Gas	Steam Turbine/Enhanced Oil Recovery	Cogen	Ventura	3.5
Oxnard	Landfill Gas	Internal Combustion	Not Cogen	Ventura	5.55
UC Davis	Natural Gas	Gas Turbine	Cogen	Yolo	3
Woodland Biomass Power Ltd	Ag. & Woodwaste	Steam Turbine	Not Cogen	Yolo	28

**a) Urban power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Mm Yolo Power LLC Facility	Landfill Gas	Reciprocating Engine	Not Cogen	Yolo	2.85

**b) Rural power plants**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Jackson Valley Energy Lp	Lignite Coal	Steam Turbine	Cogen	Amador	17.99
Mule Creek State Prison	Natural Gas	Internal Combustion	Cogen	Amador	3
Wheelabrator Martell Inc.	Woodwaste	Steam Turbine	Cogen	Amador	18
Wadham	Rice By Products	Steam Turbine	Not Cogen	Colusa	29.5
Csu Humboldt	Natural Gas		0 Cogen	Humboldt	0.35
Samoa Pacific Cellulose, Llc	Natural Gas	Steam Turbine	Cogen	Humboldt	20
Pacific Lumber Co.	Woodwaste	Steam Turbine	Cogen	Humboldt	32.5
Ultrapower 3 Blue Lake	Woodwaste	Steam Turbine	Not Cogen	Humboldt	13.806
Farihaven Power Co.	Woodwaste	Steam Turbine	Not Cogen	Humboldt	15
Brawley	Distillate Oil	Combustion Turbine	Not Cogen	Imperial	20
Rockwood	Natural Gas	Combustion Turbine	Not Cogen	Imperial	46
El Centro	Natural Gas	Steam Turbine, Combined Cycle	Not Cogen	Imperial	80
Mesquite Resource Recovery Project	Ag. & Animal Waste	Steam Turbine, Grate	Not Cogen	Imperial	17.89
Rio Bravo Poso	Coal	Steam Turbine	Cogen	Kern	33
Rio Bravo Jasmin	Petroleum Coke	Steam Turbine	Cogen	Kern	33
Mt. Poso Cogeneration	Natural Gas/Eor	Steam Turbine	Cogen	Kern	63.64

**b) rural power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
La Paloma Generating Project	Natural Gas	Combined Cycle	Not Cogen	Kern	968
Sunrise Power Project	Natural Gas	Fired Cogeneration (For Teor)	Cogen	Kern	320
Arco - Fee "B"	Natural Gas	Gas Turbine	Cogen	Kern	3.725
Welpport Project	Natural Gas	Gas Turbine	Cogen	Kern	3.8
Frito-Lay	Natural Gas	Gas Turbine	Cogen	Kern	6
Dome Project	Natural Gas	Gas Turbine	Cogen	Kern	6.6
Arco - Fee "C"	Natural Gas	Gas Turbine	Cogen	Kern	7.45
Arco - Fee "A"	Natural Gas	Gas Turbine	Cogen	Kern	7.925
Texaco - Mckittrick	Natural Gas	Gas Turbine	Cogen	Kern	10.969
North Midway	Natural Gas	Gas Turbine	Cogen	Kern	10.97
Chevron - Taft	Natural Gas	Gas Turbine	Cogen	Kern	12.5
Chevron Cymric	Natural Gas	Gas Turbine	Cogen	Kern	26.3
Dai/Oildale Cogen	Natural Gas	Gas Turbine	Cogen	Kern	31
Berry Cogen - Midway Sunset	Natural Gas	Gas Turbine	Cogen	Kern	38.7
Midset Cogen	Natural Gas	Gas Turbine	Cogen	Kern	39
Oildale Cogen	Natural Gas	Gas Turbine	Cogen	Kern	40
Boron	Natural Gas	Gas Turbine	Cogen	Kern	45
Chalk Cliff Cogen	Natural Gas	Gas Turbine	Cogen	Kern	47
Badger Creek Ltd.	Natural Gas	Gas Turbine	Cogen	Kern	47
South Belridge Cogen	Natural Gas	Gas Turbine	Cogen	Kern	48
Double "C" Ltd.	Natural Gas	Gas Turbine	Cogen	Kern	53.6
High Sierra Ltd.	Natural Gas	Gas Turbine	Cogen	Kern	53.6
Kern Front Ltd.	Natural Gas	Gas Turbine	Cogen	Kern	53.6

**b) rural power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Bear Mountain Ltd.	Natural Gas	Gas Turbine	Cogen	Kern	68.82
Live Oak Cogen	Natural Gas	Gas Turbine	Cogen	Kern	68.82
Mckittrick Cogen	Natural Gas	Gas Turbine	Cogen	Kern	72
Kern River Cogen	Natural Gas	Gas Turbine	Cogen	Kern	300
Sycamore Cogen	Natural Gas	Gas Turbine	Cogen	Kern	300
Elk Hills	Natural Gas	Gas Turbine	Not Cogen	Kern	500
Mohave Cogen	Natural Gas	Gas Turbine, Stesm Turbine	Cogen	Kern	56.4
M.H. Whittier Cal	Natural Gas		0 Cogen	Kern	0.5
Cal Resources - N. Midway Sunset	Natural Gas		0 Cogen	Kern	4.25
Arco Oxford	Natural Gas		0 Cogen	Kern	5.2
Occidental Of Elk Hills Inc.	Natural Gas		0 Cogen	Kern	10
Lost Hills	Natural Gas		0 Cogen	Kern	10.969
Berry Petroleum Co.	Natural Gas		0 Cogen	Kern	17
Midsun Partners	Natural Gas		0 Cogen	Kern	27.35
Sekr Cogen	Natural Gas		0 Cogen	Kern	34.468
Chevron - Kern River Eastridge	Natural Gas		0 Cogen	Kern	44
Sunrise Ii Combined Cycle Expansion	Natural Gas		0 Not Cogen	Kern	265
Midway-Sunset Cogen	Natural Gas/Eor	Gas Turbine	Cogen	Kern	242
Delano Energy Co. Inc.	Ag. & Woodwaste	Agricultural Waste	Not Cogen	Kern	56.5
Spi- Susanville	Woodwaste	Steam Turbine	Cogen	Lassen	14.34
Mt. Lassen Power	Woodwaste	Steam Turbine	Cogen	Lassen	11.4

**b) rural power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Big Valley Lumber Co.	Woodwaste	Steam Turbine, W/Steam	Cogen	Lassen	7.5
Hi Power Co.	Woodwaste		0 Cogen	Lassen	35.5
Heublein Wines	Natural Gas		0 Cogen	Madera	0.325
Fort Bragg Western Wood Products	Woodwaste		0 Not Cogen	Mendocino	15
Portola	Diesel	Internal Combustion	Not Cogen	Plumas	5.7
Collins Pine Co. Project	Woodwaste	Steam Turbine	Cogen	Plumas	12
Spi- Quincy	Woodwaste	Steam Turbine	Cogen	Plumas	27.5
Morro Bay	Natural Gas	Steam Turbine	Not Cogen	San Luis Obispo	1021
Koch California Ltd.	Natural Gas		0 Cogen	San Luis Obispo	0.3
Lassen Energy	Natural Gas	Gas Turbine	Cogen	Shasta	38.8
Redding Power	Natural Gas	Steam Turbine & Combustion Turbines	Not Cogen	Shasta	97.2
City Of Redding	Natural Gas		0 Cogen	Shasta	28
Spi- Anderson	Woodwaste	Fuel Cell Gasification	Cogen	Shasta	4
Wheelabator Hudson Energy	Woodwaste	Steam Turbine	Cogen	Shasta	6.8
Burney Mountain Power	Woodwaste	Steam Turbine	Cogen	Shasta	11.4
Spi- Burney	Woodwaste	Steam Turbine	Cogen	Shasta	20
Burney Forest Products	Woodwaste	Steam Turbine	Cogen	Shasta	31
Wheelabrator Shasta	Woodwaste	Steam Turbine	Cogen	Shasta	62.75
Downieville	Diesel	Combustion Turbine	Not Cogen	Sierra	0.7

**b) rural power plants (continued)**

<b>PLANTNAME</b>	<b>PRIMARY FUEL</b>	<b>TECHNOLOGY</b>	<b>COGEN</b>	<b>COUNTY</b>	<b>ONLINE MW</b>
Spi- Loyalton	Woodwaste	Steam Turbine	Cogen	Sierra	20
Tulare Detention Facility	Natural Gas	Gas Fueled Reciprocating Engine	Cogen	Tulare	0.55
Kaweah Hospital	Natural Gas	Gas Turbine	Cogen	Tulare	1
Mm Tulare Energy Llc	Landfill Gas	Gas Turbine Combined Cycle	Not Cogen	Tulare	1.8
Pacific Ultrapower Chinese Station	Woodwaste	Steam Turbine	Not Cogen	Tuolumne	25
Spi- Sonora	Woodwaste	Traveling Grate	Cogen	Tuolumne	7.5