

Lawrence Berkeley National Laboratory

Recent Work

Title

NEUTRINO BEAMS FROM A HIGH INTENSITY 200 GeV PROTON SYNCHROTRON

Permalink

<https://escholarship.org/uc/item/07k2k8qr>

Authors

Peterson, V.Z.
Keefe, D.

Publication Date

1965-02-12

University of California

**Ernest O. Lawrence
Radiation Laboratory**

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 5545*

**NEUTRINO BEAMS FROM A
HIGH INTENSITY 200 GEV PROTON SYNCHROTRON**

Berkeley, California

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

University of California
Lawrence Radiation Laboratory
Berkeley, California

NEUTRINO BEAMS FROM A
HIGH INTENSITY 200 GEV PROTON SYNCHROTRON

V. Z. Peterson and D. Keefe

February 12, 1965

Paper presented at the CERN Informal Neutrino Conference,
January 1965 at Geneva, Switzerland

NEUTRINO BEAMS FROM A
HIGH INTENSITY 200 GEV PROTON SYNCHROTRON*

V. Z. Peterson** and D. Keefe

In connection with the 200 GeV accelerator LRL Study Group's investigations of experiments possible with a high intensity 200 GeV proton synchrotron, we have investigated^(1,2) means of producing a "monochromatic" beam of high energy neutrinos (antineutrinos). We hope to use conventional focusing devices and bending magnets. This paper will present some "sample" beams to illustrate how far one can go with straightforward application of charge separation and momentum analysis of high energy pion and kaon beams if sufficient intensity of high energy protons and adequate space are available.

Several well-known features of neutrino production by ultra-high energy protons are worth mentioning. First of all, if we believe the Cocconi-Koester-Perkins description⁽³⁾ of meson production, the secondary pions and kaons are produced at such small angles at 200 GeV that unconventional broadband focusing devices for high energy parent mesons seem to be unnecessary. The root-mean-square production angle for both pions and kaons of momentum P (GeV/c) is $\theta_{\text{rms}} = 540/P$ milliradians, or 27 mr. for 20 GeV/c mesons. Secondly, the higher proton energy provides a large increase in the number of neutrinos even below 10 GeV. A 200 GeV proton can generate as many neutrinos above 24 GeV as a 25 GeV proton can generate above 2 GeV; the higher energy proton also produces 5 times as many 3 GeV neutrinos, 16 times as many 5 GeV neutrinos and 600 times as many 10 GeV neutrinos. In addition, the 200 GeV machine is designed to have a high intensity, viz, 3×10^{13} protons/pulse. We have calculated that if a scaled-up CERN-type L = S type geometry were used at 200 GeV, the elastic neutrino events observed would exceed 1 event/pulse.

* This work supported in part by the U. S. Atomic Energy Commission.

** Now at University of Hawaii, Honolulu, Hawaii

In our event rate estimates we have assumed a 100 m^3 liquid hydrogen-deuterium bubble-chamber as the detector. Liquid hydrogen-deuterium offers definite advantages in interpretation of events. The dimensions (6.0 meter diameter) are derived primarily from the desired measurement accuracy. The detector cost is probably not out of keeping with the cost of the accelerator.

In future experiments it is assumed that better definition of neutrino energy will be important, as is knowledge of whether the primary is a neutrino or anti-neutrino. We have sought to achieve this by applying the following steps in producing a beam:

- (a) Charge separation of pions, kaons, etc., by placing the proton target in a long bending magnet;
- (b) Momentum analysis (about 10 percent full width) by suitable apertures placed outside of the bending magnet; the mean momentum may be changed by tuning the main magnet, keeping $\Delta p/p$ constant;
- (c) Unwanted higher energy particles are stopped close to the target to minimize the muon background;
- (d) Conventional quadrupole focusing lenses are used to focus and transport the meson beam over distances comparable with the decay length;
- (e) The meson channel is designed with the view of creating a "pencil" beam aimed at the center of the detector.

A schematic layout of such a beam is shown in Figure 1. A beam of 200 GeV protons strikes a target at the entrance of a 7 meter long, 25 kilogauss bending magnet. Mesons of 20 GeV/c mean momentum are bent 0.29 radians and drift another 7 meters before entering a 12" aperture lens in a heavy shield wall. High energy protons and mesons are stopped by shielding placed close to the bending magnet. The mean decay lengths for 20 GeV/c kaons and pions are 150 meters and 1100 meters, respectively. Within 150 meters the mesons are bent again parallel to the original proton beam; this serves to cancel chromatic effects due to the first bending and also provides an enriched "K-neutrino" beam passing through the shielding S_1 into the smaller of two bubble-chamber detectors, D_1 . The remaining beam (mainly pions) is then transported over a long distance (or the order of 1000 meters). Pion decays produce a "pi-neutrino" beam passing through shielding S_2 into a large bubble-chamber detector D_2 . The residual charged particles (mainly protons and muons) in the focused beam are then deflected just before S_2 . A

relatively pure muon beam can be created by absorbing the pions and protons, and can be used in another experiment.

The disadvantages of such an arrangement are the large number of lenses required, the considerable space involved in the experimental area, and the precise alignment of elements required. However, these requirements are comparable with the dimensions and tolerances of the accelerator. A major advantage seems to be that it is possible to obtain either a well-defined neutrino energy, or a high neutrino intensity integrated over the total spectrum, by relatively simple changes in geometry. The layout also lends itself to multiple use for charged particle beams. The same flight path may be used for mass separators in a side branch beam.

Pencil Beam Spectra and Intensity. Let us assume that 25 GeV/c pions (10 percent $\Delta p/p$) are produced with θ_{rms} and are accepted and transported as a "pencil" beam by magnetic lenses over a distance of one mean decay length. Then we calculate the neutrino spectrum and event rate in a 6.0 meter diameter, 10^5 liter liquid hydrogen bubble-chamber placed at the end of the channel. Figure 2 shows (at the top) the "total" energy spectra of pi-neutrinos and K-neutrinos if all mesons decay; it also gives the energy spectra of neutrinos passing through the bubble-chambers D_1 (185 meters from the target) and D_2 (1380 meters) from the above pencil beam. The slope at the upper end is influenced by the finite momentum spread of the parent mesons. The spectrum would be flat if the detector were infinitely large. The decrease in intensity at lower energies is due to neutrinos emitted at larger angles missing the detector.

The intensity of neutrinos at any energy from a 10 percent meson bandwidth and one mean decay length is, of course, less than the intensity derived from the total meson flux. However, the reduction is not great; at $E_\pi = 25$ GeV, the factor is 8 for $E_\nu = 10$ GeV. Momentum analysis provides a sharp upper limit in neutrino energy which is very useful for experiments.

In the above example the total yield of elastic neutrino events for energies greater than 1 GeV, assuming a cross section of 10^{-38} cm², is 0.287 neutrinos/pion initially in the beam, and 0.388 neutrinos/kaon. For 3×10^{13} protons/pulse, 30 pulses/minute, one would expect to see 1850 pi-neutrino and 300 K-neutrino elastic events in 24 hours of running time.

Increased Resolution in Neutrino Energy. The energy spectrum of neutrinos in Figure 2 is rather broad, even though greatly narrowed by momentum analysis of the meson parents. The sharp upper limit on neutrino energy set by peak meson energy suggests that this meson energy could be varied from run to run, and subtraction methods could be used to derive the contribution of neutrinos in a narrow energy interval. This "neutrino difference method", like the "photon difference method" used with electron synchrotrons, is possible in principle, but it requires very good statistics to apply in practice.

Longer decay lengths would also serve to improve the resolution since only those high energy neutrinos aimed nearly forward will strike the detector. However, the additional real estate comes at great expense. Furthermore, when the effects of focusing are folded into the ideal "pencil beam", the result may not be as good as expected.

The simplest and most effective means of narrowing the spectrum appears to be to stop (or deflect) the meson beam at a considerable distance from the detector. Wide angle neutrinos will then miss the detector, sharply reducing the intensity at lower energies. This "beam stopper" method is illustrated in Figure 3. The solid curve is the neutrino spectrum from 20 GeV pions (10 percent bandwidth) decaying over 1230 meters and detected by a 6.0 meter diameter bubble-chamber. The dotted curve is the spectrum if the pion beam is stopped only 200 meters after the meson source. The energy width is narrowed to 1.2 GeV with a peak energy of 9 GeV. The average intensity over this 1.2 GeV interval is reduced by a factor of 5. However, it is still possible to obtain over 100 elastic events/day, with resolution of about 15 percent in neutrino energy.

Focusing Effects and Beam Transmission in the Meson Channel. The design of the meson channel is of major importance since precise alignment is required to obtain a truly "pencil" beam. Furthermore, the cost of the channel is strongly dependent upon the number and size of the lenses. We have examined the elementary properties of such a channel, using a thin-lens geometrical optics model with chromatic properties of a symmetric triplet quadrupole lens.

We are interested in the transmission of a system of N lenses, where N is between 20 and 80, as a function of momentum. The hope is to pass at

least 10 percent bandwidth. In addition we want to have small aperture lenses spaced far apart to reduce the number and cost and to define a pencil beam as nearly as possible. The focused mesons should be confined within a cone whose half-angle equals the maximum desired neutrino decay angle. Kinematics of neutrino decay at angle θ and energy E from a moving meson whose total-energy/mass ratio is γ yields:

$$E/E_{\max} = \frac{1}{(1 + \gamma^2 \theta^2)} \quad (1)$$

Thus, if we wish to have a lower limit on neutrino energy of 0.90 of the maximum energy, then $\theta = 1/3\gamma$. For pions of 20 GeV, $\theta = 2.4$ milliradians, which is much smaller than the production angle, $\theta_{\text{rms}} = 22$ milliradians.

Two arrangements of focusing lenses which seem capable of relatively broadband transmission of pions over long distances are shown in Figure 4. Figure 4A (Beam "B-4") consists of 80 equally spaced 6" diameter lenses extending over 1100 meters; at each image point a field lens is placed to contain off-axis rays from a finite source. The lenses are thus spaced a distance $2f$ apart, where f is the focal length of each lens.

It is clear that with this arrangement mesons accepted by the first lens will be completely transmitted for the mean momentum; i.e., the transmission $T(\bar{p}) = 1.0$. For particles differing by Δp in momentum the change in focal length for one lens is Δz , which for a symmetric triplet is $\Delta z = 4l \left(\frac{\Delta p}{p}\right)^2$, where l is the image distance. ($l = 2f$ in our case). The maximum number of lenses which can be used before the beam diverges and is lost due to shift in image point is $N(\max) = 2f/\Delta p)^2 = (p/\Delta p)^2$. For magnetic lenses the symmetric quadrupole triplet minimizes Δz , and we find that 100 lenses are possible for 10 percent momentum bandwidth.

The transmission of the N -lens channel for momenta different from the mean has been calculated by C. Matsubara⁽⁴⁾ using matrix methods. The first case considered was that of Figure 4A: N -equally-strong and equally-spaced lenses. We assumed a small source (3 mm diameter) and a focal length of 6.8 meters, and the lens aperture was 15 cm. diameter. The transmission as a function of momentum for this system of 80 lenses is shown in Figure 5 (solid curve). This beam channel (called "B-4") is not very wide-band and is just capable of transmitting 10 percent bandwidth without a large loss.

A defect is that the initial lens angular aperture is less than the meson production cone, and only 25 percent of available mesons are accepted.

In order to remedy this defect we have considered placing the first lens closer to the source, matching the acceptance angle to the production angle (Figure 4B, Beam "B-5"). Thus essentially all mesons produced are focused into the meson channel. Since the source is small compared with the channel lens aperture, we can afford to use a long image distance, reducing the exit angular spread at the expense of increasing the image size. By magnifying 9 times we can couple the 22 milliradian production angle to the much smaller lens acceptance angle of 2.4 milliradians.

The transmission of a 41-lens system with 30 cm. initial aperture lens of focal length 6.8 meters, followed by 40 lenses of 10 cm. diameter aperture spaced 21 meters apart, is shown in Figure 5 (dotted line). The channel now readily transmits 10 percent bandwidth, mainly due to the smaller number of lenses. Both the number and size of the lenses is substantially reduced from the previous case.

The effect of the focusing alone on the neutrino spectrum from monochromatic 20 GeV pion beam has been calculated⁽⁵⁾ and is shown in Figure 6. The solid line is the spectrum from mesons decaying in Beam B-5. The pion beam is produced in a small target and is stopped 840 meters downstream; the bubble-chamber is an additional 340 meters further away, making a total target-to-detector distance of 1170 meters. We consider the spectrum of neutrinos striking the center of the bubble-chamber only, due to pions decaying anywhere within the upstream channel. The resulting spectrum has a sharp lower-limit of 90 percent of the maximum neutrino energy in accordance with equation (1). Over 50 percent of the pions decay within the channel, and the total number of elastic events in a 10^5 liter bubble-chamber is 20 percent of those contained within the same energy interval in the ideal "pencil" beam of Figure 3 if 10 percent meson bandwidth is selected.

The total neutrino energy spread due to focusing alone (0.9 GeV) in Beam B-5 is substantially less than the width due to finite bubble-chamber size, and is comparable with the spread due to 10 percent meson energy bandwidth. The dotted curve in Figure 6 shows the broad neutrino energy spectrum (averaged over the detector) resulting from poorly focused mesons in Beam B-4. It is clear from this comparison that good energy resolution

can be achieved within a fiducial sub-volume of a large bubble-chamber if a carefully-designed focusing channel is constructed.

Thus, we have shown that it is practicable to define neutrino energy within 10 percent by practical means and with good intensity.

Acknowledgments. Some of the calculations referred to here were carried out at the University of Hawaii by Mr. Nader C. Dutta and Miss Chizuko Matsubara. More detailed reports on these calculations are available. This study originated as a summer project of the LRL Accelerator Study Group and has been continued at Hawaii with the support of the U.S. A.E.C.

REFERENCES

1. Keefe, D., "Neutrino Beams at High Energies," UCID-10131, September 9, 1964.
2. Peterson, V. Z., "A Monochromatic Neutrino Beam from a High Intensity 200 GeV Proton Synchrotron," Berkeley Accelerator Study Group Report AS/Experimental/01, November 30, 1964.
3. Cocconi, G., Koester, L. J., and Perkins, D. H., "Calculation of Particle Fluxes from Proton Synchrotrons of Energy 10 - 1000 BEV," UCID-1444, Berkeley High Energy Physics Study Seminars (1961).
4. Matsubara, C., "Investigation of Beam Transmission in a Momentum Analyzed Meson Beam for Neutrino Production," University of Hawaii internal report, December 18, 1964.
5. Dutta, N. C., "Methods for Obtaining Good Energy Resolution in a Neutrino Beam," University of Hawaii internal report, December 18, 1964.

FIGURE CAPTIONS

- Figure 1 Schematic layout (not to scale) of proposed "pencil" beam of momentum-analyzed pions and kaons to produce neutrinos. See text for description.
- Figure 2 Neutrino spectra from 10 percent momentum-analyzed and separated 25 GeV pion and kaon beams. The decay space in each case is one mean-decay-length for the parent. The detector is 6.0 meters in diameter. Shown for comparison are "ideal" spectra resulting from the total decay of all pions and kaons produced by one 200 GeV proton if all neutrinos are counted. The dashed lines show how the spectra would change if the mean momentum is increased to 30 GeV keeping all dimensions fixed.
- Figure 3 Neutrino spectrum resulting from decay of 20 GeV pions in a channel 1230 meters long. A "pencil" beam and a 6.0 meter diameter detector are assumed. The effect of stopping the beam only 200 meters after the source is shown by the dashed line; the energy resolution becomes 1.2 GeV.
- Figure 4 Two possible channel arrangements, utilizing field lenses to contain off-axis rays from a finite source.
- 4A: N-identical lenses placed $2f$ apart. The action of the field lenses is shown.
- 4B: The first lens has a wide aperture matched to the production cone, and the exit cone is matched to the (smaller) angle of maximum neutrino decay. The resulting magnification of the source must be kept much less than semi-aperture of channel lenses.
- Figure 5 The transmission of Beam B-4 (Fig. 4A) and Beam B-5 (Fig. 4B) as a function of momentum. The former involves 80 lenses of 6" aperture spaced 13.7 meters apart; the latter involves 41 lenses of 4" aperture spaced 21 meters apart, following a 12" matching lens. In both cases 10 percent meson momentum bandwidth is transmitted.
- Figure 6 Neutrino spectra resulting from beams B-4 and B-5. The solid line shows the effect of focusing only, over 840 meters; the spectrum is as observed in the center of the detector and monochromatic pions are assumed. The dotted line gives the average spectrum over a 6.0 meter bubble-chamber, for monochromatic pions, and includes the focusing of beam B-4.

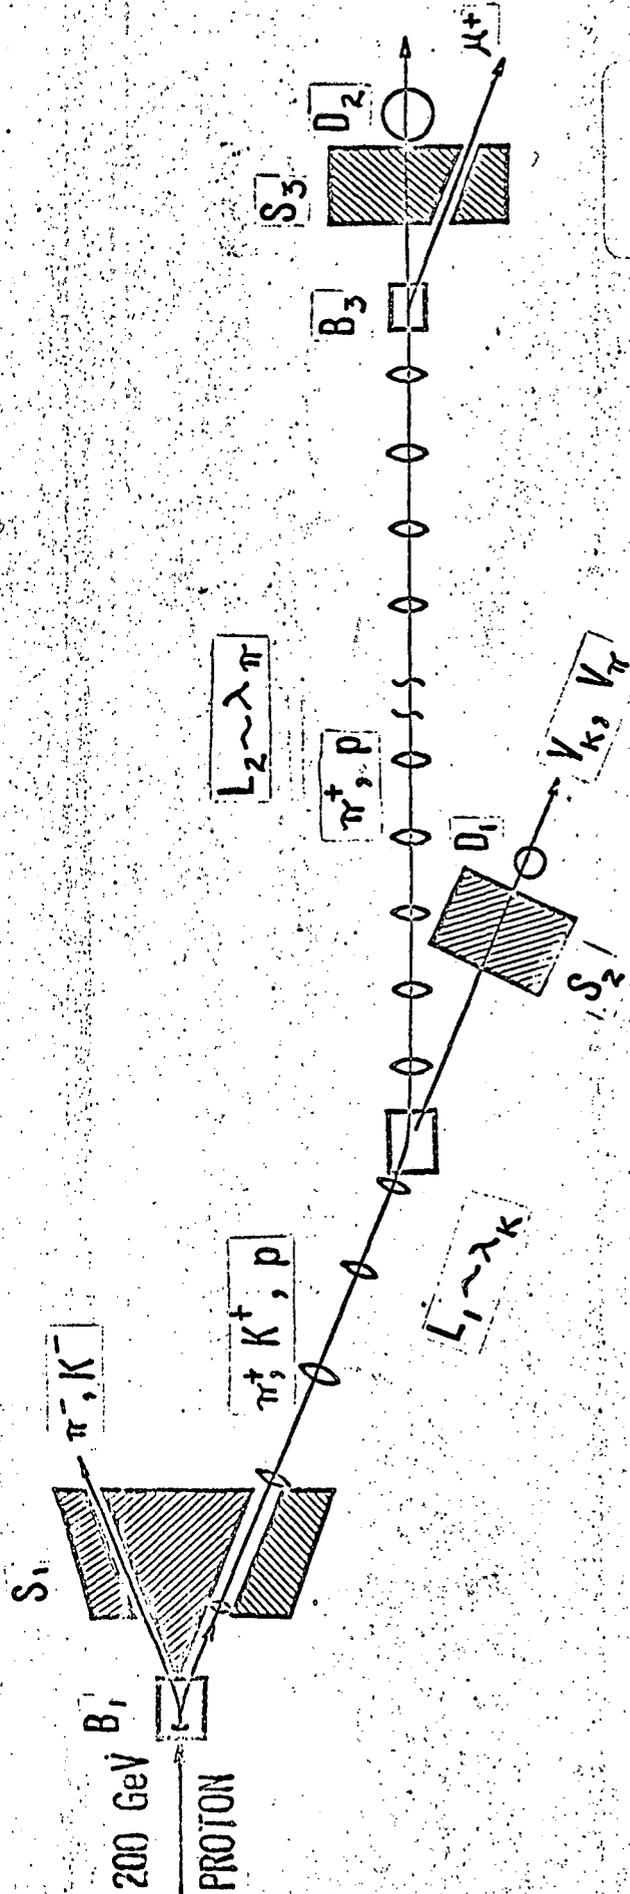


Figure 1.

Figure 2.

PER INTERACTING PROTON

$$\Delta E_{\pi,k} = 0.1 E_{\pi,k}$$




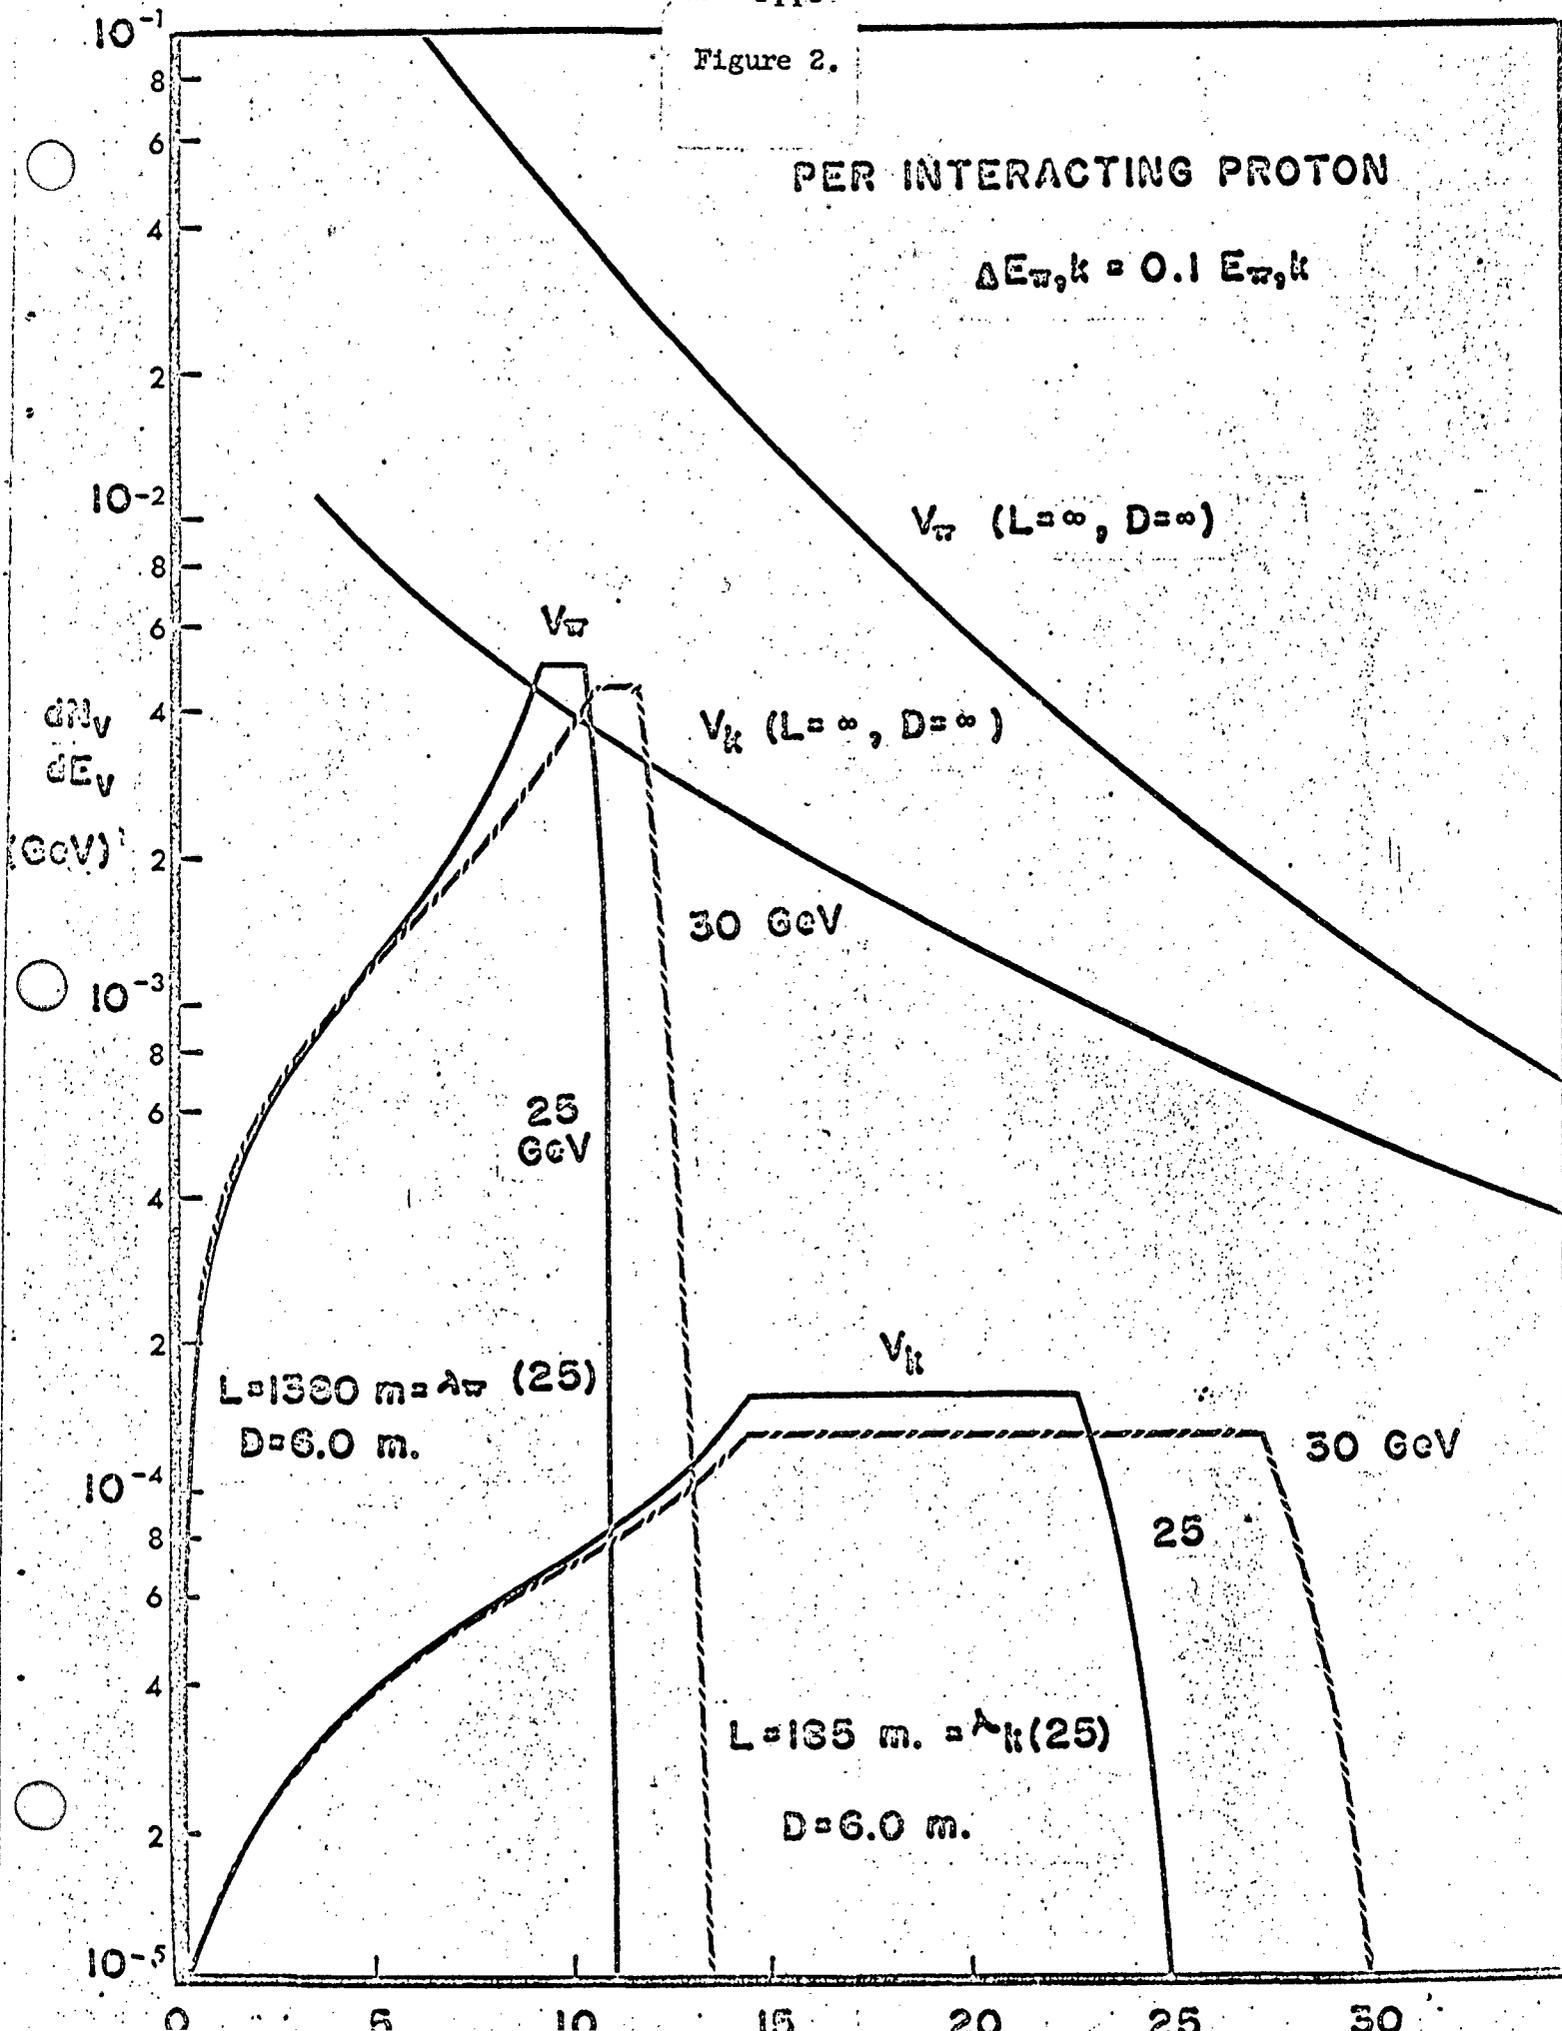


Figure 3.

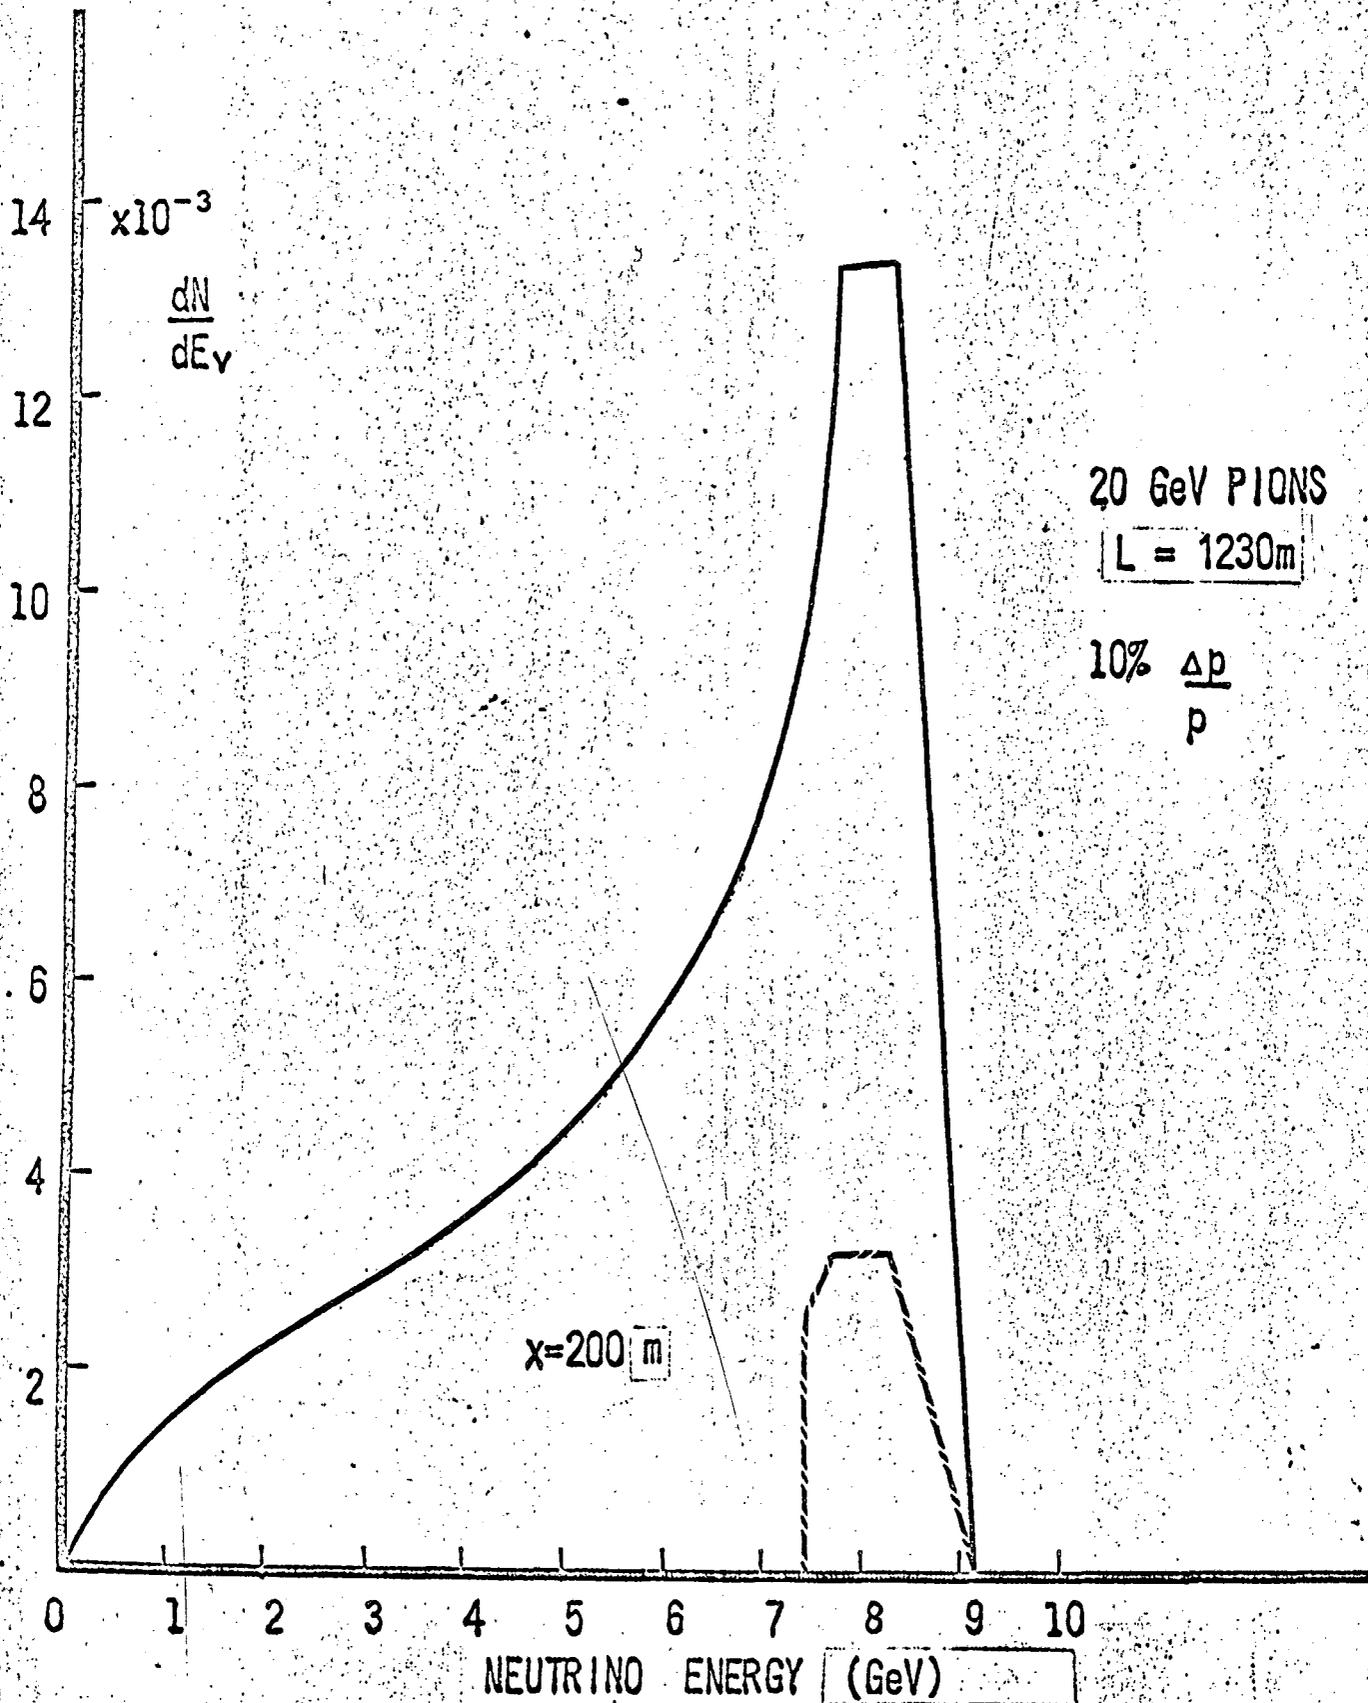

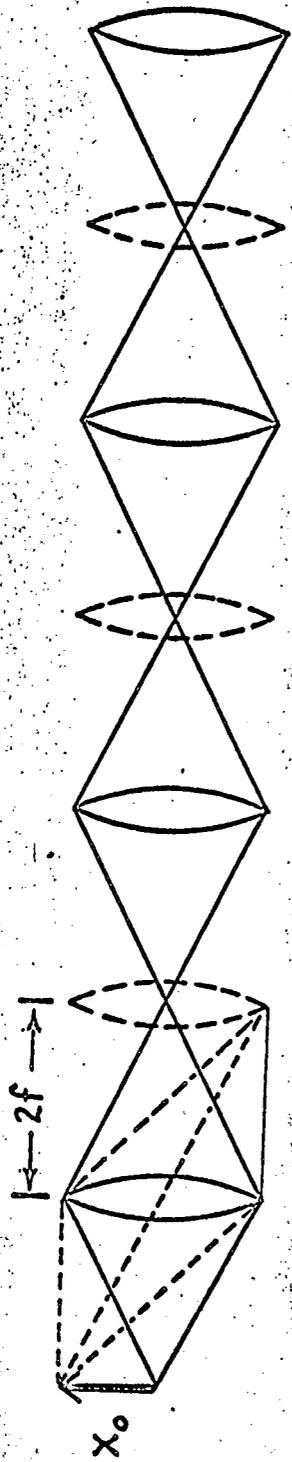

(A)

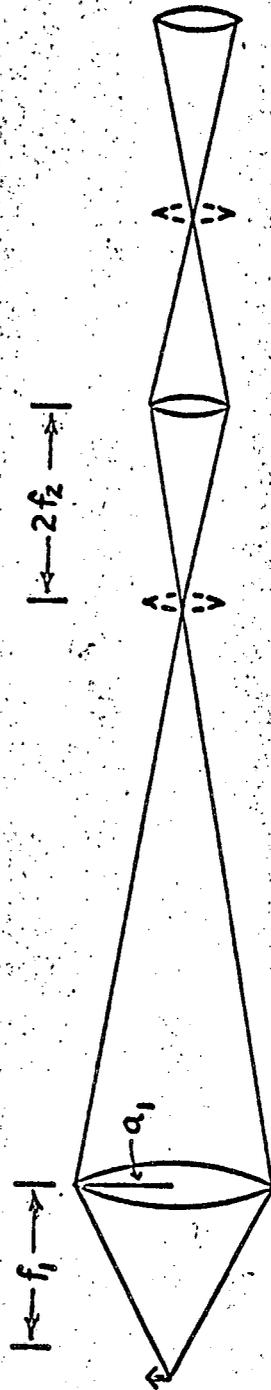

(B)

Figure 4.

Figure 5.

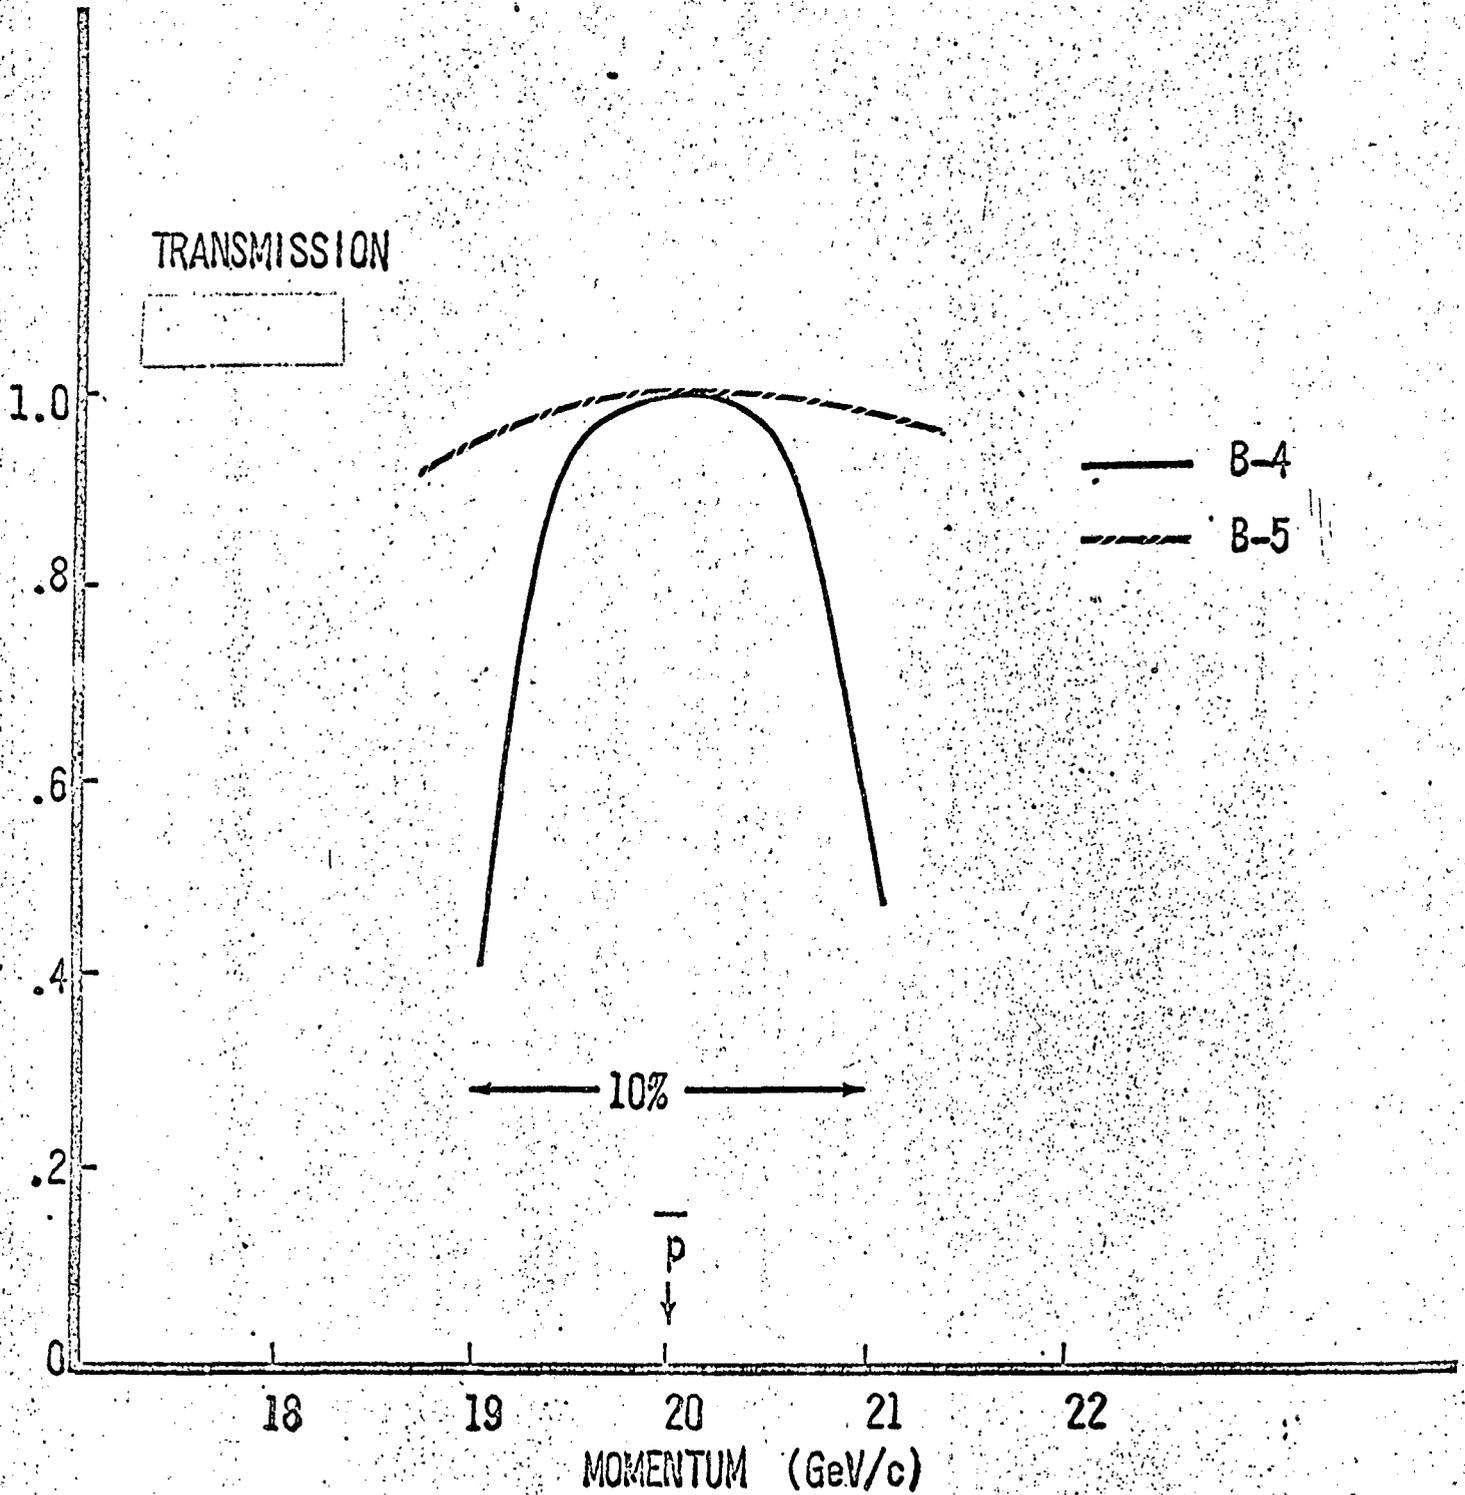


Figure 6.

$\times 10^{-4}$

NEUTRINOS
GEV-(METERS)²


SOURCE: 1 PION/STER.

TO ↑ 19

 BEAM B-4
 BEAM B-5

0 2 4 6 8 10

NEUTRINO ENERGY

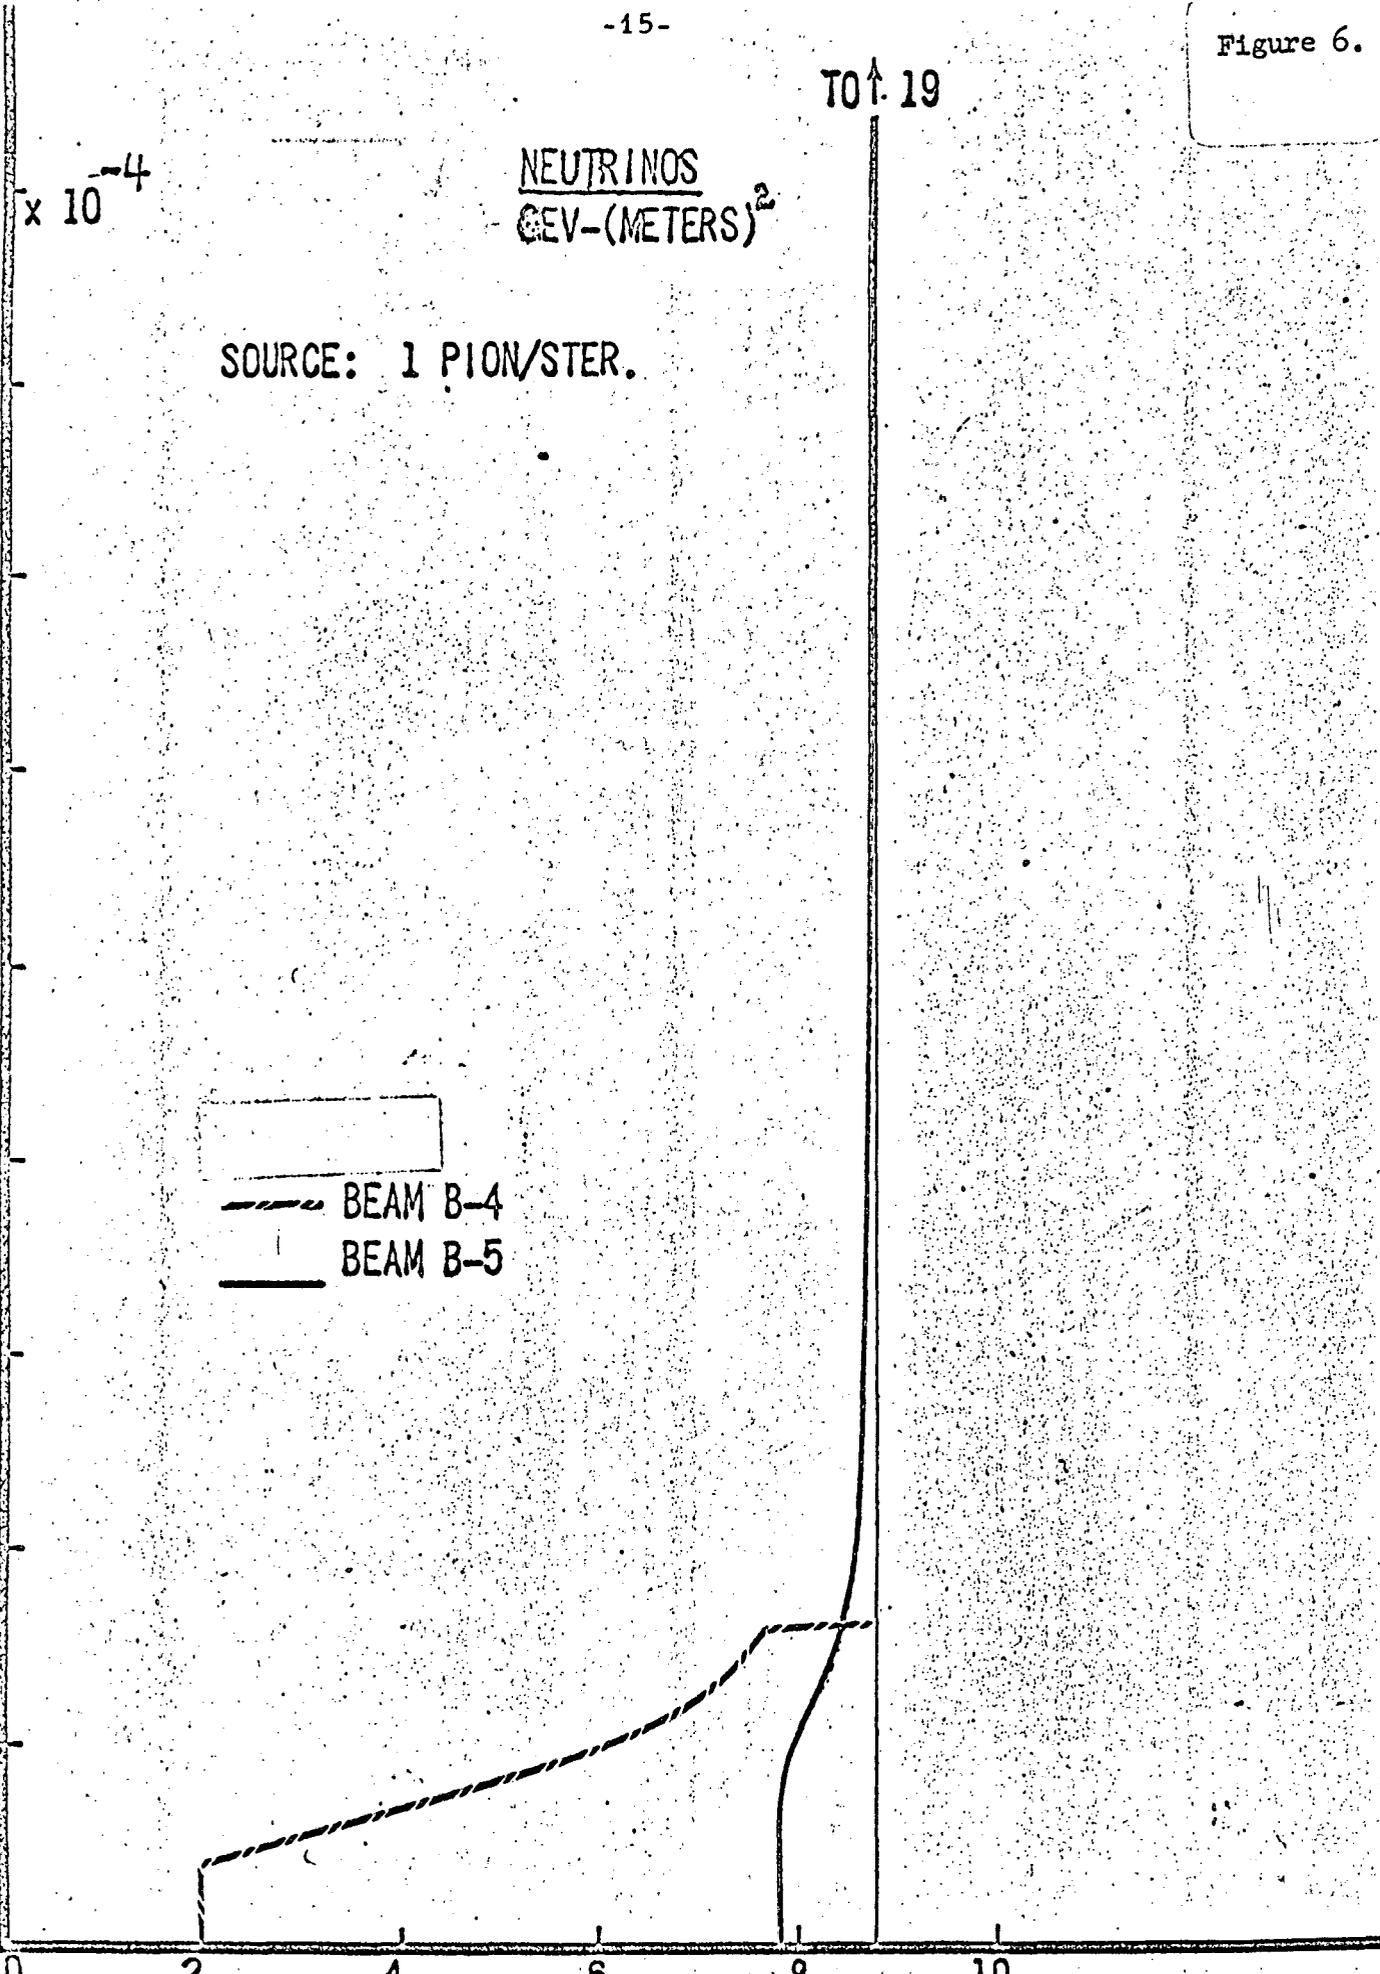

Faint, illegible text covering the majority of the page, possibly bleed-through from the reverse side.

