

# Lawrence Berkeley National Laboratory

## LBL Publications

### **Title**

ITOUGH2 Command Reference Version 3.1

### **Permalink**

<https://escholarship.org/uc/item/13x7c03x>

### **Author**

Finsterle, Stefan



### **Publication Date**

1997-04-01

# ITOUGH2

## Command Reference

### Version 3.1

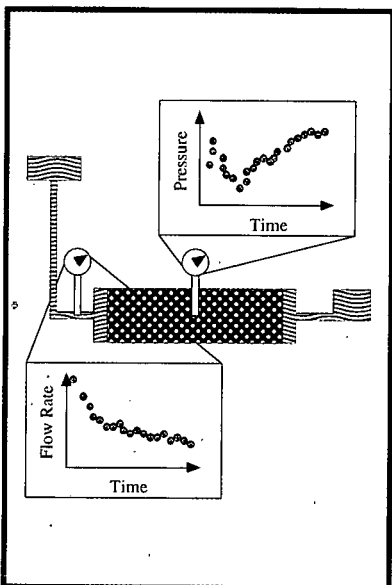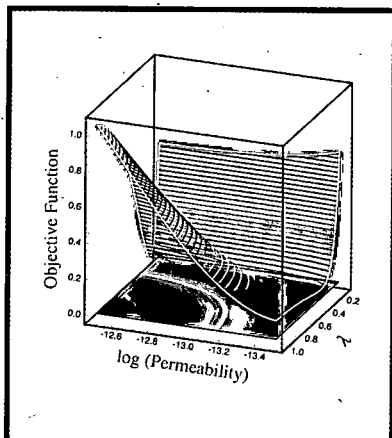

```

> PARAMETER
  >> INITIAL condition for primary variable No.:2
  >>> DEFAULT
  >>>> ANNOTATION      : Gas entrapped
  >>>> VALUE          : 1
  >>>> initial value  : 10.25
  >>>> admissible RANGE: 10.01 10.99
  >>>> VARIATION      : 0.10
  <<<<
  > OBSERVATION
  >>>> : 60 points in TIME EQUALLY spaced between
  >>>> 10.0 600.0 seconds
  >> LIQUID FLOW RATE
  >>>> CONNECTION defining inlet: IN_0 All 1
  >>>> ANNOTATION      : Flow inlet
  >>>> FACTOR          : -1.666667E-05
  >>>> HEADER contains : 1 lines
  >>>> COLUMNS        : 1 5
  >>>> Read DATA from FILE : samlp2i.col
  >>>> standard DEVIATION : 5.0 ml/min
  <<<<
  
```

S. Finsterle

Earth Sciences Division  
Lawrence Berkeley National Laboratory  
University of California  
Berkeley, CA 94720

April 1997

REFERENCE COPY |  
 Does Not |  
 Circulate |  
 Bldg. 50 Library - Ref.  
 Lawrence Berkeley National Laboratory  
 LBNL-40041  
 Copy 1

This work was supported, in part, by the Director, Office of Civilian Radioactive Waste Management, U.S. Department of Energy, through Memorandum Purchase Order EA9013MC5X between TRW Environmental Safety Systems, Inc. and The Ernest Orlando Lawrence Berkeley National Laboratory, by a grant from the Swiss National Cooperative for the Disposal of Radioactive Waste (NAGRA), Wettingen, Switzerland, and by the Assistant Secretary for Energy Efficiency and Renewable Energy, Office of Geothermal Technologies, of the U.S. Department of Energy, under contract No. DE-AC03-76SF00098.

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

# ITOUGH2 Command Reference

Version 3.1

*Stefan Finsterle*

Earth Sciences Division  
Lawrence Berkeley National Laboratory  
University of California  
Berkeley, CA 94720

April 1997

This work was supported, in part, by the Director, Office of Civilian Radioactive Waste Management, U.S. Department of Energy, through Memorandum Purchase Order EA9013MC5X between TRW Environmental Safety Systems, Inc. and the Ernest Orlando Lawrence Berkeley National Laboratory, by a grant from the Swiss National Cooperative for the Disposal of Radioactive Waste (Nagra), Wettingen, Switzerland, and by the Assistant Secretary for Energy Efficiency and Renewable Energy, Office of Geothermal Technologies, of the U.S. Department of Energy, under Contract No. DE-AC03-76SF00098.



# TABLE OF CONTENTS

1. INTRODUCTION .....	1
2. ITOUGH2 SUMMARY DESCRIPTION .....	2
3. BASIC CONCEPTS .....	8
3.1 Formats of ITOUGH2 input files .....	8
3.2 Basic concepts of ITOUGH2 input language .....	8
3.3 Main structure of ITOUGH2 input .....	9
4. ITOUGH2 COMMANDS .....	11
>> ABSOLUTE .....	12
>>>> ABSOLUTE .....	13
>>> ADJUST .....	14
>>> ALPHA .....	15
>>> ANDREWS .....	16
>>> ANNEAL .....	17
>>>> ANNOTATION .....	19
>>>> AUTO .....	20
>>>> AVERAGE .....	21
>> BOTTOMHOLE PRESSURE .....	22
>>>> BOUND .....	23
>> CAPACITY .....	24
>> CAPILLARY .....	25
>>> CAUCHY .....	26
>>> CENTERED .....	27
>>> CHARACTERISTIC .....	28
>>>> COLUMN .....	29
>>>> COMPONENT .....	30
>> COMPRESSIBILITY .....	31
> COMPUTATION .....	32
>> CONCENTRATION .....	33
>> CONDUCTIVITY .....	34
>>> CONNECTION .....	35

>>> CONSECUTIVE .....	36
>> CONTENT .....	37
>> CONVERGE .....	38
>>>> CORRELATION .....	39
>> COVARIANCE .....	40
>>> COVARIANCE .....	41
>> CUMULATIVE .....	42
>>>> DATA .....	43
>>> DEFAULT .....	45
>> DELTFACT .....	46
>>> DESIGN .....	47
>>>> DEVIATION (p) .....	48
>>>> DEVIATION (o) .....	50
>>> DIRECT .....	52
>> DRIFT .....	53
>>> ELEMENT .....	54
>> ENTHALPY (p) .....	55
>> ENTHALPY (o) .....	56
>> ERROR .....	57
>> FACTOR .....	58
>>>> FACTOR (p) .....	59
>>>> FACTOR (o) .....	60
>>> FISHER .....	61
>> FLOW .....	62
>>> FORMAT .....	63
>>>> FORMAT .....	64
>>> FORWARD (c) .....	65
>>> FORWARD (j) .....	66
>>> FOSM .....	67
>>>> GAUSS .....	69
>>> GAUSS-NEWTON .....	70
>> GENERATION .....	71
>>> GRID BLOCK .....	72
>>> GRID SEARCH .....	73
>> GUESS .....	74

>>>> GUESS .....	75
>>>> HEADER .....	76
HELP .....	77
>>> HESSIAN .....	78
>>> INCOMPLETE .....	79
>>> INDEX .....	80
>>>> INDEX (p) .....	81
>>>> INDEX (o) .....	82
>> INITIAL .....	83
>>> INPUT .....	84
>>> INTERFACE .....	85
>>> ITERATION .....	86
>>>> ITERATION (a) .....	88
>>>> ITERATION (s) .....	89
>> JACOBIAN .....	90
>>> JACOBIAN .....	91
>> KLINKENBERG .....	92
>>> L1-ESTIMATOR .....	93
>> LAG .....	94
>>> LEAST-SQUARES .....	95
>>> LEVENBERG .....	96
>>> LEVENBERG-MARQUARDT .....	97
>>> LINEARITY .....	98
LIST .....	100
>>>> LOGARITHM (p) .....	101
>>>> LOGARITHM (o) .....	102
>>>> LOG(F) .....	103
>>> MARQUARDT .....	104
>> MASS FRACTION .....	105
>>> MATERIAL .....	106
>>>> MEAN .....	107
>> MINC .....	108
>>> MODEL .....	109
>> MOMENT .....	110
>>> MONTE CALRO .....	112



>>> NEW OUTPUT .....	115
>>> NONE .....	116
>>>> NORMAL .....	117
>>> OBJECTIVE (ou) .....	118
>>> OBJECTIVE (op) .....	119
> OBSERVATION .....	120
>> OPTION .....	123
>> OUTPUT .....	124
>> PARALLEL PLATE .....	125
> PARAMETER .....	126
>>>> PARAMETER .....	127
>>> PERFORMANCE .....	128
>>> PERTURB .....	129
>>>> PERTURB .....	130
>>>> PHASE .....	131
>>>> PICK .....	132
>>> PLOTFILE .....	133
>>> PLOTTING .....	134
>>>> POLYNOM .....	135
>> POROSITY .....	136
>>> POSTERIORI .....	137
>> PRESSURE .....	138
>>>> PRIOR .....	139
>>> PRIORI .....	140
>> PRODUCTION .....	141
>> PRODUCTIVITY INDEX .....	142
>> PUMPING RATIO .....	143
>>> QUADRATIC LINEAR .....	144
>>>> RANGE .....	145
>> RATE .....	146
>>> REDUCTION .....	147
>> RELATIVE .....	148
>>>> RELATIVE .....	149
>>> RESIDUAL .....	150
>> RESTART TIME .....	151

>>> ROCKS .....	153
>> SATURATION .....	154
>>>> SCHEDULE .....	155
>> SECONDARY .....	156
>> SELEC .....	157
>>> SELECT .....	158
>>> SENSITIVITY (op) .....	159
>>> SENSITIVITY (ou) .....	160
>>>> SENSITIVITY .....	161
>>> SET .....	162
>>>> SET .....	163
>> SHIFT .....	164
>>>> SHIFT .....	165
>> SIMPLEX .....	166
>> SIMULATION .....	167
>>> SINK .....	168
>> SKIN .....	169
>>>> SKIP .....	171
>>> SOURCE .....	172
>>> STEADY-STATE .....	173
>>> STEP .....	176
>>>> STEP (p) .....	177
>>>> STEP (a) .....	178
>> STOP .....	179
>>>> SUM .....	180
>>> TAU .....	181
>> TEMPERATURE .....	182
>>>> TEMPERATURE .....	183
>> TIME (p) .....	184
>> TIME (o) .....	185
>>> time_unit .....	187
>> TOLERANCE .....	188
>> TOTAL MASS .....	189
>>>> UNIFORM .....	190
>>> UPDATE .....	191

>>> UPHILL .....	192
>> USER (p) .....	193
>> USER (o) .....	196
>>>> USER .....	198
>>>> VALUE .....	200
>>>> VARIANCE .....	201
>>>> VARIATION .....	202
>>> VERSION .....	203
>> VOLUME .....	204
>>> WARNING .....	205
>>>> WEIGHT .....	206
>>>> WINDOW .....	207
5. UTILITIES .....	209
5.1 Installation of UNIX script files .....	209
5.2 Submitting an ITOUGH2 job using command itough2 .....	210
5.3 Submitting a TOUGH2 job using command tough2 .....	212
5.4 Checking the status using command prista .....	212
5.5 Terminating an ITOUGH2 job using command kit .....	214
5.6 Obtaining online help using command it2help .....	215
ACKNOWLEDGMENT .....	216
NOMENCLATURE .....	217
REFERENCES .....	218
APPENDIX A: TOUGH2 Enhancements .....	219
A1. Introduction .....	219
A2. Printout control (KDATA) .....	219
A3. Secondary mesh (ELEM2, CONN2) .....	220
A4. Element-by-element permeability .....	221
A5. User-specified boundary conditions .....	221
A6. Relative permeability and capillary pressure functions .....	223
A7. Excluding domains from global material balances .....	225
APPENDIX B: Command Index .....	226

## LIST OF FIGURES

Figure 3.3.1.	Main structure of ITOUGH2 input. ....	10
Figure 5.2.1.	Usage and options of command <code>itough2</code> . ....	210
Figure 5.4.1.	Screen dump from command <code>prista</code> . ....	213
Figure 5.5.1.	Screen dump from command <code>kit</code> . ....	214
Figure 5.6.1.	Screen dump from command <code>it2help</code> showing command usage. .	215
Figure A3.1.	Primary and secondary mesh generation. ....	220
Figure A5.2.	Subroutine <code>USERBC</code> for specifying time-dependent boundary conditions. ....	222

## LIST OF TABLES

Table 2.1.	Parameter Transformations . . . . .	3
Table 2.2.	Levenberg-Marquardt Minimization Algorithm . . . . .	6
Table 5.1.1.	Customizing Shell Variables in ITOUGH2 Script Files . . . . .	209
Table A2.	Amount of Printout as a Function of Variable KDATA . . . . .	219
Table A6.1.	Input Parameters for Modified Brooks-Corey Model . . . . .	224
Table A6.2.	Input Parameters for Modified van Genuchten Model . . . . .	225

# 1. INTRODUCTION

This report contains a detailed description of all ITOUGH2 commands. It complements the ITOUGH2 User's Guide [*Finsterle, 1997a*], and the collection of ITOUGH2 sample problems [*Finsterle, 1997b*].

ITOUGH2 is a program for parameter estimation, sensitivity analysis, and uncertainty propagation analysis. It is based on the TOUGH2 simulator for non-isothermal multiphase flow in fractured and porous media [*Pruess, 1987, 1991*]. Extensive experience in using TOUGH2 is a prerequisite for using ITOUGH2. The preparation of an input file for TOUGH2 or its derivatives is described in separate manuals and is not part of this report.

The ITOUGH2 user's guide [*Finsterle, 1997a*] summarizes the inverse modeling theory pertaining to ITOUGH2, and describes the program output. Furthermore, information about code architecture and installation are given. In Chapter 2 of this report, a brief summary of inverse modeling theory is given to restate the main concepts implemented in ITOUGH2 and to introduce certain definitions. Chapter 3 introduces the basic concepts of the ITOUGH2 input language and the main structure of an ITOUGH2 input file. Chapter 4, the main part of this report, provides detailed descriptions of each ITOUGH2 command in alphabetical order. It is complemented by a command index in Appendix B in which the commands are given in logical order. The content of Chapter 4 is also available on-line using command `it2help`. Chapter 5 describes the usage of the UNIX script files for executing, checking, and terminating ITOUGH2 simulations.

A variety of inverse problems solved by ITOUGH2 are discussed in a collection of sample problems [*Finsterle, 1997b*], which includes a tutorial example illustrating the main features of ITOUGH2. Complete examples of ITOUGH2 input files are given along with interpretations of the corresponding output files.

The key to a successful application of ITOUGH2 is (i) a good understanding of multiphase flow processes, (ii) the ability to conceptualize the given flow and transport problem and to develop a corresponding TOUGH2 model, (iii) detailed knowledge about the data used for calibration, (iv) an understanding of parameter estimation theory and the correct interpretation of inverse modeling results, (v) proficiency in using ITOUGH2 options. This report addresses issue (v) only.

## 2. ITOUGH2 SUMMARY DESCRIPTION

A comprehensive description of inverse modeling theory implemented in ITOUGH2 is given in *Finsterle* [1997a]. The purpose of the summary description provided here is mainly to introduce basic concepts and notations referred to in Chapter 4 of this report.

ITOUGH2 is a computer program that provides inverse modeling capabilities for the TOUGH2 code. While the main purpose of ITOUGH2 is to estimate model-related hydraulic properties by calibrating TOUGH2 models to laboratory or field data, the information obtained by evaluating parameter sensitivities can be used to scrutinize the design of an experiment and to evaluate the uncertainty of model predictions.

ITOUGH2 solves the inverse problem by automatic model calibration. All TOUGH2 input parameters can be considered unknown or uncertain. The parameters are estimated based on any type of observation for which a corresponding TOUGH2 output is available, including prior information about the parameters to be estimated. A number of different objective functions and minimization algorithms are available. One of the key features of ITOUGH2 is its extensive error analysis which provides statistical information about residuals, estimation uncertainties, and the ability to discriminate among model alternatives. The impact of parameter uncertainties on model predictions can be studied by means of linear uncertainty propagation analysis or Monte Carlo simulations.

The key elements of an inverse modeling code are (1) a simulation program to model flow and transport in the hydrogeologic system ("forward modeling"), (2) the objective function which measures the misfit between the model output and the data, (3) the minimization algorithm which reduces the objective function by automatically updating parameter values, and (4) the error analysis which allows one to judge the quality of the estimates.

ITOUGH2 estimates elements of a parameter vector  $\mathbf{p}$  based on observations summarized in vector  $\mathbf{z}^*$  by minimizing an objective function  $S$  which is a function of the residual vector  $\mathbf{r}$ .

Vector  $\mathbf{p}$  of length  $n$  contains the parameters to be estimated by inverse modeling, or the parameters considered uncertain for uncertainty propagation analysis.

$$\text{Parameter vector: } \mathbf{p}^T = [p_1, p_2, \dots, p_n] \quad (2.1)$$

In the simplest case, the parameter  $p$  to be estimated is identical with a TOUGH2 input parameter  $X$ . For example,  $p$  is the porosity of a certain rock type, or a parameter of the capillary pressure function. Other parameters include initial and boundary conditions, or geometrical features such as fracture spacing. ITOUGH2 also allows one to estimate a single parameter which will be assigned to multiple TOUGH2 input variables, i.e.,  $X$  can represent more than one TOUGH2 variable. Moreover, user-specified parameters can be programmed into ITOUGH2.

Simple parameter transformations can be employed to make the inverse problem more linear or to change the distributional assumption about the parameter. For example, the log-normal character of permeability suggests estimating the logarithm of permeability rather than permeability itself. While the transformation does not change the best estimate parameter set, it makes the detection of the corresponding minimum of the objective function more robust. Different results are obtained, however, when incorporating prior information or performing uncertainty propagation analysis. In both cases a prior standard deviation must be given which represents either a normal or log-normal distribution, respectively.

Table 2.1 shows the parameter transformations available in ITOUGH2. Here,  $X$  is one or more TOUGH2 input variables (with initial guess  $X_0$ ), and  $p$  is the parameter estimated by ITOUGH2. It is important to realize that the standard deviation, parameter variation, acceptable parameter range, and the starting point for the optimization refer to  $p$  (and not  $X$ ).

**Table 2.1.** Parameter Transformations

$X \rightarrow p$	$p \rightarrow X$	ITOUGH2 command
$p = X$	$X = p$	>>>> VALUE
$p = \log_{10}(X)$	$X = 10^p$	>>>> LOGARITHM
$p = X/X_0$	$X = p \cdot X_0$	>>>> FACTOR
$p = \log_{10}(X/X_0)$	$X = 10^p \cdot X_0$	>>>> LOG(F)

Vector  $\mathbf{z}$  of length  $m$  contains dependent, observable variables, usually related to measurements taken at discrete points in space  $\mathbf{x}$  and time  $t$ . Such a selected point in space and time,  $z_i(\mathbf{x}_j, t_k)$ , will be referred to as a calibration point. Elements of  $\mathbf{z}$  refer to both measured quantities (data), indicated by an asterisk (\*), and simulation results. The most commonly used observations for calibration are pressure, flow rate, temperature and concentration measurements.

$$\text{Observation vector: } \mathbf{z}^T = \mathbf{z}(\mathbf{x}_j, t_k)^T = [z_{1,K}, z_n, z_{n+1,K}, \dots, z_m] \quad (2.2)$$

The vector of observable variables may also contain measured parameter values. For example, if permeability has been measured on cores in the laboratory, this information can be considered as an additional data point, and treated along with the direct observations of the system response. Such measured parameter values are referred to as "prior information". The first  $n$  elements of  $\mathbf{z}$  are therefore identical to the variables of  $\mathbf{p}$ .

The residual vector  $\mathbf{r}$  contains the differences between the measured and calculated system response; the latter is a function of parameter vector  $\mathbf{p}$ :

$$\text{Residual vector: } \mathbf{r}^T = (\mathbf{z}^* - \mathbf{z}(\mathbf{p}))^T = [r_{1,K}, r_n, r_{n+1,K}, \dots, r_m] \quad (2.3)$$



For example, element  $r_i$  ( $i > n$ ) is the difference between the measured and calculated pressure at a certain point in space and time. A special type of residual (for  $i \leq n$ ) is the difference between the measured parameter  $p_i^*$  (prior information, if available) and the estimated parameter value.

The elements of vectors  $\mathbf{z}$  and  $\mathbf{r}$  may have different physical meanings with different units of measurement, and represent observations of different accuracy. The inverse of the covariance matrix of  $\mathbf{z}$  can be used as a scaling matrix. If taking the view of maximum likelihood estimation, the covariance matrix is part of the stochastic model, i.e., it represents the distributional assumption about the measurement errors. A reasonable assumption about the measurement errors is that they are a result of many individual error sources, and are thus uncorrelated, normally distributed random variables with zero mean. The distributional assumption can therefore be summarized in a covariance matrix  $\mathbf{C}_{zz}$ , an  $m \times m$  diagonal matrix. The  $i$ -th diagonal element of matrix  $\mathbf{C}_{zz}$  is the variance  $\sigma_i^2$  representing the measurement error of observation  $z_i$ :

$$\mathbf{C}_{zz} = \begin{bmatrix} \sigma_1^2 & 0 & 0 & 0 & L & 0 \\ 0 & \sigma_i^2 & 0 & 0 & L & 0 \\ 0 & 0 & \sigma_n^2 & 0 & L & 0 \\ 0 & 0 & 0 & \sigma_j^2 & L & 0 \\ M & M & M & M & O & M \\ 0 & 0 & 0 & 0 & L & \sigma_m^2 \end{bmatrix} \quad (2.4)$$

The first  $n$  diagonal elements are the variances of the prior information vector  $\mathbf{p}^*$ , followed by  $m - n$  variances of the observed system state. Note that only the relative magnitude of the elements of  $\mathbf{C}_{zz}$  influences the values of the estimated parameters. We therefore introduce a dimensionless factor  $\sigma_0^2$  which is termed the prior error variance, and a positive definite matrix  $\mathbf{V}_{zz}$ , where  $\mathbf{V}_{zz}^{-1}$  will be used as a weighting matrix:

$$\mathbf{C}_{zz} = \sigma_0^2 \cdot \mathbf{V}_{zz} \quad (2.5)$$

While  $\sigma_0^2$  can assume any positive number, it is convenient to set  $\sigma_0^2 = 1$ , i.e., the weighting matrix is the inverse of the covariance matrix.

After the inversion, the *a posteriori* or *estimated error variance*  $s_0^2$  is calculated (see Eq. 2.10 below). If the preconception about the measurement errors is correct, and if the true system response is identified, the ratio  $s_0^2 / \sigma_0^2$  should not significantly deviate from 1.0.

The objective function  $S$  is a measure of the misfit between the data and the model calculation. If the measurement errors ( $\mathbf{z}^* - \mathbf{z}$ ) are normally distributed with mean

$E[(\mathbf{z}^* - \mathbf{z})] = \mathbf{0}$  and covariance matrix  $E[(\mathbf{z}^* - \mathbf{z})(\mathbf{z}^* - \mathbf{z})^T] = \mathbf{C}_{zz}$ , maximum-likelihood theory yields the weighted least-squares objective function:

$$S = (\mathbf{z}^* - \mathbf{z})^T \mathbf{C}_{zz}^{-1} (\mathbf{z}^* - \mathbf{z}) = \mathbf{r}^T \mathbf{C}_{zz}^{-1} \mathbf{r} = \sum_{i=1}^m \frac{r_i^2}{\sigma_i^2} \quad (2.6)$$

Alternative objective functions are available in ITOUGH2 (see *Finsterle* [1997a]). The best estimate parameter set minimizes the objective function (2.6). Minimization of the objective function  $S$  is based on local linearization (see Levenberg-Marquardt algorithm below). The partial derivatives of the calculated system response with respect to the parameters are summarized in the Jacobian matrix  $\mathbf{J}$  of dimensions  $m \times n$ , the elements of which are defined as follows:

$$J_{ij} = -\frac{\partial r_i}{\partial p_j} = \frac{\partial z_i}{\partial p_j} \quad (2.7)$$

ITOUGH2 calculates  $\mathbf{J}$  numerically by means of either forward or centered finite differences. The Jacobian is also important in the *a posteriori*, linear error analysis as well as the uncertainty propagation analysis.

While ITOUGH2 offers a number of different minimization algorithms, the Levenberg-Marquardt modification of the Gauss-Newton algorithm is found to be a rather general and robust procedure for iteratively updating parameter vector  $\mathbf{p}$  [*Levenberg*, 1944; *Marquardt*, 1963]. It can be described as shown in Table 2.2. If  $\lambda$  is large, the first term on the right-hand side of (2.8) becomes a matrix with a dominant diagonal. This leads to a small step along the gradient of  $S$ . Stepping along the steepest descent direction is robust, but inefficient. The Levenberg parameter  $\lambda$  is decreased after each successful step. With decreasing  $\lambda$ , the parameter update  $\Delta \mathbf{p}$  (Eq. 2.8) converges to the one proposed by the Gauss-Newton algorithm with its quadratic convergence rate.

estimated parameters can be further analyzed to obtain correlation coefficients, indicating parameter combinations that lead to similar matches, etc. Finally, we can calculate the uncertainty of the simulation results, which also allows us to identify potential outliers in the data.

The estimated error variance  $s_0^2$  represents the variance of the weighted residuals and is thus a measure of goodness-of-fit:

$$s_0^2 = \frac{\mathbf{r}^T \mathbf{V}_{zz}^{-1} \mathbf{r}}{m - n} \quad (2.10)$$

Note that if the residuals are consistent with the distributional assumption about the measurement errors (i.e., matrix  $\mathbf{C}_{zz}$ ), then the estimated error variance assumes a value close to  $\sigma_0^2$ . Next we calculate the expected value and the covariance matrix  $\mathbf{C}_{pp}$  of the estimated parameters. Based on the linearity assumption it is easy to show that the expected value of the estimated parameter is equal to the parameter itself. The definition of the covariance matrix yields:

$$\mathbf{C}_{pp} = s_0^2 (\mathbf{J}^T \mathbf{V}_{zz}^{-1} \mathbf{J})^{-1} \quad (2.11)$$

The interpretation of the covariance matrix  $\mathbf{C}_{pp}$  provides the key criteria to evaluate the inverse modeling results.

This concludes the summary description of ITOUGH2. Again, more details about inverse modeling theory, objective functions, minimization algorithms, and the residual and error analysis can be found in *Finsterle [1997a]*.

**Table 2.2.** Levenberg-Marquardt Minimization Algorithm

Step 1: Initialization:

- set iteration index  $k = 0$
- define initial Levenberg parameter  $\lambda$  (e.g.,  $\lambda^{(k=0)} = 10^{-3}$ )
- define Marquardt parameter  $\nu$  (e.g.,  $\nu = 10$ )
- define initial parameter set  $\mathbf{p}^{(k=0)} = \mathbf{p}_0$  (e.g.,  $\mathbf{p}_0 = \mathbf{p}^*$ )

Step 2: evaluate  $\mathbf{r}(\mathbf{p}^{(k)})$ ,  $S(\mathbf{p}^{(k)})$ , and  $\mathbf{J}(\mathbf{p}^{(k)})$

Step 3: propose parameter update  $\Delta\mathbf{p}$ :

$$\Delta\mathbf{p} = \left( \mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{J} + \lambda \mathbf{D} \right)^{-1} \mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{r} \quad (2.8)$$

where  $\mathbf{D} = n \times n$  diagonal matrix with  $D_{ii} = \left( \mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{J} \right)_{ii}$

Step 4: - update parameter vector:

$$\mathbf{p}^{(k+1)} = \mathbf{p}^{(k)} + \Delta\mathbf{p} \quad (2.9)$$

- evaluate  $S(\mathbf{p}^{(k+1)})$

Step 5: if  $S(\mathbf{p}^{(k+1)}) > S(\mathbf{p}^{(k)})$  increase  $\lambda$  by factor  $\nu$  and go to Step 3  
 if  $S(\mathbf{p}^{(k+1)}) < S(\mathbf{p}^{(k)})$  decrease  $\lambda$  by factor  $\nu$  and go to Step 6

Step 6: if no further improvement, stop, else  $k = k + 1$  and go to Step 2

One of the key advantages of a formalized approach to parameter estimation is the possibility to perform an extensive *a posteriori* error analysis. First, the residual analysis provides some measure of the overall goodness-of-fit and allows identification of systematic errors or flaws in the stochastic model. Next we can determine the uncertainty of the estimated parameters. Note that a good match does not necessarily mean that the estimates are reasonable. They may be highly uncertain due to a lack of sensitivity or high parameter correlations, which is an indication that the inverse problem is over-parameterized. The covariance matrix of the

## 3. BASIC CONCEPTS

### 3.1 Formats of ITOUGH2 Input Files

The user must provide at least two input files to run ITOUGH2. The first one is a TOUGH2 input file in standard TOUGH2 format as described in *Pruess* [1987, 1991a] and *Falta et al.* [1995], as well as other publications pertaining to particular TOUGH2 modules and code enhancements (e.g., *Pruess* [1991b], *Finsterle et al.* [1994], *Moridis and Pruess* [1995]). This input file defines the conceptual model. It solves the forward problem and should run successfully using standard TOUGH2 (see Section 5.3) not only for the initial parameter set, but also for a wide range of potential parameter combinations.

The second input file is the ITOUGH2 input file, in which the user specifies the parameters to be estimated, the observations used for calibration, and various program options (see Section 3.3). A special command interpreter has been developed to read the ITOUGH2 input file. The basic concept of the ITOUGH2 input language is discussed in Section 3.2. A detailed description of each ITOUGH2 command is given in Chapter 4.

### 3.2 Basic Concepts of ITOUGH2 Input Language

Execution of ITOUGH2 is controlled by means of a high-level input language. The commands are hierarchically structured, i.e., each command has a parent command on a higher command level, and potentially one or more child commands on a lower command level. The command level is identified by the corresponding number of ">" markers (e.g., ">>>" to enter command level three). Each command level must be terminated by reversed markers (e.g., "<<<" to quit command level three and return to level two). The position of the command level marker on a line is irrelevant. Any lines *not* containing a command level marker are considered to be a comment and are skipped, unless they represent data requested by a previous command. Entire sections of the input file may be commented out by marking the first and last line with `/*` and `*/`, respectively. All lines between these two marks are not interpreted even if they contain command level markers.

On the line containing a command level marker, a command is expected which is unique to the corresponding command level and the associated parent command. A command can be complemented by optional keywords. Additional text present on the command line is ignored. Commands and keywords are case-insensitive. The position of the command and keywords on a command line is arbitrary. Many commands request additional numerical or alphanumeric input. This input can be provided anywhere on the command line, but must immediately follow a colon ":". Input may consist of one or more integers, real numbers, or strings. Input belonging to the same command can be continued on following lines by using the "&" character. Each line of the input file is processed word by word, the delimiter being one or more spaces. All numerical data are read in free format. Long lists of data start one line after the command line. Data lists will be read until a FORTRAN reading error occurs.

Command `LIST` can be used on any command level to obtain a list of acceptable commands on the current command level. The keyword `HELP` or `MANUAL` can be used on any command line to print a short tutorial of the corresponding command to the output file.

In general, subcommands of the same parent command can be provided in arbitrary order. A few exceptions apply; they are clearly identified when using an incorrect order.

Examples:

```

command level marker      command      keyword      keyword
  ↓                    ↓          ↓          ↓
>> number of points in TIME : 100 , EQUALLY spaced in MINUTES
                        ↑  ↑
                        colon data
  
```

```

command level marker      colon followed by alphanumeric input      input continues
  ↓                    ↓                                ↓
>>> CONNECTION: AA__1 BB__1 AA__2 BB__2 AA__3 BB__3 &
                ↑      CC_60 CC_61 + 8 (print MANUAL page to output)
                command      ↑  ↑      keyword
                              keyword data
  
```

### 3.2 Main Structure of ITOUGH2 Input

There are three main blocks in the ITOUGH2 input file, identified by one of the following first-level commands:

- > PARAMETER
- > OBSERVATION
- > COMPUTATION

The first block (first-level command `> PARAMETER`) is used to identify those TOUGH2 input parameters that will be subjected to parameter estimation, sensitivity analysis, or uncertainty propagation analysis. A series of subcommands ensure a unique identification of the parameter by providing its type (second-level commands), and the domain it is referring to (third-level commands). The fourth-level commands are used to provide further specifications along with statistical details about the parameter.

The second block (first-level command `> OBSERVATION`) is used to identify those TOUGH2 output variables that will be compared to observed data for model calibration. Furthermore, the points in time at which calibration should occur are also specified in this block. An observable variable is identified by its type (second-level command), its location

(third-level command), as well as more detailed specifications if necessary (fourth-level commands). The measured data to which the calculated system response is compared to is also provided through a fourth-level command.

The third block (first-level command > COMPUTATION) is used for various program options and computational parameters. It deals with convergence criteria, the numerical calculation of the Jacobian matrix, statistical parameters for the error analysis, and output options. Most important, the application mode of ITOUGH2 (parameter estimation, sensitivity analysis, uncertainty propagation analysis) can be selected along with a number of additional features.

Figure 3.3.1 depicts the main structure of an ITOUGH2 input file in a generic way. A list of available subcommands can be found in Appendix B, and a detailed description of each ITOUGH2 command is given in Chapter 4.

```
> PARAMETER
  >> specify parameter type
    >>> specify parameter domain
      >>>> provide details
        <<<<
      <<<
    <<

> OBSERVATION
  >> specify calibration points in TIME
  >> specify observation type
    >>> specify location
      >>>> provide details
        >>>> provide data
          <<<<
        <<<
      <<

> COMPUTATION
  >> specify various program OPTIONS
  >> specify CONVERGENCE criteria
  >> specify parameters for calculating JACOBIAN matrix
  >> specify parameters for ERROR analysis
  >> specify OUTPUT formats
  <<
<
```

**Figure 3.3.1.** Main structure of ITOUGH2 input.

## 4. ITOUGH2 COMMANDS

A detailed description of each ITOUGH2 command is given below. The description includes the command syntax, the name of the parent command, the name of subcommands (if applicable), as well as the purpose and effect of the command. Theoretical background is provided where necessary. Furthermore, an illustrative example is given for each command.

In general, the command syntax includes the command level marker, the command name as identified by ITOUGH2, input variables (in *italics*), and optional keywords or variables (in parentheses). Alternatives are separated by a slash "/".

Example:

```
command level marker  integer variable                optional variable
      ↓                ↓                               ↓
>>> TIME : ntime (EQUAL/LOGARITHMIC) (time_unit)
      ↑                ↑           ↑
      command         optional, alternative keywords
```

The commands are given in alphabetic order. Note that the name of a command is not always unique, in which case the command level and the parent command can be used for identification. If reference is made to a command with a non-unique command name, the first character of the parent command (or the corresponding first-level command) is indicated in parentheses (e.g., >>> FORWARD (c) refers to the command in block >> CONVERGE, whereas >>> FORWARD (j) refers to the command in block >> JACOBIAN).

ITOUGH2 commands can be written in lower or upper case. In this manual, the commands and keywords are always typed in upper case for easy identification. Therefore, the lower case words on the command line are comments that will be ignored by the ITOUGH2 command interpreter.

The examples given for each command usually illustrate the basic usage of a command. In many cases, however, extended features and advanced applications are provided to demonstrate the use of a command in combination with other commands. The examples are not complete and can therefore not be run separately. Furthermore, they may have to be modified to avoid warning messages.

The command description can also be accessed online by typing `it2help`, which is the name of the UNIX script file `it2help` (see Section 5.6).



## Command

>> ABSOLUTE

## Parent Command

> PARAMETER

## Subcommand

>>> MATERIAL

## Description

This command selects as a parameter the absolute permeability (TOUGH2 variable *PER* (*ISOT*, *NMAT*)) of the specified material.

Subcommand >>>> LOGARITHM invokes estimation of a single log-value which is assigned to all selected materials; subcommand >>>> FACTOR invokes estimation of a common multiplication factor which is applied to all selected permeabilities, thus maintaining the permeability ratios between the materials; subcommand >>>> LOG(F) should be used to estimate a log-normally distributed factor with which all the permeabilities are multiplied. By default, the estimate refers to all three flow directions (*ISOT*=1, 2, 3). Subcommand >>>> INDEX can be used to select the permeability of a specific flow direction *ISOT*.

## Example

```
> PARAMETER
  >> ABSOLUTE permeability
    >>> MATERIAL: BOREH SKIN_
      >>>> LOGARITHM
        <<<<<
    >>> MATERIAL: SAND1 SAND2
      >>>> FACTOR
        >>>> INDEX: 1 2 (horizontal permeability)
          <<<<<
    >>> MATERIAL: SAND1 SAND2
      >>>> FACTOR
        >>>> INDEX: 3 (vertical permeability)
          <<<<<
    <<<<
  <<<<
```

## See Also

-

## Command

>>>> ABSOLUTE

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

-

## Description

This command takes the absolute value of the calculated system response as the model output to be compared to the observed data.

## Example

```
> OBSERVATION
  >> CAPILLARY PRESSURE
    >>> ELEMENT: ELM99
      >>>> take ABSOLUTE value and compare to ...
      >>>> ... positive DATA stored on FILE: pcap.dat
      >>>> the RELATIVE error is: 5 %
    <<<<
  <<<
<<
```

## See Also

-

**Command**

```
>>> ADJUST
```

**Parent Command**

```
>> CONVERGE
```

**Subcommand**

-

**Description**

The initial time step size is provided through TOUGH2 variable *DELTEN* or *DLT(1)*, usually followed by automatic time stepping (see TOUGH2 variables *MOP(16)* and *REDLT*). The initial time step may be too big (i.e., is automatically reduced by TOUGH2) or too small (i.e., convergence is achieved within one Newton-Raphson iteration), depending on the parameter set supplied by ITOUGH2 during an inversion. This command allows ITOUGH2 to automatically adjust the initial time step size so that convergence is achieved within more than 1 but less than *MOP(16)* Newton-Raphson iterations. Automatic time step adjustment may improve the speed of an inversion, but may also make the inversion unstable if time discretization errors are significant.

**Example**

```
> COMPUTATION
  >> CONVERGE
    >>> automatically ADJUST initial time step (TOUGH2 variable DELTEN)
    <<<
  <<
```

**See Also**

```
>>> CONSECUTIVE, >>> REDUCTION
```

## Command

```
>>> ALPHA: alpha (%)
```

## Parent Command

```
>> ERROR
```

## Subcommand

-

## Description

*alpha* is a probability used for a variety of statistical tests within ITOUGH2. The choice of *alpha* does not affect the estimated parameter set, but *alpha* is used in the residual analysis, the Fisher model test, the analysis of the resulting distribution when performing Monte Carlo simulations, and the width of the error band when performing FOSM uncertainty propagation analysis. *alpha* is expected to assume values between 0.001 and 0.200 (default: 0.01). Instead of the risk  $\alpha$ , one can also provide the confidence level  $(1 - \alpha)$ , in which case *alpha* assumes values between 0.8 and 0.999. Use keyword % if *alpha* is given in percent.

## Example

```
> COMPUTATION
  >> STOP
    >>> number of TOUGH2 SIMULATIONS: 200
    <<<
  >> ERROR propagation analysis
    >>> MONTE CARLO simulations
    >>> print quantile for risk ALPHA =: 5.0 %
    <<<
  <<
```

## See Also

-

**Command**

```
>>> ANDREWS: c
```

**Parent Command**

```
>> OPTION
```

**Subcommand**

-

**Description**

This command selects a robust estimator named Andrews. Given this estimator, the objective function to be minimized is the sum of the cosine functions  $\gamma(y_i)$ , where  $y_i$  is the weighted residual:

$$S = \sum_{i=1}^m \gamma(y_i)$$

where

$$\gamma(y_i) = \begin{cases} 1 - \cos(y_i / c) & |y_i| \leq c\pi \\ 2 & |y_i| > c\pi \end{cases}$$

with

$$y_i = \frac{r_i}{\sigma_i}$$

This objective function does not correspond to a standard probability density function. It has the general characteristic that the weight given individual residuals first increases with deviation, then decreases to reduce the impact of outliers. The parameter  $c$  indicates the deviation at which residuals are considered to be outliers. If the measurement errors happen to be close to a normal distribution with standard deviation  $\sigma_i$ , then the optimal value for the constant  $c$  is  $c = 2.1$ .

Note that this objective function is minimized using the standard Levenberg-Marquardt algorithm which is designed for a quadratic objective function. Since  $(1 - \cos)$  can be reasonably well approximated by a quadratic function for small  $y_i$ , the Levenberg-Marquardt algorithm is usually quite efficient.

**Example**

```
> COMPUTATION
  >> OPTION
    >>> use the robust estimator ANDREWS with a constant c : 1.5
  <<<
<<
```

**See Also**

```
>>> CAUCHY, >>> L1-ESTIMATOR, >>> LEAST-SQUARES,
>>> QUADRATIC-LINEAR
```

## Command

>>> ANNEAL

## Parent Command

>> OPTION

## Subcommand

>>>> ITERATION

>>>> SCHEDULE

>>>> STEP

>>>> TEMPERATURE

## Description

This command invokes Simulated Annealing to minimize the objective function  $S$ . The following steps are performed by ITOUGH2, controlled by a number of fourth-level commands:

- (1) Define the range of possible parameter values using command >>>> RANGE in block > PARAMETER.
- (2) Define an initial value of the control parameter  $\tau$  using command >>>> TEMPERATURE.
- (3) ITOUGH2 generates random perturbations  $\Delta\mathbf{p}$  of the parameter vector  $\mathbf{p}$ . The probability density function of the perturbation is either Gaussian or uniform; the initial standard deviations of these distributions are given by command >>>> DEVIATION ( $\mathbf{p}$ ).
- (4) The objective function  $S(\mathbf{p}_{k+1})$  for the new parameter set  $\mathbf{p}_{k+1} = \mathbf{p}_k + \Delta\mathbf{p}$  is evaluated.
- (5) If the objective function is decreased (i.e.,  $\Delta S = S(\mathbf{p}_{k+1}) - S(\mathbf{p}_k) < 0$ ), the change is retained. If the objective function is increased (i.e.,  $\Delta S > 0$ ), the perturbation is accepted with probability  $\Pi = \exp(-\Delta S / \tau)$ .
- (6) After a sufficient number of perturbations have been accepted (see command >>>> STEP (a)),  $\tau$  is lowered according to the annealing schedule (see command >>>> SCHEDULE).
- (7) Steps (3) through (6) are repeated until the maximum number of temperature reductions (see command >>>> ITERATION (a)) is reached.

This scheme of always taking a downhill step and sometimes taking an uphill step with probability  $\Pi$  depending on  $\tau$  is known as the Metropolis algorithm. Simulated Annealing may be especially useful for the minimization of a discontinuous cost function in order to optimize operational parameters.

## Example

```
> PARAMETER
  >> pumping RATE
    >>> SINK: EXT_1
      >>>> RANGE: -1E-1  -1E-4
      >>>> LOGARITHM
      <<<<
    <<<
  <<

> COMPUTATION
  >> TIME: 1 [YEARS]
    2.0

  >> USER specified cost function: Extraction cost
    >>> SINK: EXT_1
      >>>> NO DATA
      >>>> WEIGHT (=specific costs): 1.0
      <<<<
    <<<
  <<

> COMPUTATION
  >> OPTION
    >>> a cost function is minimized using L1-ESTIMATOR
    >>> perform minimization using Simulated ANNEALing
      >>>> initial TEMPERATURE : -0.05 (=5 % of initial cost)
      >>>> update after maximum : 100 STEPS
      >>>> annealing SCHEDULE: 0.95
      >>>> Simulated Annealing ITERATIONS: 50
      <<<<
    <<<
  <<
```

## See Also

```
>>>> GAUSS-NEWTON, >>>> GRID SEARCH, >>>> LEVENBERG-MARQUARDT,
>>>> SIMPLEX, >>>> ITERATION (a), >>>> SCHEDULE, >>>> STEP (a),
>>>> TEMPERATURE
```

## Command

```
>>>> ANNOTATION: anno
```

## Parent Command

all third-level commands in block > PARAMETER and > OBSERVATION

## Subcommand

## Description

A fifteen-character string *anno* can be provided to label parameters and observations in the ITOUGH2 output file. The annotation does not have any function except for making the ITOUGH2 output more readable (exceptions are the user-specified functions; see commands >> USER (p, o)). If no annotation is provided, ITOUGH2 internally generates a string which allows unique identification of the parameter or observation, respectively. The internally generated annotation can be used to check the correctness of the ITOUGH2 input.

## Example

```
> PARAMETER
  >> van Genuchten's CAPILLARY pressure function
    >>> ROCK TYPE           : MATRI
      >>>> ANNOTATION       : AIR ENTRY PRESSURE
      >>>> PARAMETER no.    : 2
      <<<<
    >>> ROCK TYPE           : FRAC1
      >>>> PARAMETER no.    : 2
      <<<<
    <<<
  <<
> OBSERVATION
  >> CONCENTRATION of COMPONENT No.: 3 in PHASE No.: 2
    >>> ELEMENT: ELM10
      >>>> NO DATA and no annotation
      <<<<
    <<<
  <<
```

In the ITOUGH2 output file, the first parameter is referred to as "AIR ENTRY PRESS". The annotation internally generated for the second parameter reads "CAP.PR.2 FRAC1", where "2" indicates that the second parameter of the capillary pressure ("CAP.PR.") function referring to rock type "FRAC1" is estimated. The automatically generated annotation for the observation reads "CONC.(3,2) ELM10".

## See Also



**Command**

```
>>>> AUTO
```

**Parent Command**

all third-level commands in block > OBSERVATION

**Subcommand****Description**

This command provides automatic weighting of observations. The standard deviation calculated by ITOUGH2 is 10 % of the mean of the observed values for a given data set. It is suggested, however, that the assumed measurement error or expected standard deviation of the final residuals be explicitly provided using command >>>> DEVIATION (o).

**Example**

```
> OBSERVATION
  >> PRESSURE
    >>> ELEMENT: BH__0
      >>>> AUTOMATIC weighting
      >>>> DATA are on FILE: pres.dat
      <<<<
    <<<
  <<
```

**See Also**

```
>>>> DEVIATION (o)
```

## Command

```
>>>> AVERAGE (VOLUME)
```

or

```
>>>> MEAN (VOLUME)
```

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

## Description

If multiple elements or connections are provided to indicate the location of a measurement point, ITOUGH2 takes the average of all calculated values as the model output to be compared to the data. The user must ensure that the averaging of the quantity is meaningful. If keyword `VOLUME` is present on the command line, the calculated values are weighted by the grid block volume.

## Example

```
> OBSERVATION
  >> GAS CONTENT
    >>> ELEMENTS: A1__1 A1__2 A1__3 A1__4 B1__1 B1__2 B1__3 B1__4 &
                C1__1 C1__2 C1__3 C1__4 D1__1 +3
    >>>> ANNOTATION: Ave. Gas Content
    >>>> Take VOLUME AVERAGE
    >>>> NO DATA
    <<<<
  <<<
<<
```

## See Also

```
>>>> SUM
```

**Command**

```
>> BOTTOMHOLE PRESSURE
```

**Parent Command**

```
> PARAMETER
```

**Subcommand**

```
>>> SOURCE
```

**Description**

This command selects as a parameter the bottomhole pressure for wells on deliverability (TOUGH2 variable *EX*). This parameter refers to a sink/source code name. The generation type must be DELV.

**Example**

```
> PARAMETER
  >> BOTTOMHOLE PRESSURE in well of deliverability
    >>> SINK: WEL_1 + 5
      >>>> ANNOTATION: wellb. pres. Pwb
      >>>> estimate VALUE
      >>>> RANGE      : 0.5E5 5.0E5 [Pa]
      <<<<
    <<<
  <<
```

**See Also**

-

**Command**

>>>> BOUND: *lower upper*

**Parent Command**

all third-level commands in block > PARAMETER

**Subcommand**

-

**Description**

(synonym for command >>>> RANGE)

**Example**

(see command >>>> RANGE)

**See Also**

>>>> RANGE

**Command**

```
>> CAPACITY
```

**Parent Command**

```
> PARAMETER
```

**Subcommand**

```
>>> MATERIAL
```

**Description**

This command selects as a parameter the rock grain specific heat (TOUGH2 variable *SPHT (NMAT)*).

**Example**

```
> PARAMETER
  >> heat CAPACITY
    >>> ROCK type      : GRANI
      >>>> VALUE
      >>>> RANGE      : 600.0 3000.0 [J/kg/C]
      <<<<
    <<<
  <<
```

**See Also**

-

## Command

>> CAPILLARY

## Parent Command

> PARAMETER

## Subcommand

>>> DEFAULT

>>> MATERIAL

## Description

This command selects a parameter of the capillary pressure function (TOUGH2 variable  $CP(IPAR, NMAT)$ ) of a certain rock type, or a parameter of the default capillary pressure function (TOUGH2 variable  $CPD(IPAR)$ ). Use command >>>> INDEX to select the parameter index  $IPAR$ . The physical meaning of the parameter depends on the type of capillary pressure function selected in the TOUGH2 input file, variable  $ICP$  and  $ICPD$ , respectively. The admissible range should be specified explicitly to comply with parameter restrictions (see *Pruess* [1987], Appendix B).

## Example

```
> PARAMETER
  >> parameter of CAPILLARY pressure function
    >>> DEFAULT
      >>>> ANNOTATION      : Slr
      >>>> INDEX          CPD(: 2)
      >>>> VALUE
      >>>> RANGE           : 0.01 0.99
      <<<<<
    >>> MATERIAL: SAND1 SAND2
      >>>> ANNOTATION      : vG alpha [Pa^-1]
      >>>> INDEX no.       : 3
      >>>> LOGARITHM
      >>>> RANGE           : -5.0 -1.0
      <<<<<
    <<<
  <<
```

## See Also

>> RELATIVE

## Command

>>> CENTERED

## Parent Command

>> JACOBIAN

## Subcommand

-

## Description

This command calculates elements of the Jacobian matrix by means of centered finite difference quotients:

$$J_{ij} = \frac{\partial z_i}{\partial p_j} \approx \frac{z_i(p_j + \delta p_j) - z_i(p_j - \delta p_j)}{2\delta p_j}$$

The evaluation of the Jacobian thus requires  $2n + 1$  TOUGH2 simulations, where  $n$  is the number of parameters. The size of the perturbation  $\delta p_j$  can be controlled using command >>> PERTURB. Centered finite differences are more accurate than forward finite differences, but computationally twice as expensive (also see command >>> FORWARD).

## Example

```
> COMPUTATION
  >> JACOBIAN
    >>> use CENTERED finite difference quotient
    >>> PERTURBation factor is : 0.005 times the parameter value
  <<<
<<
```

## See Also

>>> FORWARD (j), >>> PERTURB

**Command**

>>> CAUCHY

**Parent Command**

>> OPTION

**Subcommand****Description**

This command selects an objective function that corresponds to a Cauchy or Lorentzian distribution, i.e., the probability density function of the residuals reads:

$$\varphi(r_i) \sim \frac{1}{1 + \frac{1}{2} \left( \frac{r_i}{\sigma_i} \right)^2}$$

This distribution exhibits more extensive tails compared to the normal distribution, and leads therefore to a more robust estimation if outliers are present. The objective function to be minimized is given by the following equation:

$$S = \sum_{i=1}^m \log \left( 1 + \frac{1}{2} y_i^2 \right)$$

with

$$y_i = \frac{r_i}{\sigma_i}$$

This objective function can be minimized using the standard Levenberg-Marquardt algorithm which is designed for a quadratic objective function. The objective function can be reasonably well approximated by a quadratic function, so that the Levenberg-Marquardt algorithm is usually quite efficient.

**Example**

```
> COMPUTATION
  >> OPTION
    >>> assume measurement errors follow a CAUCHY distribution
  <<<
<<
```

**See Also**

```
>>> ANDREWS, >>> L1-ESTIMATOR, >>> LEAST-SQUARES,
>>> QUADRATIC-LINEAR
```



**Command**

```
>>> CHARACTERISTIC
```

**Parent Command**

```
>> OUTPUT
```

**Subcommand**

```
-
```

**Description**

This command generates a file in the format specified by command `>>> FORMAT` containing the characteristic curves (relative permeability and capillary pressure functions) of all rock types used in the TOUGH2 model. The file name contains the string "`_ch`".

**Example**

```
> COMPUTATION
  >> OUTPUT
    >>> generate file with CHARACTERISTIC curves
    >>> in : TECPLOT FORMAT
    <<<
  <<
```

**See Also**

```
>>> FORMAT
```

## Command

```
>>>> COLUMN: itime idata (istd_dev)
```

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

## Description

This command identifies the column holding the time and observed value in the data definition block (see command >>>> DATA). By default, transient observations are expected to be provided in two columns, where the first column contains the observation time, and the second column contains the corresponding measurement. Deviations from this format must be indicated by providing the numbers of the columns, *itime* and *idata*, holding time and data information, respectively. If a third integer *istd\_dev* is provided, an additional column is expected holding the standard deviation of the corresponding measurement. This allows one to specify individual standard deviations for each data point (the subcommand >>>> DEVIATION assigns a single standard deviation to all data points of a data set). The columns following command >>>> DATA are read in free format. If a column contains non-numeric characters, command >>>> FORMAT must be used.

## Example

```
> OBSERVATION
  >> CAPILLARY PRESSURE
    >>> ELEMENT                : A1__1
      >>>> COLUMN                : 2 3
      >>>> skip                    : 3 HEADER lines
      >>>> conversion FACTOR      : -100.0 [hPa] - [-Pa]
      >>>> DATA                    (time is in MINUTES)
-----
# Time [min]  Cap. Pres, [hPa] FlowmeterX Flow Rate [mg/s]
-----
1      5.0    0.1698331055E+02 FlowmeterA 0.98693999946E+01
2     10.0    0.2075763428E+02 FlowmeterA 0.1039689596E+02
3     15.0    0.2357142822E+02 FlowmeterA 0.1162893932E+02
4     20.0    0.2529052490E+02 FlowmeterA 0.1353439620E+02
.     .     .     .     .     .     .     .     .     .     .
      >>>> standard DEVIATION: 0.5 [hPa]
      <<<<
      <<<<
```

## See Also

```
>>>> DATA, >>>> DEVIATION (o), >>>> FORMAT, >>>> HEADER,
>>>> PICK
```

### Command

```
>>>> COMPONENT comp_name/: icomp
```

### Parent Command

```
>>> ELEMENT  
>>> SOURCE (o)
```

### Subcommand

-

### Description

This command identifies a component either by its name (*comp\_name*) or the component number (*icom*p). A list of allowable component names for the given EOS module can be obtained from the header of the ITOUGH2 output file.

### Example

```
> OBSERVATION  
  >> CONCENTRATION  
    >>> ELEMENT: ZZZ99  
      >>>> ANNOTATION: TCE concentration  
      >>>> COMPONENT No.: 3 (=VOC)  
      >>>> dissolved in LIQUID PHASE  
      >>>> DATA on FILE: tce.dat  
      >>>> standard DEVIATION: 1.0E-6  
      <<<<<  
    <<<<  
  <<<<
```

### See Also

```
>>>> PHASE
```

## Command

>> COMPRESSIBILITY

## Parent Command

> PARAMETER

## Subcommand

>>> MATERIAL

## Description

This command selects as a parameter the pore space compressibility  $c_\phi$  (TOUGH2 variable *COM(NMAT)*) of a certain rock type. Under fully liquid-saturated conditions, pore space compressibility estimates  $c_\phi$  can be converted to a specific storage coefficient  $S_s$  [ $m^{-1}$ ] as follows:

$$S_s = \phi \cdot \rho \cdot g (c_l + c_\phi)$$

where  $\phi$  is porosity,  $\rho$  is density of water,  $g$  is gravitational acceleration, and  $c_l \approx 4.4 \cdot 10^{-10}$  [ $Pa^{-1}$ ] is water compressibility. Similarly, estimation of  $c_\phi$  for grid blocks representing a well or borehole is useful for the determination of a dimensionless wellbore storage coefficient  $C_{bh}$ :

$$C_{bh} = \phi_{bh} \cdot \rho \cdot g \cdot V_{bh} (S_l \cdot c_l + S_g \cdot c_g + c_\phi)$$

where  $\phi_{bh}$  and  $V_{bh}$  are the porosity and volume of the grid block representing the well,  $S_l$  and  $S_g$  are the liquid and gas saturation, and  $c_g$  is gas compressibility which is approximately  $1/p$ .

## Example

```
> PARAMETER
  >> pore space COMPRESSIBILITY
    >>> MATERIAL: BOREH
      >>>> ANNOTATION: Wellbore storage
      >>>> LOGARITHM
      >>>> RANGE      : -10.00  -7.0
      <<<<
    >>> MATERIAL: SKIN_ ROCK_ BOUND
      >>>> ANNOTATION: Storativity
      >>>> LOGARITHM
      <<<<
    <<<<
```

See Also

## Command

> COMPUTATION

## Parent Command

-

## Subcommand

>> CONVERGE  
>> ERROR  
>> JACOBIAN  
>> OPTION  
>> OUTPUT

## Description

This is the first-level command for specifying a number of computational parameters, convergence criteria, program options, and output formats. The general format is as follows:

```
> COMPUTATION
  >> specify various program OPTIONS
  >> specify CONVERGENCE criteria
  >> specify parameters for calculating JACOBIAN matrix
  >> specify parameters for ERROR analysis
  >> specify OUTPUT formats
<<
```

## Example

```
> COMPUTATION
  >> CONVERGENCE criteria
    >>> perform : 5 ITERATIONS
    <<<
  >> JACOBIAN
    >>> use CENTERED finite difference quotient with
    >>> a relative parameter PERTURBation of : 0.5 %
    <<<
  >> program OPTIONS
    >>> use LEAST-SQUARES objective function (default)
    >>> allow the simulation to reach STEADY state
    <<<
  >> OUTPUT
    >>> generate PLOTFILE for: TECPLOT visualization software
    >>> print all times in HOURS
<<
```

## See Also

-

### Command

```
>> CONCENTRATION (comp_name/COMPONENT: icom)  
                (phase_name/PHASE: iphase)
```

### Parent Command

```
> OBSERVATION
```

### Subcommand

```
>>> ELEMENT
```

### Description

This command selects as an observation type the concentration [ $\text{kg/m}^3$ ] of a component in a given phase. Concentration is defined as the product of mass fraction of component *icom* in phase *iphase* times density of phase *iphase*. This observation type refers to an element. Component number *icom* or component name *comp\_name*, and phase number *iphase* or phase name *phase\_name* depend on the EOS module being used. They are listed in the header of the ITOUGH2 output file, and can be specified either on the command line or using the two subcommands >>>> COMPONENT and >>>> PHASE, respectively.

### Example

```
> OBSERVATION  
  >> CONCENTRATION of BRINE in LIQUID  
    >>> ELEMENT: A1__1
```

OR

```
> OBSERVATION  
  >> CONCENTRATION of COMPONENT No.: 2 in PHASE No.: 2  
    >>> ELEMENT: A1__1
```

OR

```
> OBSERVATION  
  >> CONCENTRATION  
    >>> ELEMENT: A1__1  
      >>>> COMPONENT: 2  
      >>>> LIQUID PHASE
```

### See Also

```
>> MASS FRACTION
```

**Command**

```
>> CONDUCTIVITY
```

**Parent Command**

```
> PARAMETER
```

**Subcommand**

```
>>> MATERIAL
```

**Description**

This command selects as a parameter the formation heat conductivity under fully liquid-saturated conditions (TOUGH2 variable *CWET (NMAT)*).

**Example**

```
> PARAMETER
  >> heat CONDUCTIVITY
    >>> ROCK type      : GRANI
    >>>> VALUE
    >>>> RANGE        : 0.5 5.0 [W/m/C]
    <<<<<
    <<<<
  <<<<
<<<<<
```

**See Also**

-

## Command

```
>>> CONNECTION: elem1 elem2 (elem_i elem_j ...)
                (++)/+-/++ iplus)
```

or

```
>>> INTERFACE: elem1 elem2 (elem_i elem_j ...) (++)/+-/++
iplus)
```

## Parent Command

```
>> FLOW
```

## Subcommand

```
all fourth-level commands in block > OBSERVATION
```

## Description

This command reads pairs of element names defining a connection. Element names are designated by a three-character/two-integer (FORTRAN format: AAAII) code name. Blanks in the element names as printed in the TOUGH2 output file must be replaced by underscores (e.g., an element name specified in the TOUGH2 input file as 'B 007' is printed as 'B 0 7' to the TOUGH2 output file. Therefore, it has to be addressed in the ITOUGH2 input file as 'B\_0\_7').

Multiple connections can be specified, and ITOUGH2 calculates the sum or mean of all flow rates (see subcommands >>>> SUM and >>>> AVERAGE, respectively).

A sequence of *iplus* connections can be generated where the number of the first and/or the second element is increased by 1. If only the first (second) element in a sequence of connections should be increased, use +- (-+). If both elements are to be increased, use + (or ++). The following two command lines are thus identical:

```
>>> CONNECTION: AA__1 BB_15   +- 2
>>> CONNECTION: AA__1 BB_15   AA__1 BB_16   AA__1 BB_17
```

## Example

```
> OBSERVATION
  >> LIQUID FLOW RATE
    >>> list of CONNECTIONS: ELM_1 ELM_2 + 48
    >>>> ANNOTATION      : Boundary flux
    >>>> take the SUM of the flow rates across 49 connections
    >>>> DATA on FILE   : flow.dat
    >>>> RELATIVE error: 10 %
    <<<<
    <<<
    <<
```

## See Also

```
>>>> AVERAGE, >>>> SUM
```



## Command

```
>>> CONSECUTIVE: max_iter1
```

## Parent Command

```
>> CONVERGE
```

## Subcommand

-

## Description

By default, TOUGH2 simulations are stopped if 10 consecutive time steps converge with a single Newton-Raphson iteration because no update of primary variables occurs. This command allows changing the maximum number of allowable time steps with ITER=1 to *max\_iter1*.

Consecutive time steps with no update of primary variable occur if:

- (1) steady-state is reached;
- (2) calibration or printout times are too narrowly spaced;
- (3) the maximum time step size (TOUGH2 variable *DELTMX*) is too small;
- (4) the initial time step (TOUGH2 variable *DELTEN* or *DLT(1)*) is too small;
- (5) a small time step is taken to land on a calibration or printout time.

Only (1) is an acceptable TOUGH2 convergence (see command >>> STEADY-STATE). All the other reasons may lead to premature termination of a TOUGH2 simulation. Convergence problems are more often encountered in ITOUGH2 than in a standard TOUGH2 simulation because many parameter combinations are submitted. This command makes TOUGH2 more tolerant of this kind of convergence failure. It is important, however, that *max\_iter1* is only increased to overcome temporary convergence problems during the optimization, i.e., the final parameter set should yield a TOUGH2 simulation without convergence problems. Calibration points should not be spaced too narrowly in time (see command >> TIME). Command >>> ADJUST can be used to overcome problem (4). Note that a special time stepping procedure is incorporated in ITOUGH2 to avoid problem (5).

## Example

```
> COMPUTATION
  >> CONVERGE
    >>> accept : 20 CONSECUTIVE time steps that converge on ITER=1
    <<<
  <<
```

## See Also

```
>> TIME, >>> ADJUST, >>> REDUCTION
```

## Command

```
>> CONTENT (phase_name/PHASE: iphase)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> ELEMENT
```

## Description

This command selects as a parameter the content of phase *iphase* as an observation type.

Phase content is defined as the product of saturation and porosity.

The phase name *phase\_name* or phase number *iphase*, which depend on the EOS module being used, are listed in the ITOUGH2 header, and can be specified either on the command line or using subcommand >>>> PHASE.

Estimating phase content and phase saturation is identical only if porosity remains constant. Porosity can be variable (i) due to compression of the pore space (i.e., if TOUGH2 variable *COM* (*NMAT*) is not zero), and (ii) if porosity is one of the parameters to be estimated and is updated during the inversion.

## Example

```
> OBSERVATION
  >> TIME: 1 point at steady-state
    1.0E20
  >> LIQUID CONTENT or
    CONTENT in PHASE No.: 2
  >>> ELEMENT: A1__1
    >>>> ANNOTATION: Water content
    >>>> FACTOR      : 0.01 (data given in %)
    >>>> one steady-state DATA point
          0.0    23.0
          1.0E50 23.0
    >>>> DEVIATION: 5.0 %
    <<<<
  >>> ELEMENT: A1__1
    >>>> ANNOTATION: Gas content
    >>>> GAS PHASE (overwrites iphase specified on command line)
    >>>> NO DATA, just for plotting
    >>>> WEIGHT      : 1.0E-20
    <<<<
  <<<
<<
```

## See Also

## Command

```
>> CONVERGE  
or  
>> STOP  
or  
>> TOLERANCE
```

## Parent Command

```
> COMPUTATION
```

## Subcommand

```
>>> ADJUST  
>>> CONSECUTIVE  
>>> FORWARD  
>>> INCOMPLETE  
>>> INPUT  
>>> ITERATION  
>>> LEVENBERG  
>>> LIST  
>>> MARQUARDT  
>>> REDUCTION  
>>> SIMULATION  
>>> STEP  
>>> UPHILL  
>>> WARNING
```

## Description

This is the parent command of a number of subcommands that deal with tolerance measures and convergence criteria for the inversion and, to a certain extent, the TOUGH2 simulation.

## Example

```
> COMPUTATION  
  >> CONVERGENCE criteria  
    >>> ignore WARNING messages, then  
    >>> perform : 5 ITERATIONS  
    >>> stop if more than : 5 unsuccessful UPHILL steps are proposed  
    >>> allow for : 20 CONSECUTIVE time steps converging on ITER=1  
    >>> and : 20 time step REDUCTIONS  
    >>> accept : 6 INCOMPLETE TOUGH2 runs  
    >>> the initial LEVENBERG parameter shall be : 0.01  
    >>> use the default value (=: 10.0) for the MARQUARDT parameter  
    <<<
```

## See Also

```
>> OPTION
```

## Command

```
>>>> CORRELATION: (-) rcorr
```

## Parent Command

```
>>> SELECT
```

## Subcommand

## Description

This command defines one of the criteria used for automatic parameter selection. It examines the ratio between the apparent conditional standard deviation  $\sigma_p^*$  and the joint standard deviation  $\sigma_p$  as a measure of overall parameter correlation (since the calculation is performed far from the minimum, the standard deviations cannot be interpreted as actual estimation uncertainties):

$$\chi = \frac{\sigma_p^*}{\sigma_p} \quad 0 < \chi \leq 1$$

Those parameters with a ratio larger than *lrcorr*, i.e., the most independent parameters, are selected. Strongly correlated parameters are (temporarily) excluded from the optimization process.

If a negative value is given for *rcorr*, the selection criterion is relaxed with each iteration *k*, and reaches zero for the last iteration *max\_iter*, i.e., all parameters are selected for the final step.

$$rcorr_k = |rcorr| \cdot \left(1 - \frac{k}{max\_iter}\right)$$

The choice for *rcorr* depends on the number of parameters *n* specified in block `> PARAMETER`. The more parameters are estimated simultaneously, the higher are parameter interdependencies. This fact should be acknowledged by specifying a smaller value for *lrcorr* if *n* increases.

## Example

```
> COMPUTATION
  >> OPTION
    >>> SELECT parameter automatically every
      >>>> : 3 ITERATIONS
      >>>> based on the CORRELATION criterion with rcorr : -0.10
    <<<<
  <<<
<<
```

## See Also

```
>>>> ITERATION (s), >>>> SENSITIVITY
```

## Command

```
>> COVARIANCE (FILE: file_name)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

## Description

This command reads the diagonal elements of the *a priori* covariance matrix  $C_{zz}$ . Usually the variances of the observations are specified separately for each data set using command >>>> DEVIATION (o), or they are provided as a separate column along with the data (see commands >>>> COLUMN and >>>> DATA). As an alternative, one can assign or overwrite variances using the second-level command >> COVARIANCE, followed by two columns holding index  $i$  and variance  $C_{ii}$ . Since this command addresses elements of the assembled covariance matrix, the user must provide the index that corresponds to the position of the observation in vector  $z$ . This information is best retrieved from the ITOUGH2 output file after running one forward simulation. Note that the index changes whenever the number of observations, parameters, or calibration times is changed. The variances can also be read from a covariance file which has to contain three columns, holding index  $i$ , index  $j$ , and the (co-)variance  $C_{ij}$  (this is the same format as the one on the covariance file generated by command >>> COVARIANCE). Despite the fact that two indexes must be provided, only diagonal elements, i.e.,  $i = j$ , will be accepted as input.

## Example

```
> OBSERVATION
  >> : 30 EQUALLY space calibration TIMES in MINUTES between
      3.0 90.0
  >> plus : 1 steady-state TIME near
      86400.0 seconds
  >> PRESSURE
      >>> ELEMENT: A1__1
          >>>> transient and steady-state DATA are on FILE: pres.dat
          >>>> standard DEVIATION: 2000.0 Pa
          <<<<
          <<<
  >> change one element of COVARIANCE matrix to increase its weight
      32 1.0E4
(provided that 2 parameters are estimated, the steady-state data point is
observation number 32)
<<
```

## See Also

```
>>> COVARIANCE, >>>> COLUMN, >>>> DEVIATION, >>>> DATA
```

**Command**

```
>>> COVARIANCE
```

**Parent Command**

```
>> OUTPUT
```

**Subcommand**

-

**Description**

This command generates a file with extension ".cov" with the covariance matrix of the calculated system response:

$$\mathbf{C}_{\hat{z}\hat{z}} = \mathbf{J}\mathbf{C}_{pp}\mathbf{J}^T = s_0^2 \cdot \mathbf{J}(\mathbf{J}^T\mathbf{C}_{zz}^{-1}\mathbf{J})^{-1}\mathbf{J}^T$$

Note that  $\mathbf{C}_{\hat{z}\hat{z}}$  is a square matrix of dimension  $m \times m$ .

**Example**

```
> COMPUTATION
```

```
>> OUTPUT
```

```
>>> print COVARIANCE matrix of calculated system response
```

```
<<<
```

```
<<
```

**See Also**

-

## Command

```
>> CUMULATIVE (comp_name/COMPONENT: icom)  
          (phase_name/PHASE: iphase)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> SOURCE
```

## Description

This command selects as an observation type the cumulative injection or production of component *icom* or phase *iphase*. This observation type refers to a sink or source code name. It can be used when time-dependent generation rates are to be estimated where the total amount of injected or produced fluid is approximately known, or if the total generation rate is prescribed in block GENER, but the phase composition of the produced fluid is variable and sensitive to the parameters of interest. Finally, the cumulative amount of injected or produced fluid can be used as an observable variable for wells on deliverability. Note that the cumulative mass of a phase produced in an element strongly depends on the composition of the produced fluid mixture according to the options provided by TOUGH2 flag *MOP(9)*.

Component number *icom* or component name *comp\_name*, and phase number *iphase* or phase name *phase\_name* depend on the EOS module being used. They are listed in the ITOUGH2 header and can be specified either on the command line or using the two subcommands >>>> COMPONENT and >>>> PHASE, respectively. If neither a phase nor component number is specified, the total, cumulative mass of all phases or components will be calculated.

## Example

```
> OBSERVATION  
  >> CUMULATIVE METHANE produced  
    >>> SOURCE: RW__1  
      >>>> ANNOTATION      : Total methane [1]  
      >>>> FACTOR          : -7.67358E-04 [1] - [kg]  
      >>>> DATA from FILE: tot_ch4.dat [HOUR]  
      >>>> DEVIATION       : 5.0 [1]  
      <<<<<  
    <<<<  
  <<<<  
<<<<<
```

## See Also

-

## Command

>>>> DATA (*time\_unit*) (FILE: *file\_name*)

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

## Description

This command reads a list of observation times and the corresponding data. Each list will be referred to as a data set in the ITOUGH2 output file. An annotation is generated for each data set, or a string can be supplied by the user for its identification (see command >>>> ANNOTATION).

Data can be supplied either directly following the command line or on a separate file (use keyword FILE followed by the name of the data file after a colon).

Time and data must be arranged in columns. They are read in free format. Data are accepted until a FORTRAN input error occurs. The total number of data points read by ITOUGH2 is printed to the ITOUGH2 output file and should be checked for consistency.

By default, the first column is expected to hold the observation times, and the second column the data values. Deviations from this format are possible (see commands >>>> COLUMN, >>>> FORMAT, >>>> SET (o), and >>>> HEADER for details). Data can also be represented by a polynomial or a user-specified function (see commands >>>> POLYNOM and >>>> USER, respectively).

Observation times do not need to coincide with the calibration times defined by command >> TIME (o). Linear interpolation is performed for calibration times that fall between observation times. This requires, however, that the first observation time is earlier than the first calibration time, and that the last observation time is later than the last calibration time. If this condition is not met, command >>>> WINDOW should be used. Only one time window can be specified for each data set, i.e., multiple data sets must be provided if multiple time windows are needed.

If time is not given in seconds, the appropriate time unit (MINUTE, HOUR, DAY, WEEK, MONTH, YEAR) must be specified on the command line. If the units of the data points are different from the standard units used in TOUGH2, a conversion factor must be provided through command >>>> FACTOR.

If no observed data are available (e.g., when performing design calculations prior to testing, or when using ITOUGH2 for generating time series plots), a dummy data set must be supplied. Alternatively, command >>>> NO DATA can be used.



## Example

```
> OBSERVATION
  >> GAS PRESSURE
    >>> in ELEMENT: A1__1
      >>>> DATA follow in default format, time (sec) vs. pressure (Pa)
          1.0  100000.0
          10.0 101343.8
          20.0 105991.3
          30.0 108965.9
          60.0 115003.8
          ....
          3600.0 218762.0
      >>>> standard DEVIATION: 5000.0 Pa
    <<<<
  <<<

  >> LIQUID FLOW rate
    >>> CONNECTION B1__1 B1__2
      >>>> HEADER contains : 3 lines to be skipped
      >>>> time and value are in COLUMNS: 3 6
      >>>> conversion FACTOR is : -1.6667E-5 [ml/min] to [-kg/sec]
      >>>> use SET No. : 3
      >>>> DATA are provided on FILE : flow.dat with time in MINUTES
      >>>> a RELATIVE measurement error of : 5.0 % is assumed
    <<<<
  <<<

  >> BRINE CONCENTRATION in LIQUID PHASE
    >>> ELEMENT: C1__1
      >>>> NO DATA available, just for plotting
      >>>> assign small WEIGHT of : 1.0E-20
    <<<<
  <<<
<<
```

## See Also

```
>>>> ANNOTATION, >>>> COLUMN, >>>> FACTOR, >>>> FORMAT,
>>>> HEADER, >>>> PICK, >>>> POLYNOM, >>>> SET (o),
>>>> USER, >>>> WINDOW
```

## Command

```
>>> DEFAULT
```

or

```
>>> MATERIAL: DEFAU
```

## Parent Command

```
>> CAPILLARY
```

```
>> INITIAL
```

```
>> RELATIVE
```

## Subcommand

all fourth-level commands in block > PARAMETER

## Description

Parameters of the default relative permeability and capillary pressure functions (TOUGH2 block RPCAP) or default initial conditions (TOUGH2 block PARAM.4) are addressed by command >>>> DEFAULT. Alternatively, a material name DEFAU can be provided following command >>>> MATERIAL.

## Example

```
> PARAMETER
  >> INITIAL PRESSURE
    >>> DEFAULT initial pressure (block PARAM.4)
      >>>> ANNOTATION: Init. Formation Pres.
      >>>> GUESS      : 1.5E5
      <<<<
    <<<

  >> RELATIVE PERMEABILITY FUNCTION
    >>> MATERIAL: BOREH
      >>>> ANNOTATION : Sgr borehole
      >>>> PARAMETER #: 2
      <<<<

    >>> MATERIAL: BOUND DEFAU
      >>>> ANNOTATION : Sgr elsewhere
      >>>> PARAMETER #: 2
      <<<<

    <<<
  <<
```

## See Also

```
>>> MATERIAL, >>> MODEL
```

### Command

```
>>> DELTFACT: deltfact
```

### Parent Command

```
>> CONVERGE
```

### Subcommand

-

### Description

In TOUGH2, time step size can be controlled in various ways (see *Pruess* [1987] for a description of input variables DELTEN, DLT, DELTMX, NOITE, REDLT, and MOP (16)). The time step is also automatically adjusted in order for the simulation time to land on any of the specified calibration or printout times. This may lead to very small time steps or even convergence failures (see command >>> CONSECUTIVE).

In ITOUGH2, the proposed time step is increased up to a factor of DELTFACT (default: 1.2) if this increase allows the simulation to reach the next calibration or printout time. This may lead to time stepping different from standard TOUGH2.

### Example

```
> COMPUTATION
  >> CONVERGE
    >>> DELTFACT: 1.0 (as in standard TOUGH2)
    >>> allow : 20 CONSECUTIVE time steps converging in 1 iteration
    <<<
  <<
```

### See Also

```
>>> CONSECUTIVE
```

**Command**

>>> DESIGN

**Parent Command**

>> OPTION

**Subcommand****Description**

(synonym for command >>> SENSITIVITY)

**Example**

(see command >>> SENSITIVITY)

**See Also**

>>> SENSITIVITY

## Command

>>>> DEVIATION: *sigma*

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

This command specifies the standard deviation  $\sigma_{p_i}$  of the initial parameter guess. Prior information about model parameter  $i$  will be weighted by  $1/\sigma_{p_i}$ , i.e., the difference between the prior information value  $p_i^*$  and the estimate  $\hat{p}_i$  contributes to the objective function as follows:

$$\text{weighted squared residual from prior information} = \frac{(p_i^* - \hat{p}_i)^2}{\sigma_{p_i}^2}$$

Commands for specifying the standard deviation are:

>>>> DEVIATION:  $\sigma_{p_i}$   
>>>> VARIANCE:  $\sigma_{p_i}^2$   
>>>> WEIGHT:  $1/\sigma_{p_i}$

By default, prior information is not weighted, i.e.  $\sigma_{p_i}^2 = \infty$ .

The standard deviation reflects the uncertainty associated with the initial guess. If the initial guess is to be weighted, prior information should originate from an independent source. For example, if porosity will be estimated based on transient pressure data, the prior information value should be taken from a "direct" porosity measurement, e.g. using mercury-porosimetry or oven-drying methods. In these cases, the measured parameter values  $p_i^*$  are considered to be additional data points which serve as a physical plausibility criterion for the estimate  $\hat{p}_i$ . The  $p_i^*$  values, along with the observations of the system state  $z_i^*$ , are then weighted according to their uncertainties (see >>>> DEVIATION (o)). Note that the relative weighting between prior information and the observations  $z_i^*$  depends on the number of calibration points selected. If many transient data points are available, a smaller standard deviation  $\sigma_{p_i}$  may be specified to increase the relative weight of prior information.

In many cases, appropriately weighting the initial guess makes an ill-posed inverse problem unique. Furthermore, the solution becomes more stable if a parameter is not very sensitive. However, using  $1/\sigma_{p_i}$  as a regularization parameter to improve the ability to obtain a unique solution with a poorly conceptualized inverse problem is not recommended. Erratic behavior of a parameter during the inversion should be taken as an indication that the data do not contain sufficient information for the determination of the parameter. Differences between parameter values that are independently determined from laboratory experiments and inverse modeling suggest the presence of a systematic error or scaling problem. These inconsistencies should be resolved rather than averaged out.

The standard deviation  $\sigma_{p_i}$  is also used to scale the columns of the Jacobian matrix. While the solution of the inverse problem is not affected by the choice of the scaling factor, all the qualitative sensitivity measures are directly proportional to  $\sigma_{p_i}$ . If prior information is not weighted, the scaling factor is taken to be 10 % of the respective parameter value. Command >>>> VARIATION should be used to change the default scaling factor without concurrently assigning a weight to prior information.

When performing uncertainty propagation analyses,  $\sigma_{p_i}$  designates the parameter uncertainty affecting the model prediction. It is used to generate a set of random parameter values for Monte Carlo simulations, and it represents the standard deviation of a normal distribution if performing linear uncertainty propagation analysis (for more details see commands >>> MONTE CARLO and >>> FOSM, respectively).

### Example

```
> PARAMETER
  >> POROSITY
    >>> MATERIAL: TUFFn
      >>>> PRIOR information : 0.38 (laboratory measurement)
      >>>> standard DEVIATION: 0.04 (measurement error)
      <<<<
    >>> MATERIAL: ALLUV
      >>>> PRIOR information : 0.30 (from experience)
      >>>> VARIANCE           : 0.01 (uncertainty of guess)
      <<<<
    >>> MATERIAL: FAULT
      >>>> initial GUESS      : 0.25 (no measurements available)
      >>>> WEIGHT             : 0.00 (default)
      >>>> VARIATION          : 0.10 (for scaling of Jacobian)
      <<<<
    <<<
  <<
```

### See Also

```
>> GUESS, >>> FOSM, >>> MONTE CARLO, >>>> DEVIATION (o),
>>>> PRIOR, >>>> VARIANCE, >>>> VARIATION, >>>> WEIGHT
```

## Command

>>>> DEVIATION: *sigma*

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

-

## Description

This command specifies the standard deviation  $\sigma_{z_i}$  of the observations. The squares of the standard deviations constitute the diagonal elements of the *a priori* covariance matrix.

The specified value *sigma* is assigned to all data points of the corresponding data set. It must be given in the same units as the data (see command >>>> FACTOR). Individual values for each calibration point can be explicitly specified using command >>>> COLUMN or >> COVARIANCE, or are calculated as a fraction of the measured value if using command >>>> RELATIVE.

The standard deviation should represent the expected variability of the final residuals. In the absence of modeling errors, the standard deviation is equivalent to the measurement error. A reasonable value can be derived by visual examination of the data, i.e., by estimating the standard deviation of the differences between the observed values and a line representing the expected match; note that this procedure is based on the assumption that time averages can be used to calculate the ensemble average, i.e., that the data set is a result of an ergodic process. The inverse of the *a priori* covariance matrix is used to weight the fitting error. It also scales observations of different types and units. In the framework of maximum likelihood theory, the covariance matrix constitutes the stochastic model along with the assumption of normality and independence.

The parameter estimates are not affected by the absolute values of  $\sigma_{z_i}$ , but only by the ratios  $\sigma_{z_i}/\sigma_{z_j}$ . It is suggested, however, to use reasonable values that are related to the measurement error. If the final residuals are - on average - significantly larger than the *a priori* specified standard deviations, the Fisher model test fails. The *a posteriori* standard deviations of the final residuals are printed in the output for each data set for comparison purposes.

Alternative commands are:

```
>>>> DEVIATION:  $\sigma_{z_i}$ 
>>>> VARIANCE:  $\sigma_{z_i}^2$ 
>>>> WEIGHT:  $1/\sigma_{z_i}$ 
```

The following command lines are thus equivalent:

```
>>>> standard DEVIATION: 0.1
>>>> VARIANCE: 0.01
>>>> WEIGHT: 10.0
```

## Example

```
> OBSERVATION
  >> PRESSURE
    >>> ELEMENT : AA412
      >>>> conversion FACTOR: 1E5 from [bar] to [Pa]
      >>>> DATA on FILE: pressure.dat
      >>>> standard DEVIATION: 0.05 [bar]
    <<<<
  <<<
<<
```

## See Also

```
>> COVARIANCE, >>>> AUTO, >>>> COLUMN, >>>> DEVIATION (p),
>>>> RELATIVE, >>>> VARIANCE, >>>> WEIGHT
```



**Command**

>>> DIRECT

**Parent Command**

>> OPTION

or

>>> CONVERGE

**Subcommand**

-

**Description**

(synonym for command >>> FORWARD (o))

**Example**

(see command >>> FORWARD (o))

**See Also**

>>> FORWARD (o)

## Command

>> DRIFT

## Parent Command

> PARAMETER

## Subcommand

>>> NONE

>>> SET

## Description

This command selects as a parameter the slope of a time-dependent trend. The trend is added to the TOUGH2 output referring to a specific data set:

$$z = z_{TOUGH2} + drift \cdot time$$

where (*drift · time*) is the trend added to the calculated TOUGH2 output  $z_{TOUGH2}$ . The result  $z$  is compared to the measurement  $z^*$  of the corresponding data set.

This option allows removal of a trend in the data (for example, a flowmeter may exhibit an unknown offset and time-dependent trend that needs to be estimated). A non-zero value must be provided as initial guess through the ITOUGH2 input file using command

>>>> GUESS. The data set is identified by number using command >>> SET (p).

## Example

> PARAMETER

estimate coefficients of regression  $dz=A+B*time$  to correct flowmeter data

>> SHIFT

>>> NONE

>>>> ANNOTATION: coefficient A (constant)

>>>> INDEX : 2 3 4 (identifies data sets)

>>>> GUESS : 4.0E-6 [kg/sec]

<<<<

<<<

>> DRIFT

>>> NONE

>>>> ANNOTATION: coefficient B (slope)

>>>> INDEX : 2 3 4

>>>> GUESS : 1.0E-9 [kg/sec/sec]

<<<<

<<<

<<

## See Also

>> FACTOR, >> LAG, >> SHIFT, >>> SET (p), >>>> INDEX (p)

## Command

```
>>> ELEMENT: eleme (eleme_i ...) (+ iplus)  
or  
>>> GRID BLOCK: eleme (eleme_i ...) (+ iplus)
```

## Parent Command

all second-level commands in block > OBSERVATION requiring element names.

## Subcommand

all fourth-level commands in block > OBSERVATION

## Description

This command reads one or more element names. Most observation types refer to a variable that is associated with a grid block (as opposed to a connection or sink/source name).

Element names are designated by a three-character/two-integer (FORTRAN format: AAII) code name. Blanks in the element names as printed in the TOUGH2 output file must be replaced by underscores (e.g. an element name specified in the TOUGH2 input file as 'B 007' is printed as 'B 0 7' in the TOUGH2 output file. Therefore, it has to be addressed in the ITOUGH2 input file as 'B\_0\_7').

Multiple elements can be specified, and ITOUGH2 calculates the sum or mean of the corresponding output variable (see subcommands >>>> SUM and >>>> MEAN, respectively).

A sequence of *iplus* elements can be generated by increasing the number of the last element. The following two command lines are identical:

```
>>> ELEMENT: AA__1 BB_15 +3  
>>> ELEMENT: AA__1 BB_15 BB_16 BB_17 BB_18
```

## Example

```
> OBSERVATION  
  >> GAS SATURATION  
    >>> ELEMENTS: ELM_0      + 99  
      >>>> ANNOTATION      : Mean saturation  
      >>>> take the MEAN of the saturation in all 100 elements  
      >>>> DATA on FILE   : Sg.dat  
      >>>> DEVIATION       : 0.05  
      <<<<<  
    <<<<  
  <<<<
```

## See Also

```
>>> CONNECTION, >>> SINK, >>>> MEAN, >>>> SUM
```

## Command

>> ENTHALPY

## Parent Command

> PARAMETER

## Subcommand

>>> SOURCE

## Description

This command selects as a parameter the fixed specific enthalpy of the injected fluid (TOUGH2 variable *EX*) or the time-dependent specific enthalpy of the produced or injected fluid (TOUGH2 variable *F3(L)*, *LTAB*>1 and *ITAB* non-blank). This parameter refers to a sink/source code name. Estimating a time-dependent enthalpy requires providing index *L* through command >>>> INDEX.

Note that enthalpy is also an observation type (see command >> ENTHALPY (o)).

## Example

```
> PARAMETER
  >> specific ENTHALPY
    >>> SOURCE: INJ_1
      >>>> ANNOTATION: fixed enthalpy
      <<<<
    >>> SOURCE: INJ_2 INJ_5
      >>>> ANNOTATION: variable enthalpy
      >>>> VALUE
      >>>> INDEX      : 1 2 3 8 9 10
      <<<<
    <<<
  <<
```

## See Also

>> TIME (p), >> ENTHALPY (o)

## Command

```
>> ENTHALPY (phase_name/PHASE: iphase)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> SINK
```

## Description

This command selects as an observation type the flowing enthalpy in a production well. This observation type refers to a sink code name. If multiple elements are provided, the flowing enthalpy is weighted by the individual production rates. If a phase is selected either by specifying a valid *phase\_name* or a phase number *iphase* or through command >>>> PHASE, only the flowing enthalpy of that phase is calculated.

Note that the enthalpy of the injected fluid can also be an unknown parameter to be estimated (see command >> ENTHALPY (p)).

## Example

```
> OBSERVATION
  >> flowing ENTHALPY
    >>> SINK: WEL_1 + 5
      >>>> ANNOTATION      : Flowing enthalpy
      >>>> FACTOR          : 1000.0           [kJ/kg] - [J/kg]
      >>>> DATA from FILE: enthalpy.dat     [HOUR]
      >>>> DEVIATION        : 10.0           [kJ/kg]
      <<<<<
    <<<<
  <<<<
<
```

## See Also

```
>> ENTHALPY (p)
```

## Command

>> ERROR

## Parent Command

> COMPUTATION

## Subcommand

>>> ALPHA  
>>> FISHER  
>>> FOSM  
>>> HESSIAN  
>>> LINEARITY  
>>> LIST  
>>> MONTE CARLO  
>>> POSTERIORI  
>>> PRIORI  
>>> TAU

## Description

This is the parent command of a number of subcommands that deal with the *a posteriori* error analysis or uncertainty propagation analysis.

## Example

```
> COMPUTATION
  >> ERROR analysis
    >>> use confidence level 1-ALPHA:= 95 %
    >>> use sigma as determined by FISHER model test
    >>> calculate finite difference HESSIAN matrix
    >>> check LINEARITY assumption on : 99 % level
    <<<
  <<
```

## See Also

### Command

>> FACTOR

### Parent Command

> PARAMETER

### Subcommand

>>> NONE

>>> SET

### Description

This command selects as a parameter a constant factor with which the calculated TOUGH2 output will be multiplied. The factor is applied to the output that refers to a specific data set:

$$z = z_{TOUGH2} \cdot factor$$

where *factor* is the multiplication factor and  $z_{TOUGH2}$  is the TOUGH2 output. The result  $z$  is compared to the measurement  $z^*$  of the corresponding data set.

This option allows correcting for a systematic, but unknown relative error in the data.

The data set is identified by number using command >>> SET (p).

If the factor is known and does not need to be estimated, use command

>>>> FACTOR (o).

### Example

```
> PARAMETER
  >> FACTOR
    >>> SET No. : 1
      >>>> ANNOTATION: correct amplitude
      >>>> GUESS: 1.0
      <<<<
    <<<
  <<
```

### See Also

>> DRIFT, >> LAG, >> SHIFT, >>> SET (p), >>>> FACTOR (o)

## Command

>>>> FACTOR

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

The parameter to be estimated is a factor with which the initial TOUGH2 parameter value is multiplied:

$$p = X/X_0 \Leftrightarrow X = p \cdot X_0$$

Here,  $p$  is the estimated parameter,  $X$  is the TOUGH2 parameter, and  $X_0$  is the initial value of the TOUGH2 parameter. This option is useful to estimate a scaling factor for variable initial and boundary conditions, or to determine the mean of a quantity while maintaining ratios (e.g., if estimating a common factor applied to all three permeability values in a model domain, the anisotropy ratio remains constant). If the factor is log-normally distributed, add command >>>> LOGARITHM or use command >>>> LOG(F). Estimating a factor is opposed to estimating the parameter value directly (command >>>> VALUE) or its logarithm (command >>>> LOGARITHM (p)).

## Example

```
> PARAMETER
  >> ABSOLUTE permeability
    >>> MATERIAL: CLAY1 SAND1
      >>>> estimate multiplication FACTOR, and maintain both the
        anisotropy ratio within a layer as well as the permeability
        ratio between clay and sand.
      >>>> INDEX           : 1 2 3
      >>>> initial GUESS: 1.0 (default)
      >>>> RANGE           : 0.01 100.0
      <<<<
    <<<
  <<
```

## See Also

>>>> LOGARITHM (p), >>>> LOG(F), >>>> VALUE



## Command

>>>> FACTOR: *factor*

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

-

## Description

This command provides a conversion factor with which the data are multiplied so they comply with standard TOUGH2 units. The conversion factor is also applied to the standard deviation (see command >>>> DEVIATION (o)), i.e., the measurement error must be given in the same units as the data. The standard TOUGH2 units are used throughout the ITOUGH2 output file, i.e., all observed and calculated values as well as residuals and standard deviations have been multiplied by *factor*.

## Example

```
> OBSERVATION
  >> PRESSURE
    >>> ELEMENT: WEL99
      >>>> conversion FACTOR: 1E5 [bar] - [Pa]
      >>>> pressure DATA in HOURS and bar on FILE: pres.dat
      >>>> standard DEVIATION: 0.01 [bar]
      <<<<
    <<<
  <<
```

## See Also

>> FACTOR

## Command

>>> FISHER

## Parent Command

>> ERROR

## Subcommand

## Description

The *a posteriori* estimated error variance  $s_0^2$  represents the variance of the mean weighted residual and is thus a measure of goodness-of-fit:

$$s_0^2 = \frac{\mathbf{r}^T \mathbf{C}_{zz}^{-1} \mathbf{r}}{m - n}$$

The value  $s_0^2$  is used in the subsequent error analysis. For example, the covariance matrix of the estimated parameters,  $\mathbf{C}_{pp}$ , is directly proportional to the scalar  $s_0^2$ . Note that if the residuals are consistent with the distributional assumption about the measurement errors (i.e., matrix  $\mathbf{C}_{zz}$ ), then the estimated error variance assumes a value close to one.  $s_0^2$  is also an estimate for the true or *a priori* error variance  $\sigma_0^2$ . It can be shown that the ratio  $s_0^2/\sigma_0^2$  follows an *F*-distribution with the two degrees of freedom  $f_1 = m - n$ , and  $f_2 = \infty$ .

Therefore, it can be statistically tested to see whether the final match deviates significantly from the modeler's expectations, expressed by matrix  $\mathbf{C}_{zz}$ . This is called the Fisher Model Test. The user must decide whether the error analysis should be based on the *a posteriori* or *a priori* error variance (see commands >>> POSTERIOR and >>> PRIOR, respectively). The decision can also be delegated to the Fisher Model Test according to the following table:

Fisher Model Test	Error Variance	Comment
$s_0^2/\sigma_0^2 > F_{m-n,\infty,1-\alpha}$	$s_0^2$	error either in the functional or stochastic model
$1 \leq s_0^2/\sigma_0^2 \leq F_{m-n,\infty,1-\alpha}$	$s_0^2$	model test passed
$s_0^2/\sigma_0^2 < 1$	$\sigma_0^2$	probably error in stochastic model

## Example

```
> COMPUTATION
```

```
>> ERROR
```

```
>>> let the FISHER model test decide whether the  
      a priori or a posteriori error variance should be used
```

```
<<<
```

## See Also

```
>>> ALPHA, >>> POSTERIORI, >>> PRIORI
```

## Command

```
>> FLOW (phase_name/PHASE: iphase)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> CONNECTION
```

## Description

This command selects as an observation type the flow rate of phase *iphase* or total fluid flow rate. This observation type refers to a connection.

The phase name *phase\_name* or phase number *iphase*, which depend on the EOS module being used, are listed in the ITOUGH2 header. They can be specified either on the command line or using the subcommand >>>> PHASE. If no phase is specified, the total flow rate is selected.

Note that the sign of the calculated flow rate depends on the order of the two elements in a connection.

## Example

```
> OBSERVATION
  >> GAS FLOW rate
    >>> CONNECTION: INJ_1 ELM_2
      >>>> ANNOTATION      : Gas flow
      >>>> FACTOR          : -16.666667 to convert from m^3/min to kg/s
      >>>> DATA on FILE   : inject.dat
      >>>> RELATIVE error: 3.0 %
      <<<<
    <<<

  >> FLOW rate
    >>> CONNECTION: A11_1 A11_2 B11_1 B11_2 C11_1 C11_2 &
                  D11_1 D11_2 E11_1 E11_2 F11_1 F11_2
      >>>> ANNOTATION: Flow across boundary
      >>>> LIQUID PHASE flow rate
      >>>> take the SUM
      >>>> of the ABSOLUTE values of the 6 flow rates
      >>>> DATA in [kg/s], time in [MINUTES] are on FILE: outflow.dat
      >>>> standard DEVIATION: 0.1 kg/sec
      <<<<
    <<<
  <<
```

## See Also

-

## Command

```
>>> FORMAT: format (LIST)
or
>>> PLOTFILE: format (LIST)
```

## Parent Command

```
>> OUTPUT
```

## Subcommand

-

## Description

ITOUGH2 does not directly generate graphs (except for the residual plot and correlation chart). However, it does generate a plot file with data at the calibration points and system response as calculated with the initial, intermediate (see command >>> PLOTTING), and final parameter set. A plot file with the relative permeability and capillary pressure curves can also be requested (see command >>> CHARACTERISTIC).

These plot files must be processed by an external visualization package.

ITOUGH2 generates plot files in PLOPO format, a visualization software developed by U. Kuhlmann at ETH, Zürich. The PLOPO plot file is internally reformatted to comply with formats of other visualization programs. The string *format* identifies the visualization software (for a list of available formats add keyword LIST). The reformatted plot files have a file extension specific for the chosen software (for example ".tec" for TECPLOT.)

A general format accepted by most commercially available plotting programs is the arrangement in columns, where the first column contains the time, and additional columns hold the data and calculated system response for various observations. This general format can be obtained by using keyword COLUMN.

The default format is TECPLOT, and can be changed to another format in file *it2main.f*, BLOCK DATA IT, through variable *IPLOTFMT*.

Additional interfaces can be programmed into subroutine PLOTIF and REFORMAT.

## Example

```
> COMPUTATION
  >> OUTPUT
    >>> FORMAT of plot file : COLUMNS (print LIST of available formats)
    <<<
  <<
```

## See Also

```
>>> CHARACTERISTIC, >>> PLOTTING
```

## Command

>>>> FORMAT: *format*

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

## Description

This command accepts a FORTRAN format statement for reading data. By default, data are read in free format following the >>>> DATA command or directly from a data file. If a column contains non-numeric characters, formatted input can be invoked by providing a string *format* representing the corresponding FORTRAN format statement. The format statement must be in brackets and must not contain any blanks.

## Example

```
> OBSERVATION
  >> LIQUID FLOW rate
    >>> CONNECTION : ELM50 BOT_1
      >>>> multiply measurements by FACTOR: -1.0E-06
      >>>> FORMAT: (3X,F11.1,30X,E17.10) used to read time and value
      >>>> COLUMN: 1 2 (time is in col. 1, flow rate in col. 2
                    of above FORMAT statement)
      >>>> SKIP : 3 lines before reading values
      >>>> DATA in MINUTES
```

```
-----
# Time [min]  Cap. Pres, [hPa] FlowmeterX Flow Rate [mg/s]
-----
1      5.0    0.1698331055E+02 FlowmeterA 0.9869399946E+01
2     10.0    0.2075763428E+02 FlowmeterA 0.1039689596E+02
3     15.0    0.2357142822E+02 FlowmeterA 0.1162893932E+02
4     20.0    0.2529052490E+02 FlowmeterA 0.1353439620E+02
5     25.0    0.2598133789E+02 FlowmeterA 0.1469761628E+02
.     ....
```

```
>>>> RELATIVE error is: 10.0 % of the individual measurement
```

```
<<<<
```

```
<<<
```

## See Also

>>>> DATA, >>>> COLUMN, >>>> HEADER, >>>> PICK

### Command

>>> FORWARD

or

>>> DIRECT

### Parent Command

>> CONVERGE

or

>> OPTION

### Subcommand

-

### Description

This command allows one TOUGH2 simulation to be performed in order to solve the forward problem.

It is advantageous to perform a single TOUGH2 simulation before invoking more expensive inversions. The result from the forward run can be used to check TOUGH2 and ITOUGH2 input. Furthermore, a plotfile is generated with the results from the simulation with the initial parameter set which can be compared to the observed data. The CPU time requirement for an inversion can also be estimated from a single TOUGH2 simulation.

(Note that there is another command >>> FORWARD in block >> JACOBIAN.)

### Example

```
> COMPUTATION
```

```
>> STOP after
```

```
>>> solving the DIRECT problem
```

```
/*
```

```
>>> before performing : 5 ITOUGH2 ITERATIONS
```

```
*/
```

```
<<<
```

```
<<
```

### See Also

```
>>> SIMULATION
```

## Command

```
>>> FORWARD (: iswitch)
```

## Parent Command

```
>> JACOBIAN
```

## Subcommand

-

## Description

With this command the elements of Jacobian matrix are calculated by means of a forward finite difference quotient:

$$J_{ij} = \frac{\partial z_i}{\partial p_j} \approx \frac{z_i(p_j + \delta p_j) - z_i(p_j)}{\delta p_j}$$

The evaluation of the Jacobian thus requires  $n + 1$  TOUGH2 simulations, where  $n$  is the number of parameters. The size of the perturbation  $\delta p_j$  can be controlled using command >>> PERTURB.

The Jacobian is used in both the minimization algorithm and the *a posteriori* error analysis. For the Levenberg-Marquardt minimization algorithm, the accuracy obtained by using a forward (as opposed to centered) finite difference quotient is usually sufficient, especially during the first few iterations far away from the minimum. However, if approaching the minimum and especially for the subsequent error analysis one might want to use a more accurate approximation of the Jacobian. If a colon is given on the command line followed by an integer *iswitch*, ITOUGH2 switches from forward to centered finite differences after *iswitch* iterations.

## Example

```
> COMPUTATION
  >> CONVERGE
    >>> perform a total of : 6 ITOUGH2 ITERATIONS
    <<<
  >> JACOBIAN
    >>> use FORWARD finite differences for : 5 iterations, i.e.
        a centered finite difference quotient is used for the final
        iteration and error analysis.
    >>> PERTURBation factor is : 0.005 times the parameter value
    <<<
  <<
```

## See Also

```
>>> CENTERED, >>> PERTURB
```

## Command

```
>>> FOSM (MATRIX: ndim) (ITOUGH2) (CORRELATION) (DIAGONAL)
```

## Parent Command

```
>> ERROR
```

## Subcommand

## Description

This command performs First-Order-Second-Moment (FOSM) uncertainty propagation analysis. FOSM quantifies the uncertainty of model predictions as result of parameter uncertainty. FOSM is the analysis of the mean and covariance of a random function based on its first order Taylor series expansion. FOSM analysis presumes that the mean and covariance are sufficient to characterize the distribution of the dependent variables, i.e., the model results are assumed to be normally distributed, and perturbations about the mean can be approximated by linear functions  $\mathbf{J}$ . The covariance of the uncertain parameters,  $\mathbf{C}_{pp}$ , is translated into the covariance of the simulated system response,  $\mathbf{C}_{zz}$ :

$$\mathbf{C}_{zz} = \mathbf{J}\mathbf{C}_{pp}\mathbf{J}^T$$

The diagonal elements of matrix  $\mathbf{C}_{pp}$ , i.e., the variances of the parameters, can be supplied by command >>>> VARIANCE (or related commands) in block > PARAMETER. If correlations are to be taken into account, the full covariance matrix must be provided. This is indicated by keyword MATRIX, which is followed by a colon and the dimension *ndim* of the square matrix  $\mathbf{C}_{pp}$ . The elements of matrix  $\mathbf{C}_{pp}$  can be supplied using one of the following options:

- (1) *ndim* lines must be provided, each line holding the lower triangle of the covariance matrix. If keyword CORRELATION is present, the off-diagonal terms represent correlation coefficients rather than covariances. Example:

```
>>> FOSM error analysis, read CORRELATION MATRIX of dimension: 4
  9.1234
 -0.67   0.00413
  0.80   0.213   1.3E-6
  0.50  -0.155   0.90   4.3E12
```

- (2) If calculated during a previous ITOUGH2 inversion, the covariance matrix can be taken from the ITOUGH2 output file and directly copied after the command line. This option is invoked by keyword ITOUGH2. The matrix will be read by formatted input, so it is crucial that the correct format is maintained. If *ndim* is greater than 6, the matrix is split in multiple submatrices. All submatrices must be copied exactly as they were printed to the ITOUGH2 output file.



## Example:

```
>>> FOSM error analysis, read MATRIX of dim.: 3 in ITOUGH2 format
      log(abs. perm.)      POROSITY SAND      Gas entrapped
log(abs. perm.)      .80643E-04      .846      -.253
POROSITY SAND      .64412E-04      .71921E-04      -.500
Gas entrapped      -.52623E-05      -.98296E-05      .53843E-05
```

If the full matrix is provided, but only the diagonal terms (variances) shall be used in the error analysis, use keyword `DIAGONAL` on the command line. This option makes it easy to study the impact of correlations on the uncertainty propagation analysis.

The uncertainty of the model prediction as a result of parameter uncertainty is given as a standard deviation in the residual analysis. Furthermore, the plotfile contains the system response for the mean parameter set as well as error band on the specified confidence level (see command `>>> ALPHA`).

It is suggested to also increase the perturbation factor for calculating the Jacobian matrix, and to use a centered finite difference quotient. This yields in an more realistic the error band if the model is highly non-linear. It should be realized, however, that Monte Carlo is the preferred method if dealing with highly non-linear flow systems.

## Example

```
> COMPUTATION
  >> ERROR propagation analysis
    >>> perform First-Order-Second-Moment (FOSM) analysis
    >>> draw error bands on (1-ALPHA)=: 95 % confidence level
    <<<
  >> JACOBIAN
    >>> use CENTERED finite difference quotient
    >>> PERTURBATION factor at least: 5.0 %
    <<<
  <<
```

## See Also

```
>>> ALPHA, >>> MONTE CARLO
```

## Command

>>>> GAUSS

or

>>>> NORMAL

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

This command generates normally distributed input parameters for Monte Carlo simulations. This is the default distribution. Parameter values will be generated following a normal distribution with the initial guess as the mean, and the standard deviation taken from command >>>> DEVIATION. Only values within the specified range will be accepted. If command >>>> LOGARITHM is also present, parameters follow a log-normal distribution.

## Example

```
> PARAMETER
  >> ABSOLUTE permeability
    >>> MATERIAL: SAND1 BOUND WELLB
      >>>> ANNOTATION          : log(k) is uncertain
      >>>> LOGARITHM
      >>>> generate log-NORMAL distribution about mean...
      >>>> initial GUESS        : -12.0             and with...
      >>>> standard DEVIATION   : 1.0              within the...
      >>>> admissible RANGE     : -15.0 -9.0
      <<<<
    <<<
  <<

> COMPUTATION
  >> perform ERROR propagation analysis by means of...
    >>> MONTE CARLO simulations
    <<<
  >> STOP after...
    >>>           : 400 TOUGH2 runs
    <<<
  <<
```

## See Also

>>> MONTE CARLO, >>>> UNIFORM

## Command

```
>>> GAUSS-NEWTON
```

## Parent Command

```
>> OPTION
```

## Subcommand

## Description

This command performs Gauss-Newton steps to minimize the objective function. The Gauss-Newton algorithm assumes linearity and can be described as follows:

$$\Delta \mathbf{p} = \left( \mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{J} \right)^{-1} \mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{r}$$
$$\mathbf{p}^{(k+1)} = \mathbf{p}^{(k)} + \Delta \mathbf{p}$$

Gauss-Newton steps are efficient if the model is linear (only one iteration required to find minimum) or nearly-linear. If the model is highly nonlinear, Gauss-Newton steps are usually too large, leading to an inefficient or even unsuccessful step.

By default, ITOUGH2 uses the Levenberg-Marquardt minimization algorithm, which is a modification of the Gauss-Newton algorithm.

## Example

```
> COMPUTATION
  >> OPTION
    >>> use GAUSS-NEWTON minimization algorithm
  <<<
  >> STOP
    after >>> :1 ITERATION
  <<<
  <<
```

## See Also

```
>>> ANNEAL, >>> GRID SEARCH, >>> LEVENBERG-MARQUARDT,
>>> SIMPLEX
```

## Command

```
>> GENERATION (comp_name/COMPONENT: icom)
           (phase_name/PHASE: iphase)
or
>> PRODUCTION (comp_name/COMPONENT: icom)
           (phase_name/PHASE: iphase)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> SINK
```

## Description

This command selects as an observation type the total or fractional generation rate in a production well. This observation type refers to a sink code name.

The total generation rate is usually prescribed in TOUGH2 block GENER, or can be considered a parameter to be estimated (see command >> RATE). A variable generation rate suitable for calibration is obtained only for wells on deliverability (type DELV), or if the generation rate of a specific phase or component is used.

The fractional generation rate refers to the production of a specific phase or component. The component name *comp\_name* or component number *icom*, as well as the phase name *phase\_name* or phase number *iphase*, which depend on the EOS module being used, are listed in the ITOUGH2 header. They can be specified either on the command line or using the subcommands >>>> COMPONENT and >>>> PHASE, respectively. If neither a phase nor a component is specified, the total generation rate is calculated. If a phase but no component is selected, the generation rate of that phase including all components is calculated. If a component but no phase is selected, the generation rate of that component in all phases is calculated. Finally, if a specific phase and a specific component is given, only the generation rate of that component in the specified phase is calculated.

## Example

```
> OBSERVATION
  >> GAS GENERATION (includes both air and vapor)
    >>> SINK: DLV_1 + 5
      >>>> FACTOR           : 1000.0           [Nl/s] - [kg/s]
      >>>> DATA on FILE    : gasflow.dat      [HOURL]
      >>>> RELATIVE error: 10.0                [%]
      <<<<
      <<<
      <<
```

## See Also

```
>> CUMULATIVE, >> RATE, >> TOTAL MASS, >>>> COMPONENT,
>>>> PHASE
```

**Command**

>>> GRID BLOCK: *eleme* (*eleme\_i* ...) (+ *iplus*)

**Parent Command**

all second-level commands in block > OBSERVATION requiring element names.

**Subcommand**

all fourth-level commands in block > OBSERVATION

**Description**

(synonym for command >>> ELEMENT)

**Example**

(see command >>> ELEMENT)

**See Also**

>>> ELEMENT

## Command

```
>>> GRID SEARCH: ninval1 (ninvali...)  
or  
>>> OBJECTIVE: ninval1 (ninvali...)
```

## Parent Command

```
>> OPTION
```

## Subcommand

## Description

This command evaluates the objective function using a regular grid to map the parameter space. First, lower and upper bounds must be defined for each parameter using command >>>> RANGE in block > PARAMETER. This range is then subdivided into *ninteri* intervals by inserting *invali+1* equally spaced points, generating parameter sets on a regular grid in the *n*-dimensional parameter space. The objective function is evaluated at each grid point.

Evaluating the objective function throughout the entire parameter space is referred to as grid searching. The parameter set, the value of the objective function, and the contribution of each observation type to the objective function is printed to the ITOUGH2 output file. The global minimum is likely to be in the vicinity of the parameter set with the lowest objective function. Furthermore, the information listed in the output file can be used to visually represent and study the topology of the objective function. For example, one can generate a contour plot of the objective function for *n=2* which may reveal the presence local minima. If only one output variable is defined in block > OBSERVATION and no data are provided, this option can also be used in combination with command >>> L1-ESTIMATOR to examine the sensitivity of the output variable over an extensive parameter range.

## Example

```
> COMPUTATION  
  >> OPTION  
    >>> GRID SEARCH! subdivide 2D-parameter space into: 20 10 intervals  
    <<<  
  <<
```

## See Also

```
>>> ANNEAL, >>> LEVENBERG-MARQUARDT, >>> GAUSS-NEWTON,  
>>> SIMPLEX
```

## Command

```
>> GUESS (FILE: file_name)
```

## Parent Command

```
> PARAMETER
```

## Subcommand

-

## Description

This command identifies initial guesses of the parameters to be estimated. The initial guess vector  $\mathbf{p}^{(k=0)} = \mathbf{p}_0$  is the starting point of the minimization algorithm (iteration  $k = 0$ ). Usually, the initial guess vector is identical with vector  $\mathbf{p}^*$  which holds prior information about the parameters. By default,  $\mathbf{p}_0$  and  $\mathbf{p}^*$  are identical, taken from the TOUGH2 input file, and overwritten by command >>>> PRIOR. The starting point for the minimization algorithm may be different from the prior information vector. In this case, prior information is taken from the TOUGH2 input file or must be provided through command >>>> PRIOR. The starting point is taken from command >> GUESS which overwrites the initial guess provided through command >>>> GUESS.

A parameter is identified by an integer value indicating its position in the parameter block:  
*I* XIGUESS(*I*)

This format is identical to that of file <*invfile*>.par. Initial guesses can be provided either following the command line, or read from a file if keyword FILE is present. The filename is given after the colon. This latter option is useful to transfer best estimates from one inversion to another if the order of the parameters is the same.

## Example

```
> PARAMETER
  >> GUESS
  2  0.345   (initial guess for parameter no. 2)
  3 -16.971 (initial guess for parameter no. 3)
      /* (the initial guess for parameter no. 1 is taken from the
         fourth-level command >>>> GUESS, or - if not present -
         from the TOUGH2 input file) */
...

> PARAMETER
  >> read GUESS from FILE: testi.par
```

## See Also

```
>>>> GUESS, >>>> PRIOR
```

## Command

>>>> GUESS: *guess*

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

This command provides an initial guess of the parameter to be estimated. If neither this command or command >> GUESS is used, the initial guess is taken from the TOUGH2 input file. The initial guess is the starting point for the minimization algorithm, to be distinguished from prior information (see command >>>> PRIOR). The initial guess can be overwritten by the second-level command >> GUESS.

If command >>>> LOGARITHM is present, the initial guess is the logarithm of the parameter. Similarly, if command >>>> FACTOR is present, the initial guess should be a multiplication factor (default is 1.0).

## Example

```
> PARAMETER
  >> ABSOLUTE permeability
    >>> ROCK types: CLAY1 CLAY2 CLAY3 BOUND
      >>>> FACTOR
        >>>> initial GUESS      : 1.0
        >>>> is not WEIGHTed    : 0.0 (default)
      <<<<<
    >>> ROCK type : SAND1
      >>>> LOGARITHM
        >>>> PRIOR information : -12.0
        >>>> standard DEVIATION: 1.0 order of magnitude
      <<<<<
    <<<<

  >> GUESS, i.e., starting point for optimization
    2 -13.0
  <<
```

## See Also

>> GUESS, >>>> PRIOR, >>>> DEVIATION, >>>> VARIATION



## Command

```
>>>> HEADER: nskip
or
>>>> SKIP: nskip
```

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

-

## Description

This command identifies the number of lines to be skipped before reading data. Data reading starts *nskip*+1 lines after the command line >>>> DATA, or on the (*nskip*+1)-th line of the data file (see command >>>> DATA). Lines containing data are skipped using command >>>> PICK.

## Example

```
> OBSERVATION
  >> TEMPERATURE
    >>> ELEMENTS: ELM_10 + 4
      >>>> SKIP: 3 lines before reading data
      >>>> DATA [HOURS]

(1) -----
(2)   time [h]   temperature   comment
(3) -----
      0.00           21.3   mean temperature prior to experiment
      1.12           21.3   heater turned on
      1.15           21.9
      1.20           23.4
      2.00           32.8   heater turned off
      2.10           29.3
      2.20           26.7
      2.30           24.1
      4.00           21.6   end of experiment

-----
      >>>> standard DEVIATION: 0.5 degrees C
      <<<<
      <<<
      <<
```

## See Also

>>>> COLUMN, >>>> DATA, >>>> FORMAT, >>>> PICK, >>>> SET (o)

**Command**

HELP (a keyword in combination with any command)

**Parent Command**

-

**Subcommand**

-

**Description**

A short message about the command usage is printed to the ITOUGH2 output file if keyword HELP is present on the command line. See also LIST and >>> INDEX for further support. If command >>> INPUT is used, the help message can be retrieved without performing any ITOUGH2 calculations.

**Example**

```
> COMPUTATION
  >> CONVERGE (what does this command do? HELP!)
    >>> while you're at it, print a LIST of available commands,
    >>> then stop after INPUT is read (HELP again!)
  <<<
<<
```

**See Also**

>>> INDEX, LIST

## Command

```
>>> HESSIAN
```

## Parent Command

```
>> ERROR  
>> JACOBIAN
```

## Subcommand

## Description

This command computes a finite difference Hessian matrix  $\mathbf{H}$  for the error analysis following optimization. The elements of  $\mathbf{H}$  are given by:

$$H_{jk} = 2 \sum_{i=1}^m \frac{1}{\sigma_i^2} \left[ \frac{\partial z_i}{\partial p_j} \frac{\partial z_i}{\partial p_k} - r_i \frac{\partial^2 z_i}{\partial p_j \partial p_k} \right]$$

The evaluation of  $\mathbf{H}$  by means of finite differences requires  $2n + n(n-1)/2$  additional TOUGH2 simulations, where  $n$  is the number of parameters. By default, the Hessian matrix, which is the inverse of the parameter covariance matrix, is approximated by  $\mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{J}$  based on the linearity assumption, i.e., the second derivative term is ignored. Evaluating the finite difference Hessian, which takes into account the non-linearities, provides a means by which to check the linearity assumption (for another approach see command >>> LINEARITY). This may lead to a more accurate calculation of the covariance matrix of the estimated parameters. However, inclusion of the second-derivative term may yield a Hessian matrix that is not positive definite due to the presence of outliers, strong non-linearities, or the fact that the minimum has not been detected accurately, i.e., when the positive and negative residuals  $r_i$  do not cancel each other. In this case, ITOUGH2 automatically proceeds with the linearized Hessian which is positive definite by definition.

## Example

```
> COMPUTATION  
  >> ERROR analysis should be based on  
    >>> finite difference approximation of the HESSIAN matrix  
  <<<
```

## See Also

```
>>> LINEARITY
```

## Command

```
>>> INCOMPLETE: max_incomplete
```

## Parent Command

```
>> CONVERGE
```

## Subcommand

## Description

A successful ITOUGH2 run is based on the robustness and stability of the underlying TOUGH2 simulation. It is therefore imperative to develop a TOUGH2 model that is capable of completing the desired simulation for a variety of parameter combinations. The simulation must reach the time of the last calibration point, i.e., a premature termination due to convergence failures is not acceptable. The number of potential convergence failures or errors leading to premature termination is large. The type of convergence failure is indicated in the ITOUGH2 output file. It is usually impossible to continue the optimization process after a convergence failure. However, in some cases ITOUGH2 is able to retrieve information from a previous simulation which allows it to continue the inversion despite an incomplete run. ITOUGH2 always terminates if an incomplete run is encountered during the first evaluation of the Jacobian. The maximum number of incomplete simulations to be accepted by ITOUGH2 can be set by variable *max\_incomplete* (default: 5). However, one should not rely on inversions that contain incomplete TOUGH2 runs. Note that if option >>> STEADY-STATE is invoked, all incomplete simulations are accepted by ITOUGH2 assuming that steady-state conditions have been reached.

## Example

```
> COMPUTATION
  >> TOLERANCE
    >>> perform : 10 ITERATIONS
    >>> or stop if : 250 TOUGH2 SIMULATIONS are executed
    >>> accept  : 10 INCOMPLETE runs, if possible
  <<<
<<
```

## See Also

```
>>> STEADY-STATE
```

**Command**

>>> INDEX

**Parent Command**

>> OUTPUT

**Subcommand**

-

**Description**

Prints the ITOUGH2 command index to the ITOUGH2 output file.

**Example**

```
> COMPUTATION
  >> OUTPUT
    >>> print command INDEX
    <<<
  <<
```

**See Also**

LIST, HELP

## Command

```
>>>> INDEX: index (index_i...)
```

or

```
>>>> PARAMETER: index (index_i...)
```

## Parent Command

most third-level commands in block > PARAMETER

## Subcommand

## Description

This command provides a list of integers for further parameter specification. The integers are usually indexes of TOUGH2 arrays, such as *IPAR* in arrays *CP(IPAR,NMAT)* or *RPD(IPAR)*, selecting the *IPAR*-th parameter of the capillary pressure or default relative permeability function, respectively. If multiple indexes are provided, a single parameter will be estimated and assigned to all the corresponding array elements.

## Example

```
> PARAMETER
  >> estimate 2nd parameter of default CAPILLARY pressure function
    >>> DEFAULT
      >>>> PARAMETER CPD: 2
      <<<<
    <<<

  >> optimize generation RATE of alternating "huff & puff" system
    >>> SOURCE: WEL_1
      >>>> ANNOTATION           : Injection
      >>>> INDEX of array F2    : 1 3 5 7 9
      <<<<
    >>> SOURCE: WEL_1
      >>>> ANNOTATION           : Pumping
      >>>> INDEX of array F2    : 2 4 6 8 10
      <<<<
    <<<
  <<
```

## See Also

**Command**

>>>> INDEX: *index* (*index\_i...*)

or

>>>> PARAMETER: *index* (*index\_i...*)

**Parent Command**

all third-level commands in block > OBSERVATION

**Subcommand**

-

**Description**

This command provides a list of integers for further specification of user-specified observations (see command >> USER (o)).

**Example**

(see command >> USER (o))

**See Also**

>> USER(o)

## Command

```
>> INITIAL (PRESSURE/: ipv)
```

## Parent Command

```
> PARAMETER
```

## Subcommand

```
>>> DEFAULT
```

```
>>> MATERIAL
```

## Description

This command selects as a parameter the initial condition for all grid blocks associated with a certain rock type (TOUGH2 variable *DEPU(ipv)*) or default initial condition (TOUGH2 variable *DEP(ipv)*). Since boundary conditions are specified as initial conditions for inactive grid blocks or grid blocks with a large volume, this command can also be used to estimate boundary conditions. Initial conditions estimates cannot be provided for individual elements unless they have a unique material name associated with them. Estimating the first primary variable can be selected using keyword *PRESSURE*. All the other primary variables must be identified by number, i.e. by an integer *ipv* that follows a colon on the command line. Alternatively, *ipv* can be provided through command `>>>> INDEX`. The initial guess for the parameter is taken from TOUGH2 block *PARAM.4*, or should be provided by using commands `>> GUESS` or `>>>> GUESS` or `>>>> PRIOR`.

## Example

```
> PARAMETER
  >> INITIAL PRESSURE
    >>> MATERIAL: BOUND
      >>>> ANNOTATION: Boundary Pressure
      >>>> scale pressures on boundary by constant FACTOR
    <<<<
  <<<

  >> INITIAL condition for primary variable No.: 2
    >>> MATERIAL           : SAND1 DEFAU
      >>>> ANNOTATION       : Initial Saturation
      >>>> VALUE
      >>>> initial GUESS    : 10.4
      >>>> admissible RANGE: 10.01 10.99
    <<<<
  <<<
<<
```

## See Also



**Command**

```
>>> INPUT
```

**Parent Command**

```
>> CONVERGE
```

**Subcommand**

```
-
```

**Description**

This command makes ITOUGH2 stop immediately after the TOUGH2 and ITOUGH2 input files have been read and checked for consistency. This is useful to check input before time consuming simulations are invoked, or in combination with LIST, HELP, and

```
>>> INDEX.
```

**Example**

```
> COMPUTATION
  >> print LIST of available commands on this command level
  >> CONVERGE (print HELP message to ITOUGH2 output file and
    >>> stop immediately after INPUT is read)
    <<<
  <<
```

**See Also**

```
>>> INDEX, HELP, LIST
```

**Command**

>>> INTERFACE: *elem\_1 elem\_2 (elem\_i elem\_j ...)* (+ *iplus*)

**Parent Command**

>> FLOW

**Subcommand**

all fourth-level commands in block > OBSERVATION

**Description**

(synonym for command >>> CONNECTION)

**Example**

(see command >>> CONNECTION)

**See Also**

>> CONNECTION

## Command

>>> ITERATION: *max\_iter*

## Parent Command

>> CONVERGE

## Subcommand

-

## Description

This command sets the maximum number of ITOUGH2 iterations to *max\_iter*. If using the Levenberg-Marquardt minimization algorithm, an ITOUGH2 iteration consists of a number of TOUGH2 simulations and includes the following steps:

- (1) solution of the forward problem,
- (2) evaluation of the Jacobian matrix (requiring  $n$  or  $2n$  TOUGH2 simulations depending on whether a forward or centered finite difference quotient is requested, see command >> JACOBIAN),
- (3) updating of the parameter vector (see also command >>> STEP),
- (4) check run(s) to see whether the new parameter set leads to a reduction of the objective function; if not, go back to step 3.

If the objective function is successfully reduced, the iteration is completed, and the last check run is used as the solution of the forward problem (step (1) above) for the next iteration. By default, new iterations are performed until one of the following convergence criteria is met (note that different convergence criteria apply if options other than Levenberg-Marquardt optimization are used):

- (1) the maximum number of TOUGH2 simulations is reached (see command >>> SIMULATION),
- (2) the maximum number of incomplete TOUGH2 simulations is reached (see command >>> INCOMPLETE),
- (3) the scaled step size is smaller than the minimum relative step size =  $10^{-9}$ ,
- (4) all parameters are at their user-specified bounds,
- (5) the objective function is smaller than the relative function tolerance,
- (6) the maximum number of unsuccessful uphill steps is exceeded (see command >>> UPHILL),
- (7) the Levenberg parameter exceeds  $10^{12}$ ,
- (8) the norm of the gradient vector is smaller than  $10^{-5}$  (optimality criterion).

In most cases, however, it is sufficient to stop the inversion after a few iterations because no significant fit improvement is obtained after about 5 to 15 iterations. Generally more iterations are required with increasing number of parameters and stronger non-linearities of the flow problem.

The progress of the objective function reduction can be observed by typing the command `prista` (see unix script file *prista*), and inversion can be terminated using the `kit` command (see unix script file *kit*).

It is suggested to perform a single ITOUGH2 iteration or to use option `>> SENSITIVITY ANALYSIS` prior to running a full inversion in order to check the relative importance and sensitivity of each parameter, the parameter step size, the initial value of the Levenberg parameter, etc.

### Example

```
> COMPUTATION
  >> STOP after
    >>> : 6 ITERATIONS
    <<<
  <<
```

### See Also

```
>>> SENSITIVITY, >>> CENTERED, >>> FORWARD, >>> INCOMPLETE,
>>> SIMULATION, >>> UPHILL
```

### Command

```
>>>> ITERATION: max_iter
```

### Parent Command

```
>>> ANNEAL
```

### Subcommand

-

### Description

This command limits the maximum number of iterations performed by the Simulated Annealing minimization algorithm. An iteration is completed if:

- (1) the maximum number of steps  $m_{step}$  on a temperature level is reached (see command >>>> STEP (a)), or
- (2) the objective function has been reduced  $0.2 \cdot m_{step}$  times

Each iteration is followed by a reduction of the control parameter  $\tau$  (temperature) according to the annealing schedule (see command >>>> SCHEDULE).

### Example

```
> COMPUTATION
  >> OPTION
    >>> Simulated ANNEALing
      >>>> maximum number of ITERATIONS: 100
      >>>> maximum number of STEPS per ITERATION: 50
      >>>> annealing SCHEDULE: 0.95
      >>>> initial TEMPERATURE: -0.02
      <<<<
    <<<
  <<
```

### See Also

```
>>>> STEP (a), >>>> SCHEDULE
```

### Command

```
>>>> ITERATION: niter
```

### Parent Command

```
>>> SELECT
```

### Subcommand

### Description

This command defines the number of iterations after which the criteria for automatic parameter selection is reevaluated (see commands >>>> CORRELATION and >>>> SENSITIVITY).

A full Jacobian matrix is evaluated every multiple of *niter* iterations. In intermediate iterations, only the columns of the Jacobian corresponding to the selected parameters are updated.

### Example

```
> COMPUTATION
  >> OPTION
    >>>> SELECT parameter automatically every
      >>>> : 3 ITERATIONS
      >>>> based on the SENSITIVITY criterion with rsens : -0.10
    <<<<
  <<<
<<
```

### See Also

```
>>>> CORRELATION, >>>> SENSITIVITY
```

## Command

>> JACOBIAN

## Parent Command

> COMPUTATION

## Subcommand

>>> CENTERED

>>> FORWARD

>>> HESSIAN

>>> LIST

>>> PERTURB

## Description

This is the parent command of a number of subcommands that deal with the calculation of the Jacobian matrix **J**. The elements of the Jacobian matrix are the partial derivatives of the system response at the calibration points with respect to the parameters to be estimated:

$$J_{ij} = -\frac{\partial r_i}{\partial p_j} = -\frac{\partial(z_i^* - z_i)}{\partial p_j} = \frac{\partial z_i}{\partial p_j}$$

The Jacobian matrix discussed here must be distinguished from the one calculated in the simulation program TOUGH2. The latter is used to solve the set of non-linear algebraic iterations arising at each time step; its elements are the partial derivatives of the mass residuals with respect to the primary variables, and its numerical computation is controlled by the TOUGH2 variable *DFAC*.

## Example

```
> COMPUTATION...
```

```
>> ...of the JACOBIAN matrix is performed...
```

```
>>> ...using FORWARD finite difference quotients for : 3 iterations  
before switching to centered finite difference quotients.
```

```
>>> Parameter PERTURBation factor is: 1 % (default)
```

```
<<<
```

```
<<
```

## See Also

-

**Command**

>>> JACOBIAN

**Parent Command**

>> OUTPUT

**Subcommand****Description**

This command prints the Jacobian matrix after each iteration. By default, the (scaled) Jacobian matrix is printed only once at the end of the optimization.

**Example**

```
> COMPUTATION
  >> OUTPUT
    >>> print JACOBIan after each iteration.
    <<<
  <<
```

**See Also**

>>> RESIDUAL



**Command**

```
>> KLINKENBERG
```

**Parent Command**

```
> PARAMETER
```

**Subcommand**

```
>>> MATERIAL
```

**Description**

This command selects as a parameter the Klinkenberg slip factor (TOUGH2 variable *GK (NMAT)*).

**Example**

```
> PARAMETER
  >> KLINKENBERG slip factor
    >>> ROCK type      : GRANI
      >>>> LOGARITHM
        >>>> RANGE      : 1.0 10.0
          >>>> VARIATION : 1.0
            <<<<
          <<<
        <<<
```

**See Also**

-

## Command

>>> L1-ESTIMATOR

## Parent Command

>> OPTION

## Subcommand

## Description

This command selects the  $L_1$ -estimator, i.e., the objective function to be minimized is the sum of the weighted absolute residuals.

$$S = \sum_{i=1}^m \frac{|r_i|}{\sigma_i}$$

Minimizing the mean absolute deviation leads to a maximum-likelihood estimate if the errors follow a double exponential distribution.

$$\varphi(r_i) = \frac{1}{2\sigma_i} \exp\left(-\left|\frac{r_i}{\sigma_i}\right|\right)$$

The  $L_1$ -estimator should be used, for example, to minimize a cost function for the optimization of a cleanup operation. Furthermore, it can be used whenever the objective function of interest is a linear function of the model output (e.g., in a sensitivity analysis using command >>> OBJECTIVE in block >> OPTION).

Note that this objective function is usually minimized using the Levenberg-Marquardt algorithm which is designed for a quadratic objective function. Minimization is therefore rather inefficient, requiring more iterations and a high initial Levenberg parameter.

## Example

```
> COMPUTATION
  >> OPTION
    >>> use L1-ESTIMATOR, then draw contours of the
    >>> OBJECTIVE function based on : 10 points in the parameter space
  <<<
<<
```

## See Also

```
>>> ANDREWS, >>> CAUCHY, >>> LEAST-SQUARES,
>>> QUADRATIC-LINEAR
```

## Command

>> LAG

## Parent Command

> PARAMETER

## Subcommand

>>> NONE

>>> SET

## Description

This command selects as a parameter a constant lag, shifting data in time. The time lag is applied to the output that refers to a specific data set:

$$z(t) = z_{TOUGH2}(t + lag)$$

Here,  $t$  is time,  $lag$  is the estimated time lag in seconds, and  $z_{TOUGH2}$  is the TOUGH2 output. The result  $z$  is compared to the measurement  $z^*$  of the corresponding data set. A single data set is identified by number using command >>> SET (p); multiple data sets are specified with command >>>> INDEX (p).

If the lag is known, i.e., does not need to be estimated, use command >>>> SHIFT TIME, a subcommand of > OBSERVATION.

## Example

```
> PARAMETER
  >> LAG
    >>> NONE
      >>>> ANNOTATION: time lag
        >>>> INDEX: 1 2 3
          >>>> GUESS: 300 sec.
            <<<<
              <<<
                <<
```

## See Also

>> DRIFT, >> FACTOR, >> SHIFT, >>> SET (p), >>>> INDEX(p),  
>>>> SHIFT

## Command

>>> LEAST-SQUARES

## Parent Command

>> OPTION

## Subcommand

## Description

This command selects least-squares optimization, i.e., the objective function to be minimized is the sum of the squared weighted residuals.

$$S = \mathbf{r}^T \mathbf{C}_{zz}^{-1} \mathbf{r} = \sum_{i=1}^m \left( \frac{r_i}{\sigma_i} \right)^2$$

Minimizing the squared weighted residuals leads to a maximum-likelihood estimate if the errors are normally distributed with zero mean and covariance matrix  $\mathbf{C}_{zz}$ :

$$\varphi(\mathbf{r}) = (2\pi)^{-m/2} |\mathbf{C}_{zz}|^{-1/2} \exp\left(-\frac{1}{2} \mathbf{r}^T \mathbf{C}_{zz}^{-1} \mathbf{r}\right)$$

Least-squares estimation is the default. If outliers are more prominent than described by the tail of the normal distribution, one may want to use one of the robust estimators to reduce the weight of outliers or even eliminate them (see commands >>> ANDREWS, >>> CAUCHY, or >>> QUADRATIC-LINEAR).

The least-squares objective function is a quadratic function if the residuals depend linearly on the parameters; it is nearly-quadratic for a non-linear model. The Levenberg-Marquardt algorithm is best suited to minimize the non-linear least-squares objective function.

## Example

```
> COMPUTATION
  >> OPTION
    >>> use LEAST-SQUARES
    <<<
  <<
```

## See Also

>>> ANDREWS, >>> CAUCHY, >>> L1-ESTIMATOR, >>> QUADRATIC-LINEAR

**Command**

```
>>> LEVENBERG: lambda
```

**Parent Command**

```
>> CONVERGE
```

**Subcommand**

-

**Description**

This command sets the initial value of the Levenberg parameter  $\lambda$  (default: 0.001). During the optimization process (see command >>> LEVENBERG-MARQUARDT), the Levenberg parameter is divided by the Marquardt parameter  $\nu$  (see command >>> MARQUARDT) after each successful iteration, and is multiplied by  $\nu$  if the new parameter set leads to an increased value of the objective function, i.e., if an unsuccessful step was proposed. A big value for  $\lambda$  means that a small step along the steepest descent direction is performed. A  $\lambda$  value of zero is equivalent to a Gauss-Newton step. The former is robust but inefficient, the latter has a quadratic convergence rate but may lead to unsuccessful steps.

**Example**

```
> COMPUTATION
  >> CONVERGE
    >>> maximum number of ITERATIONS: 10
    >>> set initial LEVENBERG parameter to: 0.1 to make a
      safe first step
    <<<
  <<
```

**See Also**

```
>>> MARQUARDT
```

## Command

>>> LEVENBERG-MARQUARDT

## Parent Command

>> OPTION

## Subcommand

## Description

This command selects the Levenberg-Marquardt algorithm to minimize the objective function. This is the default minimization algorithm. The Levenberg-Marquardt algorithm combines the robustness of a steepest descent method with the efficiency of a Gauss-Newton step (see command >>> GAUSS-NEWTON):

$$\Delta \mathbf{p} = \left( \mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{J} + \lambda \mathbf{D} \right)^{-1} \mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{r}$$
$$\mathbf{p}^{(k+1)} = \mathbf{p}^{(k)} + \Delta \mathbf{p}$$

where  $\mathbf{D}$  is a diagonal matrix with elements  $D_{ii} = (\mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{J})_{ii}$ .

The Levenberg-Marquardt method switches continuously from a gradient method (large  $\lambda$ , see command >>> LEVENBERG) far from the minimum to a Gauss-Newton step as the minimum is approached and  $\lambda$  is reduced.

## Example

```
> COMPUTATION
  >> OPTION
    >>> use LEVENBERG-MARQUARDT minimization algorithm (default)
    <<<
  >> CONVERGE
    >>> initial LEVENBERG parameter lambda is : 0.001 (default)
    >>> MARQUARDT parameter nue is           : 10.000 (default)
    <<<
  <<
```

## See Also

>>> ANNEAL, >>> GAUSS-NEWTON, >>> GRID SEARCH, >>>SIMPLEX,  
>>> LEVENBERG, >>> MARQUARDT

### Command

```
>>> LINEARITY (: alpha (%))
```

### Parent Command

```
>> ERROR
```

### Subcommand

-

### Description

The covariance matrix of the estimated parameters,  $\mathbf{C}_{pp}$ , is calculated using linear error analysis:

$$\mathbf{C}_{pp} = s_0^2 (\mathbf{J}^T \mathbf{C}_{zz}^{-1} \mathbf{J})^{-1}$$

The confidence region around the estimated parameter set for the linearized case consists of those values  $\mathbf{p}$  for which

$$(\mathbf{p} - \hat{\mathbf{p}})^T \mathbf{C}_{pp} (\mathbf{p} - \hat{\mathbf{p}}) \leq n \cdot F_{n,m-n,1-\alpha}$$

where  $\hat{\mathbf{p}}$  is the parameter vector at the optimum. The covariance matrix  $\mathbf{C}_{pp}$  approximates the actual surface of the objective function at its minimum by a tangent hyperellipsoid under the assumption of normality and linearity. If the model is nonlinear, the coverage of the confidence region by the linear approximation may be very poor with respect to both its size and its shape.

When using this command, it is assumed that the shape of the confidence region is close to ellipsoidal, and that the orientation of the hyperellipsoid in the  $n$ -dimensional parameter space is accurately obtained from the linear error analysis. Then, by only adjusting the size of the hyperellipsoid, we can better approximate the confidence region without losing the advantage of producing easily understandable results which are also simple to report. The procedure adopted here is based on a comparison of the actual objective function with the results from the linear approximation at discrete points in the parameter space. These test points  $\tilde{\mathbf{p}}$  are preferably located along the main axis of the hyperellipsoid, i.e.:

$$\tilde{\mathbf{p}}_{i\pm} = \hat{\mathbf{p}} \pm (n \cdot F_{n,m-n,1-\alpha})^{1/2} a_i \mathbf{u}_i \quad i = 1, L, n$$

Here,  $\tilde{\mathbf{p}}_{i\pm}$  are two test parameter sets on the  $i$ -th axis, the direction of which is given by the eigenvector  $\mathbf{u}_i$  of the covariance matrix  $\mathbf{C}_{pp}$ . Note that the distance from the optimal parameter set  $\hat{\mathbf{p}}$  is selected as a multiple of the corresponding eigenvalue  $a_i^2$  and the quantile of the  $F$ -distribution. This means that the correction is tailored to approximate the confidence region on a certain confidence level  $1 - \alpha$ . The eigenvalues  $a_i^2$  which represent the length of the semiaxis are now corrected as follows:

$$a_i^2 = a_i^2 s_0^2 \left( \frac{A_+ + A_-}{2} \right)_i$$

with

$$A_{\pm i} = \frac{n \cdot F_{n, m-n, 1-\alpha}}{S(\tilde{\mathbf{p}}_{i\pm}) - S(\hat{\mathbf{p}})}$$

Finally, the new covariance matrix is back-calculated from the eigenvectors  $\mathbf{u}_i$  and the updated eigenvalues  $a_i^2$ .

This correction procedure requires  $2n$  additional solutions of the direct problem and is thus relatively inexpensive. While the resulting confidence region is ellipsoidal by definition, the differences between  $S(\tilde{\mathbf{p}}_{i+})$  and  $S(\tilde{\mathbf{p}}_{i-})$  provide, as a byproduct of the correction procedure, some insight into the asymmetry of the true confidence region.

The user may specify  $\alpha$  or  $1 - \alpha$  in % or the quantile  $(n \cdot F_{n, m-n, 1-\alpha})^{1/2}$  directly (by omitting % on the command line).

Note that the correction procedure fails if the minimum is not accurately identified. In this case ITOUGH2 automatically proceeds with the covariance matrix from the linear error analysis.

### Example

```
> COMPUTATION
  >> ERROR analysis
    >>> calculate finite difference HESSIAN and then
    >>> check LINEARITY assumption on the : 95 % confidence level
    <<<
  <<
```

### See Also

```
>>> HESSIAN
```



## Command

LIST (available on all command levels)

## Parent Command

-

## Subcommand

-

## Description

This command provides a list of all available commands on the corresponding command level. The list contains the actual upper case spelling of the command as interpreted by the program. Potential keywords are not listed. A complete list of all commands can be obtained with command >>> command INDEX.

## Example

```
> LIST
> COMPUTATION
  >> STOP after
    >>> INPUT
    <<<
  <<
<
```

The following list is printed to the ITOUGH2 output file showing all first-level commands:

```
***** LIST OF COMMANDS ***** on level 1:
*
* > OPTION
* > COMPUTATION
* > PARAMETER
* > OBSERVATION
* > MEASUREMENT
*
***** LIST OF COMMANDS *****
```

## See Also

>>> INDEX, >>> INPUT

## Command

>>>> LOGARITHM

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

The parameter  $p$  to be estimated is the logarithm of the TOUGH2 parameter  $X$ :

$$p = \log_{10}(X) \Leftrightarrow X = 10^p$$

Estimation of logarithms is recommended if the parameter is expected to vary over a large range of values, suggesting a log-normal distribution of its estimate. Note that all quantities referring to this parameter are also in log-space (e.g., range, standard deviation, step length, etc.). Estimating the logarithm is chosen here over estimating the parameter value directly (command >>>> VALUE), estimating a multiplication factor (command >>>> FACTOR (p)), or estimating a log-normally distributed multiplication factor (command >>>> LOG (F)).

## Example

```
> PARAMETER
  >> ABSOLUTE permeability
    >>> MATERIAL: SAND1
      >>>> estimate LOGARITHM (this is the default for this parameter)
      >>>> initial GUESS      : -12.0      = 1 darcy
      >>>> admissible RANGE  : -15.0 -9.0
      >>>> standard DEVIATION : 1.0      order of magnitude
      >>>> maximum STEP size  : 0.5      log-cycles per iteration
      <<<<
    <<<
  <<
```

## See Also

>>>> FACTOR (p), >>>> LOG (F), >>>> VALUE

## Command

>>>> LOGARITHM

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

-

## Description

This command takes the logarithm (base 10) of an observable variable. The corresponding measurement error is assumed to be log-normally distributed. Taking the logarithm is suggested when the observation assumes values over many orders of magnitude (e.g., concentration, water potential). Note that this option emphasizes the importance of smaller values of the variable, and is not applicable to data sets that contain zero measurements.

## Example

```
> OBSERVATION
  >> CAPILLARY PRESSURE
    >>> ELEMENT: TP__1
      >>>> first take the ABSOLUTE value and
      >>>> then the LOGARITHM
      >>>> standard DEVIATION of log: 1.0
      >>>> DATA on FILE: wp.dat
    <<<<
  <<<
<<
```

## See Also

-

## Command

>>>> LOG (F)

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

The parameter to be estimated is a log-normally distributed factor with which the initial TOUGH2 parameter value is multiplied:

$$p = \log_{10}(X/X_0) \Leftrightarrow X = 10^p \cdot X_0$$

Here,  $p$  is the estimated parameter,  $X$  is the TOUGH2 parameter, and  $X_0$  is the initial value of the TOUGH2 parameter. This option is useful to determine the mean of a log-normally distributed quantity while maintaining ratios (e.g., if estimating a common factor applied to all three permeability values in a model domain, the anisotropy ratio remains constant). Estimating a factor is chosen here over estimating the parameter value directly (command >>>> VALUE) or its logarithm (command >>>> LOGARITHM (p)).

## Example

```
> PARAMETER
  >> ABSOLUTE permeability
    >>> MATERIAL: SAND1 SAND2 SAND3 SAND4 SAND5
      >>>> estimate LOG(F)
        >>>> INDEX           : 1 2 3
        >>>> initial GUESS: 0.0 (default)
        >>>> RANGE           : -3.0 3.0
        <<<<
      <<<
    <<
```

## See Also

>>>> LOGARITHM (p), >>>> FACTOR, >>>> VALUE

## Command

```
>>> MARQUARDT: nue
```

## Parent Command

```
>> CONVERGE
```

## Subcommand

-

## Description

This command sets the Marquardt parameter  $\nu$  (default: 10.0). During the optimization process, the Levenberg parameter  $\lambda$  (see command >>> LEVENBERG) will be divided by the Marquardt parameter  $\nu$  after each successful iteration, and it will be multiplied by  $\nu$  if the new parameter set leads to an increased value of the objective function, i.e., if an unsuccessful step was proposed.

A big value for  $\lambda$  means that a small step along the gradient direction is performed. A  $\lambda$  value of zero is equivalent to a Gauss-Newton step. The former is robust but inefficient, the latter has a quadratic convergence rate but may lead to unsuccessful steps.

The Marquardt parameter therefore determines how fast the step size and step direction changes from steepest descent to Gauss-Newton and vice versa.

## Example

```
> COMPUTATION
  >> CONVERGE
    >>> maximum number of ITERATIONS: 10
    >>> set initial LEVENBERG parameter to: 0.1 to make a
      safe first step
    >>> MARQUARDT parameter : 2.0 (slow change to Gauss-Newton steps)
    <<<
  <<
```

## See Also

```
>>> LEVENBERG
```

## Command

```
>> MASS FRACTION (comp_name/COMPONENT: icom)  
                (phase_name/PHASE: iphase)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> ELEMENT
```

## Description

This command selects as an observation type the mass fraction of component *icom* in phase *iphase*. This observation type refers to one or more elements.

Component number *icom* or component name *comp\_name*, and phase number *iphase* or phase name *phase\_name* depend on the EOS module being used. They are listed in the ITOUGH2 header, and can be specified either on the command line or using the two subcommands >>>> COMPONENT and >>>> PHASE, respectively.

## Example

```
> OBSERVATION  
  >> MASS FRACTION of BRINE in LIQUID  
    >>> ELEMENT: A1__1
```

or

```
> OBSERVATION  
  >> MASS FRACTION of COMPONENT No.: 2 in PHASE No.: 2  
    >>> ELEMENT: A1__1
```

or

```
> OBSERVATION  
  >> MASS FRACTION  
    >>> ELEMENT: A1__1  
      >>>> COMPONENT: 2  
      >>>> PHASE      : 2
```

## See Also

```
>> CONCENTRATION
```

## Command

```
>>> MATERIAL: mat_name (mat_name_i ...) (+ iplus)  
or  
>>> ROCKS      : mat_name (mat_name_i ...) (+ iplus)
```

## Parent Command

all second-level commands in block > PARAMETER referring to a material name

## Subcommand

all fourth-level commands in block > PARAMETER

## Description

This command identifies material names (TOUGH2 variable *MAT*). Most parameters refer to a particular material, i.e., they are specified in TOUGH2 in block ROCKS. Rock types are designated by a five-character code name. Blanks in the material name must be replaced by underscores (e.g., if *MAT* in TOUGH2 reads 'CLAY ', *mat\_name* must read 'CLAY\_'). If multiple material names are provided, the estimate of the corresponding parameter will be jointly assigned to all listed materials. If distinct parameters are sought for each rock type, separate >>> MATERIAL blocks must be defined. Default properties (i.e., for parameters referring to TOUGH2 blocks PARAM.4 and RPCAP) can be selected either by >>> DEFAULT or >>> MATERIAL: DEFAU.

If the last two characters of the last *mat\_name* are integers, a sequence of *iplus* material names can be generated. The following two command lines are thus identical:

```
>>> MATERIAL: BOREH ROC10 ROC_1 +4  
>>> MATERIAL: BOREH ROC_1 ROC_2 ROC_3 ROC_4 ROC_5 ROC10
```

## Example

```
> PARAMETER  
  >> ABSOLUTE permeability  
    >>> MATERIAL: BOUND BOREH SAN_1 +2  
      >>>> LOGARITHM  
        <<<<<  
      <<<<  
  >> INITIAL PRESSURE  
    >>> MATERIAL: BOREH  
      >>>> ANNOTATION: Pi borehole  
        <<<<<  
    >>>> MATERIAL: BOUND DEFAU  
      >>>>> ANNOTATION: Pi elsewhere  
        <<<<<  
      <<<<<
```

## See Also

```
>>> DEFAULT, >>> MODEL
```

**Command**

>>>> MEAN (VOLUME)

**Parent Command**

all third-level commands in block > OBSERVATION

**Subcommand**

-

**Description**

(synonym for command >>>> AVERAGE)

**Example**

(see command >>>> AVERAGE)

**See Also**

>>>> AVERAGE



**Command**

```
>> MINC
```

**Parent Command**

```
> PARAMETER
```

**Subcommand**

```
>>> MODEL
```

**Description**

This command selects as a parameter the fracture spacing which is a parameter of the MINC preprocessor (TOUGH2 variable *PARMINC(I)*). The fracture set is identified through command >>>> INDEX. This parameter refers to the entire model.

Estimating fracture spacing is only possible if the mesh can be generated internally without further editing by the user. Single elements and connections can be modified, however, by means of TOUGH2 commands ELEM2 and CONN2, respectively. For example, if a mesh is generated using MESHMAKER and MINC, the volumes of individual boundary elements can be adjusted in the ELEM2 block, i.e., avoiding the need for external editing.

**Example**

```
> PARAMETER
  >> MINC parameter
    >>> MODEL
      >>>> ANNOTATION: Fracture spacing
      >>>> INDEX      : 1 2 3 (one value for all three fracture sets)
      >>>> GUESS      : 50.0 [m]
      >>>> DEVIATION  : 10.0 [m]
      <<<<<
    <<<<
  <<<<
```

**See Also**

-

## Command

>>> MODEL

or

>>> NONE

## Parent Command

all second-level commands in block > PARAMETER or > OBSERVATION addressing parameters or observations that refer to the entire model domain or a non-specific item.

## Subcommand

all fourth-level commands in block > PARAMETER or > OBSERVATION, respectively.

## Description

Most parameters refer to a rock type or code name of a sink or source. Some parameters, however, are general or associated with the entire model domain. Similarly, while most observations refer to an element, connection, or sink/source, there are observation types that are not associated with a well-defined point in space. The commands >>> MODEL or >>> NONE are dummy commands, i.e. place holders on the third command level for parameter and observation types not further specified by one of the other third-level commands.

## Example

```
> PARAMETER
  >> SELEC parameter
    >>> NONE
      >>>> ANNOTATION: Gel Density (EOS11)
      >>>> INDEX      : 2
      >>>> VALUE
      <<<<
    <<<
  <<

> OBSERVATION
  >> TOTAL MASS of PHASE: 2
    >>> refers to entire MODEL
      >>>> ANNOTATION   : Mass of liquid
      >>>> DATA on FILE : liquid.dat
      >>>> DEVIATION    : 0.01 [kg]
    <<<
  <<
```

## See Also

>>> ELEMENT, >>> CONNECTION, >>> DEFAULT, >>> MATERIAL,  
>>> SET, >>> SOURCE

### Command

```
>> MOMENT (FIRST/SECOND) (X/Y/Z) (comp_name/COMPONENT: icom)
      (phase_name/PHASE: iphase)
```

### Parent Command

```
> OBSERVATION
```

### Subcommand

```
>>> MODEL
```

### Description

This command selects as an observation type the first or second spatial moment in X, Y, or Z direction of component *icom* or phase *iphase*. This observation type refers to all elements with *SPHT* < 10<sup>4</sup>. The X, Y, and Z coordinates of the grid blocks must be given in TOUGH2 block ELEM, columns 51-60, 61-70, 71-80, respectively.

Component number *icom* or component name *comp\_name*, and phase number *iphase* or phase name *phase\_name* depend on the EOS module being used. They are listed in the ITOUGH2 header, and can be specified either on the command line or using the two subcommands >>>> COMPONENT and >>>> PHASE, respectively. If only a phase but no component is specified, the spatial moment of the indicated phase including all components is calculated. If only a component but no phase is given, the spatial moment of that component in all phases is calculated. If both a component and a phase are given, the spatial moment of the component in the specified phase is calculated.

The spatial moments are calculated as follows:

$$M_{ijk} = \sum_{\beta} \sum_{\kappa} \sum_{n=1}^{NEL} \left( X^i \cdot Y^j \cdot Z^k \cdot V \cdot \phi \cdot S_{\beta} \cdot \rho_{\beta} \cdot X_{\beta}^{\kappa} \right)_n$$

where the first sum is taken over the selected phase(s)  $\beta$ , the second sum is taken over the selected component(s)  $\kappa$ , and the third summation accumulates the masses of component  $\kappa$  in phase  $\beta$  from all elements that are included in the global mass balance calculation (i.e., elements with a rock grain specific heat lower than 10<sup>4</sup> J/kg°C). The mass in element  $n$  is the product of the element volume  $V_n$ , the porosity  $\phi_n$ , the saturation  $S_{\beta n}$ , the phase density  $\rho_{\beta n}$ , and the mass fraction  $X_{\beta n}^{\kappa}$ .

The first moment represents the center of mass coordinates which are given by

$$\langle X \rangle = M_{100}/M_{000}$$

$$\langle Y \rangle = M_{010}/M_{000}$$

$$\langle Z \rangle = M_{001}/M_{000}$$

The second moment represents the variances in the three directions given by

$$\sigma_X^2 = \frac{M_{200}}{M_{000}} - \langle X \rangle^2$$

$$\sigma_Y^2 = \frac{M_{020}}{M_{000}} - \langle Y \rangle^2$$

$$\sigma_Z^2 = \frac{M_{002}}{M_{000}} - \langle Z \rangle^2$$

This option may be especially useful for characterizing the location and spreading of a contaminant or saturation plume. Note that boundary effects may have a strong impact on spatial moment calculation.

### Example

```
> OBSERVATION
  >> FIRST MOMENT (Z-coordinate) of TRACER COMPONENT in LIQUID PHASE
    >>> entire MODEL
      >>>> ANNOTATION:  plume Z coord.
      >>>> NO DATA
      <<<<
    <<<

  >> SECOND MOMENT (X-coordinate) of TRACER COMPONENT in LIQUID PHASE
    >>> entire MODEL (except boundary elements with SPHT .gt. 10000)
      >>>> ANNOTATION:  transversal spreading
      >>>> NO DATA
      <<<<
    <<<
  <<
```

See Also

## Command

```
>>> MONTE CARLO (SEED: iseed) (GENERATE) (CLASS: nclass)
```

## Parent Command

```
>> ERROR
```

## Subcommand

-

## Description

This command performs Monte Carlo simulations to determine the uncertainty of model predictions as a result of parameter uncertainty. The general procedure is as follows:

- (1) a probability distribution is defined for each uncertain parameter;
- (2) parameter values are randomly sampled from their respective distributions;
- (3) sampled parameter values are randomly combined to obtain a parameter vector;
- (4) a TOUGH2 simulation is performed and the results at the specified observation points are stored;
- (5) steps (3) through (4) are repeated;
- (6) the ensemble of the modeling results can be statistically analyzed.

The type of distribution can be specified for each parameter in the respective parameter definition block (see command >>>> UNIFORM or >>>> NORMAL). The mean is given by the initial guess (see command >>>> GUESS), and the standard deviation by command >>>> DEVIATION (*p*). The generated parameter value is rejected if outside the specified range (see command >>>> RANGE).

The number of Monte Carlo simulations,  $n_{MC}$ , must be provided in block >> CONVERGE using command >>> SIMULATION, i.e., by specifying the maximum number of TOUGH2 simulations. The number of Monte Carlo simulations  $n_{MC}$  can be considered sufficient if:

- (1) the selected probability density function of the input parameters is reasonably well approximated by the histogram of the randomly generated parameter values. Keyword GENERATE can be used in combination with various seed numbers (keyword SEED) and values for  $n_{MC}$  (command >>> SIMULATION) to generate histograms of the input parameters without actually performing Monte Carlo simulations. Once a satisfactory distribution of the input parameters is achieved, the Monte Carlo simulations can be invoked by simply deleting keyword GENERATE.
- (2) the histogram of the model predictions allows for a statistical analysis. That means that a sufficient number of realizations (= simulation results) should fall within each interval used to calculate probabilities. For example: The probability that TCE concentrations  $c_{TCE}$  fall within the interval  $[a, b]$  is approximated by:

$$\Gamma_{[a,b]} = \Pr(a \leq c_{TCE} \leq b) = \frac{\text{number of realizations in interval } [a,b]}{\text{total number of Monte Carlo simulations}} = \frac{n_{[a,b]}}{n_{MC}}$$

Therefore, the minimum number of Monte Carlo simulations,  $n_{MC,\min}$ , should be large enough so that  $\Gamma_{[a,b]}$  remains constant, i.e. independent of  $n_{MC}$ . This condition is fulfilled for relatively small values of  $n_{MC}$  in the case of intervals around the mean, where  $n_{[a,b]}$  is usually large due to the high probability density. However, if we are interested in the tail of the distribution, for example to calculate the (low) risk that TCE concentrations exceed a certain standard, then the number of Monte Carlo simulations required is much higher.

- (3) The minimum number of Monte Carlo simulations must be increased if the number of uncertain parameter increases because more parameter combinations are possible.
- (4) From experience, the number of Monte Carlo simulations can be as low as 50 and as high as 2000 or greater.

Histograms of the input parameters and output variables as printed to the ITOUGH2 output file. By default, the interval between the smallest and highest value is subdivided into  $\sqrt{n_{MC}}$  classes. The number of classes can be changed using keyword CLASS.

The standard plot file contains all output sets from  $n_{MC}$  simulations, where each set contains the model result as a function of time. A second plot file is generated with "\_mc" in the file name. In this second plot file, each curve represents the ensemble of the model output at one point in time. Denoting the number of output sets, for which prediction uncertainty is to be studied, by  $n_{set}$ , and the number of times by  $n_{times}$ , then the standard plot contains  $n_{set} \cdot n_{MC}$  curves, each curve consisting of  $n_{times}$  points. The second plotfile contains  $n_{set} \cdot n_{times}$  curves, each consisting of  $n_{MC}$  points.

## Example

```
> PARAMETER
  >> ABSOLUTE permeability
    >>> MATERIAL                : ROCK_
    >>>> generate NORMAL distribution
    >>>> of LOGARITHM
    >>>> with mean (GUESS)      : -16.0
    >>>> standard DEVIATION    : 1.0
    >>>> in the RANGE           : -18.5 -13.5
    <<<<
  <<<
  >> POROSITY
    >>> MATERIAL                : ROCK_
    >>>> VALUE
    >>>> UNIFORM distribution
    >>>> RANGE                   : 0.02 0.10
    <<<<
  <<<
  <<

> OBSERVATION
  >> TIMES: 20 EQUALLY spaced in MINUTES
    3.0 60.0

  >> PRESSURE
    >>> ELEMENT: PRE_0
    >>>> NO DATA
    >>>> WEIGHT: 1.0
    <<<<
  <<<
  <<

> COMPUTATION
  >> STOP
    >>> number of Monte Carlo SIMULATIONS: 250
    <<<
  >> ERROR propagation analysis
    >>> MONTE CARLO (SEED number is: 777)
    <<<
  <<
```

## See Also

```
>>> FOSM, >>> SIMULATION, >>>> NORMAL, >>>> RANGE,
>>>> UNIFORM
```

### **Command**

```
>>> NEW OUTPUT
```

### **Parent Command**

```
>> OUTPUT
```

### **Subcommand**

-

### **Description**

This command creates a new TOUGH2 output file with unique file name for each TOUGH2 run. By default, the TOUGH2 output file is overwritten each time a new simulation starts.

### **Example**

```
> COMPUTATION
  >> OUTPUT
    >>> write to NEW OUTPUT after each TOUGH2 run.
    <<<
  <<
```

### **See Also**

-



**Command**

>>> NONE

**Parent Command**

all second-level commands in block > PARAMETER or > OBSERVATION addressing parameters or observations that refer to the entire model domain or a non-specific item.

**Subcommand**

all fourth-level commands in block > PARAMETER or > OBSERVATION, respectively.

**Description**

(synonym for command >>> MODEL)

**Example**

(see command >>> MODEL)

**See Also**

>>> MODEL

**Command**

>>>> NORMAL

**Parent Command**

all third-level commands in block > PARAMETER

**Subcommand****Description**

(synonym for command >>>> GAUSS)

**Example**

(see command >>>> GAUSS)

**See Also**

>>>> GAUSS

**Command**

```
>>> OBJECTIVE
```

**Parent Command**

```
>> OUTPUT
```

**Subcommand**

```
-
```

**Description**

This command prints the value of the objective function after each TOUGH2 simulation. By default, the value of the objective function is printed to the output file only after completion of an ITOUGH2 iteration.

**Example**

```
> COMPUTATION  
  >> OUTPUT  
    >>> always print OBJECTIVE function  
    <<<  
  <<
```

**See Also**

```
>>> JACOBIAN
```

**Command**

>>> OBJECTIVE: *ninval1 (ninvalidi...)*

**Parent Command**

>> OPTION

**Subcommand**

-

**Description**

(synonym for command >>> GRID SEARCH)

**Example**

(see command >>> GRID SEARCH)

**See Also**

>>> GRID SEARCH

## Command

> OBSERVATION

## Parent Command

-

## Subcommands

>> CONCENTRATION  
>> CONTENT  
>> COVARIANCE  
>> CUMULATIVE  
>> ENTHALPY  
>> FLOW  
>> GENERATION  
>> LIST  
>> MASS FRACTION  
>> MOMENT  
>> PRESSURE  
>> PRODUCTION  
>> RESTART TIME  
>> SECONDARY  
>> SATURATION  
>> TEMPERATURE  
>> TIME (o)  
>> TOTAL MASS  
>> USER (o)  
>> VOLUME

## Description

This is the first-level command for specifying the observations available for use in parameter estimation. It can also be used to specify the points in space and time at which output is requested for sensitivity analysis, uncertainty propagation analysis, or plotting. The observations are a subset of all TOUGH2 output variables. Only those variables should be specified for which data are available. Besides the observations listed above, the user can specify additional data types by means of command >> USER.

The second-level command >> TIME is used to select calibration points in time. The observation type is specified by the second-level command, the points in space are identified by the third-level command, and further specifications as well as the data themselves are given through fourth-level commands. The generic structure of a observation block is as follows:

```
> OBSERVATION
  >> specify calibration points in TIME
  >> specify observation type
    >>> specify location
      >>>> provide details
      >>>> provide data
      <<<<
    <<<
  <<
```

### **Example**

(see examples on second command level)

### **See Also**

-

**Command**

>> OPTION

**Parent Command**

> COMPUTATION

**Subcommand**

>>> ANDREWS  
>>> ANNEAL  
>>> CAUCHY  
>>> DIRECT  
>>> FORWARD  
>>> GAUSS-NEWTON  
>>> GRID SEARCH  
>>> L1-ESTIMATOR  
>>> LEAST-SQUARE  
>>> LEVENBERG-MARQUARDT  
>>> LIST  
>>> OBJECTIVE  
>>> QUADRATIC-LINEAR  
>>> SELECT  
>>> SENSITIVITY  
>>> SIMPLEX  
>>> STEADY-STATE

**Description**

This is the parent command of a number of subcommands for selecting ITOUGH2 program options. By default, ITOUGH2 performs automatic model calibration using the weighted least-squares objective function and the Levenberg-Marquardt minimization algorithm.

**Example**

(see examples on third command level)

**See Also**

-

## Command

>> OUTPUT

## Parent Command

> COMPUTATION

## Subcommand

>>> CHARACTERISTIC

>>> COVARIANCE

>>> FORMAT

>>> INDEX

>>> LIST

>>> JACOBIAN

>>> NEW OUTPUT

>>> OBJECTIVE

>>> PERFORMANCE

>>> PLOTFILE

>>> PLOTTING

>>> SENSITIVITY

>>> *time\_unit*

>>> UPDATE

>>> RESIDUAL

>>> VERSION

## Description

This command specifies the format and amount of printout generated. The ITOUGH2 output file contains the results usually needed for subsequent interpretation. Additional information can be requested which may be useful for debugging.

## Example

> COMPUTATION

>> OUTPUT

>>> Generate plot files in : TECPLOT FORMAT

>>> plot CHARACTERISTIC curves

>>> print OBJECTIVE function after each TOUGH2 run

>>> print RESIDUALS after each ITOUGH2 iteration

>>> print the ITOUGH2 command INDEX

>>> print VERSION control statements

>>> print with UPDATE information.

<<<

<<

## See Also



## Command

>> PARALLEL PLATE

## Parent Command

> PARAMETER

## Subcommand

>>> MATERIAL

## Description

This command selects as a parameter the aperture of a parallel plate fracture model. The single fracture must be modeled as a 1D- or 2D model of thickness 1 meter, i.e., aperture must be identical to porosity. Furthermore, the capillary pressure model must contain a parameter CP (2, NMAT) which represents the gas entry pressure (e.g., Brooks-Corey (ICP=10), van Genuchten (ICP=11)).

The parallel plate model relates porosity  $\phi$ , permeability  $k$  [m<sup>2</sup>], and gas entry pressure  $p_e$  [Pa] to aperture  $a$  [m] as follows:

$$\begin{aligned}\phi &= a \\ k &= \frac{f \cdot a^3}{12} \\ p_e &= \frac{2\sigma \cos(\phi)}{a} = \frac{0.14366}{a}\end{aligned}$$

Here,  $f = 1$  is fracture frequency [m<sup>-1</sup>],  $\sigma = 0.07183$  [Pa·m] is the surface tension of water, and  $\phi$  is the contact angle which is assumed to be zero. Using this option overwrites the porosity, absolute permeability and parameter CP (2, NMAT) given in the TOUGH2 input file.

Note that the parallel plate model used here is inconsistent. Using a relative permeability and capillary pressure function presumes some surface roughness or aperture distribution within the fracture plane.

## Example

```
> PARAMETER
  >> aperture in PARALLEL PLATE fracture model
    >>> ROCK type           : FRACT
      >>>> LOGARITHM
      >>>> PRIOR information : -4.0   (100 micron)
      >>>> standard DEVIATION:  1.0
      >>>> RANGE           : -5.0 -3.0
    <<<<
  <<<
```

## See Also

-

## Command

> PARAMETER

## Parent Command

## Subcommands

- >> ABSOLUTE PERMEABILITY
- >> BOTTOMHOLE PRESSURE
- >> CAPACITY
- >> CAPILLARY PRESSURE FUNCTION
- >> COMPRESSIBILITY
- >> CONDUCTIVITY
- >> DRIFT
- >> ENTHALPY
- >> GUESS
- >> INITIAL
- >> KLINKENBERG
- >> LAG
- >> LIST
- >> MINC
- >> PARALLEL PLATE
- >> POROSITY
- >> PRODUCTIVITY INDEX
- >> PUMPING RATIO
- >> RATE
- >> RELATIVE PERMEABILITY FUNCTION
- >> SELEC
- >> SHIFT
- >> SKIN
- >> TIME
- >> USER

## Description

This is the first-level command to specify the parameters to be estimated. The parameters to be estimated are a subset of all TOUGH2 input parameters defined in the TOUGH2 input file. Only those parameters should be specified that are unknown or uncertain; they will be subjected to the estimation process or uncertainty propagation analysis. Select only those parameters that are sensitive enough to influence the state variables for which observations are available (see also >>> SELECT). Besides the parameters listed above, the user can specify additional parameters by means of command >> USER.

The parameter type is specified by the second-level command, the domain it refers to is identified by the third-level command, and further specifications must be provided through a number of fourth-level commands. The generic structure of a parameter block is as follows:

```
> PARAMETER
  >> specify parameter type
    >>> specify parameter domain
      >>>> provide details
        <<<<
      <<<
    <<
```

**Example**

(see examples for second-level commands)

**See Also**

> OBSERVATION, > COMPUTATION

**Command**

>>>> PARAMETER: *index (index\_i...)*

**Parent Command**

all third-level commands in block > PARAMETER and > OBSERVATION

**Subcommand**

-

**Description**

(synonym for command >>>> INDEX)

**Example**

(see command >>>> INDEX)

**See Also**

>>>> INDEX

**Command**

```
>>> PERFORMANCE
```

**Parent Command**

```
>> OUTPUT
```

**Subcommand**

-

**Description**

This command performs a very rough benchmark analysis of computer performance and prints the relative CPU time requirement as compared to a reference workstation.

**Example**

```
> COMPUTATION
  >> OUTPUT
    >>> perform PERFORMANCE comparison
    <<<
  <<
```

**See Also**

-

### Command

>>> PERTURB: (-) alpha (%)

### Parent Command

>> JACOBIAN

### Subcommand

### Description

This command specifies the perturbation factor  $\alpha$  for numerical computation of the Jacobian matrix.

The columns of the Jacobian matrix are calculated by perturbing the corresponding parameter  $p_i$  by a small amount  $\delta p_i$ , and taking either a forward or centered finite difference quotient. The perturbation is usually a fraction of the parameter value itself:

$$\delta p_i = \alpha \cdot p_i$$

The default value for  $\alpha$  is 1 %, which can be changed globally for all parameters using the third-level command >>> PERTURB, or individually for each parameter using the fourth-level command >>>> PERTURB. A negative value can be provided to specify a constant perturbation, independent of parameter value:

$$\delta p_i = |-\alpha|$$

This option is sometimes required for parameters having either very small or very large values (such as initial pressure, generation times, or residual gas saturation).

### Example

```
> COMPUTATION
  >> JACOBIAN
    >>> PERTURBation factor alpha : 0.005 of parameter value
    <<<
  <<
```

### See Also

>>> FORWARD, >>> CENTERED, >>>> PERTURB

## Command

>>>> PERTURB: (-) *alpha* (%)

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

This command specifies the perturbation factor  $\alpha$  for numerical computation of the Jacobian matrix. The columns of the Jacobian matrix are calculated by perturbing the corresponding parameter  $p_i$  by a small amount  $\delta p_i$ , and taking either a forward or centered finite difference quotient. The perturbation is usually a fraction of the parameter value itself:

$$\delta p_i = \alpha \cdot p_i$$

The default value for  $\alpha$  is 1 %, which can be changed globally for all parameters using the third-level command >>> PERTURB, or individually for each parameter using the fourth-level command >>>> PERTURB. A negative value can be provided to specify a constant perturbation, independent of parameter value:

$$\delta p_i = |-\alpha|$$

This option is sometimes required for parameters having either very small or very large values (such as initial pressure, generation times, or residual gas saturation).

## Example

```
> PARAMETER
  >> TIME at which production rate changes
    >>> SOURCE: WEL_3
      >>>> INDEX of array F1                : 5
      >>>> initial GUESS                    : 1.7E8 seconds
      >>>> PERTURB by constantly             : -3.6E3 seconds
    <<<<
  <<<
  <<
> COMPUTATION
  >> JACOBIAN
    >>> all other parameters are PERTURBed by : 2 % of their values
  <<<
  <<
```

## See Also

>>> PERTURB

## Command

```
>>>> PHASE phase_name/: iphase
```

## Parent Command

```
>>> ELEMENT  
>>> SOURCE (o)
```

## Subcommand

## Description

This command identifies a phase either by its name (*phase\_name*) or the phase number (*iphase*). A list of allowable phase names for the given EOS module can be obtained from the header of the ITOUGH2 output file.

## Example

```
> OBSERVATION  
  >> CONCENTRATION  
    >>> ELEMENT: ZZZ99  
      >>>> ANNOTATION: TCE concentration  
      >>>> COMPONENT No.: 3  
      >>>> dissolved in LIQUID PHASE  
      >>>> DATA on FILE: tce.dat  
      >>>> standard DEVIATION: 1.0E-6  
      <<<<  
    <<<  
  <<
```

## See Also

```
>>>> COMPONENT
```



## Command

>>>> PICK: *npick*

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

-

## Description

This command identifies the number of data points being skipped when reading from a long data file. Only every *npick* data point is read. The default is *npick*=1, i.e., every data point is accepted.

## Example

```
> OBSERVATION
  >> TEMPERATURE
    >>> ELEMENTS: ELM_10 + 4
      >>>> SKIP: 3 lines before reading data
      >>>> PICK only every : 10 data point
      >>>> DATA on file: temp.log
      >>>> standard DEVIATION: 0.5 degrees C
      <<<<
    <<<
  <<
```

## See Also

>>>> COLUMN, >>>> DATA, >>>> FORMAT, >>>> SET (o), >>>> SKIP

**Command**

>>> PLOTFILE: *format* (LIST)

**Parent Command**

>> OUTPUT

**Subcommand**

-

**Description**

(synonym for command >>> FORMAT (o))

**Example**

(see command >>> FORMAT (o))

**See Also**

>>> FORMAT (o)

**Command**

```
>>> PLOTTING: niter
```

**Parent Command**

```
>> OUTPUT
```

**Subcommand**

-

**Description**

By default, the plot file contains the observed data (interpolated at the calibration points), as well as the system response calculated with the initial and final parameter set. Additional intermediate curves can be requested for visualizing the optimization process. Curves are generated for every multiple of *niter* ITOUGH2 iterations.

**Example**

```
> COMPUTATION
```

```
>> OUTPUT
```

```
>>> PLOTTING: 1 (plots the calculated system response after each  
                ITOUGH2 iteration)
```

```
<<<
```

```
<<
```

**See Also**

-

## Command

```
>>>> POLYNOM: idegree (time_unit)
```

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

## Description

Represents observed data by a polynomial of degree *idegree*:

$$z^*(t) = \sum_{i=0}^{idegree} A_i \cdot t^i$$

where *t* denotes time in *time\_units* (default is seconds), and  $A_i$  are the *idegree*+1 coefficients which are read in free format on the lines following the command line.

## Example

```
> OBSERVATION
  >> LIQUID FLOW
    >>> CONNECTION: A1__1 A1__2
      >>>> TIME SHIFT: 5 MINUTES
      >>>> conversion FACTOR: 1.6667E-02 [kg/min] - [kg/sec]
      >>>> POLYNOM of degree: 1 (linear function), time in MINUTES
      2.34 -0.03
      A0    A1 = coefficients of linear regression through
                data given in [min] and [kg/min]
      >>>> standard DEVIATION: 0.01 kg/min
      <<<<
      <<<
      <<
```

## See Also

```
>>>> DATA, >>>> USER
```

**Command**

```
>> POROSITY
```

**Parent Command**

```
> PARAMETER
```

**Subcommand**

```
>>> MATERIAL
```

**Description**

This command selects as a parameter porosity (TOUGH2 variable *POR (NMAT)*). This parameter refers to a rock type.

**Example**

```
> PARAMETER
  >> POROSITY
    >>> ROCK type           : CLAY1
      >>>> VALUE
        >>>> PRIOR information : 0.28
        >>>> standard DEVIATION: 0.05
        >>>> RANGE             : 0.10 0.50
        >>>> PERTURB           : -0.01
      <<<<
    <<<
  <<
```

**See Also**

-

### Command

```
>>> POSTERIORI
```

### Parent Command

```
>> ERROR
```

### Subcommand

### Description

The estimated error variance  $s_0^2$  represents the variance of the mean weighted residual and is thus a measure of goodness-of-fit:

$$s_0^2 = \frac{\mathbf{r}^T \mathbf{C}_{zz}^{-1} \mathbf{r}}{m - n}$$

The *a posteriori* error variance  $s_0^2$  or *a priori* error variance  $\sigma_0^2$  is used in the subsequent error analysis. For example, the covariance matrix of the estimated parameters,  $\mathbf{C}_{pp}$ , is directly proportional to the scalar  $s_0^2$  or  $\sigma_0^2$ , respectively. Note that if the residuals are consistent with the distributional assumption about the measurement errors (i.e., matrix  $\mathbf{C}_{zz}$ ), then the estimated error variance assumes a value close to one.

The user must decide whether the error analysis should be based on the *a posteriori* or *a priori* error variance. The decision can also be delegated to the Fisher Model Test (see command >>> FISHER). ITOUGH2 uses the *a posteriori* error variance  $s_0^2$  by default.

### Example

```
> COMPUTATION
  >> ERROR analysis
    >>> based on A POSTERIORI error variance
    <<<
```

### See Also

```
>>> FISHER, >>> PRIORI
```

## Command

```
>> PRESSURE (CAPILLARY) (phase_name/PHASE: iphase)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> ELEMENT
```

## Description

This command selects as an observation type the phase pressure or capillary pressure. This observation type refers to one or more elements. The phase name *phase\_name* or phase number *iphase*, which depend on the EOS module being used, are listed in the header of the ITOUGH2 output file. They can be specified either on the command line or using subcommand >>>> PHASE. If no phase is specified, ITOUGH2 takes the pressure of the first phase which is usually the reference pressure. The pressure of a phase of greater wettability is calculated as the sum of the reference pressure and the corresponding capillary pressure. In a two-phase system there is only one capillary pressure, i.e., the difference between the pressure in the wetting and non-wetting phase. In a three-phase system (e.g., gas, NAPL, aqueous phase), there are two capillary pressures, i.e., the capillary pressure between the non-wetting phase liquid (NAPL) and the gas phase, and the capillary pressure between the wetting (aqueous) and the gas phase. The name of the wetting phase must be provided to identify the particular capillary pressure in a three-phase system.

## Example

```
> OBSERVATION
  >> PRESSURE
    >>> ELEMENT: AA__1 + 56
      >>>> ANNOTATION      : Mean gas pressure
      >>>> take AVERAGE of pressures in all 57 elements
      >>>> DATA on FILE   : pres.dat
      >>>> VARIANCE        : 1E6 Pa
      <<<<<
    <<<<
  >> NAPL CAPILLARY PRESSURE
    >>> ELEMENT: BB__1
      >>>> take LOGARITHM of
      >>>> ABSOLUTE Pco
      >>>> DATA on FILE   : Pco.dat
      >>>> VARIANCE        : 1.0 log-cycle
      <<<<<
    <<<<<
```

## See Also

-

## Command

```
>>>> PRIOR: prior_info
```

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

This command provides the prior information of the parameter to be estimated. If command >>>> PRIOR is omitted, the value from the TOUGH2 input file is taken. Prior information is only effective if a standard deviation is provided (see command >>>> DEVIATION (p)), in which case the difference between the parameter estimate and its prior value is penalized in the objective function. The starting point for the optimization is given through commands >> GUESS and >>>> GUESS. If command >>>> LOGARITHM is present, the prior information is the logarithm of the parameter. Similarly, if command >>>> FACTOR is present, the prior information should be a multiplication factor (default is 1.0).

## Example

```
> PARAMETER
  >> ABSOLUTE permeability
    >>> ROCK type : SAND1
      >>>> LOGARITHM
        >>>> PRIOR information : -12.0
          >>>> standard DEVIATION: 1.0 order of magnitude
            <<<<
      >>> ROCK types: CLAY1 CLAY2 CLAY3 BOUND
        >>>> FACTOR
          >>>> initial GUESS      : 1.0
          >>>> is not WEIGHTed    : 0.0 (default)
            <<<<
        <<<

  >> GUESS, i.e., starting point for optimization
    1 -13.0
  <<
```

## See Also

```
>> GUESS, >>>> GUESS, >>>> DEVIATION, >>>> VARIATION
```



## Command

```
>>> PRIORI
```

## Parent Command

```
>> ERROR
```

## Subcommand

-

## Description

The estimated error variance  $s_0^2$  represents the variance of the mean weighted residual and is thus a measure of goodness-of-fit:

$$s_0^2 = \frac{\mathbf{r}^T \mathbf{C}_{zz}^{-1} \mathbf{r}}{m - n}$$

The *a posteriori* error variance  $s_0^2$  or *a priori* error variance  $\sigma_0^2$  is used in the subsequent error analysis. For example, the covariance matrix of the estimated parameters,  $\mathbf{C}_{pp}$ , is directly proportional to the scalar  $s_0^2$  or  $\sigma_0^2$ , respectively. Note that if the residuals are consistent with the distributional assumption about the measurement errors (i.e., matrix  $\mathbf{C}_{zz}$ ), then the estimated error variance  $s_0^2$  assumes a value close to one.

The user must decide whether the error analysis should be based on the *a posteriori* or *a priori* error variance. The decision can also be delegated to the Fisher Model Test (see command >>> FISHER). ITOUGH2 uses the *a posteriori* error variance  $s_0^2$  by default. However, for design calculations or synthetic inversions, the error analysis should be based on the *a priori* variance  $\sigma_0^2$  which is 1 by definition.

## Example

```
> COMPUTATION
  >> ERROR
    >>> based on A PRIORI error variance
    <<<
```

## See Also

```
>>> FISHER, >>> POSTERIORI
```

**Command**

>> PRODUCTION (*phase\_name*/PHASE: *iphase*)

**Parent Command**

> OBSERVATION

**Subcommand**

>>> SINK

**Description**

(synonym for command >> GENERATION)

**Example**

(see command >> GENERATION)

**See Also**

>> GENERATION

**Command**

```
>> PRODUCTIVITY INDEX
```

**Parent Command**

```
> PARAMETER
```

**Subcommand**

```
>>> SOURCE
```

**Description**

This command selects the productivity index for wells on deliverability (TOUGH2 variable *GX*) as a parameter to be estimated. This parameter refers to a sink/source code name. The generation type must be DELV.

**Example**

```
> PARAMETER
  >> PRODUCTIVITY INDEX
    >>> SINK: WEL_1
      <<<<
    <<<
  <<
```

**See Also**

-

## Command

>> PUMPING RATIO

## Parent Command

> PARAMETER

## Subcommand

>>> SOURCE

## Description

This command selects as a parameter the pumping ratios of all wells belonging to the same well group. This option can be used to determine the distribution of generation rates among a group of wells, e.g., to determine the optimum pumping strategy for a cleanup operation. For example, the total extraction rate from a system of wells is often limited by the treatment capacity. However, extraction rates of individual wells can be adjusted, optimizing the efficiency of the cleanup operation. A well group consists of all sinks/sources with the same code name (TOUGH2 variable *SL*). The sum of the constant generation rates (TOUGH2 variable *GX*) of all wells within the same well group remains constant, but individual rates are adjusted. It is imperative to estimate as many pumping ratios as the number *n* of wells within the well group of interest. After optimization, the actual generation rate for well *i* is calculated from the prescribed total pumping rate  $q_{tot}$  and the estimated pumping ratio  $a_i$

$$q_i = q_{tot} \frac{a_i}{\sum_{j=1}^n a_j}$$

## Example

```
> PARAMETER
  >> PUMPING RATIO
    >>> SOURCE: EXT_1
      >>>> GUESS      : 0.25
      <<<<<
    >>> SOURCE: EXT_2
      >>>> GUESS      : 0.5
      <<<<<
    >>> SOURCE: EXT_3
      >>>> GUESS      : 0.25
      <<<<<
    <<<<
  <<<<
```

## See Also

## Command

>>> QUADRATIC-LINEAR: c

## Parent Command

>> OPTION

## Subcommand

## Description

This command selects a quadratic-linear robust estimator. Given this estimator, the objective function to be minimized is a combination of least-squares for small residuals and the first norm for residuals larger than  $c$ -times the prior standard deviation:

$$S = \sum_{i=1}^m \gamma(y_i)$$

where

$$\gamma(y_i) = \begin{cases} y_i^2 & |y_i| \leq c \\ c(2|y_i| - c) & |y_i| > c \end{cases}$$

with

$$y_i = \frac{r_i}{\sigma_i}$$

This objective function does not correspond to a standard probability density function. It has the general characteristic that the weight given individual residuals first increases quadratically with deviation, then only linearly to reduce the impact of outliers.

For  $c \rightarrow \infty$ , the estimator is identical to least-squares; for  $c \rightarrow 0$ , it approaches the  $L_1$ -estimator.

Note that this objective function is minimized using the standard Levenberg-Marquardt algorithm which is designed for a quadratic objective function. Since the function is quadratic for  $y_i \leq c$ , the Levenberg-Marquardt algorithm is usually quite efficient.

## Example

```
> COMPUTATION
```

```
>> OPTION
```

```
>>> use a QUADRATIC-LINEAR robust estimator with a constant c : 1.0
```

```
<<<
```

```
<<
```

## See Also

```
>>> ANDREWS, >>> CAUCHY, >>> L1-ESTIMATOR, >>> LEAST-SQUARES
```

## Command

```
>>>> RANGE: lower upper  
or  
>>>> BOUND: lower upper
```

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

-

## Description

This command sets the admissible parameter range. It provides *lower* and *upper* bounds of the parameter. During the optimization process, ITOUGH2 may suggest parameter values that are physically not valid (e.g., negative porosity) or not reasonable (e.g., very high permeability). Limiting the admissible range for the values a parameter can assume prevents the simulation from stopping due to an unphysical or unreasonable parameter value. However, it is strongly suggested not to specify a narrow parameter range about the initial guess. The range should reflect physical bounds, and the expected variation of the parameter. If prior knowledge suggests that a certain parameter varies only slightly about the initial guess, this information should enter the inversion as a standard deviation associated with the initial guess, i.e. prior information (see command >>>> DEVIATION (p)). A parameter tends to greatly vary, potentially hitting its lower or upper bound, if (i) a systematic error is present, (ii) the initial guess is far away from the best estimate, (iii) the parameter is not sensitive, or (iv) the parameter is highly correlated to more sensitive parameters. The final parameter set should not contain parameters at their lower or upper bounds. If some of the estimated parameters are at the bounds, it is suggested to carefully examine the four potential reasons mentioned above. A new inversion should be performed after corrective actions have been taken.

## Example

```
> PARAMETER  
  >> POROSITY  
    >>> MATERIAL: SANDY  
      >>>> PRIOR information : 0.34  
      >>>> standard DEVIATION: 0.05  
      >>>> admissible RANGE   : 0.01 0.99  
      <<<<<  
    <<<  
  <<
```

## See Also

```
>>>> DEVIATION (p), >>>> STEP
```

## Command

```
>> RATE
```

## Parent Command

```
> PARAMETER
```

## Subcommand

```
>>> SOURCE
```

## Description

This command selects as a parameter the constant generation rate (TOUGH2 variable *GX*) or time-dependent generation rate (TOUGH2 variable *F2(L)* for *LTAB* > 1). This parameter refers to a sink/source code name. Estimating a time-dependent generation rate requires providing index *L* through command >>>> INDEX.

## Example

```
> PARAMETER
  >> RATE
    >>> SOURCE: WEL_1 + 5
      >>>> ANNOTATION: const. rate
      >>>> LOGARITHM
      <<<<
    >>> SOURCE: INJ_1
      >>>> ANNOTATION: variable rate
      >>>> VALUE
      >>>> INDEX      : 7
      <<<<
    <<<
  <<
```

## See Also

```
>> TIME (p)
```

## Command

>>> REDUCTION: *max\_red*

## Parent Command

>> CONVERGE

## Subcommand

-

## Description

By default, a TOUGH2 simulation stops if 20 consecutive time step reductions have occurred without convergence. This command changes the maximum number of allowable time step reductions to *max\_red*.

Time step reductions occur if:

- (1) the initial time step is too large (see TOUGH2 variable *DELTEN* or *DLT(1)*, and command >>> ADJUST),
- (2) TOUGH2 parameter *NOITE* is too small,
- (3) a failure in the EOS module occurs ,
- (4) boundary conditions are changed drastically during the course of the simulation.

Variable *max\_red* should only be increased to address problem (4), i.e., when drastic changes in generation rates (TOUGH2 block GENER) are imposed, or if Dirichlet boundary conditions are changed using command >> RESTART TIME or through subroutine USERBC.

## Example

```
> COMPUTATION
  >> CONVERGE
    >>> accept : 30 CONSECUTIVE time step reductions
    <<<
  <<
```

## See Also

>> RESTART TIME, >>> ADJUST, >>> CONSECUTIVE



## Command

>> RELATIVE

## Parent Command

> PARAMETER

## Subcommand

>>> DEFAULT

>>> MATERIAL

## Description

This command selects a parameter of the relative permeability function (TOUGH2 variable  $RP(IPAR, NMAT)$ ) of a certain rock type, or a parameter of the default relative permeability function (TOUGH2 variable  $RPD(IPAR)$ ). Command >>>> INDEX must be used to select the parameter index  $IPAR$ . The physical meaning of the parameter depends on the type of relative permeability function selected in the TOUGH2 input file, variable  $IRP$  or  $IRPD$ . The admissible range should be specified explicitly to comply with parameter restrictions (see *Pruess [1987]*, Appendix A).

## Example

```
> PARAMETER
  >> parameter of RELATIVE permeability function
    >>> DEFAULT
      >>>> ANNOTATION      : Resid. Gas Sat.
      >>>> PARAMETER no.   : 2
      >>>> VALUE
      >>>> RANGE           : 0.01 0.99
      <<<<<
    >>> MATERIAL: ZONE1 +3
      >>>> ANNOTATION      : IRP=7, RP(1)=m
      >>>> PARAMETER no.   : 1
      >>>> FACTOR
      <<<<<
    <<<<
  <<<<
```

## See Also

>> CAPILLARY

### Command

>>>> RELATIVE: *rel\_err* (%)

### Parent Command

all third-level commands in block > OBSERVATION

### Subcommand

### Description

This command takes a fraction of the observed value as the standard deviation of the measurement error (for more details see command >>>> DEVIATION (o)).

This option cannot be applied to data sets that contain zero measurements.

### Example

```
> OBSERVATION
  >> LIQUID FLOW RATE
    >>> CONNECTION INJ_1 DOM_2
      >>>> DATA on FILE: flow.dat
        >>>> RELATIVE measurement error of : 5 % is assumed
          <<<<
            <<<
              <<
```

### See Also

>>>> DEVIATION (o)

**Command**

```
>>> RESIDUAL
```

**Parent Command**

```
>> OUTPUT
```

**Subcommand**

```
-
```

**Description**

This command prints the observed and calculated system response as well as the residuals after each ITOUGH2 iteration. By default, the residuals are printed only once at the end of the optimization.

**Example**

```
> COMPUTATION
  >> OUTPUT
    >>> print RESIDUALs after each TOUGH2 simulation.
    <<<
  <<
```

**See Also**

```
>>> JACOBIAN
```

## Command

```
>> RESTART TIME: ntime (time_unit) (NEW)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

## Description

This command selects points in time at which the boundary conditions are changed by a step function, and reassigns primary variables and/or grid block volumes for selected elements. Such times are termed "restart times" because in standard TOUGH2 one would have to stop the simulation, and restart it after having changed the initial conditions of certain elements. This option is useful for modeling well tests, where the condition in the borehole is changed at certain points in time. For the simultaneous calibration of well tests consisting of many test events, it is imperative to model the entire sequence in a single simulation run, i.e. individual events must be connected. Recall, that complicated, time-varying boundary conditions can also be programmed into subroutine USERBC.

The specification of a restart time is identical to specifying calibration points (see command >> TIME (o)). Instead of calibration times, a restart time *restart\_time* is indicated. Following the line containing the restart time, a list of element names *elem* (or element numbers) can be given, followed by an integer *ipv* indicating which primary variable is to be changed. If *ipv* is zero, the volume of the corresponding element is changed. Finally, the new primary variable or grid block volume, respectively, is given. The general format is as follows:

```
>> RESTART TIME: 1 (time_unit)
    restart_time
    elem ipv pv
    elem ipv pv
    .... ..
```

A comprehensive example is given below.


This option can also be used to periodically generate a SAVE file. This may be desirable for very long TOUGH2 simulations. In case of a computer failure, the run can be restarted at the time of the last restart time.

If keyword NEW is present, a new SAVE file with unique file name is created for each RESTART time.

## Example

This example demonstrates the use of restart times to connect four individual test events into a single simulation. The test sequence starts with a shut-in recovery period, i.e. in the TOUGH2 input file the actual interval volume is assigned to the element representing the borehole. At time  $t_{CP}$ , a constant pressure pumping test is initiated, i.e., the element volume

is increased to a very large number, and the prescribed interval pressure is specified as initial conditions. A shut-in pressure recovery period starts at time  $t_{REC}$ , modeled by reassigning the actual interval volume. Finally, a pulse test is simulated, assuming that all the gas that potentially accumulates in the borehole interval has been released at time  $t_{PULSE}$ , prior to applying a short pressure pulse. The pressure response in the injection well is schematically shown in the figure below, followed by the appropriate ITOUGH2 block with restart times and boundary condition specifications.

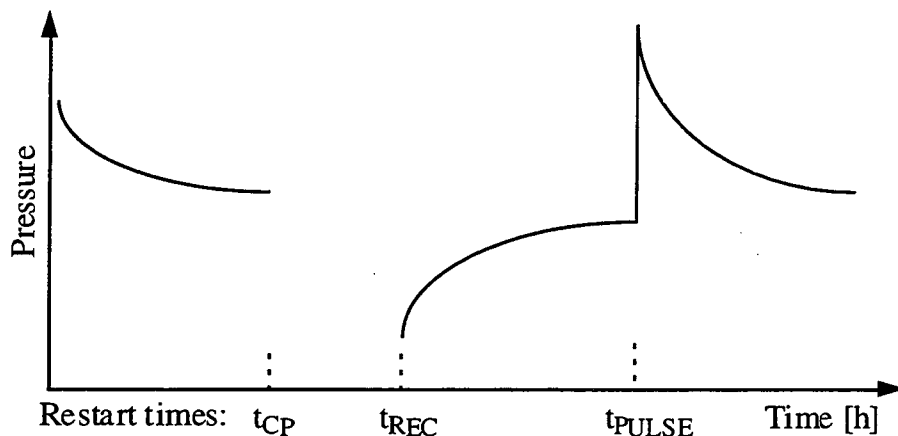

```
> OBSERVATION
  >> RESTART TIME: 1      [HOURS]
      2.56                (tCP)
      BOR_1    0  1.0E+50  (large volume for const. pressure b.c.)
      BOR_1    1  1.3E+05  (set constant interval pressure)

  >> RESTART TIME: 1      [HOURS]
      3.51                (tREC)
      BOR_1    0  0.73     (actual volume for shut-in recovery)

  >> RESTART TIME: 1      [HOURS]
      5.44                (tPULSE)
      BOR_1    2  0.00     (prescribe single-phase liquid cond.)
      BOR_1    1  4.85E+05 (pressure pulse)
      |        |        |
      element  ipv pv/vol
```

TOUGH2 stops at each restart time, writes a SAVE file, reads it as an INCON file, changes initial conditions, i.e. updates the primary variables or grid block volumes of the indicated elements, and continues the simulation.

### See Also

```
>> TIME (o)
```

**Command**

>>> ROCKS: *mat\_name* (*mat\_name\_i* ...) (+ *iplus*)

**Parent Command**

all second-level commands in block > PARAMETER referring to a material name

**Subcommand**

(synonym for command >>> MATERIAL)

**Description**

(see command >>> MATERIAL)

**Example**

-

**See Also**

>>> MATERIAL

## Command

```
>> SATURATION (phase_name/PHASE: iphase)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> ELEMENT
```

## Description

This command selects phase saturation as an observation type. This observation type refers to an element. The phase name *phase\_name* or phase number *iphase*, which depend on the EOS module being used, are listed in the ITOUGH2 header. They can be specified either on the command line or using the subcommand >>>> PHASE.

## Example

```
> OBSERVATION
  >> GAS SATURATION
    >>> calculated for ELEMENT: AA__5
      >>>> ANNOTATION: Sg during gas injection
        >>>> DATA [HOURS]
          0.1  0.01
          0.3  0.13
          0.5  0.34
          0.8  0.59
          1.2  0.72
          1.5  0.81
          2.0  0.86
          2.5  0.89
          5.0  0.91
        >>>> DEVIATION: 0.05
      <<<<
    <<<

  >> SATURATION
    >>> ELEMENT: BB__5
      >>>> NAPL PHASE saturation
        >>>> NO DATA available (i.e., just for plotting)
        >>>> WEIGHT: 1.0E-20 (don't weigh, just plot!)
      <<<<
    <<<
  <<
```

## See Also

## Command

```
>>>> SCHEDULE: (-)beta
```

## Parent Command

```
>>> ANNEAL
```

## Subcommand

## Description

This command defines the annealing schedule for Simulated Annealing minimization. The annealing schedule is a function describing the temperature reduction (and thus the probability of accepting an uphill step, see command >>> ANNEAL). The temperature is updated after a certain number of successful steps have been performed (see command >>>> STEP (a)).

There are two functions available. If *beta* is positive ( $\beta < 1$ , typically 0.9), the following annealing schedule is used:

$$\tau_k = \beta^k \cdot \tau_0$$

where *k* is the iteration index, and  $\tau_0$  is the initial temperature specified by command >>>> TEMPERATURE. A negative *beta* invokes the following annealing schedule:

$$\tau_k = \tau_0(1 - k / K)^{|\beta|}$$

where *K* is the maximum number of iterations (see command >>>> ITERATION (a)).

## Example

```
> COMPUTATION
  >> OPTION
    >>> Simulated ANNEALing
      >>>> total number of ITERATIONS: 200
      >>>> initial TEMPERATURE: -0.05
      >>>> update after: 100 STEPS
      >>>> annealing SCHEDULE: 0.95
    <<<<
  <<<
<<
```

## See Also

```
>>>> ITERATION (a), >>>> STEP, >>>> TEMPERATURE
```



## Command

```
>> SECONDARY (phase_name/PHASE: iphase) (: ipar)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> ELEMENT
```

## Description

This command selects thermophysical properties, which are so-called "secondary parameters" in TOUGH2, as an observation type. This observation type refers to an element.

The secondary parameter refers to elements of TOUGH2 vector *PAR* (see *Pruess* [1991], Figure 2). The index *ipar* must be provided in the command line after a colon or through the fourth-level command >>>> INDEX. The fluid phase must also be identified. The phase name *phase\_name* or phase number *iphase*, which depend on the EOS module being used, are listed in the ITOUGH2 header. They can be specified either on the command line or using the fourth-level command >>>> PHASE.

The following table lists the thermophysical property addressed by *ipar*. Some of the properties can be selected using an alternative second-level command.

<i>ipar</i>	Secondary Parameter	Alternative Command
1	phase saturation	SATURATION
2	relative permeability	-
3	viscosity	-
4	density	-
5	specific enthalpy	-
6	capillary pressure	PRESSURE
<i>NB+i</i>	mass fraction of component <i>i</i>	MASS FRACTION

## Example

```
> OBSERVATION
  >> SECONDARY parameter No: 3
    >>> ELEMENT: AA__5
      >>>> ANNOTATION: gas viscosity
      >>>> GAS PHASE
      >>>> NO DATA
      <<<<
    <<<
```

## See Also

```
>> MASS FRACTION, >> PRESSURE, >> SATURATION,
>>>> PHASE, >>>> INDEX
```

**Command**

```
>> SELEC
```

**Parent Command**

```
> PARAMETER
```

**Subcommand**

```
>>> MODEL
```

**Description**

This command selects as a parameter one of the SELEC parameters (TOUGH2 variable  $FE(I)$ ). The physical meaning of the parameter depends on the module being used. The index  $I$  must be provided through command >>>> INDEX.

**Example**

```
> PARAMETER
  >> SELEC parameter
    >>> MODEL
      >>>> ANNOTATION: Gel Density (EOS11)
      >>>> INDEX      : 2
      >>>> VALUE
      <<<<<
    <<<<
  <<<<
```

**See Also**

-

## Command

```
>>> SELECT
```

## Parent Command

```
>> OPTION
```

## Subcommand

```
>>>> CORRELATION  
>>>> ITERATION  
>>>> LIST  
>>>> SENSITIVITY
```

## Description

This command invokes the automatic parameter selection option of ITOUGH2. The parameters defined in block `> PARAMETER` are screened according to two selection criteria (see commands `>>>> SENSITIVITY` and `>>>> CORRELATION`). Only the most sensitive and/or most independent parameters are subjected to the optimization process. Automatic parameter selection allows one to submit a larger set of parameters to the estimation process. If a parameter is not sensitive enough to be estimated from the available data, it is automatically removed from the set of parameters being updated. This makes the inversion faster because fewer parameters must be perturbed for calculating the Jacobian matrix (the full Jacobian is only calculated every few iteration when the selection criteria are reevaluated). The inversion is also more robust. Parameters that are not sensitive or highly correlated tend to be changed drastically during an ITOUGH2 iteration which may cause unnecessary numerical difficulties. If they are (temporarily) removed from the parameter set, they remain at their initial or current value.

An additional advantage of using this option is the fact that sensitivities, estimation uncertainties, and parameter correlations are calculated for all the specified parameters, regardless of whether they are updated during the optimization.

Due to the non-linearity of the inverse problem at hand, sensitivity coefficients and parameter correlations constantly change during the optimization. Therefore, the selection criteria must be reevaluated from time to time (see command `>>>> ITERATION (s)`), i.e., parameters may be deactivated and reactivated during the course of an inversion.

## Example

```
> COMPUTATION  
  >> OPTION  
    >>> automatic parameter SELECTION  
      >>>> SENSITIVITY criterion: -0.1  
      >>>> repeat selection every : 3 rd ITERATION  
      <<<<  
    <<<
```

## See Also

## Command

```
>>> SENSITIVITY  
or  
>>> DESIGN
```

## Parent Command

```
>> OPTION
```

## Subcommand

## Description

This command makes ITOUGH2 evaluate the sensitivity matrix without performing any optimization. By default, the scaled Jacobian matrix, i.e., the sensitivity coefficients scaled by the standard deviation of the observation and expected parameter variation, respectively, is printed to the ITOUGH2 output file:

$$\tilde{J}_{ij} = J_{ij} \frac{\sigma_{p_j}}{\sigma_{z_i}} = \frac{\partial z_i}{\partial p_j} \cdot \frac{\sigma_{p_j}}{\sigma_{z_i}}$$

In addition, the unscaled sensitivity coefficients can be printed by invoking subcommand >>> SENSITIVITY in block >>> OUTPUT.

This information can be used to identify the parameters that most strongly affect the system behavior at actual or potential observation points. Similarly, the relative information content of actual or potential observations, i.e., the contribution of each data point to the solution of the inverse problem can be evaluated.

Based on this command, ITOUGH2 also calculates the covariance matrix of the estimated parameters, i.e., the estimation uncertainty under the assumption that the variances of the residuals are accurately depicted by the prior covariance matrix  $C_{zz}$ . This information along with the global sensitivity measures (sums of absolute sensitivity coefficients) can be used to optimize the design of an experiment.

It is recommended to use a relatively large perturbation factor (see command >>> PERTURB), possibly in combination with centered finite difference quotients (see command >>> CENTERED) for the purpose of sensitivity analysis.

## Example

```
> COMPUTATION  
  >> OPTION  
    >>> perform a SENSITIVITY analysis for test DESIGN  
    <<<  
  <<
```

## See Also

```
>>> CENTERED, >>> PERTURB, >>>> SENSITIVITY (o)
```

## Command

```
>>> SENSITIVITY
```

## Parent Command

```
>> OUTPUT
```

## Subcommand

-

## Description

This command prints the sensitivity matrix to the ITOUGH2 output file. The elements of the sensitivity matrix are the partial derivatives of the system response at the observation points with respect to the parameters:

$$J_{ij} = \frac{\partial z_i}{\partial p_j}$$

By default, ITOUGH2 prints the scaled Jacobian matrix, the elements of which are the sensitivity coefficients scaled by the ratio of the standard deviation of the observation and expected parameter variation:

$$\tilde{J}_{ij} = J_{ij} \frac{\sigma_{p_j}}{\sigma_{z_i}} = \frac{\partial z_i}{\partial p_j} \cdot \frac{\sigma_{p_j}}{\sigma_{z_i}}$$

## Example

```
> COMPUTATION
  >> OUTPUT
    >>> print SENSITIVITY matrix in addition to the scaled Jacobian
    <<<
  <<
```

## See Also

-

## Command

```
>>>> SENSITIVITY: (-) rsens
```

## Parent Command

```
>>> SELECT
```

## Subcommand

## Description

This command defines one of the criteria used for automatic parameter selection. It examines the potential of a parameter to reduce the objective function:

$$\delta = |\partial S|$$

Here,  $\partial S$  is the change of the objective function if the parameter is perturbed by a certain, small value (see command `>>> PERTURB`).

Normalizing to the maximum value  $\delta_{\max}$  yields the selection criterion  $\omega$ :

$$\omega = \frac{\delta}{\delta_{\max}} \quad 0 < \omega \leq 1$$

Those parameters with an  $\omega$ -value larger than  $|rsens|$ , i.e., the most sensitive parameters, are selected. Parameters which are unlikely to significantly reduce the objective function are (temporarily) excluded from the optimization process.

If a negative value is given for *rsens*, the selection criterion is relaxed with each iteration *k*, and reaches zero for the last iteration *max\_iter*, i.e., all parameters specified in block `> PARAMETER` are selected for the final step.

$$rsens_k = |rsens| \cdot \left(1 - \frac{k}{max\_iter}\right)$$

## Example

```
> COMPUTATION
  >> OPTION
    >>> SELECT parameter automatically every
      >>>> : 3 ITERATIONS
      >>>> based on the SENSITIVITY criterion with rsens : -0.10
    <<<<
  <<<
<<
```

## See Also

```
>>>> ITERATION (s), >>>> CORRELATION
```

## Command

```
>>> SET: iset
```

## Parent Command

```
>> DRIFT  
>> FACTOR  
>> LAG  
>> SHIFT
```

## Subcommand

all fourth-level commands in block > PARAMETER

## Description

The parent command of this command identifies a parameter that refers to a data set, i.e., it manipulates the observed data. The data set is identified by its ordering number *iset* as specified in block > OBSERVATION. Alternatively, *iset* can be read using subcommand >>>> INDEX; the latter command must be used if multiple sets are selected.

## Example

```
> PARAMETER
```

Estimate coefficients of regression  $dz=A+B*time$  to correct flowmeter data. The flowmeter data are provided as data set No. 2, 3, and 4 in the OBSERVATION block. All three data sets exhibit a constant offset to be estimated. Data set No. 3 also shows a drift.

```
>> SHIFT  
  >>> NONE (multiple sets will be selected)  
    >>>> INDEX      : 2 3 4  
    >>>> ANNOTATION: constant A (set 2, 3 and 4)  
    >>>> GUESS      : 4.0E-6 [kg/sec]  
    <<<<<  
  <<<<  
  
>> DRIFT  
  >>> data SET No.   : 3  
    >>>> ANNOTATION: coefficient B (set 3 only)  
    >>>> GUESS      : 1.0E-9 [kg/sec/sec]  
    <<<<<  
  <<<<  
<<<<
```

## See Also

-

## Command

```
>>>> SET: iset
```

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

## Description

Multiple data sets can be stored on a single file, separated by a single line containing characters. This command is used to select the *iset*'th data set on a data file. By default, data are read from the first set following the header lines (see command >>>> HEADER).

## Example

```
> OBSERVATION
  >> PRESSURE
    >>> ELEMENT: AAA99
      >>>> ANNOTATION: Pres. well BBB
      >>>> conversion FACTOR: 1.0E5
      >>>> skip: 3 HEADER lines, then
      >>>> select: 2 nd SET on
      >>>> COLUMNS: 2 3
      >>>> DATA FILE: pres.dat [HOURS]
      >>>> RELATIVE error: 0.05
    <<<<
  <<<<
```

The content of file *pres.dat* is:

```
1 This is file pres.dat
Line Time      Pressure
3 Data set 1: Pressure in borehole AAA
4 0.0          1.000
5 1.0          1.134
6 2.0          1.495
7 Data set 2: Pressure in borehole BBB
8 0.0          1.051
9 1.0          1.433
10 2.0         1.874
11 3.0         2.431
.. ...        .....
```

## See Also

```
>>>> HEADER
```



## Command

>> SHIFT

## Parent Command

> PARAMETER

## Subcommand

>>> NONE

>>> SET

## Description

This command selects as a parameter a constant used to shift the calculated TOUGH2 output. The constant is added to the output that refers to a specific data set:

$$z = z_{TOUGH2} + shift$$

where *shift* is the constant added to the calculated TOUGH2 output  $z_{TOUGH2}$ . The result  $z$  is compared to the measurement  $z^*$  of the corresponding data set.

This option allows removal of a constant from the data. For example, if matching relative pressure data that fluctuate around an unknown mean, or if a flowmeter exhibits an unknown offset that needs to be estimated, the shift parameter being estimated is the mean or offset, respectively.

A non-zero value must be provided as an initial guess through the ITOUGH2 input file using command >>>> GUESS.

The data set is identified by number using command >>> SET (p) or command >>>> INDEX (p).

If the constant is known, i.e. does not need to be estimated, use command >>>> SHIFT, a subcommand of > OBSERVATION, to shift the data.

## Example

```
> PARAMETER
```

```
>> SHIFT
```

```
>>> SET No. : 1
```

```
>>>> ANNOTATION: atmos. pres.
```

```
>>>> GUESS: -1.0E5 [Pa] subtract atmospheric pressure
```

```
<<<<
```

```
>>> NONE
```

```
>>>> ANNOTATION: offset
```

```
>>>> INDEX      : 2 3 4 (one constant for data sets 2, 3, and 4)
```

```
>>>> GUESS      : 4.0E-6 [kg/sec]
```

```
<<<<
```

```
<<<
```

```
<<
```

## See Also

>> DRIFT, >> FACTOR, >> LAG, >>> SET (p), >>>> SHIFT

## Command

```
>>>> SHIFT: shift (TIME (time_unit)).
```

## Parent Command

```
all third-level commands in block > OBSERVATION
```

## Subcommand

## Description

This command shifts data values or observation times by a known, constant value *shift*. The effect of this command is a direct data manipulation which must be distinguished from estimating an unknown constant that shifts the model output (see command >> SHIFT). If keyword TIME is present on the command line, the constant *shift* is added to all observation times of the corresponding data set. This is useful to adjust the reference time of the data record if it is different from the starting time of the simulation (TOUGH2 variable TSTART). The time unit can be selected using one of the *time\_unit* keywords. If keyword TIME is not present, *shift* is added to all observed values. The units of *shift* must match those of the observed data (see command >>>> FACTOR).

## Example

```
> OBSERVATION
  >> PRESSURE
    >>> ELEMENT: GUG_0
      >>>> ANNOTATION: rel. pres.
      >>>> conversion FACTOR: 1000.0 [kPa] - [Pa]
      >>>> SHIFT: -100.0 [kPa] subtract atmospheric pressure from data
      >>>> SHIFT TIMES as well by: -1.25 DAYS
      >>>> relative pressure DATA in [HOURS] and [kPa] follow:
          30.0  101.314
          30.5  101.789
          31.0  102.113
          ....
      >>>> standard DEVIATION: 0.5 [kPa]
    <<<<
  <<<
<<
```

## See Also

```
>> SHIFT, >>>> FACTOR
```

## Command

```
>>> SIMPLEX
```

## Parent Command

```
>> OPTION
```

## Subcommand

-

## Description

This command selects the downhill simplex method to minimize the objective function. The downhill simplex method does not calculate derivatives and can therefore be used for discontinuous objective functions. The initial simplex is defined by the initial parameter set  $\mathbf{p}_0$  and  $n$  additional points given by :

$$\mathbf{p}_i = \mathbf{p}_0 + \sigma_i \cdot \mathbf{e}_i \quad i = 2, \dots, (n+1)$$

where  $\sigma_i$  is the parameter variation given by commands >>>> VARIATION or >>>> DEVIATION ( $\mathbf{p}$ ), and the  $\mathbf{e}_i$ 's are  $n$  unit vectors along the parameter axis. At the end of minimization by means of the simplex algorithm, the Jacobian matrix is evaluated to allow for a standard error analysis.

The simplex algorithm is most useful in connection with the  $L_1$ -estimator and discontinuous cost functions.

## Example

```
> COMPUTATION
  >> OPTION
    >>> use SIMPLEX algorithm to minimize objective function
  <<<
<<
```

## See Also

```
>>> ANNEAL, >>> GAUSS-NEWTON, >>> GRID SEARCH,
>>> LEVENBERG-MARQUARDT
```

## Command

>>> SIMULATION: *mtough2*

## Parent Command

>> CONVERGE

## Subcommand

-

## Description

This command limits the number of TOUGH2 simulations performed during an inversion. A rough estimate of the total number of TOUGH2 simulations during an inversion can be made given the number of iterations requested (see command >>> ITERATION) and the type of finite difference quotients calculated (see commands >>> FORWARD and >>> CENTERED). However, there is an unknown number of unsuccessful steps that cannot be accounted for.

The maximum number of TOUGH2 simulations may also be limited in order to stop and examine a specific simulation that leads to convergence problems (see command >>> INCOMPLETE).

If performing Monte Carlo simulations (see command >>> MONTE CARLO), *mtough2* is the number of parameter sets generated and thus the number of realizations of the calculated system output.

## Example

```
> COMPUTATION
  >> STOP after
    >>> a total of : 500 TOUGH2 SIMULATIONS
    <<<
  >> ERROR analysis
    >>> MONTE CARLO
    <<<
  <<
```

## See Also

>>> ITERATION, >>> MONTE CARLO, >>> INCOMPLETE

**Command**

>>> SINK: *sink\_name* (*sink\_name\_i* ...) (+ *iplus*)

**Parent Command**

all second-level commands in block > PARAMETER or > OBSERVATION referring to sink names

**Subcommand**

all fourth-level commands in block > PARAMETER or > OBSERVATION

**Description**

(synonym for command >>> SOURCE)

**Example**

(see command >>> SOURCE)

**See Also**

>>> SOURCE

## Command

>> SKIN

## Parent Command

> PARAMETER

## Subcommand

>>> MATERIAL

## Description

This command selects as a parameter the skin zone radius around a well. In general, the radial thickness of the skin zone is predefined by the discretization of the flow region. In order to estimate the skin zone radius, the TOUGH2 mesh must be generated using the MESHMAKER utility. Furthermore, two zones must be generated using logarithmically increasing radial distances (option LOGAR). The skin radius is defined by the parameter RLOG after the first appearance of keyword LOGAR. In addition, an I5 integer must be provided after NRAD, NEQU, and NLOG, indicating the material type number for the corresponding grid blocks (see example below). Estimation of a skin zone radius may be unstable if changing the discretization significantly affects the modeling results.

## Example

The following MESHMAKER block is from a TOUGH2 input file. A radial mesh is generated with a borehole of radius 0.1 m (material type 1), a skin zone of material type 2 and initial radius of 0.3 m, partitioned into 20 grid blocks, and an outer zone of material type 3 which extends to a radial distance of 10.0 m. The thickness of the layer is 1.0 m. The skin zone radius to be estimated is printed in italics.

```
MESHMAKER
RZ2D
RADI
  2    1
0.000E+00 0.100E+00
LOGAR
  20    2 0.300E+00 0.100E-01
LOGAR
  80    3 1.000E+01
LAYER
  1
0.100E+01
```

The corresponding parameter block in the ITOUGH2 input file reads:

```
> PARAMETER
  >> SKIN zone radius
    >>> MATERIAL: SKINZ (= material name 2 in block ROCKS)
      >>>> ANNOTATION: Skin radius
        >>>> VALUE
          >>>> initial guess: 0.3
            >>>> RANGE      : 0.12  1.00
              <<<<<
                <<<<
                  <<<<
                    <<<<
```

**See Also**

**Command**

>>>> SKIP: *nskip*

**Parent Command**

all third-level commands in block > OBSERVATION

**Subcommand**

-

**Description**

(synonym for command >>>> HEADER)

**Example**

(see command >>>> HEADER)

**See Also**

>>>> HEADER



## Command

```
>>> SOURCE: source_name (source_name_i ...) (+ iplus)  
or  
>>> SINK: sink_name (sink_name_i ...) (+ iplus)
```

## Parent Command

all second-level commands in block > PARAMETER or > OBSERVATION referring to source names.

## Subcommand

all fourth-level commands in block > PARAMETER or > OBSERVATION, respectively

## Description

This command reads one or more sink/source code names (TOUGH2 variable *SOURCE*) or element names associated with a sink or source (TOUGH2 variable *ELEG*) as specified in the TOUGH2 block GENER. Both parameter and observations may refer to sources. Sources and source elements are designated by a three-character/two-integer (FORTRAN format: AAAII) code name. Blanks in the names as printed in the TOUGH2 output file must be replaced by underscores (e.g. a source or element name specified in the TOUGH2 input file as 'B 007' is printed as 'B 0 7' in the TOUGH2 output file. Therefore, it must be addressed in the ITOUGH2 input file as 'B\_0\_7').

Multiple names can be specified. A sequence of *iplus* elements can be generated by increasing the number of the last element. The following two command lines are identical:

```
>>> SOURCE: WEL_1 WEL15 +3  
>>> SOURCE: WEL_1 WEL15 WEL16 WEL17 WEL18
```

## Example

```
> PARAMETER  
  >> determine ENTHALPY of injected fluid...  
    >>> SOURCE: WEL_1  
      >>>> LOGARITHM  
      <<<<<  
      <<<  
  << ... based on...  
> OBSERVATION  
  >> ... the total VAPOR PRODUCTION in the extraction wells  
    >>> SINK : EXT_1 + 3  
      >>>> DATA on FILE : steam.dat  
      >>>> RELATIVE error: 10 %  
      <<<<<  
      <<<<
```

## See Also

-

## Command

```
>>> STEADY-STATE (SAVE) (: max_time_step)
```

## Parent Command

```
>> OPTION
```

## Subcommand

-

## Description

This command allows TOUGH2 to reach steady state prior to or after a transient simulation. This option can be used to calibrate against steady-state data (only or in combination with transient data), or to reach an equilibrium as initial conditions for a subsequent transient simulation.

Note that a transient TOUGH2 simulation must be performed to reach steady state. Steady state is usually indicated by one of the following convergence failures:



- too many time steps converged on a single Newton-Raphson iteration (see command >>> CONSECUTIVE);
- convergence failure followed by two time steps converging on a single Newton-Raphson iteration;
- too many time step reductions (see command >>> REDUCTION);
- maximum number of time steps reached (TOUGH2 variable *MCYC*);
- maximum simulation time reached (TOUGH2 variable *TIMAX*);
- maximum time step size reached (use a colon on the command line followed by *max\_time\_step* to select a maximum time step size. The *max\_time\_step* must be smaller than TOUGH2 variable *DELTMX*).

ITOUGH2 usually stops if a TOUGH2 run terminates due to one of the above mentioned convergence failures (see command >>> INCOMPLETE). If command >>> STEADY-STATE is present, however, it accepts convergence failures and proceeds with the inversion.

Inversions involving steady-state runs can be greatly accelerated by using keyword *SAVE* on the command line. After the first steady-state run has been completed, ITOUGH2 takes the steady-state conditions stored on file *SAVE* as the initial condition (file *INCON*) for the next TOUGH2 run, sets the initial time step to the (usually large) last time step of the previous simulation, and updates the parameter set. Since the parameter set is changed only slightly between subsequent TOUGH2 simulations, the new steady state is usually reached within a few additional time steps. This option should not be used if also calibrating against transient data preceding the steady-state data point.

Figure (a) below illustrates the use of the steady-state option assuming that calibration against steady-state data is to be performed. A steady-state calibration time  $t_{\infty}$  should be specified at a very late point in time (i.e., beyond the transient phase of the simulation), and the same time should be assigned to the observed steady-state data point in block >>>> DATA. (In addition to the steady-state point, one might also specify calibration points during the

transient phase). The TOUGH2 simulation proceeds until a convergence failure occurs at an unknown point in time  $t_{cf}$ . The primary variables at that point are written to file *SAVE* and reused as initial conditions for the subsequent TOUGH2 run (only if keyword *SAVE* is present). Then, the calculated system state at time  $t_{cf}$  is compared to the steady-state data point at time  $t_{\infty}$  (make sure that  $t_{\infty}$  is always greater than  $t_{cf}$ , e.g., set  $t_{\infty} = 1E20$ ).

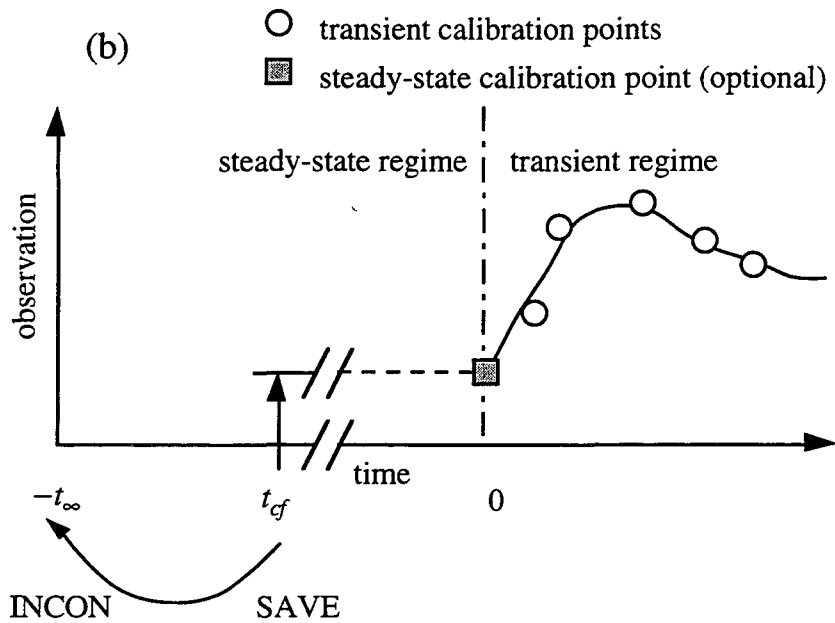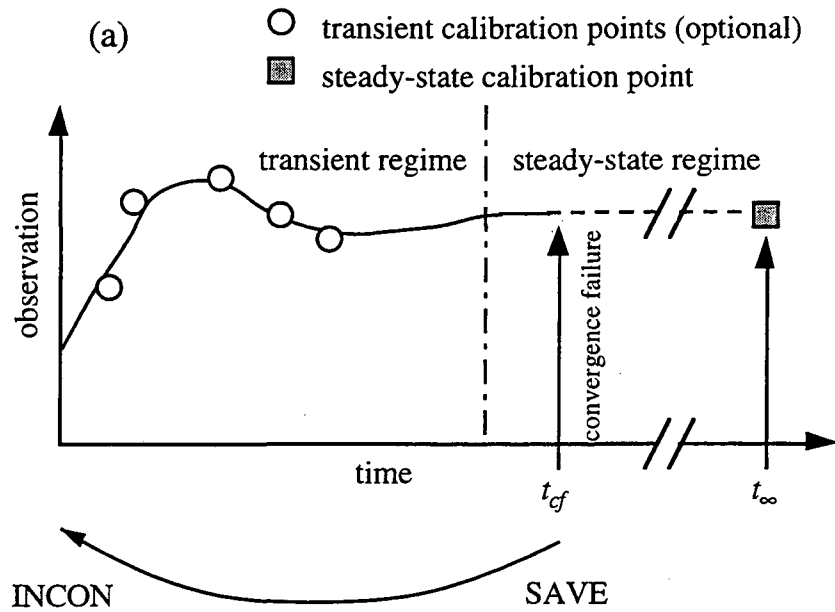

The second application of the steady-state option is illustrated in Figure (b). If a steady-state regime is to precede a transient regime within a single simulation (e.g., to assure initial conditions are at equilibrium, a state that depends on the parameters to be estimated), a negative starting time  $-t_{\infty}$  (TOUGH2 variable *TSTART*) must be specified. Ensure that  $| -t_{\infty} |$  is larger than the duration required to reach steady state, e.g.,  $-t_{\infty} = -1E20$ . The TOUGH2 simulation proceeds until a convergence failure occurs at an unknown point in time  $t_{cf}$ , creating the steady-state regime. The primary variables at that point are written to file *SAVE* to be used as initial conditions for the subsequent TOUGH2 simulation (only if keyword *SAVE* is present). The simulation time is then set to zero, and the transient regime of the simulation is initiated. This requires that boundary conditions are changed at time zero, e.g., by starting injection or withdrawal, or by changing Dirichlet-type boundary conditions (see command `>> RESTART TIME`).

(Note that if transient data are combined with steady-state data, the standard deviation of the steady-state data point may have to be decreased substantially to outweigh the large number of transient points.)

### Example

```
> OBSERVATION
  >> steady-state point in TIME: 1 (= t_inf)
      1.0E20

  >> PRESSURE
    >>> ELEMENT: FDF76
      >>>> DATA
          1.0E20  1.354E5
      >>>> DEVIATION: 0.05E5
      <<<<<
    <<<
  <<

> COMPUTATION
  >> OPTION
    >>> allow STEADY-STATE, use SAVE file for restart
    <<<
  >> CONVERGENCE criteria
    >>> Presume steady-state if : 5 CONSECUTIVE time steps
        converge on ITER=1
    >>> number of ITERATIONS: 5
    <<<
  <<
<
```

### See Also

```
>>> RESTART TIME, >>> CONSECUTIVE, >>> INCOMPLETE,
>>> REDUCTION
```

## Command

```
>>> STEP: max_step
```

## Parent Command

```
>> CONVERGENCE
```

## Subcommand


-

## Description

This command defines the maximum allowable size of the scaled update vector  $\Delta\mathbf{p}$  per ITOUGH2 iteration. The step length of the scaled parameter update vector is defined as follows:

$$|\Delta\mathbf{p}| = \left[ \sum_{i=1}^n \left( \frac{\Delta p_i}{p_i} \right)^2 \right]^{1/2}$$

This is a global step size limitation as opposed to the one specified for each individual parameter (see command >>>> STEP). Limiting the global step size may make the inversion more stable. Parameter *max\_step* should be chosen large enough, so that the size of the proposed step size  $|\Delta\mathbf{p}'|$  is reduced to  $|\Delta\mathbf{p}_{\max}|$  only during the first few iterations. The figure below illustrates that limiting the step size maintains the direction of the step taken in the parameter space.

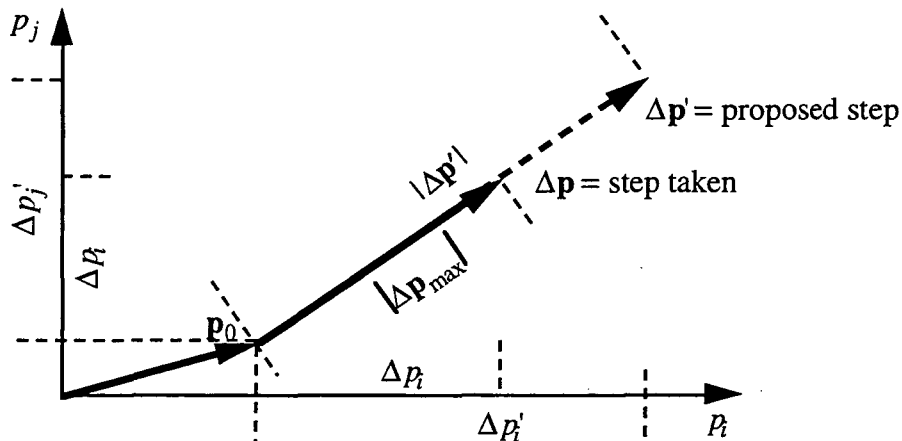

## Example

```
> COMPUTATION
  >> CONVERGENCE
    >>> number of ITERATIONS      : 10   (may need more iterations!)
    >>> limit scaled STEP size to: 1.0 [dimensionless]
    <<<
  <<
```

## See Also

```
>>>> STEP
```

## Command

```
>>>> STEP: max_step
```


## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

## Description

This command defines the maximum allowable step size, limiting the change in the corresponding parameter per ITOUGH2 iteration. Large steps are usually proposed for a parameter if (i) the initial guess is far away from the best estimate, (ii) the parameter has a low sensitivity, or (iii) the parameter is highly correlated to more sensitive parameters. If the system state is a strongly non-linear function of the parameter, even a moderate step size may make the inversion unstable. Parameter *max\_step* should be chosen large enough, so that the proposed step size  $\Delta p'_i$  is reduced to  $\Delta p_{i,max}$  only during the first few iterations. The figure below illustrates that limiting the step size also changes the direction of the step taken in the parameter space. A global step size limitation can also be specified (see command >>> STEP), maintaining the direction of vector  $\Delta p'$ .

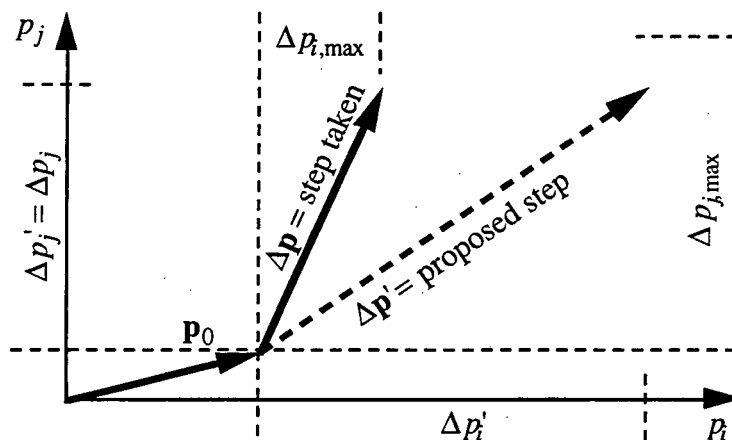

## Example

```
> PARAMETER
  >> POROSITY
    >>> MATERIAL: SANDY
      >>>> standard DEVIATION: 0.10
      >>>> max. STEP size      : 0.05
    <<<<
  <<<
<<
```

## See Also

```
>>> STEP, >>>> DEVIATION, >>>> RANGE
```

## Command

```
>>>> STEP: max_step
```

## Parent Command

```
>>> ANNEAL
```

## Subcommand

-

## Description

This command defines an iteration for Simulated Annealing minimization based on the number of successful steps or total number of steps as defined by *max\_step*. After each iteration is completed, the temperature is reduced according to the annealing schedule (see command >>>> SCHEDULE). An iteration is completed and the annealing temperature reduced if:

- (1) the total number of successful and unsuccessful steps reaches *max\_step*, or
- (2)  $(0.2 \cdot \textit{max\_step})$  successful steps have been performed

## Example

```
> COMPUTATION
  >> OPTION
    >>> Simulated ANNEALing
      >>>> maximum number of ITERATIONS: 100
      >>>> maximum number of STEPS per ITERATION: 50
      >>>> annealing SCHEDULE: 0.9
      >>>> initial TEMPERATURE: -0.02
    <<<<
  <<<
<<
```

## See Also

```
>>>> SCHEDULE
```

**Command**

>> STOP

**Parent Command**

> COMPUTATION

**Subcommand**

(see command >> CONVERGE)

**Description**

(synonym for command >> CONVERGE)

**Example**

(see command >> CONVERGE)

**See Also**

>> CONVERGE



**Command**

```
>>>> SUM
```

**Parent Command**

all third-level commands in block > OBSERVATION

**Subcommand**

-

**Description**

If multiple elements or connections are provided to indicate the location of a measurement point, this command takes the sum of all calculated values as the model output to be compared to the data. The user must ensure that the summation of the quantity is meaningful.

**Example**

```
> OBSERVATION
  >> LIQUID FLOW rate
    >>> CONNECTION: A1__1 A2__1 + 7
      >>>> ANNOTATION: Liquid flow across boundary
      >>>> Take SUM of flow rates across 9 connections
      >>>> NO DATA
      <<<<
    <<<
  <<
```

**See Also**

```
>>>> AVERAGE
```

## Command

```
>>> TAU: (-)niter
```

## Parent Command

```
>> ERROR
```

## Subcommand

## Description

If multiple observation types (e.g., pressure, flow rate, prior information, etc.) are used to estimate model parameters, the relative weights assigned to each type is given by the ratio  $\lambda_{ij} = \tau_i / \tau_j$ , where  $\tau_i$  are scalars such that  $\mathbf{C}_i = \tau_i \mathbf{V}_i$ . Here,  $\mathbf{C}_i$  is the covariance matrix of all observations of type  $i$  (a submatrix of covariance matrix  $\mathbf{C}_{zz}$ ), and  $\mathbf{V}_i$  is a positive symmetric matrix. By default,  $\tau_i$  is fixed at 1. This command allows  $\lambda_{ij}$  to be updated in an iterative process, where  $\tau_i$  is recalculated every multiple of *niter* iterations and is given by:

$$\tau_i = \frac{\mathbf{r}_i^T \mathbf{C}_i^{-1} \mathbf{r}_i}{m_i}$$

If a negative number is provided for *niter*, prior information is excluded from the process. Recall that  $\tau_i$  refers to all data of a certain observation type (i.e., not to individual data sets). The process assigns weights such that the relative contribution of each observation type to the objective function tends to  $1 / \omega$ , where  $\omega$  is the number of observation types used in the inversion. It should also be realized that the Fisher model test becomes meaningless if  $\lambda_{ij}$  is updated during the inversion because the test will always be fulfilled by definition. While this option provides flexibility in reassigning relative weights to data of different types, it is instead suggested to carefully select the standard deviations of the observations and prior parameter estimates (see command `>>>> DEVIATION (p/o)`) based on potential measurement and modeling errors.

## Example

```
> COMPUTATION
>> ERROR
>>> update TAU every : -3 rd iteration
<<<
```

## See Also

```
>>>> DEVIATION
```

**Command**

```
>> TEMPERATURE
```

**Parent Command**

```
> OBSERVATION
```

**Subcommand**

```
>>> ELEMENT
```

**Description**

This command selects temperature as an observation type. This observation type refers to an element.

**Example**

```
> OBSERVATION
  >> TEMPERATURE
    >>> ELEMENT      : TCP_1
      deg(C) = (deg(F) - 32) * 0.55
    >>>> SHIFT      : -32.00
    >>>> FACTOR      : 0.55
    >>>> .temperature DATA in deg(F) on file: temp.dat
    >>>> DEVIATION: 0.2 degree Fahrenheit
    <<<<
  <<<
<<
```

**See Also**

-

## Command

```
>>>> TEMPERATURE: (-) temp0
```

## Parent Command

```
>>> ANNEAL
```

## Subcommand

## Description

This command defines the initial temperature  $\tau_0$  for Simulated Annealing minimization. The initial temperature is reduced after each iteration  $k$  according to the annealing schedule (see command >>>> SCHEDULE). The temperature  $\tau_k$  defines the probability  $\Pi$  with which an uphill step  $\Delta S$  should be accepted:

$$\Pi = \exp(-\Delta S / \tau_k)$$

The probability decreases with decreasing temperature. The initial temperature *temp0* should be a reasonable fraction of the objective function  $S$ . If a positive value is given, then  $\tau_0 = \text{temp0}$ . If a negative value is provided, the initial temperature is internally calculated as a fraction of the initial objective function:

$$\tau_0 = |\text{temp0}| \cdot S_0$$

## Example

```
> COMPUTATION
  >> OPTION
    >>> Simulated ANNEALing
      >>>> maximum number of ITERATIONS: 100
      >>>> maximum number of STEPS per ITERATION: 50
      >>>> annealing SCHEDULE: 0.95
      >>>> initial TEMPERATURE: -0.01 times the initial obj. func.
    <<<<
  <<<
<<
```

## See Also

```
>>>> STEP (a), >>>> SCHEDULE
```

## Command

```
>> TIME
```

## Parent Command

```
> PARAMETER
```

## Subcommand

```
>>> SOURCE
```

## Description

This command selects as a parameter the time of a time-dependent generation rate (TOUGH2 variable  $F1(L)$  for  $LTAB > 1$ ). This parameter refers to a sink/source code name. Index  $L$  must be provided through command `>>>> INDEX`. Time stepping during simulation should be small compared to the expected variation of the parameter. Furthermore, it is suggested to prescribe the parameter perturbation for calculation of the Jacobian, i.e. use command `>>>> PERTURB` and specify a reasonably large time perturbation provided as a negative number.

## Example

```
> PARAMETER
  >> generation TIME
    >>> SOURCE: INJ_1 + 5
      >>>> ANNOTATION: End of spill
      >>>> INDEX      : 2
      >>>> VALUE
      >>>> RANGE      : 1E8 2E8 [sec]
      >>>> PERTURB    :      -1E5 [sec]
      >>>> max. STEP  : 86400   [sec]
    <<<<
  <<<
<<
```

## See Also

```
>> ENTHALPY, >> RATE
```

## Command

>> TIME: *n*time (EQUAL/LOGARITHMIC) (*time\_unit*)

## Parent Command

> OBSERVATION


## Subcommand

## Description

This command selects points in time during a TOUGH2 run at which the calculated system response is used for subsequent ITOUGH2 analysis. In the case of inverse modeling, these are the calibration times at which calculated and observed system responses are compared. Time stepping in the TOUGH2 simulation is forced to exactly match all specified calibration times, i.e., defining calibration times has the same effect on the simulation as specifying printout times in the TOUGH2 block TIMES (printout can be suppressed, however, by specifying a negative integer for TOUGH2 parameter KDATA). Thus, time stepping considerations must be taken into account when selecting the spacing of calibration points (see also command >>> CONSECUTIVE).

Only one set of calibration times can be specified which is then applied to all data sets (see, however, command >>>> WINDOW).

Calibration times do not have to match the times at which measurements are available, since the value of the observed data at the calibration point will be linearly interpolated between adjacent data points as illustrated in the figure below.

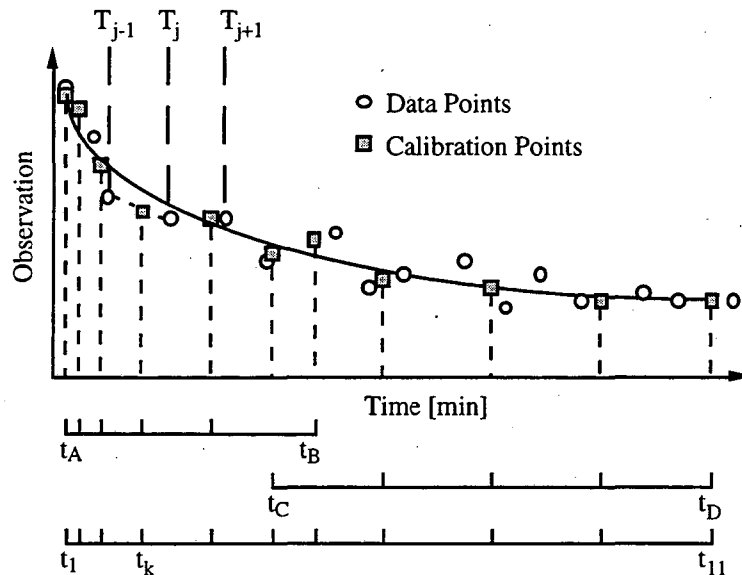

Calibration times can be specified in three ways: (i) explicitly listed, (ii) automatically generated with equal spacing, and (iii) automatically generated with logarithmic spacing. The corresponding input formats are given by example below. Admissible keywords for selecting the time units *time\_unit* are SECOND, MINUTE, HOUR, DAY, WEEK and YEAR.

```
>> (i) provide a list of : 10 TIMES in [MINUTES] on the following lines
      1.0   2.0   5.0  10.0  15.0  20.0
      30.0  45.0  60.0 120.0 180.0 360.0
```

In the example above, the first *n*time=10 numbers will be read in free format and interpreted as calibration times in minutes.

```
>> (ii) generate :10 points TIMES, EQUALLY spaced between tA and tB
      60.0  600.0
      tA   tB
```

10 equally spaced points in time will be generated between 60.0 and 600.0 seconds. Time limits *tA* and *tB* are read in free format.

```
>> (iii) generate :10 , LOGARITHMICALLY spaced points TIMES in [HOURS]
      0.01  12.0
```

10 logarithmically spaced points in time will be generated between 36 seconds and 12 hours.

The three formats can be used repeatedly, concurrently, and with overlapping time periods (see example below). All specified times will be sorted internally.

### Example

The following block generates a total of 11 calibration times; they are schematically shown in the figure above.

```
> OBSERVATION
  >> : 6 LOGARITHMICALLY spaced TIMES in SECONDS between
      30.0  720.0  (tA and tB)

  >> TIME: 5 EQUALLY spaced [MINUTES]
      10.0  30.0  (tC and tD)
```

### See Also

```
>> RESTART TIME, >>> CONSECUTIVE, >>>> WINDOW
```

## Command

>>> *time\_unit*

or as a keyword to any command requesting time units

## Parent Command

>> OUTPUT

## Subcommand

## Description

This command or keyword specifies the time units of all times in the ITOUGH2 output and plot files. Admissible time units are SECOND (default), MINUTE, HOUR, DAY, WEEK, MONTH, and YEAR. The time output unit may be different from the time units specified in the input or data files.

## Example

```
> OBSERVATION
  >> : 7 EQUALLY spaced TIMES in [DAYS]
      1.0 7.0

  >> PRESSURE
      >>> ELEMENT: ZZZ90
          >>>> DATA in [MINUTES] on FILE: pres.dat
          >>>> time WINDOW: 48.0 123.0 [HOURS]
          <<<<
          <<<
          <<

> COMPUTATION
  >> print OUTPUT times
      >>> in WEEKS
          <<<
          <<
```

## See Also



**Command**

>> TOLERANCE

**Parent Command**

> COMPUTATION

**Subcommand**

(see command >> CONVERGE)

**Description**

(synonym for command >> CONVERGE)

**Example**

(see command >> CONVERGE)

**See Also**

>> CONVERGE

## Command

```
>> TOTAL MASS (phase_name/PHASE: iphase/  
                comp_name/COMPONENT: icom) (CHANGE)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> MODEL
```

## Description

This command selects as an observation type the total mass of phase *iphase* or component *icom*. This observation type refers to the entire model domain. More precisely, the volume balance calculation includes all elements with *SPHT* < 10,000 (see TOUGH2 block ROCKS.1).

Component number *icom* or component name *comp\_name*, and phase number *iphase* or phase name *phase\_name* depend on the EOS module being used. They are listed in the header of the ITOUGH2 output file, and can be specified either on the command line or using the two subcommands >>>> COMPONENT and >>>> PHASE, respectively. If keyword CHANGE is present, the change of the total mass since data initialization is computed.

## Example

```
> OBSERVATION  
  >> CHANGE of TOTAL MASS in place since beginning of simulation  
    >>> entire MODEL  
      >>>> ANNOTATION   : Total brine mass injected  
      >>>> BRINE is the COMPONENT of interest  
      >>>> FACTOR      : 1.0E-03 [g] - [kg]  
      >>>> DATA on FILE : brine.dat  
      >>>> DEVIATION   : 10.0 [g]  
      <<<<<  
    <<<<  
  
  >> TOTAL MASS of PHASE: 2 (= net weight of laboratory column)  
    >>> entire MODEL  
      >>>> ANNOTATION   : Mass of liquid (water and brine)  
      >>>> DATA on FILE : liquid.dat  
      >>>> DEVIATION   : 0.01 [kg]  
      <<<<  
    <<<<
```

## See Also

## Command

>>>> UNIFORM

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

-

## Description

This command generates uniformly distributed input parameters for Monte Carlo simulations. Parameter values are sampled between the lower and upper bound specified by command >>>> RANGE.

## Example

```
> PARAMETER
  >> RELATIVE permeability function
    >>> DEFAULT
      >>>> PARAMETER          RPD(: 1)
      >>>> ANNOTATION          : Slr is uncertain
      >>>> sample from UNIFORM distribution between...
      >>>> RANGE                : 0.01 0.50
    <<<<
  <<<
<<

> COMPUTATION
  >> perform ERROR propagation analysis by means of...
    >>> MONTE CARLO simulations
    <<<
  >> STOP after...
    >>>                : 400 TOUGH2 runs
    <<<
  <<
```

## See Also

>>>> MONTE CARLO, >>>> GAUSS

**Command**

>>> UPDATE

**Parent Command**

>> OUTPUT

**Subcommand**

-

**Description**

This command writes version update information to the ITOUGH2 output file.

**Example**

```
> COMPUTATION
  >> OUTPUT
    >>> write UPDATE information to ITOUGH2 output file
    <<<
  <<
```

**See Also**

>>> INDEX, >>> VERSION, HELP, LIST

**Command**

```
>>> UPHILL: max_uphill
```

**Parent Command**

```
>> CONVERGE
```

**Subcommand**

```
-
```

**Description**

By default, an inversion is stopped if more than 10 consecutive unsuccessful parameter steps have been proposed. The default can be overwritten by *max\_uphill*. Each unsuccessful step results in an increase of the Levenberg parameter  $\lambda$  (see command >>> LEVENBERG), leading to a smaller step size deflected towards the gradient.

**Example**

```
> COMPUTATION
  >> STOP either if
    >>> : 10 ITERATIONS have been completed
    or
    >>> : 3 TOUGH2 runs were INCOMPLETE
    or
    >>> : 5 unsuccessful UPHILL steps have been proposed
  <<<
<<
```

**See Also**

```
>>> ITERATION, >>> LEVENBERG
```

## Command

```
>> USER (: anno)
```

## Parent Command

```
> PARAMETER
```

## Subcommand

```
>>> ELEMENT  
>>> MATERIAL  
>>> MODEL  
>>> SET  
>>> SOURCE
```

## Description

This command selects a user-specified parameter. This option enables a user to estimate any conceivable parameter which can be any TOUGH2 variable or function thereof. The user must program the function in subroutine `USERPAR`, file `it2user.f`. Identification of and details about the parameter can be given in the ITOUGH2 input file and will be transferred to subroutine `USERPAR`. A parameter annotation *anno* should be provided following a colon on the command line. This annotation (or a substring thereof) will be available in subroutine `USERPAR` (variable `ANNO`) and can be used to identify the parameter type. The significant part of the string should therefore not be changed by command `>>>> ANNOTATION`. Furthermore, multiple material names as well as grid block or sink/source code names defined by the corresponding third-level command will be transferred to the subroutine in array `NAMEA`. Integers read after command `>>>> INDEX` are provided through array `IDA`. A flag (variable `IVLF`) indicates whether the estimate is a value, logarithm, or multiplication factor of the corresponding parameter.

The user must ensure that all TOUGH2 variables used by the function are transferred to subroutine `USERPAR` via `COMMON` blocks. If a variable is not predefined in one of the standard `COMMON` blocks, a new `COMMON` block must be created and added to the include file `usercom.inc`.

Subroutine `USERPAR` has two major blocks. In the first block (`IUIG=1`), the value specified in the TOUGH2 input file is transferred to ITOUGH2 as an initial guess. Programming this first part is optional because initial guesses can also be provided through the ITOUGH2 input file by means of command `>> GUESS`, `>>>> PRIOR`, or `>>>> GUESS`. Programming the second part (`IUIG=2`) is mandatory. In this part, the parameter is updated, i.e., the generic parameter value calculated by ITOUGH2, which is stored in variable `XX`, must be assigned to the appropriate TOUGH2 variable.

The following is the header of subroutine `USERPAR` in file `it2user.f`, describing the transfer variables. File `it2user.f` must be recompiled before the user-specified parameter becomes active.

```

*****
      SUBROUTINE USERPAR(IUIG,XX,IVLF,IDA,NAMEA,ANNO)
*****
* User specified parameters
* IUIG = 1 : Provide initial guess (input)
*      = 2 : Update parameter
* XX   = ITOUGH2 variable = parameter to be estimated
*      (output if IUIG=1, input if IUIG=2)
* IVLF = 1: value (input)
*      = 2: logarithm
*      = 3: factor
* IDA  = parameter IDs (if needed) (input)
*      the number of elements in IDA is stored in IDA(MAXR-1)
* NAMEA = material or element names (if needed) (input)
*      the number of elements in NAMEA is stored in IDA(MAXR)
* ANNO  = parameter annotation as specified in ITOUGH2 input file
*****

```

### Example

In this simple example, the tortuosity factor (TOUGH2 variable *TORT(NMAT)*) is treated as a user-specified parameter. Variable *TORT* is provided through COMMON block SOLI11 in include file *rock.inc*. The parameter block in the ITOUGH2 input file and subroutine USERPAR are given below.

```

> PARAMETER
  >> USER-specified parameter: TORTUOSITY
    >>> MATERIAL: SAND1
        <<<<
    <<<
  <<

```

```

*****
      SUBROUTINE USERPAR(IUIG,XX,IVLF,IDA,NAMEA,ANNO)
*****
C
C$$$$$$$$$ COMMON BLOCKS FOR ROCK PROPERTIES $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
  INCLUDE 'rock.inc'
C
  CHARACTER ANNO*(*),NAMEA*5
  DIMENSION IDA(*),NAMEA(*)
C
  CALL GETNMAT(NAMEA(1),NMAT)
  IF (IUIG.EQ.1) XX=TORT(NMAT)
  IF (IUIG.EQ.2) TORT(NMAT)=XX
  END
*****

```

The following is a more general version of subroutine USERPAR for the determination of tortuosity. It allows specifying multiple rock types on command line >>>> MATERIAL, and offers the possibility to estimate tortuosity either as a value, a logarithm, or a multiplication factor. Note that identifying the parameter by its annotation is only necessary if other user-specified parameters are also addressed in the same subroutine.

```

*****
      SUBROUTINE USERPAR(IUIG,XX,IVLF,IDA,NAMEA,ANNO)
*****
C
C$$$$$$$$$ PARAMETERS FOR SPECIFYING THE MAXIMUM PROBLEM SIZE $$$$$$$$$$
      INCLUDE 'maxsize.inc'
C
C$$$$$$$$$ COMMON BLOCKS FOR ROCK PROPERTIES $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
      INCLUDE 'rock.inc'
C
      CHARACTER ANNO*(*),NAMEA*5
      DIMENSION IDA(*),NAMEA(*),X0(MAXROC)
C
C --- Return TOUGH2 value as initial guess
      IF (IUIG.EQ.1) THEN
          IF (ANNO(1:10).EQ.'TORTUOSITY') THEN
              DO 1000 I=1,IDA(MAXR)
                  CALL GETNMAT(NAMEA(I),NMAT)
                  IF (IVLF.EQ.1) THEN
                      XX=TORT(NMAT)
                  ELSE IF (IVLF.EQ.2) THEN
                      XX=LOG10(TORT(NMAT))
                  ELSE
                      XX=1.0D0
                      X0(NMAT)=TORT(NMAT)
                  ENDIF
1000          CONTINUE
              ENDIF
C
C --- Update parameter
      ELSE IF (IUIG.EQ.2) THEN
C --- Identify parameter by its annotation
          IF (ANNO(1:10).EQ.'TORTUOSITY') THEN
              DO 1001 I=1,IDA(MAXR)
C --- Obtain material identifier NMAT
                  CALL GETNMAT(NAMEA(I),NMAT)
                  IF (IVLF.EQ.1) THEN
C --- Estimate is tortuosity value
                      TORT(NMAT)=XX
                  ELSE IF (IVLF.EQ.2) THEN
C --- Estimate is logarithm of tortuosity
                      TORT(NMAT)=10.0D0**XX
                  ELSE
C --- Estimate is multiplication factor for initial tortuosity
                      TORT(NMAT)=X0(NMAT)*XX
                  ENDIF
1001          CONTINUE
              ENDIF
          ENDIF
      END
      END
*****

```

Additional examples can be found in file *it2user.f*.

**See Also**



## Command

>> USER (: *anno*)

## Parent Command

> OBSERVATION

## Subcommand

>>> CONNECTION

>>> ELEMENT

>>> MODEL

>>> SOURCE

## Description

This command selects a user-specified observation type. This option enables a user to introduce a new observation type, i.e., any type of data can be used for parameter estimation by defining the corresponding model output which is a user-specified function of TOUGH2 variables. The user must program the function in subroutine USEROBS, file *it2user.f*. Identification of and details about the observation can be given in the ITOUGH2 input file and will be transferred to subroutine USEROBS. The annotation *anno* (or a substring thereof) will be available in subroutine USEROBS (variable *ANNO*); it can be used to identify the observation type and data set. The significant part of the string should therefore not be changed by subcommand >>>> ANNOTATION. Multiple grid block names or sink/source code names defined by the appropriate third-level command will be transferred to the subroutine in array *GRIDA*. The corresponding element numbers are stored in array *NECA*, with *INEC* pointing to the currently processed array index. Integer variables read after command >>>> INDEX are provided through array *IOBSA*. On output, subroutine USEROBS returns the user-specified model result *TRESULT*.

The user must ensure that all TOUGH2 variables used by the function are transferred to subroutine USERPAR via COMMON blocks. If a variable is not predefined in one of the standard COMMON blocks, a new COMMON block must be created and added to the include file *usercom.inc*.

The following is the header of subroutine USEROBS, describing the transfer variables. File *it2user.f* must be recompiled before the user-specified observation becomes active.

```
*****
      SUBROUTINE USEROBS (IUSER, IOBSA, GRIDA, NECA, INEC, ANNO, TRESULT)
*****
* Provides TOUGH2 result for user-specified observation type          *
* IUSER   : Number of dataset (input)                                *
* IOBSA   : Array containing user specified IDs (input)              *
* GRIDA   : Array containing grid block names (input)                *
* NECA    : Array containing index of grid block or connection (input) *
* INEC    : Current pointer to GRIDA and NECA, respectively (input)  *
* ANNO    : Annotation (input)                                       *
* TRESULT: User-defined TOUGH2 result (output)                       *
*****
```

## Example

In this example the pressure difference measured between two points in a laboratory column is defined as a user-specified observation. Two differential pressures are measured, referring to the liquid and NAPL phase, respectively. The ITOUGH2 input block and sub-routine USEROBS are given below. Variable *IOBSA* (*MAXR-2*) holds the phase number.

```
> OBSERVATION
  >> USER-specified observation type: Pres. Diff.
    >>> difference between ELEMENTs: A1112 A1152
      >>>> ANNOTATION           : Pres. Diff. aqueous phase
      >>>> PHASE                 : 2
      >>>> DATA FILE            : dp_aqu.dat
      >>>> DEVIATION             : 1000.0
      <<<<<
    >>> difference between ELEMENTs: A1112 A1152
      >>>> ANNOTATION           : Pres. Diff. NAPL phase
      >>>> NAPL PHASE           :
      >>>> DATA FILE            : dp_napl.dat
      >>>> DEVIATION             : 1000.0
      <<<<<
  <<<<

*****
      SUBROUTINE USEROBS (IUSER, IOBSA, GRIDA, NECA, INEC, ANNO, TRESULT)
*****
C$$$$$$$$$ PARAMETERS FOR SPECIFYING THE MAXIMUM PROBLEM SIZE $$$$$$$$$$
      INCLUDE 'maxsize.inc'
C$$$$$$$$$ COMMON BLOCKS FOR PRIMARY VARIABLES $$$$$$$$$$$$$$$$$$$$$$
      INCLUDE 'primary.inc'
C$$$$$$$$$ COMMON BLOCK FOR SECONDARY VARIABLES $$$$$$$$$$$$$$$$$$$$$$
      INCLUDE 'second.inc'
C --- Identify observation:
      IF (ANNO(1:11).EQ.'Pres. Diff.') THEN
C --- Reference and capillary pressure of first element:
      NEC=NECA(1)
      NLOC=(NEC-1)*NK1
      NLOC2=(NEC-1)*NSEC*NEQ1+(IOBSA(MAXR-2)-1)*NBK
      PREF1=X(NLOC+1)
      PCAP1=PAR(NLOC2+6)
      P1=PREF1+PCAP1
C --- Reference and capillary pressure of second element:
      NEC=NECA(2)
      NLOC=(NEC-1)*NK1
      NLOC2=(NEC-1)*NSEC*NEQ1+(IOBSA(MAXR-2)-1)*NBK
      PREF2=X(NLOC+1)
      PCAP2=PAR(NLOC2+6)
      P2=PREF2+PCAP2
C --- Take the difference
      TRESULT=P2-P1
      ENDIF
      END
C --- End of USEROBS
```

See Also

## Command

>>>> USER

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

-

## Description

Observed data can be represented as a user-specified function of time. The function must be coded into subroutine USERDATA, file *it2user.f*. The following is the header of subroutine USERDATA, describing the transfer variables. File *it2user.f* must be recompiled before the user-specified data definition becomes active.

```
*****
      SUBROUTINE USERDATA (IDF, TIME, ANNO, F)
*****
* User specified function to represent observed data          *
* IDF : data set identifier (input)                          *
* TIME: time at which data are to be provided (input)      *
* ANNO: annotation (input)                                   *
* F   : value of observed data at time TIME (output)        *
*****
```

## Example

In this example an analytical solution is provided as data to be matched (see sample problem 8). Liquid saturation in response to a liquid pulse is calculated as a function of time and location in subroutine USERDATA (see following page). Note that the Z-coordinate is passed to USERDATA through the annotation.

```
> OBSERVATIONS

  >> LIQUID SATURATION
    >>> GRID BLOCK      : BP1_1
    >>>> ANNOTATION    : ANALYT. Z=0.100
    >>>> DEVIATION     : 0.002
    >>>> analytical solution given by USER-specified function
    <<<<

    >>> GRID BLOCK      : BZ1_1
    >>>> ANNOTATION    : ANALYT. Z=0.200
    >>>> DEVIATION     : 0.002
    >>>> analytical solution given by USER-specified function
    <<<<
  <<<
<<
```

```

*****
      SUBROUTINE USERDATA (IDF, TIME, ANNO, F)
*****
* User specified function to represent observed data *
* IDF : data set identifier (input) *
* TIME: time at which data are to be provided (input) *
* ANNO: annotation (input) *
* F : value of observed data at time TIME (output) *
*****
C
C$$$$$$$$$ PARAMETERS FOR SPECIFYING THE MAXIMUM PROBLEM SIZE $$$$$$$$$$
      INCLUDE 'maxsize.inc'
C
C$$$$$$$$$ COMMON BLOCKS FOR SIMULATION PARAMETERS $$$$$$$$$$
      INCLUDE 'param.inc'
C
C$$$$$$$$$ COMMON BLOCKS FOR ROCK PROPERTIES $$$$$$$$$$
      INCLUDE 'rock.inc'
C
C$$$$$$$$$ COMMON BLOCK FOR SECONDARY VARIABLES $$$$$$$$$$
      INCLUDE 'second.inc'
C
C$$$$$$$$$ COMMON BLOCKS FOR TOTAL MASS AND VOLUMES $$$$$$$$$$
      INCLUDE 'rmasvol.inc'
C
C$$$$$$$$$ COMMON BLOCKS FOR ELEMENTS $$$$$$$$$$
      INCLUDE 'elements.inc'

      CHARACTER ANNO*(*)
      SAVE A

      F=0.0D0
C --- Analytical solution 1D-pulse
      IF (ICALL.EQ.1) A=CP(1,1)
      IF (ANNO(1:10).EQ.'ANALYT. Z=') THEN
          READ(ANNO(11:15), '(F5.3)', IOSTAT=IOS) Z
          V=PER(3,1)*PAR(4)*GF/POR(1)/PAR(3)
          DIFF=A*PER(3,1)/POR(1)/PAR(3)
          XM=XPVLU0(2)/POR(1)
          F=XM/(DSQRT(4.0D0*3.1416D0*DIFF*TIME))*
&      DEXP(-(Z-V*TIME)**2/(4.0D0*DIFF*TIME))
          ENDIF
      END
C --- END of USERDATA

```

## See Also

>>>> DATA, >>>> POLYNOM

**Command**

>>>> VALUE

**Parent Command**

all third-level commands in block > PARAMETER

**Subcommand****Description**

This command selects the estimation of the parameter value as opposed to its logarithm (see command >>>> LOGARITHM (p)) or a multiplication factor (commands >>>> FACTOR (p) or >>>> LOG(F)).

**Example**

```
> PARAMETER
  >> parameter of RELATIVE permeability function
    >>> MATERIAL: SAND1
      >>>> estimate VALUE of ...
      >>>> ANNOTATION           : Resid. Liq. Sat.
      >>>> PARAMETER no.       : 1
      <<<<<
    <<<
  <<
```

**See Also**

>>>> FACTOR (p), >>>> LOGARITHM (p), >>>> LOG(F)

**Command**

>>>> VARIANCE: *sigma*<sup>2</sup>

**Parent Command**

all third-level commands in block > PARAMETER and > OBSERVATION

**Subcommand**

-

**Description**

(see >>>> DEVIATION (p/o))

**Example**

(see >>>> DEVIATION (p/o))

**See Also**

>>>> DEVIATION (p/o)

## Command

>>>> VARIATION: *sigma*

## Parent Command

all third-level commands in block > PARAMETER

## Subcommand

-

## Description

This command specifies the expected variation  $\sigma_{p_j}$  of a parameter.  $\sigma_{p_j}$  is used to scale the columns of the Jacobian matrix, yielding dimensionless and comparable sensitivity coefficients. While the solution of the inverse problem is not affected by the choice of the scaling factor, all the qualitative sensitivity measures are directly proportional to  $\sigma_{p_j}$ :

$$\text{scaled sensitivity coefficient: } S_{ij} = \frac{\partial z_i}{\partial p_j} \cdot \frac{\sigma_{p_j}}{\sigma_{z_i}} = J_{ij} \cdot \frac{\sigma_{p_j}}{\sigma_{z_i}}$$

If no standard deviation (see >>>> DEVIATION (p)) or parameter variation is specified, the scaling factor is taken to be 10 % of the respective parameter value.

For sensitivity analyses,  $\sigma_{p_j}$  can be taken as the perturbation one would apply to study the effect of the parameter on the modeling result.

## Example

```
> PARAMETER
  >> POROSITY
    >>> MATERIAL: FAULT
      >>>> expected VARIATION           : 0.10
      <<<<
    <<<
  >> ABSOLUTE permeability
    >>> MATERIAL: FAULT
      >>>> expected VARIATION           : 1.00 (one order of magnitude)
      <<<<
    <<<
  <<
> COMPUTATION
  >> OPTION
    >>> SENSITIVITY analysis
    <<<
  <<
```

## See Also

>>>> DEVIATION (p)

## Command

```
>>> VERSION
```

## Parent Command

```
>> OUTPUT
```

## Subcommand

## Description

This command prints version control statements at the end of the ITOUGH2 output file. The same information is always written to the \*.msg file. If making code modifications it is strongly suggested to update the version control statement at the beginning of each subroutine or function.

## Example

```
> COMPUTATION
  >> OUTPUT
    >>> VERSION control statements
    <<<
```

On output:

```
-----
ITOUGH2          Current version      V3.0 (JULY 12, 1996)
-----
ITOUGH2  1.0      1 SEPTEMBER 1992      First version is an adaptation of ITOUGH V1.0
ITOUGH2  1.1      1 JANUARY 1993       INOBSDAT,INPAIRED: Flexible time specification
                                     INEROR,MTCARLO: number of classes can be specified
                                     INUSER,USERPAR: user specified parameter
                                     INUSROBS,USEROBS: user specified observations
                                     PLOTPI,PLOTCHAR: Reformat plotfiles, plot characteristic curves
                                     PLOTCHAR: Plots characteristic curves
ITOUGH2  1.2      15 FEBRUARY 1993     Add version for IBM RS/6000
                                     1 APRIL 1993
                                     26 MAY 1993
                                     INANNEAL,ANNEAL: Simulated Annealing minimization
ITOUGH2  2.0      12 AUGUST 1993       File t2cgl.f: Conjugate gradient solvers added
ITOUGH2  2.1      23 SEPTEMBER 1993    Rearrange parameter vector
                                     29 SEPTEMBER 1993
                                     15 FEBRUARY 1994
ITOUGH2  2.2      1 FEBRUARY 1994     Rearrange observation vector
                                     Add new observation types
                                     Steady-state data points allowed
                                     This version is documented in
                                     LBL-34581, ITOUGH2 User's Guide, Version 2.2
ITOUGH2  2.3      10 MAY 1994          Correlation chart, performance comparison, stopping and restarting
                                     16 JUNE 1994
                                     New parameter types added
ITOUGH2  2.4      15 DECEMBER 1994     Sensitivity analysis
ITOUGH2  2.5      10 JANUARY 1995     Automatic parameter selection
                                     13 JANUARY 1996
ITOUGH2  3.0      12 JULY 1996        Aligned common blocks in include files
                                     YMP Software Qualification
-----
WHATCOM  1.0      10 AUGUST 1993       #35: Q: WHAT COMPUTER IS USED? A: IBM
CALLSIG  2.5      20 MAY 1996         #112: SIGNAL HANDLER
CPUSEC   1.0      10 AUGUST 1993       #--: RETURNS CPU-TIME (VERSION IBM)
OPENFILE 2.5      4 JUNE 1996         #31: OPENS MOST OF THE FILES
LENOS    1.0      1 MARCH 1992        #28: RETURNS LENGTH OF LINE
PREC     1.0      1 AUGUST 1992       #86: CALCULATE MACHINE DEPENDENT CONSTANTS
ITHEADER 1.0      1 AUGUST 1992       #29: PRINTS ITOUGH2 HEADER
DAYTIM   1.0      10 AUGUST 1993     #32: RETURNS DATE AND TIME (VERSION IBM)
THEADER  1.1      27 MAY 1993        #30: PRINTS TOUGH2 HEADER
INFUT    2.5      15 MARCH 1996      READ ALL DATA PROVIDED THROUGH FILE *INPUT*, + SECONDARY MESH + USERX
MESHM    1.0      24 MAY 1990        EXECUTIVE ROUTINE FOR INTERNAL MESH GENERATION
-----
```

## See Also

```
>>> UPDATE
```



## Command

```
>> VOLUME (phase_name/PHASE: iphase) (CHANGE)
```

## Parent Command

```
> OBSERVATION
```

## Subcommand

```
>>> MODEL
```

## Description

This command selects as an observation type the total volume of phase *iphase*. This observation type refers to the entire model domain. More precisely, the volume balance calculation includes all elements with SPHT < 10,000 (see TOUGH2 block ROCKS.1). The phase name *phase\_name* or phase number *iphase*, which depend on the EOS module being used, are listed in the ITOUGH2 header. They can be specified either on the command line or using the subcommand >>>> PHASE.

If keyword CHANGE is present, the change of the total volume since data initialization is computed. This option can be used, for example, to calculate the cumulative volumetric liquid flow which is equivalent to the change of the total gas volume in place.

## Example

```
> OBSERVATION
  >> CHANGE in total GAS VOLUME
    >>> entire MODEL
      >>>> ANNOTATION: Cum. vol. water flux
      >>>> FACTOR      : 1.0E-06 [ml] - [m^3]
      >>>> DATA [DAYS]
          0.00    0.00
          0.10   245.16
          0.25   354.84
          0.50   419.35
          0.75   451.61
          1.00   470.97
          1.60   503.23
          1.95   516.13
          2.10   522.58
          2.50   539.35
          3.00   552.26
      >>>> DEVIATION : 5.0 [ml]
      <<<<
    <<<
  <<
```

## See Also

**Command**

```
>>> WARNING
```

**Parent Command**

```
>> CONVERGE
```

**Subcommand**

-

**Description**

ITOUGH2 checks the consistency of the TOUGH2 and ITOUGH2 input, printing error and warning messages to the ITOUGH2 output file. The program stops if an error or warning is encountered. Command >>> WARNING makes ITOUGH2 continue despite the occurrence of a warning message.

It is strongly suggested to resolve all warning messages before continuing. Warning messages should only be ignored if the reason for message is completely understood and deemed harmless.

**Example**

```
> COMPUTATION
  >> STOP
    >>> don't stop because of WARNINGS
  <<<
<<
```

**See Also**

```
>>> INPUT
```

**Command**

>>>> WEIGHT: *1/sigma*

**Parent Command**

all third-level commands in block > PARAMETER and > OBSERVATION

**Subcommand**

-

**Description**

(see >>>> DEVIATION (p/o))

**Example**

(see >>>> DEVIATION (p/o))

**See Also**

>>>> DEVIATION (p/o)

## Command

```
>>>> WINDOW: time_A time_B (time_unit)
```

## Parent Command

all third-level commands in block > OBSERVATION

## Subcommand

## Description

The times at which the observed and calculated system response are compared are referred to as calibration times. They are specified using command >> TIME. The calibration times are defined globally, i.e., there is only one set of calibration times and it is applied to all data sets. Calibration times and observation times may be different; observed data are linearly interpolated between adjacent data points to obtain a value at the calibration time.

In the standard case, the first data point is observed at or before the first calibration time, and the last data point is observed at or after the last calibration time. This configuration ensures that a value for calibration is available or can be interpolated at every calibration point. The standard situation is sketched in Figure (a) below, assuming that equally spaced calibration times (dashed lines) have been defined, i.e., using the following command line:


```
>> TIMES: 7 EQUALLY SPACED
```

If, for some reason, only a subset of the available data can be used for calibration as shown in Figure (b) below, the user must specify the time window between which data should be processed: *time\_A* and *time\_B* are the lower and upper bounds of the window. Only one time window may be specified per data set. If more than one time window is required, new data sets containing the same data must be generated and different time windows specified for each data set. The time units of *time\_A* and *time\_B* can be specified using one of the *time\_unit* keywords.

If a data set does not contain data that extend over the entire range of calibration times, ITOUGH2 automatically adjusts the time window to coincide with the first and last data point as shown in Figure (c). A warning message is printed, however, which can be avoided by explicitly specify the time window.

If the specified time window is larger than the available data set, the value of the first and last data point is horizontally extrapolated to *time\_A* and *time\_B*, respectively, as indicated in Figure (d).

If time is shifted, the time window must be given with reference to the time system of the data, if command >>>> SHIFT TIME: *tshift* appears before command >>>> WINDOW. Conversely, the window must be given in the shifted time system, if the shift command appears after command >>>> WINDOW.

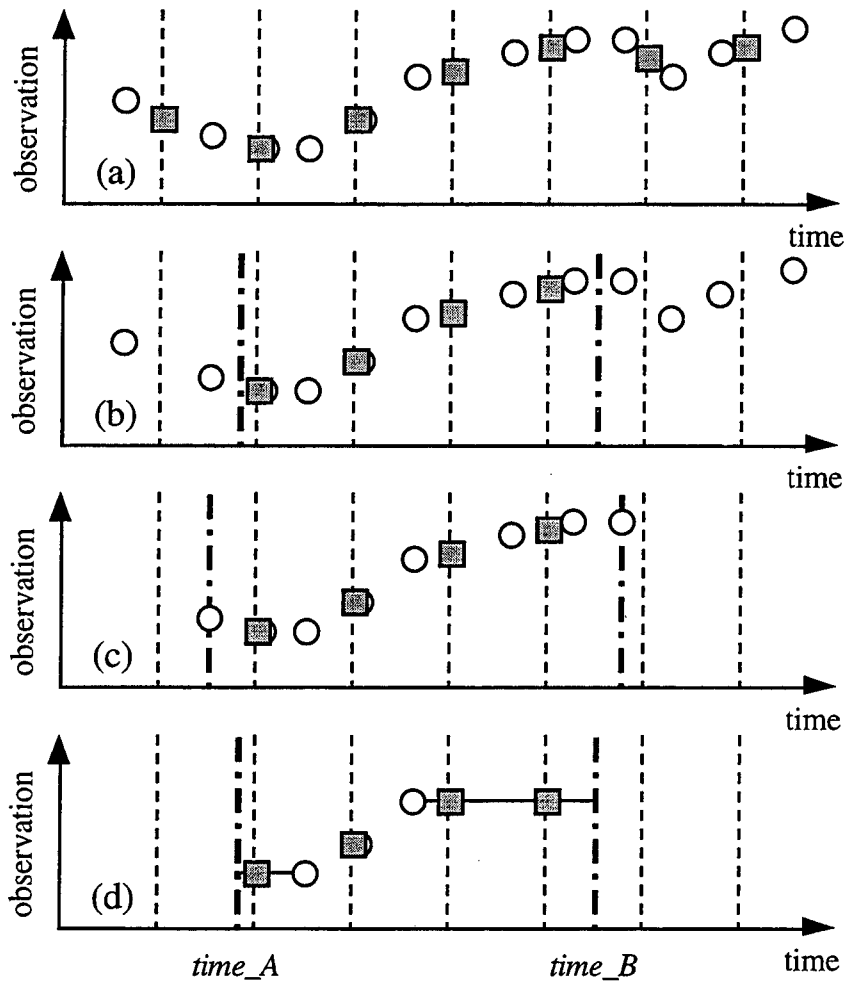

- - - - calibration time      ○ data point  
 - - - - time window          ■ calibration point

### Example

```

> OBSERVATION
>> :7 EQUALLY spaced TIMES in [MINUTES]
    5.0 35.0
>> PRESSURE
>>> ELEMENT: ZZZ99
>>>> DATA [HOURS] on FILE: pres.dat
>>>> time WINDOW: 299.0 901.0 [SECONDS] -> 3 calibration points
>>>> DEVIATION : 1.E3
<<<<
<<<
  
```

### See Also

```
>> TIME, >>>> SHIFT
```

## 5. UTILITIES

### 5.1 Installation of UNIX Script Files

Installation of ITOUGH2 is described in *Finsterle* [1997a]. While ITOUGH2 can be run simply by typing the name of the executable, use of the UNIX script files discussed in this chapter adds convenience and increases safety. There are five UNIX script files for running (I)TOUGH2 (*itough2* and *tough2*), displaying the current status (*prista*), and terminating ITOUGH2 runs (*kit*), plus file *it2help*, which allows one to obtain on-line help for ITOUGH2 commands (i.e., the content of Chapter 4).

A UNIX script file is a command file that contains a shell program, and - if properly installed - can be invoked like any other UNIX command, i.e., simply by typing the file name (e.g., the script file *kit* is invoked by typing `kit`). The five script files discussed here make use of the Bourne shell (first line reads `#!/bin/sh`), but can be executed from any other shell as well.

The script files may have to be customized as discussed in this section. It is suggested that all script files are installed in a subdirectory *\$HOME/bin*, where *\$HOME* is the user's login directory. An alternate directory is */usr/local/bin* which allows use of the ITOUGH2 script files for other users as well. The directory must be in the user's search path (see UNIX command `path` for adding a directory to the search path). All script files should be executable (see UNIX command `chmod` for changing file permissions). A few shell variables may have to be customized as summarized in Table 5.1.1.

**Table 5.1.1.** Customizing Shell Variables in ITOUGH2 Script Files

Script File	Shell Variable	Default	Description
<i>itough2</i>	<code>prog_dir</code>	<i>\$HOME/itough2</i>	Directory of ITOUGH2 executable
	<code>tmp_dir</code>	<i>\$HOME</i>	Main temporary directory
<i>tough2</i>	<code>script_dir</code>	<i>\$HOME/bin</i>	Directory of <i>itough2</i> script file
<i>prista</i>	<code>tmp_dir</code>	<i>\$HOME</i>	Main temporary directory
<i>kit</i>	<code>ps_opt</code>	<i>ux</i>	Option for UNIX command <code>ps</code>
<i>it2help</i>	<code>help_dir</code>	<i>\$HOME/itough2</i>	Directory of file <i>it2help.txt</i>

The default values assume that ITOUGH2 is installed in directory *\$HOME/itough2*, and all script files are in directory *\$HOME/bin*. Script file *kit* requires identifying a suitable option for UNIX command `ps`. If typing "`ps ps_opt`" during the execution of an ITOUGH2 run, the command output must contain the process ID and the command name of the ITOUGH2 executable, including string "*itough2\_*". Depending on the option being selected, the process ID appears in either the first or the second column (`ipid = 1` or `2`). Command line `awk `{print $ipid}`` near the end of file *kit* must be adjusted accordingly (for details see header of file *kit*).

## 5.2 Submitting an ITOUGH2 Job Using Command `itough2`

Script file `itough2` should be used to submit an ITOUGH2 job on a UNIX workstation. The command usage, reproduced in Figure 5.2.1, can be displayed by typing `itough2` without any arguments.

```
=====
ITOUGH2 --- ITOUGH2 --- ITOUGH2 --- ITOUGH2 --- ITOUGH2 --- ITOUGH2 --- ITOUGH2
=====

Script file   : /itelos/finster/bin/itough2

Syntax
-----

itough2 [Options] inv_file dir_file ieos &

inv_file      : ITOUGH2 input file
dir_file      : TOUGH2 input file
ieos          : EOS module identifier

Options
-----
-no_delete    : temporary directory /itelos/finster/it2_PID is not deleted
-m m_file     : copies m_file as input file MESH to temporary directory
-i i_file     : copies i_file as input file INCON to temporary directory
-g g_file     : copies g_file as input file GENER to temporary directory
-fi any_file  : copies any_file from working to temporary directory
-ito ito_file : name of ITOUGH2 output file (default: inv_file.out)
-to to_file   : name of TOUGH2 output file (default: dir_file.out)
-save sa_file : name of SAVE output file (default: dir_file.sav)
-mesh         : returns output file MESH to working directory as dir_file.mes
-lin          : returns output file LINEQ to working directory as dir_file.lin
-plo          : returns output file PLOPO to working directory as inv_file.plo
-cov          : returns covariance file to working directory as inv_file.cov
-fo any_file  : returns any_file from temporary to working directory

Examples
-----
itough2 sample1 sample1 3 &
itough2 -mesh dummi meshm.inp 1 &
itough2 -i equil.inc -m coarse.mes inverse.inp t2voc.inp voc &
```

**Figure 5.2.1.** Usage and options of command `itough2`.

The general command syntax is:

```
itough2 [options] inv_file dir_file ieos &
```

Command `itough2` is followed by three arguments in the following order: (1) the name of the ITOUGH2 input file (`inv_file`), (2) the name of the TOUGH2 input file (`dir_file`), and (3) an indicator of the EOS module being used (`ieos`, usually a whole

number). Additional options discussed below may precede the mandatory arguments. ITOUGH2 should always be run in the background (i.e., add "&" at the end of the command line) to allow usage of commands `prista` and `kit`. Example:

```

command          TOUGH2 input file      background
  ↓              ↓                      ↓
itough2 samplei.inp sample.inp 3 &
      ↑              ↑
      ITOUGH2 input file      Number of EOS module

```

Submitting this command line has the following effect. A temporary directory is created named  $\$(temp\_dir).it2\_$$$ , where  $\$(temp\_dir)$  is the directory specified by shell variable `tmp_dir` (see Table 5.1.1, usually the user's home directory), and  $$$$  is a unique process ID number. The specified input files are copied from the working directory to the temporary directory. ITOUGH2 is started where the name of the executable depends on the EOS module requested (see *Finsterle [1997a]* for details on code installation). In this example, EOS3 is used. After completion of the run, the main output files are copied from the temporary to the working directory, and the temporary directory is deleted unless flag `-no_delete` is specified or the program was terminated with an error signal.

Some ITOUGH2 runs may require additional input files containing mesh information, initial conditions, sinks and sources, or other special data. These files must be explicitly specified using flags `-m`, `-i`, `-g`, and `-fi`, respectively, followed by the appropriate file name. For example, if the TOUGH2 blocks `ELEME` and `CONNE` are provided on a separate file named `coarse.mes`, the command reads:

```
itough2 -m coarse.mes samplei.inp sample.inp 3 &
```

By default, only the main output files are returned to the working directory, before the temporary directory is deleted. If additional files should be preserved, such as the mesh files `MESH` and `MINC`, the linear equation file `LINEQ`, the PLOPO plot file or the covariance file of the calculated system response, the flags `-mesh`, `-lin`, `-plo`, and `-cov` must be specified, respectively. Finally, the default names of the ITOUGH2 output file, the TOUGH2 output file, and the TOUGH2 `SAVE` file can be changed using options `-ito`, `-to`, and `-save`, respectively, followed by the desired file name. Example:

```
itough2 -i test.sav -save test.sav2 -mesh testi test voc &
```

In this example, initial conditions are not provided through the TOUGH2 input file `test`, but are read from file `test.sav`, which apparently is the `SAVE` file from a previous run. In order not to overwrite this file, the default file name for the current `SAVE` file is changed to `test.sav2`. The `MESH` file generated by this run is returned to the working directory with name `test.mes`. This is an inversion using the T2VOC simulator [*Falta et al., 1995*], for which "voc" must be given for argument `ieos`.



### 5.3 Submitting a TOUGH2 Job Using Command `tough2`

ITOUGH2 can also be used to run standard TOUGH2 simulations. There are several advantages of using ITOUGH2 for forward runs: (1) only one version of the simulation program has to be installed and maintained; (2) the exact same code is used for solving both the forward and inverse problem, reducing the risk of introducing errors when modifying the programs; (3) additional program features are available (see Appendix A); and (4) a forward run can be observed and terminated using commands `prista` and `quit`, respectively.

The general command syntax is:

```
tough2 [options] tough2_file ieos &
```

Command `tough2` is followed by two arguments in the following order: (1) the name of the TOUGH2 input file (`tough2_file`), and (2) an indicator of the EOS module being used (`ieos`, usually a whole number). Additional options may precede the mandatory arguments. They are the same as for command `itough2` (see Section 5.2).

Command `tough2` calls command `itough2` with a dummy ITOUGH2 input file `invdir` which is expected to be present in directory  $\$(prog\_dir)$  (see Table 5.1.1). There is only minimal overhead associated with reading the dummy input file and writing additional output. The name of the message file created by command `tough2` is always `t2.msg`.

### 5.4 Checking the Status Using Command `prista`

The progress of a TOUGH2 run or ITOUGH2 inversion can be observed using command `prista` which accesses file `status` in the temporary directory. File `status` is updated after each forward simulation, and contains iteration statistics, information about the current parameter set, and the development of the objective function.

If more than one (I)TOUGH2 simulations are running at the same time, the user is first prompted to select which run shall be checked (see Figure 5.4.1). Then, the content of file `status` is displayed. The current parameter set is printed along with the last and total update. The sensitivity measure  $\delta = |\partial S|$  shows the change of the objective function if the parameter is perturbed by a small amount (see command `>>> PERTURB`). Lastly, information about the objective function is given, with its current value, the update due to the perturbation of the parameter indicated by the arrow `<---`, and the total improvement with respect to the initial value which is printed in the last column.

The user has then the opportunity to look at some of the output files using the `vi`-editor or UNIX command `tail`. If the file number is given, command `tail` is invoked which displays the last 10 lines of the chosen output file. The `tail` command continues to display lines as they are added to the output file until stopped by pressing the `Ctrl-C` key sequence.

```

your_prompt> prista
Which simulation do you want to check?

1 --> (11:43) tough2 sam3
2 --> (11:42) itough2 sam2pli sam2
3 --> (09:54) itough2 sam5i sam5

Enter ID: 2

=====
      STATUS OF ITOUGH2 SIMULATION
=====

Date                : Wed Mar 12 11:43
ITOUGH2 file        : sam2pli
TOUGH2 file         : sam2
Directory           : /itelos/finster/itough2/samples/sample2
Comment             : No fit improvement. Jacobian (forward).

Iterations completed      :          1      Iterations to go      7
TOUGH2 runs completed    :          8      Unsuccessful steps    0
TOUGH2 runs to go (approx.) :        43      Log(Levenberg)        -3
CPU time used [sec]      :        41.63    for last step        5.48

Parameter           Current Last Update Total Update      Sens. Active
1. ABS. K GEYS1+8 : -.1939E+02 -.3917E+00 -.3917E+00      937.787
2. KLINK GEYS1+8 :  .6543E+01  -.4569E+00  -.4569E+00     871.680
3. POROSITY GEYS1+ :  .1080E-01  -.4311E-02  -.4311E-02     24.210 <---

TOUGH2 run No. :          8          8 - 5          5 - 1      Initial
Obj. Function :  .6016E+05  .2421E+02  -.2572E+06  .3174E+06

Do you want to read an output file?

1 --> sam2.out
2 --> sam2pli.out
* --> another file
g --> grep output file

Enter file No. plus v(i) or t(ail): 2 v

```

**Figure 5.4.1.** Screen dump from command `prista`.

In order to use the `vi`-editor, the file number has to be followed by the character `v`. Note that no changes should be made since the file is continuously updated by ITOUGH2.

Command `prista` allows a user to inspect a TOUGH2 or ITOUGH2 simulation. If deemed necessary, the run can be terminated using command `kit` (see Section 5.5).

## 5.5 Terminating an ITOUGH2 Job Using Command `kit`

A TOUGH2 run or ITOUGH2 inversion can be signaled and in particular terminated using command `kit` (see Figure 5.5.1). `kit` sends a signal to the process running ITOUGH2. A signal handler is installed (see file `mdep???f`) triggering the desired action. Command `kit` is usually used after checking the status of an (I)TOUGH2 run using command `prista` (see Section 5.4). The following options are available:

- (1) Terminates (I)TOUGH2 immediately and abruptly.
- (2) Terminates ITOUGH2 after completion of a TOUGH2 run. The Jacobian matrix used for the error analysis may contain columns that are from the previous evaluation. The corresponding parameter sensitivities are printed in parentheses [ ] in the ITOUGH2 output file.
- (3) Terminates (I)TOUGH2 after completion of the next time step. The system state is written to the TOUGH2 output file (even if a negative value is specified for variable `KDATA`; see Appendix A2). This option is useful especially for long TOUGH2 runs. A run can be terminated at any time and later restarted using file `SAVE`.
- (4) Terminates ITOUGH2 after completion of next ITOUGH2 iteration.
- (5) TOUGH2 output is generated after completion of the next time step; the run continues.
- (6) The output buffers are flushed so the full content of the output file can be seen during the run using command `prista`.
- (17) An (I)TOUGH2 run is stopped without terminating it.
- (19) An (I)TOUGH2 run previously stopped using option (17) is continued.
- (30) A previously submitted signal (2), (3), or (4) is canceled.

```
your_prompt> kit

#      USER      PID %CPU %MEM    SZ  RSS      TTY STAT      STIME  TIME  COMMAND
1  --> finster   13181 49.8  3.0   876 1668   pts/0 R    15:45:56 31:56 itough2_1.itelos
2  --> finster   13997 76.8  3.0   872 1664   pts/0 R    14:25:55 110:47 itough2_1.itelos

Select ITOUGH2 run by number : 2

0: exit
1: terminate immediately
2: terminate after completion of TOUGH2 run
3: terminate after completion of TOUGH2 time step
4: terminate after completion of ITOUGH2 iteration
5: print output now
6: flush output buffers
17: sleep
19: wake up
30: cancel previous signal

Choose signal: 17

Signal 17 sent to process 13997
```

**Figure 5.5.1.** Screen dump from command `kit`.

## 5.6 Obtaining Online Help Using Command `it2help`

The content of Chapter 4 of this manual (except figures) can be accessed on-line using command `it2help`, followed by the command name and, optionally, the command level. Type `it2help` to display the command usage (see Figure 5.6.1). There are two special commands:

```
it2help index
```

This command displays the complete ITOUGH2 command index (see Appendix B).

```
it2help update
```

This command displays ITOUGH2 update information.

The manual pages are stored on file `it2help.txt`. The content of this file is continuously updated to include added features of later versions of ITOUGH2.

```
=====
IT2HELP --- IT2HELP --- IT2HELP --- IT2HELP --- IT2HELP --- IT2HELP
=====

Purpose:

Displays ITOUGH2 manual pages online.

Syntax:

it2help command [command_level]

    command      = ITOUGH2 command
    command_level = integer indicating command level (1, 2, 3, or 4)

Examples:

1. it2help iteration
   Prints manual pages of command ITERATION on all command levels.

2. it2help iteration 3
   Prints manual page of third-level command >>> ITERATION.

3. it2help index
   Prints the ITOUGH2 command index.

4. it2help update
   Prints version update information.

=====
```

**Figure 5.6.1.** Screen dump from command `it2help` showing command usage.

## ACKNOWLEDGMENT

ITOUGH2 (up to version 1.1) was developed at the Laboratory of Hydraulics, Hydrology, and Glaciology (VAW) of the Swiss Federal Institute of Technology (ETH), Zürich, Switzerland, in collaboration with the Swiss National Cooperative for the Disposal of Radioactive Waste (Nagra), Wettingen, Switzerland. Subsequent versions were supported, in part, by the Director, Office of Civilian Radioactive Waste Management, U.S. Department of Energy, through Memorandum Purchase Order EA9013MC5X between TRW Environmental Safety Systems, Inc. and the Ernest Orlando Lawrence Berkeley National Laboratory, by a grant from the Swiss National Cooperative for the Disposal of Radioactive Waste (Nagra), Wettingen, Switzerland, and by the Assistant Secretary for Energy Efficiency and Renewable Energy, Office of Geothermal Technologies, of the U.S. Department of Energy, under Contract No. DE-AC03-76SF00098.

Many people have made valuable suggestions and contributions during the long and on-going development of ITOUGH2. I would like to thank J. Trösch, U. Kuhlmann (VAW) and S. Vomvoris (Nagra) for their support during the early stages of the project. Even though the main avenues of ITOUGH2 applications have been used extensively, there are many combinations of options that remain to be tested. Many errors, flaws, and inconsistencies have been detected by those who tried to apply earlier versions of ITOUGH2, and many new capabilities have been proposed. ITOUGH2 has greatly benefited from this phase of beta-testing. I would like to acknowledge the contributions of R. Senger (INTERA/CPC, Baden, Switzerland), S. Webb (Sandia National Laboratories, Albuquerque), S. White (Industrial Research Ltd., New Zealand), E. Roeder (Clemson University), T. Sonnenborg (Technical University of Denmark), A. Battistelli (Aquatec S.p.A., Italy), as well as C. Doughty, R. Ahlers, and F. Hale (LBNL). Special thanks are due to D. Bullivant and M. O'Sullivan (University of Auckland, New Zealand) who helped me restructure and streamline the coding of ITOUGH2, and to A. James and C. Doughty (LBNL) who tested some of the less frequently used options, and who thoroughly reviewed Chapter 4 of this report, making many of the command descriptions less cryptic. R. Falta (Clemson University) gave me the opportunity to write an adaptation of ITOUGH2 for PCs. C. Doughty and A. Simmons (LBNL) are thanked for their careful reviews.

If ITOUGH2 turns out to be a useful tool, this is mainly due to its powerful engine which is the simulator TOUGH2. I thank K. Pruess for his continuous support.

## NOMENCLATURE

$\alpha$	level of significance; $(1 - \alpha)$ is confidence level
$C_{pp}$	$n \times n$ covariance matrix of estimated parameters; $C_{pp} = s_0^2 (\mathbf{J}^T \mathbf{V}_{zz}^{-1} \mathbf{J})^{-1}$
$C_{zz}$	$m \times m$ <i>a priori</i> covariance matrix of measurement error,
$C_{\hat{z}\hat{z}}$	$m \times m$ <i>a posteriori</i> covariance matrix of predicted system response, $C_{\hat{z}\hat{z}} = \mathbf{J} C_{pp} \mathbf{J}^T$
$\mathbf{J}$	$m \times n$ Jacobian matrix with elements $J_{ij} = \partial z_i / \partial p_j$
$\lambda$	Levenberg parameter
$m$	number of calibration points
$n$	number of parameters
$\nu$	Marquardt parameter
$\mathbf{p}$	parameter vector (dimension $n$ )
$\mathbf{p}^*$	prior information vector (dimension $n$ )
$\mathbf{p}_0$	vector of initial parameter guesses (dimension $n$ )
$\mathbf{r}$	residual vector (dimension $m$ ) with elements $r_i = z_i^* - z_i(\mathbf{p})$
$\sigma_i^2$	<i>a priori</i> error variance
$s_0^2$	<i>a posteriori</i> or estimated error variance; $s_0^2 = \frac{\mathbf{r}^T \mathbf{V}_{zz}^{-1} \mathbf{r}}{m - n}$
$S$	objective function, e.g., sum of squared weighted residuals
$t$	time
$\mathbf{V}_{zz}^{-1}$	$m \times m$ weighting matrix, where $C_{zz} = \sigma_0^2 \cdot \mathbf{V}_{zz}$
$\mathbf{x}$	coordinate vector (dimension 3)
$X$	TOUGH2 input parameter
$X_0$	initial guess of TOUGH2 input parameter
$\mathbf{z}$	vector of observable variables (dimension $m$ )
$\mathbf{z}^*$	measurement vector (dimension $m$ ), including prior information
$\hat{\mathbf{z}}$	predicted system response (dimension $m$ )

## REFERENCES

- Falta, R. W., K. Pruess, S. Finsterle, and A. Battistelli, T2VOC user's guide, Report LBL-36400, Lawrence Berkeley Laboratory, Berkeley, CA , 1995.
- Finsterle, S., ITOUGH2 user's guide, Version 3.1, Report LBNL-40400, Lawrence Berkeley National Laboratory, Berkeley, CA , 1997a.
- Finsterle, S., ITOUGH2 sample problems, Report LBNL-40402, Lawrence Berkeley National Laboratory, Berkeley, CA , 1997b.
- Finsterle, S., K. Pruess, and P. Fraser, ITOUGH2 software qualification, Report LBNL-39489, Lawrence Berkeley National Laboratory, Berkeley, CA , 1996.
- Finsterle, S., G. J. Moridis, and K. Pruess, A TOUGH2 equation-of-state module for the simulation of two-phase flow of air, water, and a miscible gelling liquid, Report LBL-36086, Lawrence Berkeley Laboratory, Berkeley, CA , 1994.
- Levenberg, K., A method for the solution of certain nonlinear problems in least squares, *Quart. Appl. Math.*, 2, 164-168, 1944.
- Luckner, L., M. Th. van Genuchten, and D. Nielsen, A consistent set of parametric models for the two-phase flow of immiscible fluids in the subsurface, *Water Resour. Res.*, 25(10), 2187-2193, 1989.
- Marquardt, D.W., An algorithm for least squares estimation of nonlinear parameters, *SIAM J. Appl. Math.*, 11, 431-441, 1963.
- Moridis, G. J., and K. Pruess, Flow and transport simulations using T2CG1, a package of conjugate gradient solvers for the TOUGH2 family of codes, Report LBL-36235, Lawrence Berkeley Laboratory, Berkeley, CA, 1995.
- Pruess, K., TOUGH user's guide, Report NUREG/CR-4645, Nuclear Regulatory Commission (also Report LBL-20700, Lawrence Berkeley Laboratory, Berkeley, CA), 1987.
- Pruess, K., TOUGH2 - A general-purpose numerical simulator for multiphase fluid and heat flow, Report LBL-29400, Lawrence Berkeley Laboratory, Berkeley, CA, 1991a.
- Pruess, K., EOS7, an equation-of-state module for the TOUGH2 simulator for two-phase flow of saline water and air, Report LBL-31114, Lawrence Berkeley Laboratory, Berkeley, CA , 1991b.

## APPENDIX A: TOUGH2 Enhancements

### A1. Introduction

The core of ITOUGH2 contains slightly modified versions of TOUGH2 modules. Most code modifications are editorial and do not affect the simulation results. As a result, standard TOUGH2 input files can be used in ITOUGH2, and identical results are obtained if ITOUGH2 is run in forward mode [Finsterle *et al.* 1996]. However, a number of minor modifications have been made as described in the following sections. These modifications should also be made in new modules added to ITOUGH2.

### A2. Printout Control (KDATA)

In standard TOUGH2, printout of simulation results is controlled by variables `KDATA` and `MCYPR` in block `PARAM.1`, as well as by the additional printout times `TIS` given in block `TIMES`. In ITOUGH2, the calibration times are also stored in array `TIS` which means that at each calibration time the amount of printout specified by variable `KDATA` is written to the output file. This may make the TOUGH2 output file extremely long, and requires unnecessary CPU time for disk writing, since the TOUGH2 output file is overwritten each time a new TOUGH2 simulation is initiated by ITOUGH2.

If a negative number is specified for variable `KDATA`, the amount of printout is reduced (see Table A2.1), saving both disk space and CPU time. Recall that printout at the calibration points is always written to the ITOUGH2 plot file (see command `>>> FORMAT`). Also, if a TOUGH2 run is terminated due to a convergence failure or using command `kit`, the full output is automatically generated for the last time step.

Full output is always provided for the times specified in the TOUGH2 block `TIMES`; the amount of printout is given by the absolute value of `KDATA`. The times provided in TOUGH2 block `TIMES` can be in arbitrary order; they are sorted internally.

**Table A2.** Amount of Printout as a Function of Variable `KDATA`

-3	-2	-1	Printout of ...	1	2	3
-	+	+	volume and mass balance	+	+	+
-	-	+	generation rates	+	+	+
-	-	-	most important variables	+	+	+
-	-	-	fluxes and velocities	-	+	+
-	-	-	primary variables	-	-	+



### A3. Secondary Mesh (ELEM2, CONN2)

This enhancement was introduced especially for the estimation of a skin radius (see command >> SKIN) or a MINC parameter (see command >> MINC), both requiring that a new TOUGH2 mesh is generated automatically each iteration without user interference. In order to achieve this, a primary mesh must be generated using the MESHMAKER utility. Elements and connections of this primary mesh can then be overwritten by a secondary mesh provided through blocks ELEM2 and CONN2 which have the same format as blocks ELEME and CONNE, respectively. The names of the elements and connections to be modified by the secondary mesh must be identical with the corresponding ones of the primary mesh. If a secondary mesh is specified, both blocks, ELEM2 and CONN2, must be given; either of the two keywords may be followed by an empty line to indicate that no modification is to be made.

Figure A3.1 illustrates an application. A radial mesh is generated using MESHMAKER for simulating a pump test. In block ELEM2, the volume of the first grid block is changed to represent the actual interval volume. In block CONN2, the nodal distance from the first element to the interface is reduced to a very small number as usually done for connections to boundary elements. These last two modifications, which are usually made by editing the mesh file, are now automatically performed whenever a new mesh is generated during an ITOUGH2 run for the estimation of the skin radius.

```
MESHMAKER-----*-----2-----*-----3-----*-----4-----*-----5-----*-----6
RZ2D
RADII
  2      1
  0.000E+00 0.100E+00
LOGAR
  20     2 0.300E+00 0.100E-01
LOGAR
  80     3 1.000E+01
LAYER
  1
  0.100E+01

ELEM2-----1-----*-----2-----*-----3-----*-----4-----*-----5-----*-----6
A1  1                      1 .1250E+00

CONN2-----1-----*-----2-----*-----3-----*-----4-----*-----5-----*-----6
A1  1A1  2                      1 .1000E-10 .5332E-02 .6283E+00
```

**Figure A3.1.** Primary and secondary mesh generation.

#### A4. Element-by-Element Permeability

Heterogeneity is introduced into TOUGH2 models by assigning a certain rock type, for which material properties are defined in block ROCKS, to each grid block. The maximum number of rock types one can specify is given by variable MAXROC (see file *maxsize.inc*). For high resolution simulations of permeability heterogeneity, it is inconvenient to specify hundreds of rock types, one for each grid block. TOUGH2 has been extended so that grid block permeabilities or permeability modifiers can be directly specified in block ELEM, columns 41-50. If a positive value is given, it is interpreted as absolute permeability; if a negative value is provided, it is interpreted as a permeability modifier, i.e., a factor with which the absolute permeability specified in block ROCKS is multiplied. The anisotropy ratio as given in block ROCKS is preserved in both cases. Alternatively, the same information can be provided through block INCON, columns 31-40. Four additional parameters specific to a grid block can be provided in block INCON, columns 41-80.

Using a permeability modifier instead of permeability itself has the advantage that the mean of the permeability field can easily be changed (or estimated) by adjusting parameter PER (ISOT) in block ROCKS.

The permeability or permeability modifiers are stored in array USERX(1,N), where N is the grid block number, and additional parameters are stored in USERX(i,N) for i=2...5. The second parameter, USERX(2,N), is reserved for a factor scaling capillary strength (see Appendix A6 for details). To write element-by-element parameters to file SAVE, set MOP(13) to 1.

#### A5. User-Specified Boundary Conditions

In TOUGH2, Neumann boundary conditions are specified by introducing sinks and sources in block GENER. Dirichlet boundary conditions can be implemented by assigning very large volumes to grid blocks adjacent to the boundary so that the thermodynamic conditions in those elements do not change from fluid and heat exchange with finite-size grid blocks in the model domain.

Prescribed, but time-varying boundary conditions can be implemented by specifying appropriate (large) sinks and sources in grid blocks having a very large volume. For simple step changes, however, ITOUGH2 offers an alternative option (see command >> RESTART TIME). A third possibility is described in this section. The user can provide values of the primary variables for selected elements as a function of time. The function has to be programmed into subroutine USERBC, which can be found in file *it2user.f*. In subroutine USERBC, the user has the possibility to provide the value of one or more primary variables for selected elements as a function of time. For example, these values can be calculated internally or read from a file. The header of subroutine USERBC is shown in Figure A5.1. The element number N or element name CELEM can be used to identify the boundary grid block. The user is supposed to return a value for one or several of the

primary variables through array X. In the example given below, a table of time versus pressure data is read from file *atm\_pres.dat* and assigned to element 'ATM 0' using the linear interpolation function INTERP1. Note that either the full path to file *atm\_pres.dat* must be given, or the file must be copied to the temporary directory using option `-fi filename` (see Section 5.2).

```

*****
      SUBROUTINE USERBC(N,CELEM,VOLUME,TIME,X)
*****
*   User specified boundary condition                               *
*   Set MOP(22).GE.1                                             *
*       MOP(22)=1 don't call EOS                                  *
*       MOP(22)=2 call EOS                                       *
*   Return user specified boundary condition (vector X)         *
*   for element CELEM at time TIME and/or change the VOLUME of CELEM *
*****

      CHARACTER CELEM*5

      PARAMETER (MDATA=5000)

      DIMENSION X(*),DTIME(MDATA),DVALUE(MDATA)

      SAVE DTIME,DVALUE,IREAD

      IF (CELEM.EQ.'ATM 0') THEN
C --- Read table from a file
          IF (IREAD.EQ.0) THEN
              IREAD=IREAD+1
              OPEN(UNIT=39,FILE='atm_pres.dat',STATUS='OLD')
              I=0
1001          CONTINUE
              I=I+1
              READ(39,*,END=1002) DTIME(I),DVALUE(I)
              GOTO 1001
1002          CONTINUE
              NDATA=I-1
              CLOSE(39)
          ENDIF
          CALL INTERP1(TIME,X(1),DTIME,DVALUE,NDATA)
      ENDIF

```

**Figure A5.2.** Subroutine USERBC for specifying time-dependent boundary conditions.

Subroutine USERBC is called only if MOP(22) is either 1 or 2. If MOP(22) is 2, the EOS module is called after completion of a time step to ensure that the user-specified thermodynamic conditions are updated. If MOP(22) is 1, subroutine USERBC is called, but no additional call to subroutine EOS is made. This allows one to make time-dependent changes to TOUGH2 variables that are not primary variables, and that do not require a recalculation of the thermodynamic state.

## A6. Relative Permeability and Capillary Pressure Functions

Subroutines RELP and PCAP provide the relative permeability and capillary pressure functions, respectively (see *Pruess* [1987]). They are frequently modified to accommodate particular needs. The user should therefore carefully check the functional form and required parameters before selecting a certain curve through variable IRP and ICP, respectively (see also command >>> CHARACTERISTIC).

The functions provided in this version include the three-phase curves used by the T2VOC module [*Falta et al.*, 1995]. Additional functions are provided, two of which are described here. They are modified versions of the Brooks-Corey and van Genuchten functions discussed in *Luckner et al.* [1989]. In order to prevent the capillary force from increasing towards infinity as the effective saturation approaches zero, a linear function is used for saturations  $S_l$  below a certain value ( $S_{lr} + \varepsilon$ ), where  $\varepsilon$  is a small number. The slope of the linear extrapolation is identical to the slope of the capillary pressure curve at  $S_l = S_{lr} + \varepsilon$ .

The modified Brooks-Corey model is invoked by setting both IRP and ICP to 10. The model is described by the following set of equations:

$$S_{ec} = \frac{S_l - S_{lrc}}{1 - S_{lrc}} \quad (\text{A6.1a})$$

$$S_{ek} = \frac{S_l - S_{lrc}}{1 - S_{lrc} - S_{gr}} \quad (\text{A6.1b})$$

$$p_c = -p_e (S_{ec})^{-1/\lambda} \quad \text{for } S_l \geq (S_{lrc} + \varepsilon) \quad (\text{A6.2a})$$

$$p_c = -p_e \left( \frac{\varepsilon}{1 - S_{lrc}} \right)^{-1/\lambda} - \frac{p_e}{\lambda} \left( \frac{\varepsilon}{1 - S_{lrc}} \right)^{-\frac{1-\lambda}{\lambda}} (S_l - S_{lrc} - \varepsilon) \quad \text{for } S_l < (S_{lrc} + \varepsilon) \quad (\text{A6.2b})$$

$$k_{rl} = S_{ek}^{\frac{2-3\lambda}{\lambda}} \quad (\text{A6.3a})$$

$$k_{rg} = (1 - S_{ek})^2 \left( 1 - S_{ek} \frac{2+\lambda}{\lambda} \right) \quad (\text{A6.3b})$$

$$k_{rg} = 1 - k_{rl} \quad (\text{A6.3c})$$

The input parameters are described in Table A6.1.

**Table A6.1.** Input Parameters for Modified Brooks-Corey Model

Parameter	Variable	Description
IRP	10	select Brooks-Corey relative permeability model
RP (1)	$S_{lrk}$	residual liquid saturation for relative permeability functions
RP (2)	$S_{gr}$	residual gas saturation
RP (3)	(flag)	if zero, use (A6.3b), if non-zero, use (A6.3c)
ICP	10	select Brooks-Corey capillary pressure model
CP (1)	$\lambda$	pore size distribution index
CP (2)	$p_e$	gas entry pressure [Pa] if CP (2) negative and USERX (1, N) non-zero, apply Leverett's rule: $p_e = -CP(2) \cdot \sqrt{USERX(1, N) / PER(NMAT)}$ if USERX (2, N) positive then $p_e = USERX(2, N)$ if USERX (2, N) negative then $p_e = -USERX(2, N) \cdot CP(2)$
CP (3)	$\epsilon$	use linear model (A6.2b) for $S_l < S_{lr} + \epsilon$ , default: $\epsilon = 0.01$
CP (6)	$S_{lrc}$	if zero, then $S_{lrc} = S_{lrk}$

The modified van Genuchten model is invoked by setting both IRP and ICP to 11. The model is described by the following set of equations:

$$S_{ec} = \frac{S_l - S_{lrc}}{1 - S_{lrc}} \quad (\text{A6.4a})$$

$$S_{ek} = \frac{S_l - S_{lrk}}{1 - S_{lrk} - S_{gr}} \quad (\text{A6.4b})$$

$$p_c = -\frac{1}{\alpha} \left[ (S_{ec})^{-1/m} - 1 \right]^{1/n} \quad \text{for } S_l \geq (S_{lrc} + \epsilon) \quad (\text{A6.5a})$$

$$\text{linear model with continuous slope at } S_l = S_{lrc} + \epsilon \quad \text{for } S_l < (S_{lrc} + \epsilon) \quad (\text{A6.5b})$$

$$k_{rl} = S_{ek}^{1/2} \left[ 1 - (1 - S_{ek}^{1/m})^m \right]^2 \quad (\text{A6.6a})$$

$$k_{rg} = (1 - S_{ek})^{1/3} \left[ 1 - S_{ek}^{1/m} \right]^{2m} \quad (\text{A6.6b})$$

$$k_{rg} = 1 - k_{rl} \quad (\text{A6.6c})$$

The input parameters are described in Table A6.2.

**Table A6.2. Input Parameters for Modified van Genuchten Model**

Parameter	Variable	Description
IRP	11	select van Genuchten relative permeability model
RP (1)	$S_{lrk}$	residual liquid saturation for rel. perm. functions
RP (2)	$S_{gr}$	residual gas saturation
RP (3)	(flag)	if zero, use (A6.6b), if non-zero, use (A6.6c)
ICP	11	select van Genuchten capillary pressure model
CP (1)	$n$	analogous to pore size distribution index
CP (2)	$1/\alpha$	analogous to gas entry pressure [Pa] if CP (2) negative and USERX (1, N) non-zero, apply Leverett's rule: $1/\alpha = -CP(2)\sqrt{USERX(1, N)/PER(NMAT)}$ if USERX (2, N) positive then $1/\alpha = USERX(2, N)$ if USERX (2, N) negative then $1/\alpha = -USERX(2, N) \cdot CP(2)$
CP (3)	$\epsilon$	use linear model (A6.5b) for $S_l < S_{lr} + \epsilon$ , default: $\epsilon = 0.01$
CP (4)	$m$	if zero then $m = 1 - 1/n$
CP (6)	$S_{lrc}$	if zero, then $S_{lrc} = S_{lrk}$

## A7. Excluding Domains From Global Material Balances

Domains with an element volume larger than  $10^{20} \text{ m}^3$  or a negative rock grain specific heat SPHT or with SPHT greater than  $10^4 \text{ J/kg } ^\circ\text{C}$  are excluded from global material balance calculations. The absolute value of SPHT is used in the heat balance equation.

## APPENDIX B: Command Index

### > PARAMETER

- >> ABSOLUTE PERMEABILITY
- >> BOTTOMHOLE PRESSURE
- >> CAPACITY
- >> CAPILLARY PRESSURE FUNCTION
- >> COMPRESSIBILITY
- >> CONDUCTIVITY
- >> DRIFT
- >> ENTHALPY
- >> FACTOR
- >> GUESS (FILE: *file\_name*)
- >> INITIAL (PRESSURE/: *ipv*)
- >> KLINKENBERG
- >> LAG
- >> LIST
- >> MINC
- >> PARALLEL PLATE
- >> POROSITY
- >> PRODUCTIVITY INDEX
- >> PUMPING RATIO
- >> RATE
- >> RELATIVE PERMEABILITY FUNCTION
- >> SELEC
- >> SHIFT
- >> SKIN
- >> TIME
- >> USER (: *anno*)
  - >>> DEFAULT
  - >>> LIST
  - >>> MATERIAL: *mat\_name* (*mat\_name\_i...*) (+ *iplus*)
  - >>> MODEL
  - >>> NONE
  - >>> ROCK: *mat\_name* (*mat\_name\_i...*) (+ *iplus*)
  - >>> SET: *iset*
  - >>> SINK: *sink\_name* (*sink\_name\_i ...*) (+ *iplus*)
  - >>> SOURCE: *source\_name* (*source\_name\_i ...*) (+ *iplus*)

```

>>>> ANNOTATION: anno
>>>> BOUND: lower upper
>>>> DEVIATION: sigma
>>>> FACTOR
>>>> GAUSS
>>>> GUESS: guess
>>>> INDEX: index (index_i ...)
>>>> LIST
>>>> LOGARITHM
>>>> LOG(F)
>>>> NORMAL
>>>> PARAMETER: index (index_i ...)
>>>> PERTURB: (-)alpha (%)
>>>> PRIOR: prior_info
>>>> RANGE: lower upper
>>>> STEP: max_step
>>>> UNIFORM
>>>> VALUE
>>>> VARIANCE: sigma^2
>>>> VARIATION: sigma
>>>> WEIGHT: 1/sigma

```

> OBSERVATION

```

>> CONCENTRATION (comp_name/COMPONENT: icomp)
      (phase_name/PHASE: iphase)
>> CONTENT (phase_name/PHASE: iphase)
>> COVARIANCE (FILE: filename)
>> CUMULATIVE (comp_name/COMPONENT: icomp)
      (phase_name/PHASE: iphase)
>> ENTHALPY (phase_name/PHASE: iphase)
>> FLOW (phase_name/PHASE: iphase)
>> GENERATION (comp_name/COMPONENT: icomp)
      (phase_name/PHASE: iphase)
>> LIST
>> MASS FRACTION (comp_name/COMPONENT: icomp)
      (phase_name/PHASE: iphase)
>> MOMENT (FIRST/SECOND) (X/Y/Z) (comp_name/COMPONENT: icomp)
      (phase_name/PHASE: iphase)
>> PRESSURE (CAPILLARY) (phase_name/PHASE: iphase)
>> PRODUCTION (comp_name/COMPONENT: icomp)
      (phase_name/PHASE: iphase)
>> RESTART TIME: ntime (time_unit) (NEW)
>> SATURATION (phase_name/PHASE: iphase)
>> SECONDARY (phase_name/PHASE: iphase) (: ipar)

```



```

>> TEMPERATURE
>> TIME: ntime (EQUAL/LOGARITHMIC) (time_unit)
>> TOTAL MASS (comp_name/COMPONENT: icom)
           (phase_name/PHASE: iphase) (CHANGE)
>> USER (: anno)
>> VOLUME (phase_name/PHASE: iphase) (CHANGE)

>>> CONNECTION: elem1 elem2 (elem_i elem_j ...)
                (++/+-/-+ iplus)
>>> ELEMENT: elem (elem_i ...) (+ iplus)
>>> GRID BLOCK: elem (elem_i ...) (+ iplus)
>>> INTERFACE: elem1 elem2 (elem_i elem_j ...)
                (++/+-/-+ iplus)

>>> MODEL
>>> NONE
>>> SINK: sink_name (sink_namei ...) (+ iplus)
>>> SOURCE: source_name (source_namei ...) (+ iplus)

>>>> ABSOLUTE
>>>> ANNOTATION: anno
>>>> AUTO
>>>> AVERAGE (VOLUME)
>>>> COLUMN: itime idata (istd_dev)
>>>> COMPONENT comp_name/: icom
>>>> DATA (time_unit) (FILE: file_name)
>>>> DEVIATION: sigma
>>>> FACTOR: factor
>>>> FORMAT: format
>>>> HEADER: nskip
>>>> INDEX: index (index_i ...)
>>>> LOGARITHM
>>>> MEAN (VOLUME)
>>>> PARAMETER: index (index_i ...)
>>>> PHASE phase_name/: iphase
>>>> PICK: npick
>>>> POLYNOM: idegree (time_unit)
>>>> RELATIVE: rel_err (%)
>>>> SET: iset
>>>> SHIFT: shift (TIME (time_unit))
>>>> SKIP: nskip
>>>> SUM
>>>> USER
>>>> VARIANCE: sigma^2
>>>> WEIGHT: 1/sigma
>>>> WINDOW: time_A time_B (time_unit)

```

> COMPUTATION

>> CONVERGE/STOP/TOLERANCE

```
>>> ADJUST
>>> CONSECUTIVE: max_iter1
>>> DELTFACT: deltfact
>>> DIRECT
>>> FORWARD
>>> INCOMPLETE: max_incomplete
>>> INPUT
>>> ITERATION: max_iter
>>> LEVENBERG: lambda
>>> LIST
>>> MARQUARDT: nue
>>> REDUCTION: max_red
>>> SIMULATION: mtough2
>>> STEP: max_step
>>> UPHILL: max_uphill
>>> WARNING
```

>> ERROR

```
>>> ALPHA: alpha (%)
>>> FISHER
>>> FOSM (MATRIX: ndim) (ITOUGH2) (CORRELATION) (DIAGONAL)
>>> HESSIAN
>>> LINEARITY (: alpha (%))
>>> LIST
>>> MONTE CARLO (SEED: iseed) (GENERATE) (CLASS: nclass)
>>> POSTERIORI
>>> PRIORI
>>> TAU: (-)niter
```

>> JACOBIAN

```
>>> CENTER
>>> FORWARD (: iswitch)
>>> HESSIAN
>>> LIST
>>> PERTURB : (-)perturb (%)
```

```

>> OPTION
  >>> ANDREWS: c
  >>> ANNEAL
    >>>> ITERATION: max_iter
    >>>> SCHEDULE: (-)beta
    >>>> STEP: max_step
    >>>> TEMPERATURE: (-)temp0

  >>> CAUCHY
  >>> DESIGN
  >>> DIRECT
  >>> FORWARD
  >>> GRID SEARCH: ninval1 (ninvalid...)
  >>> GAUSS-NEWTON
  >>> L1-ESTIMATOR
  >>> LEAST-SQUARE
  >>> LEVENBERG-MARQUARDT
  >>> LIST
  >>> OBJECTIVE: ninval1 (ninvalid...)
  >>> QUADRATIC-LINEAR: c
  >>> SELECT
    >>>> CORRELATION: (-)rcorr
    >>>> ITERATION: niter
    >>>> LIST
    >>>> SENSITIVITY: (-)rsens
  >>> SIMPLEX
  >>> SENSITIVITY
  >>> STEADY-STATE (SAVE) (: max_time_step)

>> OUTPUT
  >>> CHARACTERISTIC
  >>> COVARIANCE
  >>> FORMAT: format (LIST)
  >>> INDEX
  >>> LIST
  >>> JACOBIAN
  >>> OBJECTIVE
  >>> PERFORMANCE
  >>> PLOTFILE: format (LIST)
  >>> PLOTTING: niter
  >>> SENSITIVITY
  >>> time_unit
  >>> UPDATE
  >>> RESIDUAL
  >>> VERSION

```

Lawrence Berkeley National Laboratory  
University of California  
Berkeley, CA 94720