UC San Diego

UC San Diego Previously Published Works

Title

Design of workplace and destination-based EV charging networks considering driver behavior, habits, and preferences

Permalink

https://escholarship.org/uc/item/1qg2s5m3

Journal

Renewable Energy, 242

ISSN

0960-1481

Authors

Myers, Jeff

Hanna, Ryan

Garg, Teevrat

et al.

Publication Date

2025-04-01

DOI

10.1016/j.renene.2025.122441

Copyright Information

This work is made available under the terms of a Creative Commons Attribution License, available at https://creativecommons.org/licenses/by/4.0/

Peer reviewed

eScholarship.org Powered by the California Digital Library
University of California

Title:

Design of workplace and destination-based EV charging networks considering driver behavior, habits, and preferences

Authors:

Jeff Myers[1,2,#], Ryan Hanna[2,3,*,#], Teevrat Garg[1,2], Josh Kavanagh[4], Jan Kleissl[2,3,5], Sebastian Tebbe[1,2,6], Byron Washom[2,7], and David G. Victor[1,2]

Affiliations:

[1] School of Global Policy and Strategy, University of California San Diego, La Jolla, CA 92093
[2] Deep Decarbonization Initiative, University of California San Diego, La Jolla, CA 92093
[3] Center for Energy Research, University of California San Diego, La Jolla, CA 92093
[4] Triton Auxiliary Programs & Services, University of California San Diego, La Jolla, CA 92093
[5] Department of Mechanical and Aerospace Engineering, University of California San Diego, La Jolla, CA 92093
[6] Department of Economics, University of Melbourne, Parkville VIC 3010, Australia
[7] Strategic Energy Initiatives, University of California San Diego, La Jolla, CA 92093
* Corresponding author. E-mail address: rehanna@ucsd.edu (R. Hanna). 9500 Gilman Drive #0519, La Jolla, CA 92093.
[#] These authors contributed equally.

Keywords:

Decarbonization, electric vehicle, electrification, human behavior, mobility, transportation

Abstract

Many workplaces and other institutions are grappling with how to plan and deploy electric vehicle (EV) charging networks to support their employees and other constituents who drive EVs. We develop a novel approach for designing EV charging networks that is driver-centric: it estimates drivers' charging needs based on their driving and charging habits and determines the optimal number and type of chargers to install to meet those needs. Unlike prior literature, our framework establishes a unique individual profile for each driver based on their observed behaviors and habits. We demonstrate our approach at the University of California San Diego (UCSD) EV network of 439 charging ports using behavioral data derived from 800 EV drivers. We find that using unique driver profiles significantly increases expected network usage and size—in some cases requiring fivefold more workplace charging sessions and a threefold larger network compared to the same analysis based on regionally-averaged driver data. These increases are driven by drivers' tendency to recharge with high battery state-of-charge, which increases network size by 50% alone and implies less value in using high-power chargers. An institution's goals for supporting drivers, which are important for equity, also significantly affect network size. Our approach can help guide institutional strategy for deploying and expanding real-world workplace and destination-based charging services.

1. Introduction

Societal shifts from gasoline to electric vehicles (EVs), already well underway in numerous countries (Hanna and Victor, 2021), are pivotal to cutting greenhouse gas (GHG) emissions from transportation (Jaramillo et al., 2022). Although the shift to EVs has occurred in tandem with home charging (LaMonaca and Ryan, 2022), workplace charging remains crucially important for at least two reasons (Bauer et al., 2021). First, whereas early EV adopters tend to be wealthier homeowners (Tal et al., 2020), later mass adopters will likely have less access to private home charging (Pierce and Slowik, 2023; Chakraborty et al., 2019) and thus rely more on alternatives like workplace networks. Second, to minimize vehicle emissions, EVs must charge when renewable energy generation is abundant. In California and other solar-dominant grids, that means daytime when most drivers are at work (Coignard et al., 2018).

Meanwhile, a growing number of corporations, universities, and other public entities have committed to net-zero carbon goals (Erb et al., 2021). To reduce GHG emissions associated with commuting, some are supporting their employees by installing workplace charging facilities.[1]

Institutions that wish to support workplace charging must set goals for supporting EV drivers and implement charging policy to cost-effectively meet those goals (Fetene et al., 2016). At such motivated institutions, decision-makers must grapple with several strategic planning questions: how much charging do constituents need? How many parking stalls should be "electrified," i.e. converted to EV stalls, to meet these needs? Which kinds of chargers should be installed? How do rules for stall "dwell-time," which limits charging session duration, trade-off with overall network utilization?

These questions form the essence of the workplace EV network planning problem (Section 2) that most EV-supporting institutions will likely face—and our focus in this paper. The aim is to design an EV charger network that reliably meets drivers' charging needs at minimal cost.

The literature on EV charging and infrastructure planning is extremely rich. It includes studies focused on the supply side, e.g. on designing networks to achieve technical goals, such as integrating renewable energy (Fachrizal et al., 2022; Hassan et al., 2023), providing taxi services (Cilio and Babacan, 2021), alleviating grid congestion (Gonzalez-Garrido et al., 2024), and integrating chargers in microgrids (Hafez and Bhattacharya, 2017), as well as on charging strategies that achieve similar goals (McClone et al., 2024; Gong et al., 2020). It also includes studies on the demand side, e.g. understanding drivers' charging patterns (Venegas, Petit, & Perez, 2021; Helmus, Lees, & van den Hoed, 2020), preferences (Delmonte et al., 2020; Hardman et al., 2018) and motivations (Sun et al., 2021) for charging, and willingness to engage with charging programs (Lagomarsino et al., 2022; Kacperski et al., 2022; Nienhueser and Qiu, 2016). Our paper is unique in that it integrates supply and demand in a new optimization framework in which workplace-wide network design is derived from bottom-up calculations of drivers' demand for workplace charging. This calculation is data-driven and obtained from the behaviors, habits, and preferences of drivers who commute regularly and use the workplace EV network.

We emphasize human behavior because it strongly shapes infrastructure needs, yet existing planning models for workplace EV networks ignore it (Bayram, Devetsikiotis, & Jovanovic, 2022; Erdogan et al., 2021), bypass it by using idealized or average behavior (Huang and Zhou, 2015; Li et al., 2020; Erdogan, Kucuksari, & Murphy, 2022; Wu, Aziz, & Haque, 2023), or otherwise neglect commuters'

[1] Commuting emissions are part of "Scope 3" emissions, which, for U.S. universities, are about 17% of total emissions (Klein-Banai and Theis, 2013).

driving and charging habits (Ferguson et al., 2018). As noted in a review of infrastructure planning (Patil, Kazemzadeh, & Bansal, 2022), supply-side studies still tend to make simplistic assumptions about driver charging behavior. We focus on the workplace because workplace charging is expected to grow second only to home charging (Bauer et al., 2021). Yet existing studies of human behavior and EV charging have focused primarily on home (Bailey et al., 2023) and public charging (Rempel et al., 2022; Sadeghianpourhamami et al., 2018) such as fast-charging plazas and street-side chargers, where policy support has been stronger. Comparatively less is known about systematic charging behaviors in the workplace and therefore about strategies for optimally designing workplace charging networks.[2]

In this context, we propose a modeling framework for the optimal design of workplace EV networks (Section 3) that advances the literature in two key ways. First, while networks could be designed by prioritizing any number of criteria, we prioritize human behavior that existing models have neglected and implement data collection systems to obtain a broad cross-section of behaviors, habits, and preferences of real drivers (Section 4). We collect these data through surveys of a new EV club (*N=800*) at UCSD that we created to support this research.[3] Our data characterize, for example, how far and frequently people commute to the workplace, how far they drive between charging sessions, whether they have access to home charging, and the type of EV they drive, among many other attributes.

Second, because these data empirically resolve human behavioral parameters for driving and charging, they allow for building models that improve the representation of drivers' charging needs. We integrate these behavioral data into a new EV network planning framework built explicitly on behavioral parameters that implicate network design. Embedding real human behavior into network planning models can significantly improve model outputs for network usage and design (as we will show); moreover, it enables assessment of how driver behaviors affect network planning, and how planned charger investments and parking rules affect drivers' use of the network.

We demonstrate the model using UCSD's EV club (*N=800*) and charging network (Section 5) to two ends. First, we investigate the significance of obtaining and using individual driver data by comparing it with the common approach of using idealized or average data. We find that use of unique driver data has a profound effect—affecting model outcomes for network usage by 500% and network size by 300%. Second, we analyze previously unstudied effects of human behaviors, which models have struggled to integrate, relative to technological variables that are standard in network design models, like charger throughput. We find that behavioral parameters dominate. In addition, we quantify network usage patterns (how drivers use the network to meet their charging needs) and the levels of stall electrification required to meet this demand.

2. Parking stall electrification

[2] We observe that seemingly similar institutions are pursuing markedly different strategies for providing charging services: the University of California Los Angeles has installed 406 Level-1 charging ports (96% of the network total; UCLA Transportation, 2024), whereas the University of California San Diego has installed 439 Level-2 ports (97% of the network total; UCSD Transportation Services, 2024b).

[3] Setting up data collection systems through an institution-wide EV club has been relatively inexpensive but required deep engagement with the university's transportation office that oversees EV chargers and parking. To encourage drivers to join and engage with the club, we provide occasional discounts on charging and run raffles for membership and responding to surveys (Garg et al., 2024a). Institutions that charge for parking could similarly offer discounts; where parking is free, institutions could use gift cards, lotteries, or games (e.g., competition across departments) to incent employee participation.

We consider the decision problem of an institution (e.g., business, university, or other public entity) with regular commuters, parking facilities, and a commitment to support the charging needs of its EV-driving constituents. The goal is to build (or expand) a network of EV chargers that meets drivers' charging needs while minimizing investment and maintenance costs. We refer to this as the problem of *parking stall electrification*: a selection problem that requires choosing a portfolio of chargers from a set of candidate portfolios. While this applies to charging networks generally (installed anywhere in society), we focus on the workplace because evidence suggests it will repeat at innumerable institutions motivated to support drivers for reasons of environmental stewardship, reputation, or competitiveness (i.e., to attract top employee talent), among others.

In its simplest form at a workplace, the stall electrification problem asks: what number and type of EV chargers should be installed to meet drivers' charging needs? The challenge is that the ecosystem of chargers and capabilities is diverse and advancing constantly, while drivers too are diverse and have unique needs (as we elaborate in Sections 3-4). Underinvesting in chargers could lead to frustration among drivers who find it difficult to reliably find an open charger, which in turn could undermine the workplace charging business model (and the EV transition generally). Overinvesting can be expensive, potentially wasteful, and lead to stranded assets as old chargers are eclipsed by new needs and capabilities.

More complex forms of the stall electrification problem could consider other institutional choices, such as parking rules, differential pricing to incentivize certain behaviors, and options for building EV-ready stubouts instead of chargers; or the potential for time-varying investments given exogenous factors that similarly change over time, like EV adoption rates, technological performance, and markets.

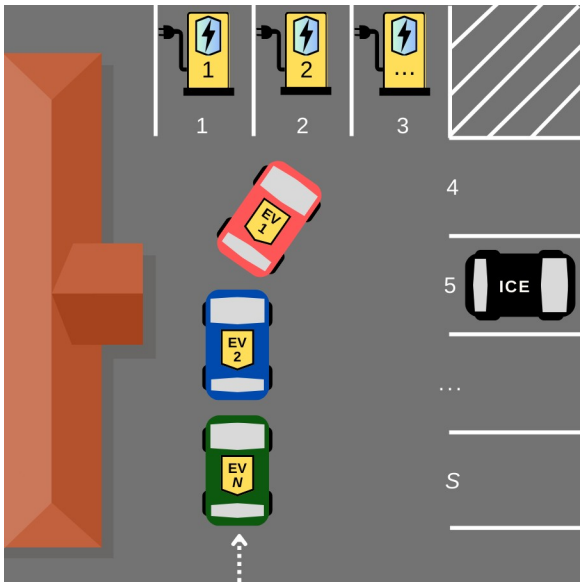


Fig. 1. Schematic of the workplace parking stall electrification problem. A subset {1,...,N} of an institution's constituents drive EVs and, with each commute, may park in either an EV or non-EV parking stall alongside internal combustion engine (ICE) vehicles. The goal of the stall electrification problem is to determine the optimal (cost-minimizing) number and type of chargers to install within the institution's {1,...,S} parking stalls that meet the charging needs of the institution's constituents.

3. Problem formulation

Herein, subscript $i \in \{1, \ldots, N\}$ indexes N EV drivers (commuters) at an institution. Each commuter drives a unique EV, so i similarly indexes EVs. EVs are either a battery EV (BEV) or plug-in hybrid EV (PHEV). Subscript c indexes the types of chargers that an institution could invest in (e.g., level-1, level-2, and DC fast chargers) as well as the charger parking rules they might enforce (e.g., allowable session dwell-time).

To optimally design a workplace EV network that meets drivers' charging needs, institutions must know four things: its policy goals for supporting drivers; the driving and charging behaviors of its EV-driving constituents; constituents' EVs; and, if applicable, the institution's existing portfolio of chargers and parking rules (Fig. 2). What emerges from these is a unique profile of each driver's interaction with the workplace network: how frequently they plug in to the network to charge (relative to total commutes) and the number of weekly sessions they initiate. In our modeling approach, the workplace network is sized to supply these sessions.

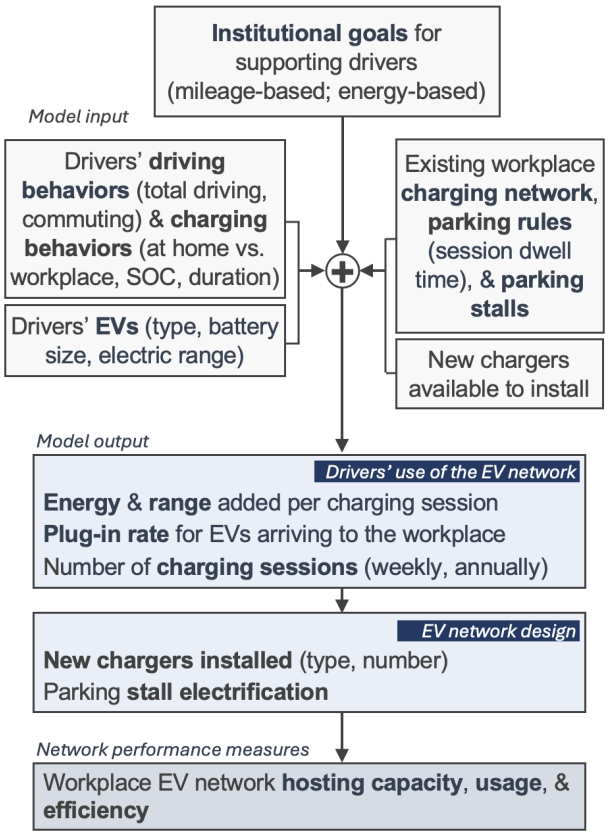


Fig. 2. Model structure: input data, outputs, and EV network performance measures. Our approach to the stall electrification problem is rooted in model inputs derived from drivers' unique behaviors. These behavioral data are collected through charging session records and surveys that solicit information about drivers' EVs, demographics, habits, and preferences for driving, charging, and commuting in their EV.

Table 1
Nomenclature. SOC–state-of-charge; BEV–battery electric vehicle; PHEV–plug-in hybrid electric vehicle; occ–occurrences; LCC–lifecycle cost.

Parameter / Variable	Description	Units
Indices and sets		
$i \in D$	EV drivers at the institution; EVs	–
$c \in C$	EV charger types installed and available to invest in; charger dwell-time limit	–
EV drivers		
N	Number of regular EV commuters at the institution	–
d_i	Commute distance (residence-to-workplace roundtrip) of driver i	mi
f_i	Commute frequency of driver i	occ/week
M_i^{total}	Annual total driving (commuting plus non-commuting) by driver i	mi
M_i^{commute}	Annual commuting mileage by driver i	mi
M_i^{other}	Annual other (non-commute) mileage by driver i	mi
C_i^{home}	Fraction of charging done at residence (i.e., home charging) by driver i	–
C_i^{work}	Fraction of charging done at the workplace by driver i	–
T_i	Mean duration of workplace charging sessions by driver i	h
$\underline{SOC}_i$	Mean battery SOC minimum ("floor") maintained by driver i (i.e., by which they plug in to charge)	–
EVs		
V_i	EV type (BEV or PHEV)	–
B_i	Nominal battery size	kWh
R_i	Nominal electric range	mi
$\square_i$	Fraction of miles driven on electricity (for PHEVs)	–
B_i^{eff}	Effective battery size (respecting the driver's SOC floor)	kWh
R_i^{eff}	Effective electric range (respecting the driver's SOC floor)	mi
Institutional policy for supporting drivers' charging needs		
M_i^{+}	The subset of driving mileage that workplace charging should supply	mi
EV chargers and parking stalls		
S	Number of parking stalls at the institution	–
K	Number of charger types installed and available to invest in	–
n^{CD}	Number of "charging days" per week at the institution	
U_c	Number of existing EV chargers of type c at the institution	–
P_c	Power delivery ("throughput") for EV charger type c	kW
$\overline{E}_c$	Maximum energy that charger type c can deliver during a charging session of τ_c duration	kWh
Δ_c	Number of charging sessions per workday that charger type c can provide	–
Decision variables		
υ_c	Number of chargers of type c	–
τ_c	Permissible session dwell-time for EV charger type c	h
Driver and workplace network measures		
$E_{i,c}^{session}$	Energy delivered to EV i during a charging session at charger type c	kWh
$R_{i,c}^{session}$	Electric range added to EV i during a charging session at charger type c	mi
$\Pi_{i,c}$	Plug-in rate of driver i (i.e., fraction of workplace commutes that end at an EV charger) when using charger type c	–

$\sigma_{i,c}^{annual}$	Annual charging sessions required by driver *i* when using charger type *c*	occ/yr
$\sigma_{i,c}^{weekly}$	Weekly charging sessions required by driver *i* when using charger type *c*	occ/week
$\sigma^{network}$	Network hosting capacity for weekly charging sessions	–
$E^{network}$	Network hosting capacity for weekly energy delivered	kWh
LCC	Lifecycle cost of the EV charging network	USD$

3.1 Institutional support for EV drivers

The optimal design of a workplace charging network depends on an institution's policy for supporting its EV-driving constituents. While institutions could support drivers in numerous ways, we study two strategies that plausibly bookend the level of support they might provide. In one strategy, an institution invests in chargers to meet some or all of drivers' driving mileage needs, e.g. total driving M^{total} or commuting M^{commute}. A second strategy meets some or all of drivers' charging needs, e.g. 100% of charging or the portion of charging not already done at home $1–C^{\text{home}}$.

These support strategies recognize (and plan for) the fact that drivers have different habits, needs, and opportunities; e.g., some have access to home charging while others, such as many renters, rely on charging outside the home (CPUC, 2022). Moreover, support strategies implicate ideals of fairness and access, since newer EV adopters tend to have less access to home charging than early adopters and hence depend more on charging outside the home (Pierce and Slowik, 2023; Chakraborty et al., 2019).

In all cases, institutional support manifests in the model as a requirement to supply some mileage driven by constituents, denoted $M^{+¿¿}$. As we show in Section 5, institutional choices for supporting drivers can significantly affect network usage rates and size.

3.2 Driver behavior and charging needs

Drivers' charging needs are a function of their driving and charging behaviors, such as the amount of driving and commuting they do, how often and deeply they charge, the EV they drive, and whether they have access to home charging. These affect, for example, the energy needed for commuting and the effective size of a driver's battery. Charging needs also depend on institutional choices such as the type of chargers installed at the workplace and parking rules that govern their use.

3.2.1 Driving and commuting

Driving behaviors include home-to-workplace roundtrip commute distance *d* (mi), commute frequency *f* (per week), and annual mileage for total driving M^{total} (mi), commuting M^{commute}, and other driving (non-commuting) M^{other}. To protect personal information (including address), d_i is estimated as the driving distance between the workplace and centroid of the driver's home zip code. At UCSD, drivers report f_i and home zip code in the EV club enrollment survey. M_i^{total} could be obtained in several ways; we have drivers report vehicle odometer readings through recurring surveys (Section 4.3). A driver's unique annual commuting profile is therefore given by

$$M_i^{\text{commute}} = 52\, f_i d_i, i = 1, \ldots, N, \quad (1)$$

and $M_i^{other} = M_i^{total} - M_i^{commute}$.

3.2.2 Charging

Charging habits include the fraction of charging done at home C^{home} and the workplace C^{work}, measured on an energy (kWh) basis; the duration T of workplace charging sessions that drivers initiate when unrestricted by policy; and the typical SOC by which they plug in to charge, $\underline{SOC}$. $C^{(\cdot)}$ are self-reported in the enrollment survey. T and $\underline{SOC}$ are revealed through charging session data.

3.2.3 EVs

EVs are characterized by their type (BEV or PHEV), battery size B (kWh), electric range R (mi), and fraction of total driving using electricity ε (for PHEVs). EV type matters because BEVs and PHEVs can have markedly different charging patterns: relative to BEVs, PHEVs could be high-frequency chargers (Venegas, Petit, & Perez, 2021) because they have smaller batteries and electric ranges commensurate to commute distances; or they could be low-frequency chargers if driven predominantly on gasoline.

Drivers report their EV (year, make, model, and type) in the club enrollment survey. B and R are then obtained from manufacturers through DOE (Department of Energy, 2024). ε depends on driver behavior, but we cannot measure it directly. Instead, we consider it as a function of vehicle range R, following the empirical relationship defined in Isenstadt et al. (2022) and given by

$$\epsilon_i = \begin{cases} 1 & ,if\ BEV \\ 1 - \exp\left(-\sum_{j=1}^{10} \left(\frac{R_i}{ND} \right)^j c_j \right) & ,if\ PHEV \end{cases}, i = 1, \ldots, N \quad (2)$$

where ND = 700 mi is normalized distance (and reflects proposed updates to codified EPA analysis) and c = [13.1, –18.7, 5.22, 8.15, 3.53, –1.34, –4.01, –3.9, –1.15, 3.88] is a weighting coefficient. Given the variation in R among EVs, mean values are 0.2–0.7. For BEVs, $\varepsilon = 1$.

An EV's effective battery size B^{eff}, given in Eq. (3), is the portion of the battery that the driver regularly uses, respecting that they typically plug in with ample remaining SOC. An EV's effective range R^{eff}, given in Eq. (4), is the distance typically traveled between plug-ins, similarly respecting how human behavior affects $\underline{SOC}$ and ε. Since $\underline{SOC} \in [0, 1]$, BEVs have $B^{eff} \leq B$ and $R^{eff} \leq R$. For PHEVs, we set $\underline{SOC} = 0$ and instead capture variation in R^{eff} through variation in ϵ; with ϵ typically 0.2–0.7 for PHEVs, $R^{eff} > R$.

$$B_i^{eff} = B_i \left(1 - \underline{SOC}_i \right), i = 1, \ldots, N \quad (3)$$

$$R_i^{eff} = R_i \left(1 - \underline{SOC}_i \right) \epsilon_i^{-1}, i = 1, \ldots, N \quad (4)$$

3.2.4 EV chargers and parking rules

Chargers are defined by their power delivery or "throughput" P (kW), while parking rules cap the session dwell-time τ (h) over which drivers can charge. EV chargers can therefore deliver maximum session energy (kWh) given by

$$\overline{E}_c = P_c \tau_c, c = 1, \ldots, K \quad (5)$$

Chargers and parking rules affect network design because they determine $\overline{E}$ and, in turn, the range that drivers can recoup per session.

3.2.5 Use of workplace charging

Notwithstanding permissible dwell-time τ_c, driver behavior reveals the typical duration T_i for which they actually charge, which may be larger or smaller than τ_c. Thus, when unrestricted by dwell-time limits, in each session drivers receive an amount of energy given by

$$E^{¿}_{i,c} = P_c T_i, i = 1, \ldots, N, c = 1, \ldots, K \quad (6)$$

Ultimately, when plugging into a charger of type c, driver i recoups energy equivalent to $E^{session}_{i,c}$, given in Eq. (7). The energy delivered $E^{session}_{i,c}$ could be as large as $\overline{E}_c$ but is usually smaller and constrained by the driver's behavior that controls their typical session duration T_i (which affects $E^{¿}_{i,c}$) or the SOC with which they typically plug in, $\underline{SOC}_i$ (which affects B^{eff}_i). Delivered energy $E^{session}_{i,c}$ begets an increase in range $R^{session}_{i,c}$, given in Eq. (8), that is proportional to the fraction of battery replenished $E^{session}_{i,c} / B^{eff}_i$.

$$E^{session}_{i,c} = min\left\{\overline{E}_c, E^{¿}_{i,c}, B^{eff}_i\right\}, i = 1, \ldots, N, c = 1, \ldots, K \quad (7)$$

$$R^{session}_{i,c} = \frac{E^{session}_{i,c}}{B^{eff}_i} R^{eff}_i, i = 1, \ldots, N, c = 1, \ldots, K \quad (8)$$

To recoup energy equivalent to $M^{+¿¿}$ annual driving miles, driver i requires $\sigma^{annual}_{i,c}$ annual charging sessions at charger c, given in Eq. (9). σ^{annual} considers that PHEVs drive only a fraction of total miles on electricity, will drive farther than R before charging, and hence require fewer charging sessions than implied by R alone.

$$\sigma^{annual}_{i,c} = \frac{M^{+¿}}{R^{session}_{i,c}} \epsilon_i, i = 1, \ldots, N, c = 1, \ldots, K ¿ \quad (9)$$

The number of *implied* weekly sessions is given by $\frac{1}{52}\sigma_{i,c}^{annual}$. However, this is constrained by the driver's commute frequency f_i: in our model, drivers do not make additional commutes just to charge; if the number of required weekly charging sessions exceeds commutes (i.e., if $\frac{1}{52}\sigma_{i,c}^{annual} > f_i$), we assume drivers charge outside the workplace and initiate only f_i weekly workplace sessions.

It follows that the driver's plug-in rate $\pi_{i,c}$, or fraction of workplace commutes that end at an EV charger, is given by Eq. (10); and the number of *actual* weekly charging sessions that driver i initiates, $\sigma_{i,c}^{weekly}$, is given by Eq. (11).

$$\pi_{i,c} = min\left\{\frac{\frac{1}{52}\sigma_{i,c}^{annual}}{f_i}, 1\right\}, i = 1, \ldots, N, c = 1, \ldots, K \quad (10)$$

$$\sigma_{i,c}^{weekly} = \pi_{i,c} f_i, i = 1, \ldots, N, c = 1, \ldots, K \quad (11)$$

Notationally, $\sigma_{i,c}^{(\cdot)}$ gives the number of sessions required by driver i when plugging in at charger type c. We note that this number of sessions is a function of the portfolio of chargers $\{\upsilon_c, \tau_c\} \forall c \in \{1, \ldots, K\}$ that the institution chooses to install.

3.3 Algorithm for selecting EV chargers

The goal of workplace EV network planning (Section 2) is to invest in a cost-minimizing portfolio of EV chargers that meets the charging needs of drivers. To determine optimal investment of chargers, we formulate a constrained optimization problem:

$$\underset{\upsilon_c, \tau_c}{minimize}\, LCC, \quad (12)$$

such that $\upsilon_c, \tau_c \in Z$ (are integers), $\upsilon_c, \tau_c \geq 0$, $\sum_c \upsilon_c \leq S$, and $\tau_c \leq 24 \forall c \in \{1, \ldots, K\}$, where LCC is the lifecycle cost of the EV network (inclusive of upfront and operating costs), υ_c is the number of chargers of type c, τ_c is the allowable session dwell-time at charger type c, and S is the total number of parking stalls at the institution that can host chargers.

In general, the constraint to meet drivers' charging needs is nonlinear: the institution seeks to install υ_c chargers with dwell-time τ_c, yet drivers' charging needs, given by $\sigma_{i,c}^{(\cdot)}$ and $\pi_{i,c}$ in Eq. (9)–(11), are a function of the institution's decisions for υ_c and τ_c.

We therefore propose a heuristic algorithm to solve the optimization problem in Eq. (12) using particle swarm optimization (PSO) (Poli, Kennedy, & Blackwell, 2007), a commonly used heuristic method that requires few assumptions about problem continuity and differentiability (Eberhart and Shi, 2001). With PSO, n_{part} particles search an n_{dim}-dimension solution space, solve the problem in Eq. (12)

for a location in the space (a candidate solution), and store and share the solution value, or "fitness." Each dimension corresponds to a single decision variable. Particles interact and exploit areas around better solutions.

We adapt the PSO routine specified in prior work of ours (Hanna 2021; Hanna et al., 2019), with two main updates. First, dimensions in the solution space correspond to υ_c and τ_c and are constrained by S and 24 h, respectively; hence candidate solutions are portfolios of chargers and their permissible dwell-time. Second, solution fitness is defined as LCC.

3.4 Heuristic for determining whether charging needs are met

The algorithm in Section 3.3 generates a portfolio of chargers—a candidate EV network—given by $\{\upsilon_c, \tau_c\} \forall c \in \{1, \ldots, K\}$. To determine whether a candidate network meets drivers' charging needs, we need criteria that appraise supply and demand for charging. While many criteria are possible, we use weekly charging sessions and energy because they are the most granular discrete measures that our data collection systems generate. A network can support a weekly maximum number of sessions $\sigma^{network}$ and can deliver energy E^{network}, given by

$$\sigma^{network} = n^{CD} \sum_c \upsilon_c \Delta_c \quad (13)$$

$$E^{network} = n^{CD} \sum_c \upsilon_c \Delta_c P_c \tau_c \quad (14)$$

where n^{CD} is the number of "charging days" per week (i.e., number of weekly workdays over which drivers can reasonably be assumed to commute and charge) and Δ_c is the number of daily sessions that charger type c can host and a function of human behavior in response to τ_c. Based on our observations of charging at UCSD, we define $n^{\text{CD}} = 5$ and Δ_c as

$$\Delta_c = \begin{cases} 3, & \tau_c \leq 2 \\ 2, & 2 < \tau_c \leq 4 \\ 1, & \tau_c > 4 \end{cases} \quad (15)$$

While the upper potential for supplying sessions and energy is a deterministic feature of the network (and therefore known), we cannot know which drivers $i = 1,\ldots,N$ will charge at which of the potentially many types of chargers $c = 1,\ldots,K$. Drivers could self-allocate efficiently (e.g., wherein high-need drivers use high-kW-throughput chargers) or inefficiently. We therefore propose an allocation algorithm (Algorithm 1) that randomly assigns drivers to chargers (lines 4–7), calculates the number of sessions and energy the network delivers per that allocation (lines 8–9), and determines whether drivers' aggregate need for sessions and energy are met by the network (lines 12–14).

The random allocation procedure in Algorithm 1 can be embedded within a Monte Carlo routine and repeated until driver assignments to chargers $\{A_c\}$, supply of sessions X, and supply of energy Y converge. The network is deemed to meet drivers' charging needs (i.e., Z = true) when the probability

of meeting demand from a random allocation of drivers and chargers exceeds some threshold, e.g. 0.95 (95th percentile), meaning we would expect network supply to meet demand during 49.4 weeks of the year.

We note that Algorithm 1 omits human behavior and could be improved in future work by integrating observations of human responses. For example, driver behaviors may tend toward efficient network outcomes, e.g. if drivers seek opportunities to charge when network utilization is low, thereby distributing demand and increasing usage. Alternatively, drivers may flout rules on session dwell-time, thereby decreasing network supply. This motivates the need to investigate the potential flexibilities in human behavior that can, all else equal, reduce investments in charging infrastructure without sacrificing service quality.

Algorithm 1. Determines the number of weekly sessions X and energy Y delivered by a workplace EV charging network, and whether that meets aggregate driver demand for sessions and energy, denoted Z. [a]

Input: N, $\sigma_{i,c}^{weekly}$, $E_{i,c}^{session}$, $\sigma^{network}$, $E^{network}$. **Output:** X, Y, Z

1 Set initial conditions[b]: $X_j = Y_j = 10^6 \; \forall \; j \in \{1, \ldots, N\}$, Z = false

2 Set unassigned drivers $U = \{1, \ldots, N\}$

3 **for** charger type $c \in \{1, \ldots, K\}$ *do*

4 Randomly assign $\sigma_c^{network}$ drivers $A_c \in_R U$

5 **if** $\sigma_c^{network} >$ ¿ $U \vee$ ¿ **then**

6 $A_c = U$

7 **end if**

8 Supply sessions $X_j = \sigma_{j,c}^{weekly} \; \forall \; j \in A_c$

9 Supply energy $Y_j = E_{j,c}^{session} \; \forall \; j \in A_c$

10 Set unassigned drivers $U = U \setminus$ ¿ A_c

11 **end for**

12 **if** $\sum_j X_j \leq \sigma^{network}$ **and** $\sum_j X_j Y_j \leq E^{network}$ **then**

13 Z = true

14 **end if**

[a] $\in_R$ denotes random allocation; $|\cdot|$ denotes set cardinality (number of set elements).

[b] Elements in X and Y are set to arbitrarily high numbers initially and overwritten (lines 8–9) only when the network is sufficiently sized to meet demand. Insufficiently-sized networks thus fail the conditions in line 12.

3.5 Stall electrification

The stall electrification rate is given by $\frac{1}{S}\sum_c \upsilon_c \in [0, 1]$. This is the fraction of parking stalls at the institution that must be "electrified," i.e. converted to an EV charging stall, to meet the aggregate charging needs of the institution's EV drivers.

3.6 EV network performance metrics

We define three metrics to quantify network performance, or how efficiently drivers use the workplace network:

- *Network hosting capacity*: the quantity of charging activity the network *could* accommodate, assuming perfectly efficient use of the network. The upper potentials for sessions and energy delivery are given by σ^{network} and E^{network}, respectively.
- *Network usage*: a measure of drivers' actual use of the network. We define network usage via the number of weekly sessions initiated and energy delivered.
- *Network efficiency*: the ratio of actual usage to hosting capacity.

4. Driver behavioral data

In this section, we elaborate the three data collection systems we implemented at UCSD to generate human behavioral data: records of campus charging sessions (obtained from the EVSE vendors operating on campus); an intake survey that drivers complete upon joining UCSD's EV club; and recurring odometer surveys sent about monthly to club members (Table 2). These data provide a unique profile of how each driver interacts with the workplace network.

Institutions without the ability to set up data collection systems can configure the network planning model in Section 3 using stylized averages for human behavior parameters; however, use of behavioral inputs that reflect the institution's drivers can vastly improve data quality and model outputs (as we show in Section 5.3).

Table 2
Data collection systems we have implemented at UCSD to generate human behavioral data, and the model parameters they define. For completeness, we include external data sources as well.

Data collection system	Driver attribute / Model parameter	Units
Club enrollment survey	Commute distance (roundtrip)	mi commute^{-1}
	Commute frequency	week^{-1}
	Commuting mileage	mi year^{-1}
EV type is reported in club enrollment survey; EV specs are obtained from DOE (2024)	EV type	BEV or PHEV
	EV battery size	kWh
	EV battery range	mi
Club enrollment survey; updated per recurring odometer surveys and campus charging sessions	Fraction of total charging done at home	–
	Fraction of total charging done at the workplace	–
Recurring odometer surveys	Total driving mileage	mi year^{-1}
Campus charging sessions	Typical charging session duration	h
	Typical battery SOC when initiating a charging session	–
Isenstadt et al. (2022)	Fraction of driving on electricity (for PHEVs)	–

4.1 Workplace charging sessions

UCSD contracts with EVSE vendors who install and manage EV chargers throughout campus. From these vendors we receive charging session-level data on every instance of an EV connecting to the campus network, including the time an EV plugs in, stops charging, and unplugs from the charger, along with the energy delivered and driver who initiated the session (through an anonymized ID number). Drivers who opt to enroll in the UCSD EV club consent to our matching their information to these IDs, allowing analysis of their sessions. In this paper, we draw on 3,218 distinct charging sessions at 113 charging ports from June 2023 to June 2024.[4]

Local charging session data is important because it defines two key human behavioral parameters. First is the duration for which drivers plug in when unconstrained by limits on session dwell-time, T. While workplaces might assume 8–9 h of plug-in time (reflecting a 9–5 pm work schedule), we observe wide variation among UCSD drivers and a mean of 7.3 h (Fig. 3a).[5]

The second parameter is the typical SOC to which drivers let their batteries fall before plugging in, $\underline{SOC}$. While automakers and analysts recommend 20% of capacity as a floor (Kostopoulos Spyropoulos, & Kaldellis, 2020), we observe that UCSD's BEV drivers recharge, on average, when $\underline{SOC}$= 0.64; i.e., they use only 36% of their battery. For PHEV drivers, the numbers are $\underline{SOC}$ = 0.27 and 73% (Fig. 3b). Planners who assume drivers plug in only upon reaching a low SOC may significantly underestimate the number of sessions that will be initiated on a workplace EV network. Such assumptions may also overestimate energy delivered per session, and hence overvalue higher-throughput chargers.

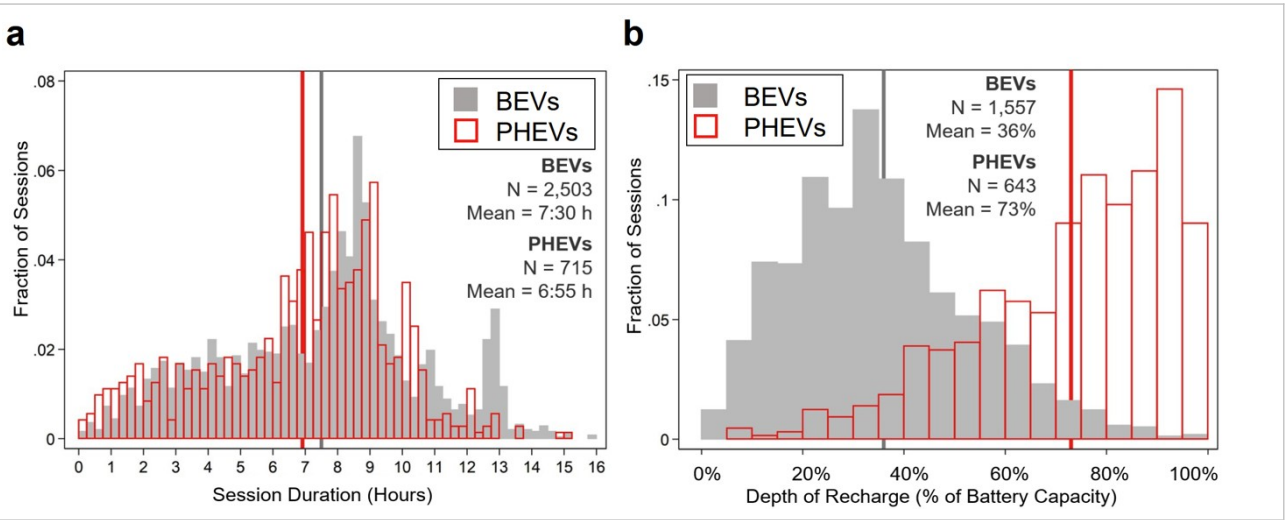


Fig. 3. Key human behavior model inputs, collected from charging session records of UCSD's EV club. **a,** Session duration is the duration drivers leave their EV plugged in and indicates the length of time drivers occupy the stall when effectively unrestricted by parking rules. **b,** Depth of recharge is the energy delivered to the EV as a percentage of the battery capacity and indicates the SOC drivers let their battery fall to before recharging. BEV and PHEV drivers charge in markedly different ways: with smaller batteries, PHEVs recharge quickly yet they occupy the charging stall nearly as long as BEVs do, and hence "block" (i.e., occupy without charging) parking stalls for about two hours longer, on average, than BEVs.

4.2 Enrollment survey: Charging and commuting habits

[4] In total, our level-2 session data span 66,000 distinct sessions over 7 years at 386 charging ports.

[5] At UCSD, drivers can park at level-2 chargers for up to 4 or 12 h (depending on the type of charger) and at DC fast chargers for up to 1 h. The campus is moving toward majority 12-h dwell-time stations.

Upon joining the UCSD EV club, drivers complete an intake survey about their EV, charging habits, driving behaviors, and demographics.

EV information includes EV make, model, and year, which we cross-reference with manufacturer databases (DOE, 2024) to obtain specifications for battery size and range. The type of EV that drivers use shapes their interactions with the workplace network, including how much energy they require and how many sessions they initiate to procure it. There are large differences, e.g., between BEVs and PHEVs (Fig. 3b)—due to large differences in battery size (Fig. 4a; 77 vs. 12 kWh mean among our EV club members). At UCSD, we observe that PHEV drivers tend to be either high-frequency chargers (charging with nearly every commute) or low-frequency chargers (instead driving regularly on gas). The distribution of the type of EVs that arrive to the workplace significantly affect network design.

Commuting and charging information includes commute frequency f and home zip code, which together enable calculations of commute distance d and total annual commuting mileage M^{commute} (Fig. 4b); and the share of charging done at home C^{home} (Fig. 4c). UCSD drivers self-report charging 41% at campus and 39% at home, on average (on an energy basis), while charging session data reveal 47% charging at campus (with the remaining 53% done off-campus). These are much lower than U.S. Department of Energy estimates, which place the national home charging average at 80% (Office of EERE, 2020). A recent meta-analysis suggests the share of residential charging exceeds 90% (Yang, Fulton, and Kendall, 2024). Compared to EV drivers nationwide, our drivers are more reliant on the workplace for charging. For institutions that support EV-driving constituents based on their driving and charging habits (as envisioned in Section 5.1), assuming that their constituents resemble the population is a risk; as our case shows, anticipating higher levels of home charging than actually occur could significantly underestimate the needed size of a workplace charging network.

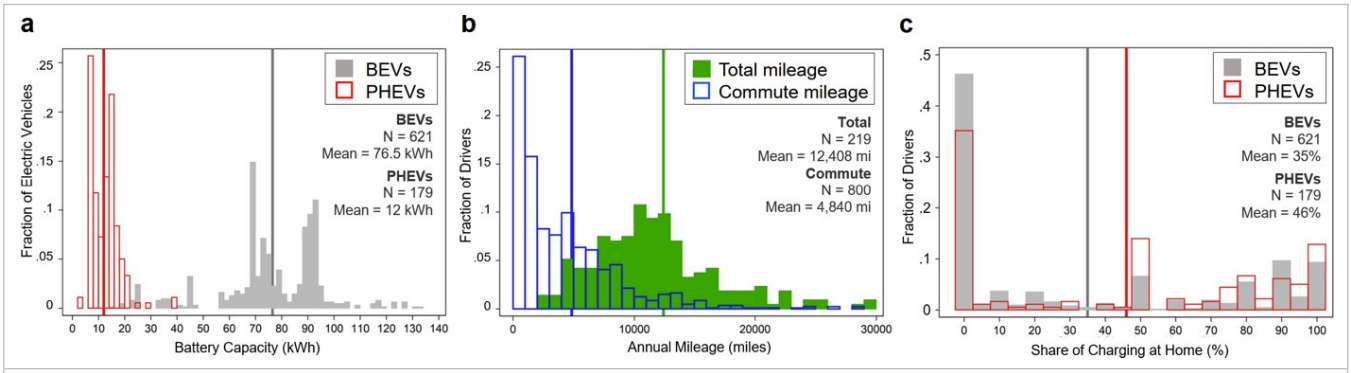


Fig. 4. Key human behavior model inputs, collected from enrollment surveys and odometer surveys of UCSD's EV club. **a,** What people drive—EV battery size. **b,** How far people drive—annual total and commuting mileage. **c,** Where people charge—the self-reported fraction of charging done at home (we also obtain the fraction charged at the workplace). Wide variation in behaviors and preferences underscores the importance of collecting unique driver data: drivers have different EVs (a), may live proximate to or distant from the workplace (b), and tend to be either primarily home chargers (e.g., >75% home charging) or defined by utter lack of access to home charging (0%) (c)—all of which lead drivers to interact with the workplace network in unique ways.

4.3 Odometer surveys: Total driving

We ask UCSD's EV club drivers monthly to report their odometer reading. Multiple readings allow for calculations of total driving mileage M^{total}, which implicates the total charging that drivers need (Fig. 4b).[6] We observe that EV club members average 35 mi/day, or 12,775 mi/year—similar to national and statewide estimates of 12,500–14,000 mi (Federal Highway Administration, 2019; Federal Highway Administration, 2022) but 48% higher than the citywide estimate of 8,650 mi (Comen, 2016). Plausible variation in total driving mileage greatly affects network usage and design. As we show in Section 5.2, assuming UCSD's club members drive the smaller San Diego-derived distance of 8,650 mi would decrease workplace charging sessions by 23%.

Odometer surveys include a free-response field in which drivers enter their mileage, as well as a field for uploading a photo of the odometer, allowing us to verify readings. We observe that 17% of readings that include a photo are reported with errors (e.g., due to excessive rounding, typos, or guessing). For drivers who have not submitted verifiable odometer readings, we construct a profile of their annual mileage using the data of drivers who have submitted readings, as shown in Fig. 5.

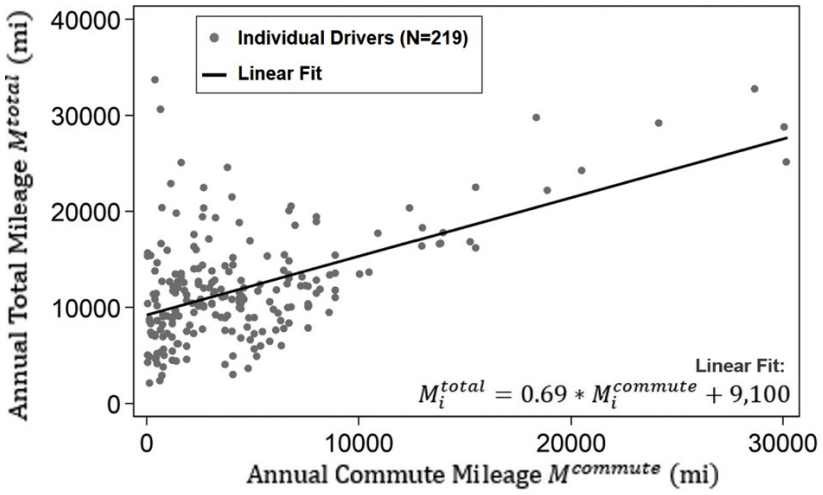


Fig. 5. Total driving and commuting for the subset of UCSD's EV club members (*n=219*) who have responded to sufficient (2+) odometer surveys to estimate their total driving. For the subset of drivers without 2+ readings, we estimate total driving from their self-reported commuting mileage, which is known, and the total driving–commuting relationship shown in the figure. Total driving mileage increases linearly with commuting mileage, given by $M_i^{\text{total}} = 0.69\, M_i^{\text{commute}} + 9100$.

5. Case study and results

In this section we demonstrate the model using UCSD's EV network and 800 drivers enrolled in the UCSD EV club. UCSD is a large institution with 75,000 affiliates (students, staff, faculty), 20,000 parking spaces, and an EV network of 439 level-2 (6.25 kW) charging ports (UCSD Transportation Services, 2024a; Bayram et al., 2016).[7]

[6] Odometer surveys are also useful as a conduit to ask additional questions of high value, e.g. about changes over time in EV ownership or home residence.

[7] UCSD's network is currently undergoing expansion: an additional 762 level-2 ports are anticipated by year-end 2025. The campus also hosts 13 DC fast chargers, with 22 more planned. About 3,000 unique drivers have used the network multiple (>1) times.

Our network design model in Section 3 requires that institutions first know how they will support drivers. In what follows, we analyze four plausible levels of support (Section 5.1), then perform general sensitivity analysis on model parameters (Section 5.2), and follow this with deeper analysis on the factors that most drive results: configuring parameters with individual driver data instead of average data (Section 5.3), the effective battery range that drivers actually use (Section 5.4), the synergy between EV charger throughput and permissible dwell-time (Section 5.5), and potential behavioral rebound effects in which drivers replace some fraction of home charging with workplace charging (Section 5.6).

5.1 Institutional strategies for supporting drivers

While institutions could supply charging needs in numerous ways, we investigate two systems of support that generate plausible bookends on the volume of charging that might be supported: one based on affiliates' driving (e.g., total driving or commuting only), and another based on charging needs (e.g., all charging or only the portion of charging not done at home). Numerically, support manifests as the total electric range M_i^+, in miles, that the workplace EV network should be capable of delivering to drivers. We analyze all four combinations of these goals, with M_i^+ set to M_i^{total}, M_i^{total} $(1–C_i^{\text{home}})$, M_i^{commute}, and M_i^{commute} $(1–C_i^{\text{home}})$ (Table 3).

Table 3
Four strategies (goals) for supporting EV drivers with workplace charging.

Case	Institutional support for…		Range (mileage) to supply M_i^+	Logic behind support
	Driving	**Charging**		
1	Total driving	All charging	M_i^{total}	Upper bound of institutional support
2	Total driving	Charging not done at home	M_i^{total} $(1–C_i^{\text{home}})$	Develop workplace charging around the home chargers that affiliates have already invested in and use
3	Commuting only	All charging	M_i^{commute}	An ethos that workplace networks support commuting, while other networks (destination, highway) support other driving
4	Commuting only	Charging not done at home	M_i^{commute} $(1–C_i^{\text{home}})$	Combination of case 2 and 3

Fig. 6 shows drivers' use of the workplace charging network under the four scenarios in Table 3. Numerical results are reported in Table 4.

Three important observations emerge from Fig. 6. First, network usage varies widely across scenarios, from 0.6 to 2.3 sessions per week per driver (Fig. 6b), indicating that institutional choices about the level of support profoundly affect network usage and size. For example, supporting all charging needs associated with commuting (scenario 3) would require a portfolio of EV chargers that supports 1 session per week per driver, on average; while a commitment to supporting all charging needs and all driving (scenario 1) would require a network that supports 2.3 sessions per week per

driver. Such wide variation suggests that institutions should exercise caution when establishing goals and in choosing the criteria by which they support commuters. There is high value in iterative planning that begins with modest ambition, evaluates progress over time, and adjusts goals accordingly.

Second, for UCSD, the decision of whether to support total driving or commuting only (scenarios 1–2 vs. 3–4) is more important than the decision of whether to support all charging or only non-home charging (scenarios 1, 3 vs. 2, 4). Increasing support from commuting to total driving triples the mean plug-in rate, from 17% to 51%; while increasing support from non-home charging to all charging increases the mean plug-in rate by one-half, from 51% to 79%.

Third, network usage varies by EV type. BEVs and PHEVs have similar network usage when only non-home charging is supported (scenarios 2, 4) because PHEV drivers report higher reliance on home charging, on average. When all charging is supported (scenarios 1, 3), PHEVs use chargers more often because their smaller batteries require more frequent charging and cannot draw as much energy per session as those of BEVs.

For the 800 UCSD club drivers, scenarios 1–4 envision supporting 0.6–2.3 weekly charging sessions per driver. This would require 96–368 chargers with 6.25 kW throughput and 12-h maximum dwell-time (the current UCSD mode), assuming uniform distribution of sessions across the 5-day workweek. With 20,000 parking spaces, that equates to a 0.5–1.8% stall electrification rate. (As our focus herein is human behavior, we report these calculations only for illustration; UCSD's 439 level-2 charging ports appear sufficient to meet the club's demand but are also used by non-club drivers and often highly congested.)

Table 4

Drivers' use of the workplace (campus) charging network: plug-in rate and anticipated number of charging sessions per week per driver. Results are the mean by EV type.

Case	**1**	**2**	**3**	**4**
Support for driving	**Total driving**	**Total driving**	**Commuting only**	**Commuting only**
Support for charging	**All charging**	**Charging not done at home**	**All charging**	**Charging not done at home**
Plug-in rate (%)				
All EVs	79%	51%	30%	17%
BEVs	76%	51%	28%	17%
PHEVs	87%	51%	35%	17%
Sessions per week per driver				
All EVs	2.3	1.5	1	0.6
BEVs	2.2	1.5	1	0.6
PHEVs	2.5	1.5	1.1	0.6

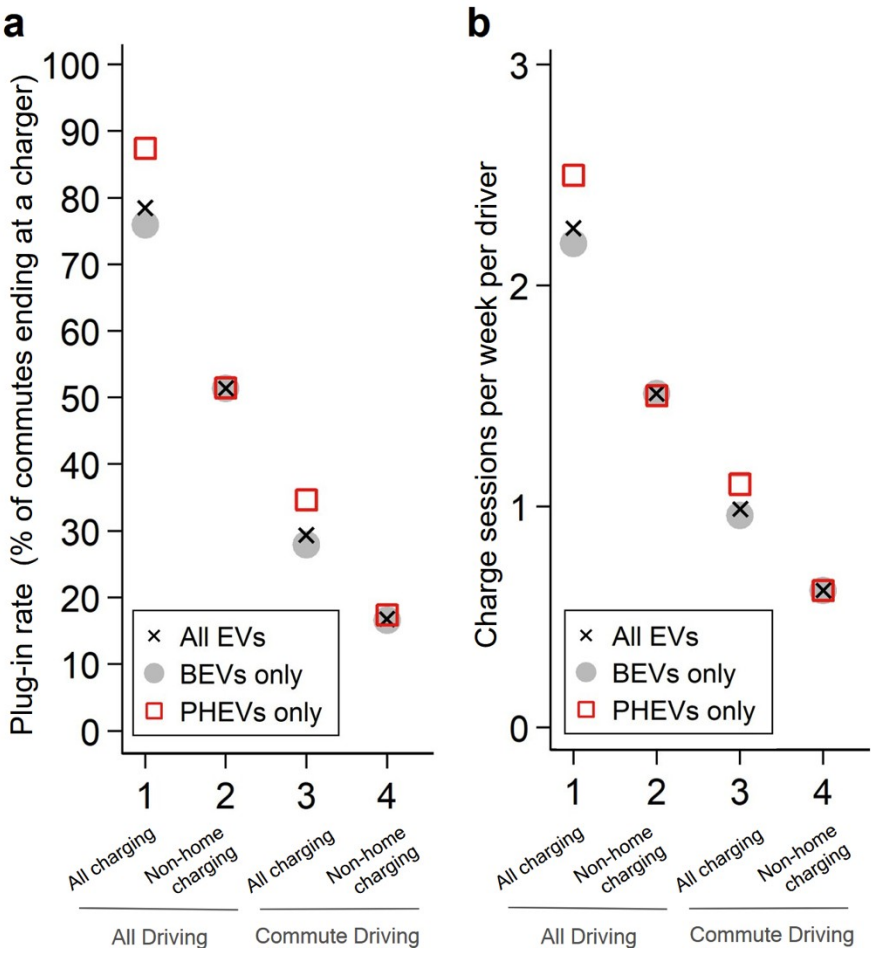


Fig. 6. Drivers' network usage for 4 scenarios of institutional support: support for total driving (scenarios 1–2) or only commuting driving (scenarios 3–4), alongside support for drivers' full charging need (1, 3) or only charging not already done at home (2, 4). **a,** Plug-in rate (i.e., the percentage of commutes to the workplace that must end in an EV stall for drivers to recoup mileage). **b,** The number of charging sessions per week per driver. Markers denote the mean across 800 UCSD EV club members (621 BEVs, 179 PHEVs).

5.2 Simple sensitivity analysis

In this section we vary all seven of the significant parameters in the model within ranges specified in Table 5. In each sensitivity analysis, we vary a single parameter while holding constant all other parameters, using scenario 3 as a baseline. In Sections 5.3–5.6 we investigate the most important parameters for charging network design and explore wider parametric variation to show implications for decision-making.

The seven sensitivities span two major clusters of factors that affect network planning: those that implicate human behavior, which institutions may have little control over; and decisions about network design, which institutions plausibly control. Fig. 7 shows results for the simple sensitivity analysis: how drivers' use of the network changes following variation in a single model parameter. While results are nuanced, several trends emerge:

- Among the two clusters of parameters, sensitivity is greater for institutional choices—especially the level of institutional support.
- After institutional goal-setting, SOC floor has the largest effect on workplace network usage. The SOC floor sensitivity is high because drivers typically plug in with high SOC (mean BEV: 64%) yet park for a duration (mean BEV: 7.5 h) that could yield significantly deeper sessions. With deeper sessions, drivers need fewer sessions (and hence an overall smaller workplace network) to recoup the energy they need.
- Sensitivities to dwell-time policy are small in our baseline because 4–8.5 h dwell-times, when combined with 6.25 kW chargers, provide ample energy to fill batteries from typical starting SOCs. This also explains the lack of any benefit from switching to higher 8.6 kW chargers. Dwell-time has a larger impact in cases where the institution's chargers have lower throughput capability (e.g., level-1), as we show in Section 5.5.
- Sensitivity to the fraction that PHEVs drive on electricity is small because PHEVs comprise a small share of all EVs (22%). However, we observe that PHEV behavior is bimodal, with drivers relying primarily on electricity or gasoline. What could matter more (but remains beyond our data collection) is the ratio of these two types of PHEV drivers at an institution.

Two takeaways emerge from these sensitivities. First, institutions should be mindful about their ambition and the chargers they plan to install. While higher-throughput chargers may enable deeper sessions, they may not reduce usage (plug-in rates, the number of sessions) unless drivers also adapt their behavior (e.g., charge with lower SOC floor). Second, to that end, institutions should strive to know their constituents' driving and charging patterns. Two behaviors—SOC floor and total driving mileage—greatly affect network usage. Institutions cannot control drivers' SOC floor (which relates to range anxiety), but may be able to shape it, e.g. through workplace charging incentives that encourage deeper (greater kWh) sessions. Credible estimates for total driving span 8,650–14,000 mi, which imply 7–29% additional or fewer weekly charging sessions that a workplace network would be designed to support. Drivers' driving and charging profiles can be understood through surveys like those we have created at UCSD.

Table 5
Parametric variation of 7 parameters in the simple sensitivity analysis. Sensitivity analysis is done with respect to scenario 3 in Table 3.

Parameter	Baseline value	Sensitivity value (low, high)	Justification
Institutional support	Total driving, non-home charging (Scenario 2)	Commuting; non-home charging (Scenario 4)	Institutional workplace network intended to support commuting needs not met at home (see Section 5.1)
		Total driving, all charging (Scenario 1)	Upper bound of institutional ambition for supporting drivers through workplace charging (see Section 5.1)
EV charger kW throughput	6.25 kW	2 kW	Typical level-1 charger throughput
		8.6 kW	Anticipated future modal level-2 charger at UCSD
EV charger	7 h [a]	4 h	Institutional policy focused on access (aimed at

dwell-time			providing 2 sessions per workday per charger)
		8.5 h	Institutional policy focused on convenience (intended to allow drivers to park for the full workday, inclusive of a break)
Battery $\underline{SOC}$ (for BEVs) [b]	64%	44%	SOC floor associated with the 85th percentile session depth (per UCSD driver session data; see Fig. 3b)
		83%	SOC floor associated with the 15th percentile session depth (per UCSD driver session data; see Fig. 3b)
Percentage of home charging brought to campus [c]	0	–25%	Potential feedback in behavior in which drivers migrate some workplace charging outside the workplace, e.g. due to expensive charging rates
		25%	Potential feedback in behavior in which drivers migrate some home charging to the workplace, e.g. due to competitive charging rates
Average annual total driving	12,775 mi	8,650 mi	San Diego regional average (Comen, 2016)
		14,000 mi	Upper bound estimate reflecting working-age U.S. population (Federal Highway Administration, 2019; Federal Highway Administration, 2022)
Mean PHEV fraction of driving on electricity	41%	33%	Mean value using 2022 industry updates to EPA's methodology (Isenstadt et al., 2022)
		58%	EPA's codified methodology (Isenstadt et al., 2022)

[a] Level-2 chargers at UCSD are installed in parking stalls with 4-h and 12-h dwell-time limits. The baseline value of 7 h reflects observed behavior of UCSD EV club drivers in 12-h stalls, indicating that dwell-time limits are usually not binding.

[b] For PHEVs, we set $\underline{SOC}=0$, as explained in Section 3.2.3.

[c] The negative sensitivity value is applicable only to projects to expand an existing EV network.

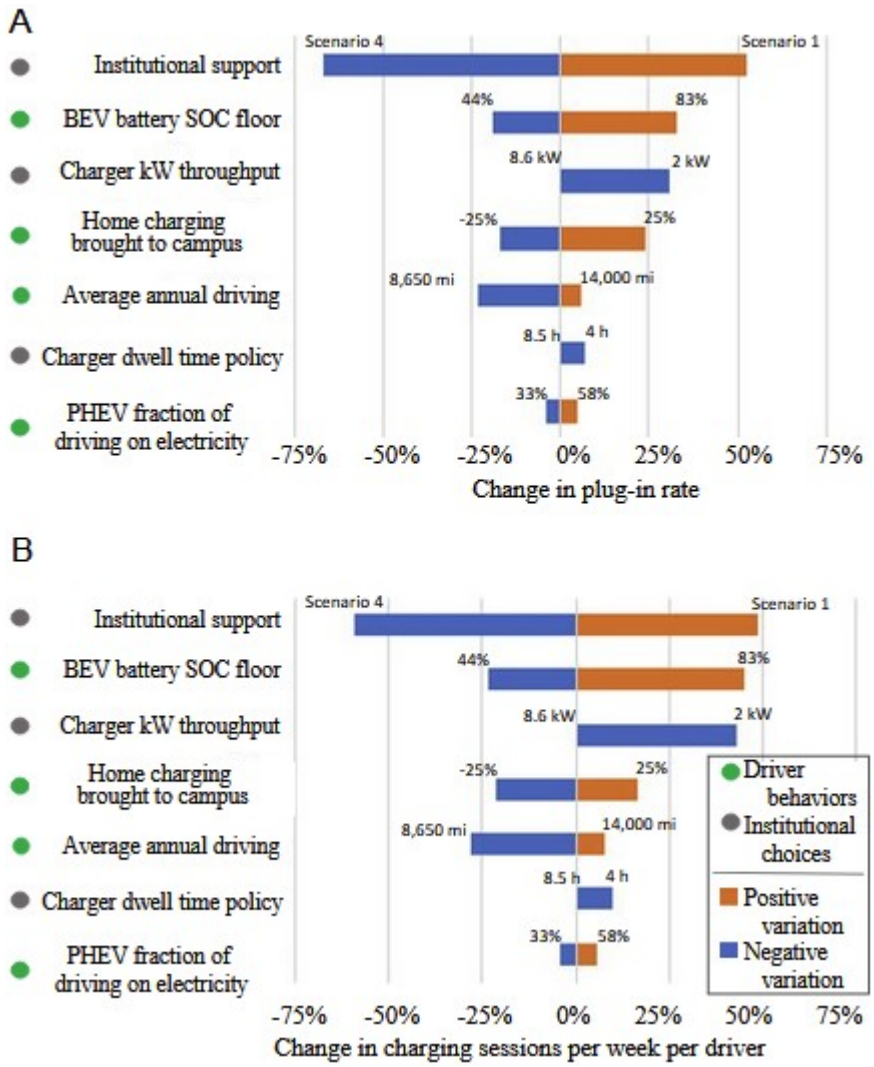


Fig. 7. Change in drivers' network usage due to variation in select model parameters. We report network usage as: **a,** plug-in rate; and **b,** charging sessions per week per driver. Variation is noted next to each parameter and reported in Table 5.

5.3 The value of local driver behavioral data

Institutions may lack the resources to deploy the kinds of data collection systems (Section 4) that we implement and use in our EV network design framework (Section 3). Instead, institutions might turn to national or regional average data instead of calibrating the model with local driver data.

Here, we quantify differences in drivers' anticipated workplace network usage derived from two sources of data inputs: external estimates (e.g., national or regional averages that disregard the institution's local drivers) and individual estimates derived from the institution's EV drivers, as detailed in Table 6. At UCSD, drivers do a smaller fraction of home charging, greater total driving, shorter-duration sessions, and smaller (fewer kWh) sessions—all of which push model outcomes toward greater use of workplace charging and network size.

Fig. 8 shows results for the two model specifications. We find that obtaining and parameterizing our model with individual data from UCSD's drivers has a massive effect on workplace charging

activity. With local driver data, plug-in rates and weekly sessions are threefold higher than those derived from external estimates, underscoring the value of calibrating the model with local human behavioral data. Using externally sourced estimates is likely better than guessing blindly, but in our case, it significantly underestimates the need for workplace chargers.

Table 6
Model parameterizations for two model runs: one derived from external estimates of driver data (which know nothing of the institution's drivers); and a second derived from individual data obtained from UCSD's EV drivers.

Parameter	Parameter basis (source)	
	External estimates (e.g., national average)[a]	Driver-derived estimates (from the institution's EV drivers)
Percentage of charging done at home	80%	38%[b]
Total annual driving	11,000 mi	12,775 mi[c]
Permissible (or effective) charger dwell-time	8 h	7 h[d]
SOC floor (for BEVs)	20%	64%[d]

[a] External estimates are: 80% home charging (Office of EERE, 2020), 11,000 mi annual total driving (Steinbach and Tefft, 2022), and 20% SOC floor per manufacturer guidance; an 8-h dwell-time reflects a standard workday.
[b] Calculated from driver responses to the UCSD EV club intake survey.
[c] Calculated from driver responses to the UCSD EV club intake survey and odometer surveys.
[d] Calculated from driver charging session records at UCSD. Driver behavior reveals that sessions are typically shorter than the permissible dwell-time implied by an 8-h workday.

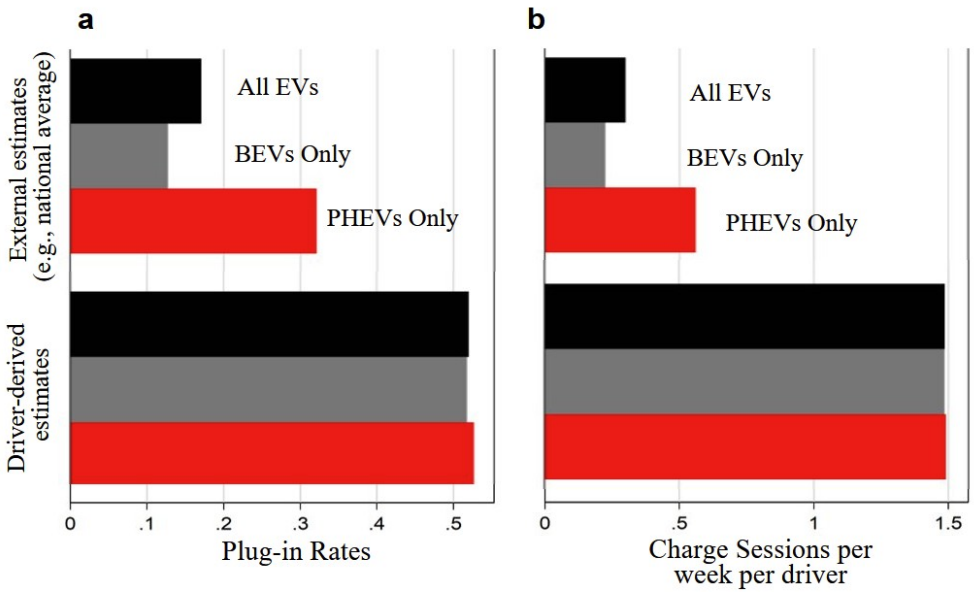


Fig. 8. Workplace network usage—**a,** plug-in rate and **b,** charging sessions per week per driver—for two model specifications that use either (at top) stylized national or regional estimates (without knowledge of local driver data); or (at bottom) observed behavioral data from the institution's EV drivers (in our study, UCSD EV drivers) used to generate unique driver profiles of network usage.

5.4 EV driver behavior: a key uncertainty

As we showed in Section 5.2, SOC floor is the model parameter that most affects workplace network usage. Here we investigate the full range of plausible driver behavior, from 0 to 0.9 (Fig. 9). $\underline{SOC}$ = 0 represents ideal behavior, in which drivers use the full available battery capacity before charging; at the other extreme, $\underline{SOC}$ = 0.9 indicates very conservative driving, in which drivers use only 10% of the available battery capacity before charging. We hold the workplace network constant, with 6.25 kW chargers and 7-h dwell-time, while varying $\underline{SOC}$. (The 7-h dwell-time reflects the observed behavior of UCSD EV club drivers when functionally unconstrained by dwell-time limits; UCSD policy typically allows for 12-h dwell-time.)

We observe two patterns in how $\underline{SOC}$ affects network usage. First, decreasing $\underline{SOC}$ from 0.9 to 0.5 has a sharp effect on drivers' network usage: plug-in rates decrease 38 percentage points (from 80% to 42%) and weekly sessions per driver fall from 2.7 to 1.2. Second, decreasing $\underline{SOC}$ further, from 0.5 to 0.1, yields additional but shallower declines in plug-in rate of 15 percentage points (from 42% to 27%), and in weekly sessions, from 1.2 to 0.7. Network operators can achieve steep declines in network usage (and hence in the number of workplace chargers needed to support drivers) by encouraging drivers to charge at lower SOC, with the greatest impact achieved by pushing down relatively high SOC floor values to 50%; diminishing returns accompany further behavioral change. These benefits hinge upon combinations of EV charger throughput and dwell-time that sufficiently charge more deeply depleted batteries.

Encouraging BEV drivers to use a wider range of their battery capacity is a substantial point of leverage to improve network utilization and reduce stall electrification requirements. Indeed, $\underline{SOC}$ may be suited to behavioral intervention, e.g. through financial incentives that encourage deeper charging sessions. If institutional policy can encourage drivers to travel farther between charging sessions (in effect reducing $\underline{SOC}$), it can reduce the number of chargers that must otherwise be installed to meet drivers' needs.

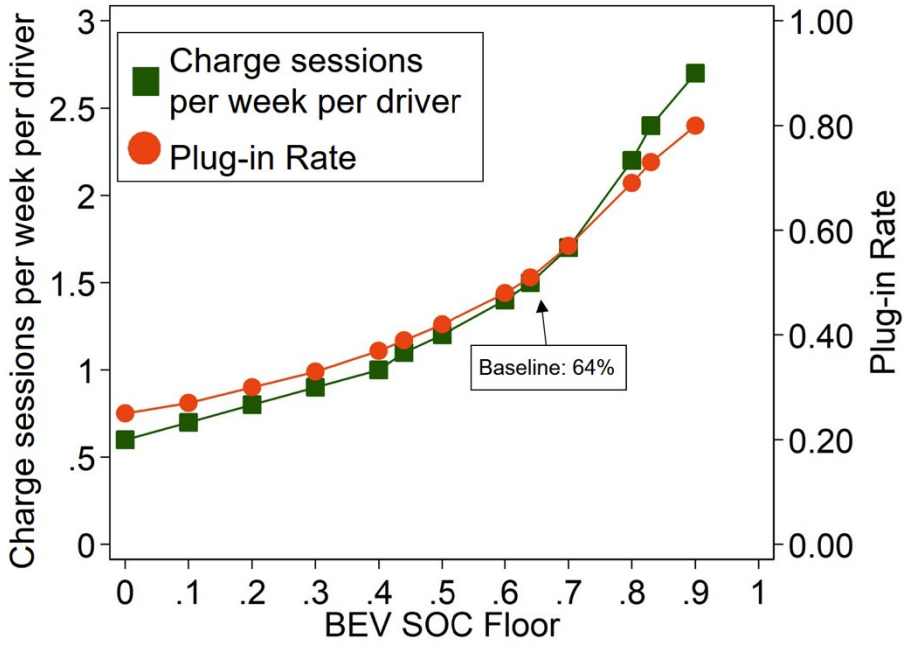


Fig. 9. The effect of $\underline{SOC}$ (the SOC to which drivers allow their batteries to fall before charging) on **a,** plug-in rate and **b,** charging sessions per week per driver. $\underline{SOC}$ varies widely among UCSD EV drivers and is the most important human behavioral parameter in the model. $\underline{SOC}$ for PHEVs is set to 0. $\underline{SOC}$ = 0.64 is the baseline value observed among BEV drivers in UCSD's EV club, while $\underline{SOC}$ = 44% and 83% indicate the sensitivity values in Section 5.2.

5.5 EV chargers and parking rules: a key synergy

Charger capabilities (kW throughput) and session dwell-time rules (h) interact to affect the maximum energy (kWh) that drivers recoup per session—and hence the number of workplace sessions drivers require. They are the two variables that institutions likely have the most control over.

We vary dwell-time from 2 h to 12 h, indicating policies that prioritize access (a workday plausibly permits four 2-h sessions) or convenience (a 12-h dwell-time allows a driver to plug in and leave their EV for the workday). In tandem, we vary charger kW-throughput from 2 kW to 18 kW, indicating level-1 chargers compatible with 120 V outlets and higher-end level-2 chargers that are common in workplace settings.[8]

Fig. 10 shows the changes in network usage for each combination of charger type and dwell-time limit. Two observations stand out. First, an institution's dwell-time policy has a larger effect on drivers' network usage when the institution uses lower-kW-throughput chargers. At lower kW throughput, the shorter dwell-time increasingly limits the energy drivers can recoup per session and drives up the number of sessions they need. Second, higher products of kW-throughput and dwell-time reduce network usage but see diminishing returns. For UCSD's drivers, returns plateau at 40–50 kWh per session. For example, with an 8-h dwell-time policy, installing chargers with 12-kW throughput only slightly reduces network usage relative to the baseline of using 6.25 kW chargers.

[8] Although level-2 chargers are common, some institutions are electrifying parking by strategically prioritizing level-1 chargers (UCLA Transportation, 2024). We suspect workplaces will not emphasize DC fast chargers, due to high capital costs and demand charges.

As a corollary, with sufficiently high kW-throughput (≥ 12 kW), dwell-time ceases to meaningfully affect network usage (except for the 2-h dwell-time); while with sufficiently high dwell-time (12 h), kW-throughput ceases to meaningfully affect usage (except for 2 kW chargers).

In making decisions about the types of chargers to install and the dwell-time rules that accompany them, institutions must be mindful of drivers' SOC floor. Institutions could install higher-kW-throughput chargers, allowing drivers to receive more energy per session. But if drivers use them opportunistically rather than by necessity (i.e., plug in with relatively high SOC; Helmus, Lees, & van den Hoed, 2020), they recharge quickly to 100% SOC and block the stall, causing congestion (Nicholas and Tal, 2015) and low charger utilization rates. In response, institutions could implement new rules to improve stall sharing—e.g. shorter dwell-times that beget higher station utilization but potentially burden employees by requiring them to charge more often and re-park their EV during the workday.

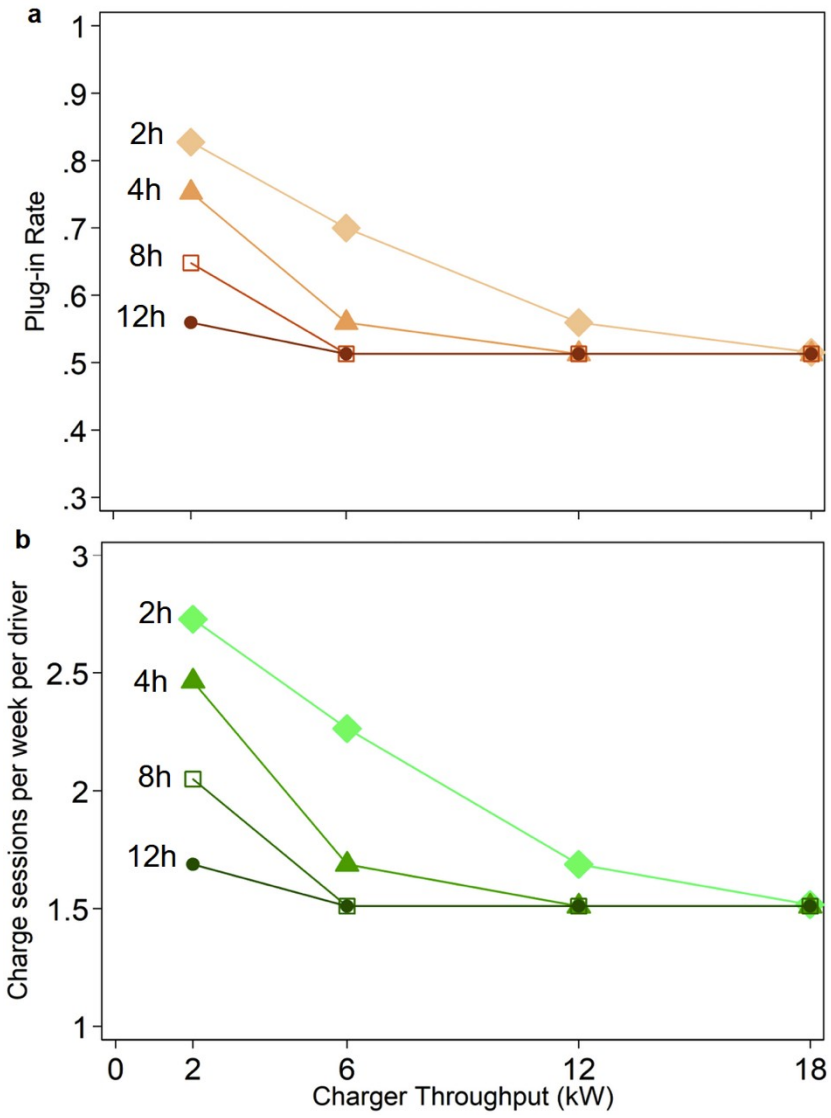


Fig. 10. The effect of institutional choices for installing EV chargers that differ in kW throughput and for implementing parking rules for session dwell-time. Effects are shown on **a,** plug-in rate and **b,** weekly charging sessions. Variation in charger throughput is plotted on the x-axis; variation in dwell-time is shown by data series. In our baseline scenarios, chargers have 6.25 kW throughput and stalls have a 7-h dwell-time.

5.6 Home share of charging brought to the workplace

Drivers could change their charging habits for many reasons, leading to changes in the proportion of charging they do at the workplace. We investigate the implications of this shift for network usage. We vary the size of this shift from 0% (the baseline) to 50% of home charging. (A value of 50% indicates that drivers who charge at home for 60% of their energy, e.g., would shift half, or 30%, to the workplace.)

Fig. 11 shows the resulting change in network usage. Experimental evidence at UCSD suggests drivers might have the flexibility to shift about 20% of their charging to the workplace (Garg et al., 2024b). Such a shift would increase plug-in rates by 11 percentage points, from 51% to 62%.

These relatively small effects reflect at least two factors. First, of UCSD drivers who do any charging on campus, many already report doing 100% of charging there (and thus cannot increase their charging on campus). Second, there is headroom to increase the amount of energy delivered per session without driving up the number of sessions, since drivers park for 7 h per session, on average, but require fewer than 7 h to reach 100% SOC.

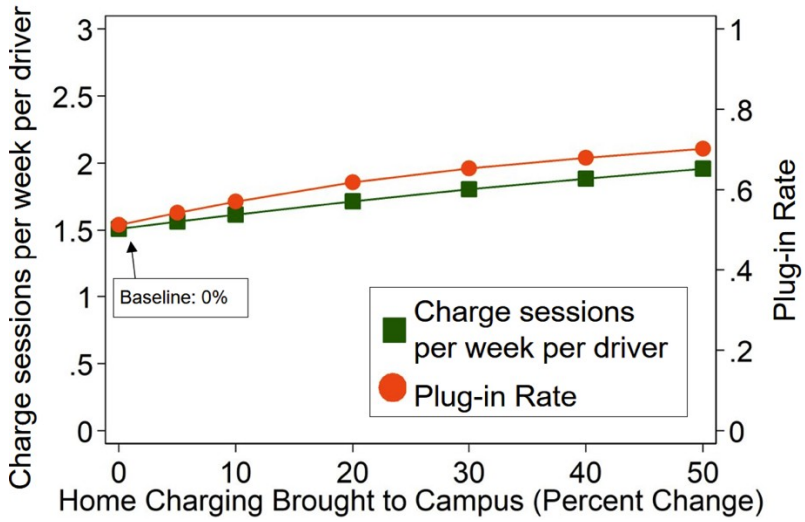


Fig. 11. The effect of a potential shift in behavior in which drivers bring home charging to the institution's workplace network. Effects are shown on network usage (plug-in rate, charging sessions per week per driver).

6. Conclusion

This paper presented a new optimization-based framework for designing workplace EV charging networks. In our framework, workplaces are institutions (e.g., businesses, universities) with regular commuters, parking facilities, and a commitment to supporting the charging needs of EV-driving constituents. The novelty of our model is that it is built, bottom-up, on the real behavior, habits, and preferences of drivers that use the network. We demonstrated the approach using UCSD's EV network and unique individual data obtained from 800 EV drivers. We conclude with three observations for modelers and institutions considering a workplace EV network.

For modelers, we find that integrating drivers' unique behavioral data into the model significantly shapes their expected use of the network. Using individual driver data in place of regional averages that are commonly used, for example, leads to a threefold increase in the number of sessions that drivers initiate.

For institutions, our results suggest taking a cautious approach when committing to support drivers. We find that different plausible goals for supporting drivers—e.g., supporting all driving and charging rather than the less ambitious goal of supporting commuting and non-home charging—can lead to a 3.8-fold increase in EV network size. This suggests there is value in beginning with modest support, evaluating network usage and driver satisfaction, and increasing ambition over time. While an institution could ensure needs are met (at very high cost) by conservatively electrifying every parking stall, we find that drivers only need to plug in to the workplace EV network on just 51% of their commutes, on average. That translates to about 1.5 sessions per week per driver.

The EV chargers that institutions install, the parking rules they implement to govern them, and driver behavior interact in complex ways that affect charging needs, network usage, and network design. Our model helps not only to answer questions around network design, but also to *identify* the key unknowns in human behavior that most affect network design. We find that the most important behavioral parameter is the battery SOC at which drivers typically charge (or, equivalently, the distance they drive between charges). If drivers can be encouraged to charge at lower SOC, then network efficiency increases and drivers' aggregate charging needs can be met with fewer total chargers.

A major unknown, which our model does not currently treat, is how human behavior might change as a workplace network forms or expands. For example, as new chargers are added, drivers may charge more frequently with shallower sessions; total sessions may increase substantially while energy delivered remains relatively unchanged. Future work is needed to understand these feedback effects. Furthermore, although institutions cannot directly control the SOC at which drivers charge, that SOC value may be malleable, e.g. through incentives that encourage "deeper" sessions. Ongoing work by our team includes randomized controlled trials and natural experiments on human behavioral responses to incentives, price changes, and increases a growing workplace charging network.

Finally, while we have focused our effort here on how driver behaviors and habits shape workplace charging needs, understanding how those needs in turn shape optimal network design requires further work. We have framed an optimization and simulation routine that determines network design as a function of drivers' needs, but what is needed next is systematic analysis that applies them to emergent networks in the real world. In future work, we intend to analyze the performance of these algorithms and the malleability of factors that most shape network design.

CRediT authorship contribution statement

Jeff Myers: Data curation, Formal analysis, Methodology, Visualization, Writing - original draft, Writing - review & editing. **Ryan Hanna:** Conceptualization, Data curation, Formal analysis, Methodology, Supervision, Writing - original draft, Writing - review & editing. **Teevrat Garg:** Writing - review & editing. **Josh Kavanagh:** Conceptualization, Writing - review & editing. **Jan Kleissl:** Data curation, Writing - review & editing. **Sebastian Tebbe:** Data curation, Writing - review & editing. **Byron Washom:** Data curation, Writing - review & editing. **David G. Victor:** Supervision, Writing - review & editing.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

We thank our colleagues at UC San Diego: Emily Carlton, Jarrett Valdez, Alvin Lee, Alessio Yu, and Steve Carlson for support with creating and administering UCSD's Triton Chargers EV club; Taylor Kempf, Yi-An Chen, and Avik Ghosh for data support; and Shane Moise for support from the UCSD Office of Innovation and Commercialization. Thanks to Cypress Hansen for graphics. This research was supported in part by a CA CARES grant (CA Climate Action, Resilience, and Environmental Sustainability; award #R02CE6883) through UCSD. Support for related work on EV charging was provided by the National Science Foundation (award # ECCS-1947050), TotalEnergies, and the Electric Power Research Institute, a nonprofit R&D organization focused on the electric power sector.

References

Bailey, M.R., Brown, D.P., Shaffer, B.C. & Wolak, F.A. Show me the money! Incentives and nudges to shift electric vehicle charge timing. *National Bureau of Economic Research*, w31630 (2023).

Bauer, G., Hsu, C.W., Nicholas, M. & Lutsey, N. Charging up America: Assessing the growing need for U.S. charging infrastructure through 2030. (International Council on Clean Transportation, 2021).

Bayram, I. S., Devetsikiotis, M., & Jovanovic, R. Optimal design of electric vehicle charging stations for commercial premises. *Int. J. Energy Res.* **46**, 10040–10051 (2022).

Bayram, I.S., Zamani, V., Hanna, R., & Kleissl. J. On the evaluation of plug-in electric vehicle data of a campus charging network. In 2016 IEEE International Energy Conference, EnergyCon 2016, Leuven, Belgium.

California Public Utilities Commission. Home Charging Access in California. Staff report no. CEC-600-2022-021. (2022).

Chakraborty, D., Bunch, D.S., Lee, J.H. & Tal, G. Demand drivers for charging infrastructure-charging behavior of plug-in electric vehicle commuters. *Transp. Res. Part D: Transport and Environment* **76**, 255–272 (2019).

Cilio, L., & Babacan, O. Allocation optimisation of rapid charging stations in large urban areas to support fully electric taxi fleets. *Appl. Energy* **295**, 117072 (2021).

Coignard, J., Saxena, S., Greenblatt, J. & Wang, D., 2018. Clean vehicles as an enabler for a clean electricity grid. *Environ. Res. Lett.* **13**, 054031 (2018).

Comen, E. San Diego Commute Times Similar to National Average. 2016. (Available at https://www.sandiego.gov/system/files/webform/pc-meetings/san_diego_commute_times_similar_to_national_average_-_san_diego_stats.pdf?sandread=cbd4972066f47bc4; accessed June 2, 2024).

Delmonte, E., Kinnear, N., Jenkins, B., & Skippon, S. What do consumers think of smart charging? Perceptions among actual and potential plug-in electric vehicle adopters in the United Kingdom. *Energy Research & Social Science* **60**, 101318 (2020).

Department of Energy. Model Year 2024 Alternative Fuel and Advanced Technology Vehicles. 2024. (Available at https://afdc.energy.gov/vehicles/search/download.pdf; accessed June 24, 2024)

Eberhart, R., & Y. Shi, Y. Particle swarm optimization: Developments, applications and resources. In: Proceedings of the 2001 Congress on Evolutionary Computation 1, 81–86 (2001).

Erb, T., Perciasepe, B., Radulovic, V., & Niland, M. Corporate climate commitments: The trend towards net zero. In: *Handbook of Climate Change Mitigation and Adaptation* (eds. Lackner, M., et al.), 2985–3018. (Cham: Springer International Publishing, 2022).

Erdogan, N., Pamucar, D., Kucuksari, S., & Deveci, M. An integrated multi-objective optimization and multi-criteria decision-making model for optimal planning of workplace charging stations. *Applied Energy* **304**, 117866 (2021).

Erdogan, N., Kucuksari, S., & Murphy, J. A multi-objective optimization model for EVSE deployment at workplaces with smart charging strategies and scheduling policies. *Energy* **254**, 124161 (2022).

Fachrizal, R., Shepero, M., Åberg, M., & Munkhammar, J. Optimal PV-EV sizing at solar powered workplace charging stations with smart charging schemes considering self-consumption and self-sufficiency balance. *Applied Energy* **307**, 118139 (2022).

Federal Highway Administration. Highway Statistics 2019. 2020. (Available at https://www.fhwa.dot.gov/policyinformation/statistics/2019/vm3m.cfm; accessed June 3, 2024).

Federal Highway Administration. Average Annual Miles per Driver by Age Group. 2022. (Available at https://www.fhwa.dot.gov/ohim/onh00/bar8.htm; accessed June 3, 2024).

Ferguson, B., Nagaraj, V., Kara, E.C., & Alizadeh, M. Optimal planning of workplace electric vehicle charging infrastructure with smart charging opportunities. In 2018 IEEE 21st International Conference on Intelligent Transportation Systems (ITSC), 2018.

Fetene, G. M., Hirte, G., Kaplan, S., Prato, C. G., & Tscharaktschiew, S. The economics of workplace charging. *Transp. Res. Part B: Methodological* **88**, 93–118 (2016).

Garg, T., Hanna, R., Kavanagh, J., Myers, J., Victor, D.G., & Tebbe, S. EV charging at the workplace: Challenges, opportunities, and new evidence from UCSD. *Parking & Mobility Magazine* 10, 46–51 (2024).

Garg, T., Hanna, R., Myers, J., Tebbe, S., & Victor, D.G. Electric vehicle charging at the workplace: Experimental evidence on incentives and environmental nudges. (2024). Working paper.

Gong, L., Cao, W., Liu, K., Yu, Y., & Zhao, J. Demand responsive charging strategy of electric vehicles to mitigate the volatility of renewable energy sources. *Renewable Energy* **156**, 665-676 (2020).

González-Garrido, A., González-Pérez, M., Asensio, F. J., Cortes-Borray, A. F., Santos-Mugica, M., & Vicente-Figueirido, I. Hierarchical control for collaborative electric vehicle charging to alleviate network congestion and enhance EV hosting in constrained distribution networks. *Renewable Energy*, 120823 (2024).

Hafez, O., & Bhattacharya, K. Optimal design of electric vehicle charging stations considering various energy resources. *Renewable Energy* **107**, 576–589 (2017).

Hanna, R., Disfani, V., Valizadeh Haghi, H., Kleissl, J., & Victor, D.G. Improving estimates for reliability and cost in microgrid investment planning models. *J. Renewable and Sustainable Energy* **11**, 045302 (2019).

Hanna, R. & Victor, D.G. Marking the decarbonization revolutions. *Nat. Energy* **6**, 568–571 (2021).

Hanna, R. Optimal investment in microgrids to mitigate power outages from public safety power shutoffs. In: *2021 IEEE Power & Energy Society General Meeting (PESGM)*, 1-5 (2021).

Hardman, S., Jenn, A., Tal, G., Axsen, J., Beard, G., Daina, N., Figenbaum, E., Jakobsson, N., Jochem, P., Kinnear, N., & Plötz, P. A review of consumer preferences of and interactions with electric vehicle charging infrastructure. *Transp. Res. Part D: Transport and Environment* **62**, 508–523 (2018).

Hassan, S. U., Yousif, M., Khan, S. N., Kazmi, S. A. A., & Imran, K. A decision-centric approach for techno-economic optimization and environmental assessment of standalone and grid-integrated renewable-powered electric vehicle charging stations under multiple planning horizons. *Energy Conversion and Management* **294**, 117571 (2023).

Helmus, J. R., Lees, M. H., & van den Hoed, R. A data driven typology of electric vehicle user types and charging sessions. *Transp. Res. Part C: Emerging Technologies* **115**, 102637 (2020).

Huang, Y. & Zhou, Y. An optimization framework for workplace charging strategies. *Transp. Res. Part C: Emerging Technologies* **52**, 144–155 (2015).

Isenstadt, A., Yang, Z., Searle, S., & German, J. Real world usage of plug-in hybrid vehicles in the United States. (International Council on Clean Transportation, 2022). Available at https://theicct.org/publication/real-world-phev-us-dec22/.

Jaramillo, P., S. Kahn Ribeiro, P. Newman, S. Dhar, O.E. Diemuodeke, T. Kajino, D.S. Lee, S.B. Nugroho, X. Ou, A. Hammer Strømman, & J. Whitehead, 2022: Transport. In IPCC, 2022: Climate Change 2022: Mitigation of Climate Change. Contribution of Working Group III to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change [P.R. Shukla, J. Skea, R. Slade, A. Al Khourdajie, R. van Diemen, D. McCollum, M. Pathak, S. Some, P. Vyas, R. Fradera, M. Belkacemi, A. Hasija, G. Lisboa, S. Luz, J. Malley, (eds.)]. Cambridge University Press, Cambridge, UK and New York, NY, USA.

Kacperski, C., Ulloa, R., Klingert, S., Kirpes, B., & Kutzner, F. Impact of incentives for greener battery electric vehicle charging–A field experiment. *Energy Policy* **161**, 112752 (2022).

Klein-Banai, C. & Theis, T.L., 2013. Quantitative analysis of factors affecting greenhouse gas emissions at institutions of higher education. *Journal of Cleaner Production* **48**, 29–38 (2013).

Kostopoulos, E. D., Spyropoulos, G. C., & Kaldellis, J. K. Real-world study for the optimal charging of electric vehicles. *Energy Reports* **6**, 418-426 (2020).

Lagomarsino, M., van der Kam, M., Parra, D., & Hahnel, U. J. Do I need to charge right now? Tailored choice architecture design can increase preferences for electric vehicle smart charging. *Energy Policy* **162**, 112818 (2022).

LaMonaca, S., & Ryan, L. The state of play in electric vehicle charging services–A review of infrastructure provision, players, and policies. *Renewable and Sustainable Energy Reviews* **154**, 111733 (2022).

Li, S., Xie, F., Huang, Y., Lin, Z. & Liu, C. Optimizing workplace charging facility deployment and smart charging strategies. *Transp. Res. Part D: Transport and Environment* **87**, 102481 (2020).

McClone, G., Ghosh, A., Khurram, A., Washom, B., & Kleissl, J. Hybrid machine learning forecasting for online MPC of work place electric vehicle charging. *IEEE Trans. Smart Grid* **15**, 1891–1901 (2024).

Nicholas, M., & Tal, G. Charging for charging at work: increasing the availability of charging through pricing. In: Transportation Research Board 94th Annual Meeting, 2015.

Nienhueser, I. A., & Qiu, Y. Economic and environmental impacts of providing renewable energy for electric vehicle charging–A choice experiment study. *Appl. Energy* **180**, 256–268 (2016).

Office of Energy Efficiency & Renewable Energy. Charging at Home. (Available at https://web.archive.org/web/20200625120521/https://www.energy.gov/eere/electricvehicles/charging-home; accessed June 2, 2024).

Patil, P., Kazemzadeh, K., & Bansal, P. Integration of charging behavior into infrastructure planning and management of electric vehicles: A systematic review and framework. *Sustainable Cities and Society* **88**, 104265 (2023).

Pierce, L. & Slowik, P. Home charging access and the implications for charging infrastructure costs in the United States. (International Council on Clean Transportation, 2023). Available at https://theicct.org/wp-content/uploads/2023/03/home-charging-infrastructure-costs-mar23.pdf.

Poli, R., Kennedy, J., & Blackwell, T. Particle swarm optimization: An overview. *Swarm Intelligence* **1**, 33–57 (2007).

Rempel, D., Cullen, C., Matteson Bryan, M., & Vianna Cezar, G. Reliability of open public electric vehicle direct current fast chargers. *Human Factors*, 1–11 (2022).

Sadeghianpourhamami, N., Refa, N., Strobbe, M., & Develder, C. Quantitive analysis of electric vehicle flexibility: A data-driven approach. *Int. J. Electr. Power Energy Syst.* **95**, 451–462 (2018).

Steinbach, R., & Tefft, B.C. American Driving Survey: 2022. (AAA Foundation for Traffic Safety, 2022).

Sun, M., Shao, C., Zhuge, C., Wang, P., Yang, X., & Wang, S. Uncovering travel and charging patterns of private electric vehicles with trajectory data: evidence and policy implications. *Transportation*, 1-31 (2021).

Tal, G., Kurani, K., Jenn, A., Chakraborty, D., Hardman, S., & Garas, D. Electric Cars in California: Policy and Behavior Perspectives. In: Contestabile, M., Tal, G., Turrentine, T. (eds) Who's Driving Electric Cars. Lecture Notes in Mobility. Springer, Cham. (2020).

UCLA Transportation. Electric Vehicle Charging Stations. (Available at https://transportation.ucla.edu/campus-parking/electric-vehicle-charging-stations; accessed June 7, 2024).

UCSD Transportation Services (a). Drive Electric. (Available at https://transportation.ucsd.edu/commute/drive-electric/index.html; accessed June 24, 2024).

UCSD Transportation Services (b). Electric Vehicle Charging Stations at UC San Diego. (Available at https://transportation.ucsd.edu/commute/ev-stations.html; accessed June 7, 2024).

Venegas, F.G., Petit, M. & Perez, Y. Plug-in behavior of electric vehicles users: Insights from a large-scale trial and impacts for grid integration studies. *ETransportation* **10**, 100131 (2021).

Wu, Y., Aziz, S. M., & Haque, M. H. Techno-economic modelling for energy cost minimisation of a university campus to support electric vehicle charging with photovoltaic capacity optimisation. *Renewable Energy* **219**, 119427 (2023).

Yang, H., Fulton, L., & Kendall, A. A Review of charging infrastructure requirements for US electric light-duty vehicles. *Renewable and Sustainable Energy Reviews* **200**, 114608 (2024).