

# Lawrence Berkeley National Laboratory

## Recent Work

### Title

NEAR-SURFACE DEFECTS FORMED DURING RAPID THERMAL ANNEALING OF PRE-AMORPHIZED AND BF<sub>2</sub><sup>+</sup> - IMPLANTED SILICON

### Permalink

<https://escholarship.org/uc/item/1t0254rr>

### Author

Sands, T.

### Publication Date

1984-06-01



# Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

RECEIVED  
LAWRENCE  
BERKELEY LABORATORY

AUG 20 1984

LIBRARY AND  
DOCUMENTS SECTION

## Materials & Molecular Research Division

Submitted to Applied Physics Letters


NEAR-SURFACE DEFECTS FORMED DURING RAPID  
THERMAL ANNEALING OF PRE-AMORPHIZED  
AND  $\text{BF}_2^+$  - IMPLANTED SILICON

T. Sands, J. Washburn, R. Gronsky, W. Maszara,  
D.K. Sadana, and G.A. Rozgonyi

June 1984

**TWO-WEEK LOAN COPY**

*This is a Library Circulating Copy  
which may be borrowed for two weeks.*

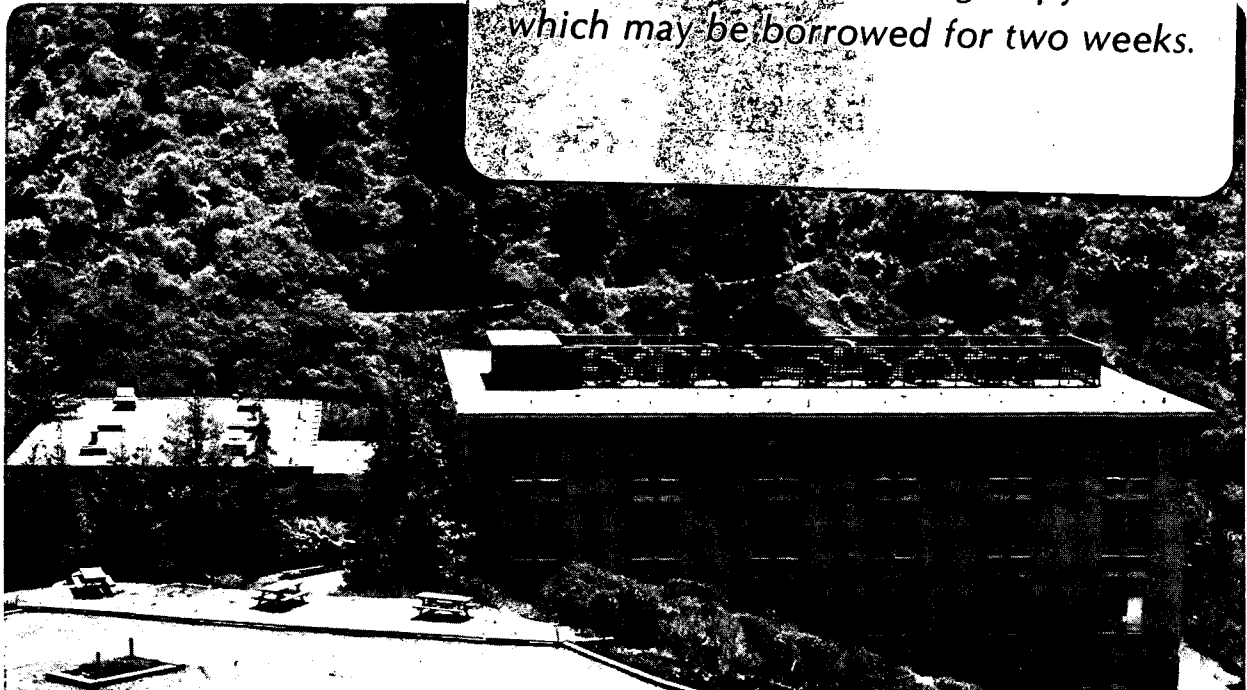

LBL-18000  
c.2

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

LBL-18000

NEAR-SURFACE DEFECTS FORMED DURING RAPID THERMAL ANNEALING  
OF PRE-AMORPHIZED AND  $\text{BF}_2^+$  - IMPLANTED SILICON

T. Sands, J. Washburn, R. Gronsky, W. Maszara,  
D.K. Sadana and G.A. Rozgonyi

Lawrence Berkeley Laboratory  
University of California  
Berkeley, California 94720

June 1984

This work was supported by the Director, Office of Energy Research, Office of Basic Energy Sciences, Materials Science Division of the U.S. Department of Energy, under Contract Number DE-AC03-76SF00098 and the Semiconductor Research Corporation.

Near-Surface Defects Formed During Rapid Thermal Annealing  
of Pre-amorphized and  $\text{BF}_2^+$  - Implanted Silicon

T. Sands, J. Washburn and R. Gronsky  
Materials and Molecular Research Division  
Lawrence Berkeley Laboratory  
Berkeley, California 94720

W. Maszara  
Materials Engineering Department  
North Carolina State University  
Raleigh, North Carolina 27650

D.K. Sadana and G.A. Rozgonyi  
Microelectronics Center of North Carolina  
Research Triangle Park  
North Carolina 27709

and  
Materials Engineering Department  
North Carolina State University  
Raleigh, North Carolina 27650

Near-surface defects formed during rapid thermal annealing (950-1150° C, 10 sec.) of pre-amorphized and  $\text{BF}_2^+$ -implanted (100) Si have been studied by a combination of cross-sectional transmission electron microscopy (XTEM) and secondary-ion mass spectrometry (SIMS). Two types of defects are identified: fine clusters (1.5-4nm in diameter) are shown to be related to fluorine; and stacking faults are correlated with the presence of both excess boron above the solid solubility limit and fluorine. In addition, high-resolution XTEM images suggest that small crystallites ( $\sim 5$  nm in diameter) in the surface oxide are  $\text{B}_2\text{O}_3$ . This observation is consistent with the SIMS data which shows segregation of boron to the surface. Finally, the peak fluorine concentration is found to be lower in samples which contain a high density ( $>10^8$

cm<sup>-2</sup>) of "hairpin" dislocations, indicating that a pipe diffusion mechanism for the rapid out-diffusion of fluorine may be operative.

Difficulties encountered when forming shallow (<0.5 μm) p<sup>+</sup>-n junctions for silicon device applications have resulted in the implementation of several novel implantation and annealing techniques: for example, implantation of the BF<sub>2</sub><sup>+</sup> molecular ion results in higher beam currents and allows higher beam energies than the equivalent B<sup>+</sup> implantation<sup>1</sup>; amorphizing the substrate surface layer prior to BF<sub>2</sub><sup>+</sup> implantation ("pre-amorphization") eliminates boron channeling and encourages the substitutional incorporation of boron during subsequent solid phase epitaxial growth<sup>2-4</sup>; and rapid annealing techniques reduce the redistribution of boron normally encountered during furnace annealing<sup>5,6</sup>. However, the processes listed above result in p<sup>+</sup>-n junctions with increased chemical and structural complexity. Recently, Maszara etal<sup>7</sup> and Carter etal<sup>8</sup> have demonstrated the presence of at least three distinct defect layers in pre-amorphized, BF<sub>2</sub><sup>+</sup>-implanted, and rapid-thermally-annealed (RTA) silicon. Since these defects may influence the electrical properties of the diodes through increased leakage currents or by the nucleation of larger defects during subsequent processing, a detailed understanding of the origins of these defects and their interactions with introduced impurities is necessary. In this letter, defect-impurity interactions in the near-surface region (0-200 nm) of shallow p<sup>+</sup>-n junctions are identified by comparison of secondary-ion mass spectrometry (SIMS) profiles of boron and fluorine with cross-sectional transmission electron microscope (XTEM) images from the same samples.

Surface layer amorphization of (100) silicon wafers to depths of 400-900 nm was accomplished either by triple-energy Si<sup>+</sup> self-implantation (350, 150 and 70 keV to doses of 10<sup>16</sup>, 2x10<sup>15</sup> and 5x10<sup>15</sup> cm<sup>-2</sup>, respectively) or by single-step Ge<sup>+</sup> implantation (300 keV to a dose of 10<sup>16</sup> cm<sup>-2</sup>). A continuous amorphous layer could be formed by Ge<sup>+</sup> implantation at (nominal) room temperature (RT) and liquid nitrogen temperature (LNT). However, a continuous amorphous layer could be formed by self-implantation only at LNT with a good thermal contact<sup>8</sup>. Following pre-amorphization, the shallow boron profile was obtained by implantation of 42 keV BF<sub>2</sub><sup>+</sup> to a dose of 2x10<sup>15</sup> cm<sup>-2</sup> at either RT or LNT. Solid phase epitaxial regrowth of the amorphous layer was induced by rapid thermal annealing (RTA) with incoherent light at temperatures of 950 - 1150 °C for 10 seconds. The distributions of boron and fluorine before and after RTA were obtained by SIMS (Cameca IMS model 3F). Plan-view TEM and XTEM provided the determination of defect distributions. Specimens for XTEM were prepared by argon ion milling at LNT (5kV, specimen current ~20µA, 15° tilt). Cross-sectional high-resolution TEM (XHRTEM) was performed with a JEOL 200-CX (spherical aberration coefficient, C<sub>s</sub> = 1.2 mm) at 200 keV. A through-focal series of high-resolution images was recorded for each area of interest in <110> zone-axis orientation with an objective aperture which contained nine beams. Images recorded at defocus values in the range of -70 to -90 nm were selected for presentation below.

The XHRTEM image of Fig. 1 shows the near-surface region of a wafer which was pre-amorphized with Si<sup>+</sup>, implanted with BF<sub>2</sub><sup>+</sup>, and then annealed by RTA at 1150 °C. Two types of near-surface defects (designated

"type III" in references 7 and 8) are visible: A distribution of fine clusters (1.5 - 4nm in diameter) centered at  $\sim 20$  nm below the silicon surface, and stacking faults bounded by Shockley partial dislocations. Both types of surface defects were observed in all samples which had been pre-amorphized with  $\text{Si}^+$ , implanted with  $\text{BF}_2^+$  at either RT or LNT, and then annealed in the temperature range 950-1150°C. The defect densities estimated from plan-view micrographs are listed in Table 1. The SIMS data (Fig. 2) from the same wafer as imaged in Fig. 1 reveals a substantial loss of fluorine, both to the surface and into the bulk, during RTA. However, a well-defined fluorine peak remains at a depth of  $\sim 20$  nm. The boron profile also shows significant in-diffusion during RTA, although the peak boron concentration ( $\sim 5 \times 10^{20} \text{ cm}^{-3}$  at a depth of  $\sim 35$  nm) remains unchanged and at a level which is substantially above the boron solid solubility limit at 1150°C ( $\sim 2-3 \times 10^{20} \text{ cm}^{-3}$ )<sup>9</sup>. In addition, the boron profile indicates a segregation of boron to the thin (5-10 nm) surface oxide that forms during RTA in an oxidizing atmosphere. Examination of the surface oxide by XHRTEM revealed the presence of small randomly-oriented crystallites ( $\sim 5$  nm in diameter) with a lattice fringe spacing of  $0.205 \pm 0.015$  nm corresponding to the {111} spacing of  $\text{B}_2\text{O}_3$ .

Samples pre-amorphized with  $\text{Ge}^+$  instead of  $\text{Si}^+$  contained a higher density of fine clusters and a much lower density of stacking faults (see Table 1). The fine clusters imaged in Fig. 3 are peaked at a depth of  $\sim 25$  nm. Frank loops (Burgers vector,  $\vec{b} = a/3 \langle 111 \rangle$ ) resulting from the condensation of excess interstitials created during implantation<sup>10</sup> are also visible at a depth of  $\sim 400$  nm. The SIMS profiles



in Fig. 4 indicate that the fluorine profile has a peak at  $\sim 25$  nm below the surface with a peak concentration of  $\sim 10^{21}$  cm $^{-3}$ . In addition, after RTA in the temperature range 950-1150°C, the samples pre-amorphized with Ge $^{+}$  show a more pronounced in-diffusion of boron as compared with samples pre-amorphized with Si $^{+}$ . As shown in Fig. 4, RTA at 1100°C for 10 seconds is sufficient to reduce the peak boron concentration to a level below the solid solubility limit at 1100°C.

The strong correlation between high concentrations of fluorine ( $>10^{19}$ cm $^{-3}$ ) and the presence of fine clusters suggests that the clusters are fluorine-related. This relationship was conclusively established by the fact that implantation of fluorine alone into amorphized substrates was found to result in a band of fine clusters whereas implantation of boron alone yielded an essentially defect-free surface region. The inset XHRTEM image of a fine cluster [Fig. 3] indicates that the fine clusters cannot be characterized by a displacement vector but rather that the fine clusters may be silicon-vacancy clusters occupied by fluorine.

The combination of the TEM images and the SIMS data show that the stacking faults are present in regions which contain both boron in concentrations above the solid solubility limit and fluorine. Implantation of boron alone into pre-amorphized substrates, even at doses as high as  $1 \times 10^{16}$  cm $^{-2}$ , was observed to result in fault-free surface regions after RTA. This result suggests that the fluorine and the excess boron may interact to form stable clusters which are accommodated structurally by the cores of Shockley partial dislocations nucleated at the advancing amorphous-crystalline interface.

Finally, it is interesting to note that the peak fluorine concentration after RTA varies with the density of "hairpin" dislocations. These hairpins<sup>7,8,11</sup> have a characteristic "V" shape with the vertex originating near the original amorphous-crystalline interface and the arms extending to the surface. For example, samples pre-amorphized with Si<sup>+</sup>, implanted with BF<sub>2</sub><sup>+</sup> at RT, and annealed at 1150°C have a peak fluorine concentration of  $\sim 6 \times 10^{19}$  cm<sup>-3</sup> and a hairpin density of  $\sim 2 \times 10^8$  cm<sup>-2</sup>, whereas, for samples implanted with BF<sub>2</sub><sup>+</sup> at LNT, the peak fluorine concentration is  $\sim 5 \times 10^{20}$  cm<sup>-3</sup> and the hairpin density is  $< 10^7$  cm<sup>-2</sup>. Similarly, samples pre-amorphized with Ge<sup>+</sup> have hairpin densities of  $< 10^7$  cm<sup>-2</sup> and contain high peak concentrations of fluorine (e.g.  $\sim 10^{21}$  cm<sup>-3</sup> for RTA at 1100°C). This correlation between the density of hairpins and the fluorine concentration indicates that the fluorine may be out-diffusing by pipe diffusion via the arms of the hairpin dislocations. In-diffusion of boron appears to be affected somewhat by the presence of hairpins. In addition, boron in-diffusion is significantly enhanced by the presence of germanium. This effect may be related to the fact that substitutional Ge and B create strain fields of opposite sign. Thus, in-diffusion of boron may serve to relieve stresses in the Ge<sup>+</sup>-implanted samples.

The authors would like to acknowledge the assistance provided by the staff at the National Center for Electron Microscopy, Lawrence Berkeley Laboratory.

This work was supported by the Director, Office of Energy Research, Office of Basic Energy Sciences, Materials Science Division of the U.S. Department of Energy, under Contract No. DE-AC03-76SF00098 and the Semiconductor Research Corporation.

References

1. H. Müller, H. RysseI and I. Ruge, in Ion Implantation in Semiconductors, edited by I. Ruge and J. Graul (Springer-Verlag, Berlin, 1971), p. 85.
2. M.Y. Tsai and B.G. Streetman, J. Appl. Phys. 50, 183 (1979).
3. T.M. Liu and W.G. Oldham, IEEE Electron Dev. Lett. EDL-4, 59 (1983).
4. B.L. Crowder, J.F. Ziegler and G.W. Cole, Ion Implantation in Semiconductors and Other Materials, edited by B.L. Crowder (Plenum, New York, 1973), p. 257.
5. J.L. Benton, G.K. Celler, D.C. Jacobson, L.C. Kimerling, D.J. Lischner, G.L. Miller and Mc.D. Robinson, in 1981 Laser and Electron Beam Interactions with Solids, edited by B.R. Appleton and G.K. Celler (Elsevier, North-Holland, New York, 1982), p. 765.
6. D.K. Sadana, S. Shatas and A. Gat, Proc. Inst. Phys. Conf. Ser. No. 67, Section 3, 143 (1983).
7. W. Maszara, C. Carter, D.K. Sadana, J. Liu, V. Ozguz, J. Wortman and G.A. Rozgonyi, Proc. of the Materials Research Society; Energy Beam-Solid Interactions and Transient Thermal Processing, Boston, Mass., Nov. 13-17, 1983 (in press).
8. C. Carter, W. Maszara, D.K. Sadana, G.A. Rozgonyi, J. Liu and J. Wortman, Appl. Phys. Lett. 44, 459 (1984).
9. G.L. Vick and K.M. Whittle, J. Electrochem Soc. 116, 1142 (1969).
10. D.K. Sadana, J. Fletcher and G.R. Booker, Electron. Lett.

15, 615 (1977).


11. T. Seidel, R. Knoell, F.A. Stevie, G. Poli and B. Schwartz,  
Proc. of the Spring Meeting of the Electrochemical Society,  
Vol. 84-1, Cincinnati, Ohio, May 6-11, 1984 (in press).

TABLE I. Defect and impurity densities following  $\text{BF}_2^+$  implantation at RT and RTA in the temperature range 950-1150°C for 10 seconds.

| Pre-amorph. ion and temp. | Stacking Fault density [ $\text{cm}^{-2}$ ] | Cluster density [ $\text{cm}^{-2}$ ] | [F] at peak [ $\text{cm}^{-3}$ ]      | [B] at peak [ $\text{cm}^{-3}$ ] |
|---------------------------|---|--------------------------------------|---------------------------------------|----------------------------------|
| $\text{Si}^+$ (LNT)       | $1 \times 10^9 - 5 \times 10^{10}$          | $< 1 \times 10^{11}$                 | $6 \times 10^{19} - 1 \times 10^{20}$ | $5 \times 10^{20}$               |
| $\text{Ge}^+$ (RT)        | $< 1 \times 10^8$                           | $1 \times 10^{12}$                   | $1 \times 10^{21}$                    | $1 \times 10^{20}$               |


Figure Captions

- Fig. 1. High-resolution XTEM micrograph of surface region after RTA at 1150 °C of Si<sup>+</sup>-amorphized and BF<sub>2</sub><sup>+</sup>-implanted silicon. Distribution of fine clusters centered at depth of ~20 nm and stacking faults are visible.
- Fig. 2. Fluorine and boron SIMS profiles from sample imaged in Fig. 1. Note fluorine peak and boron segregation to surface during RTA.
- Fig. 3. Bright-field ( $\vec{g} = 220$ ) XTEM micrograph of surface region after RTA at 1100 °C of Ge<sup>+</sup>-amorphized and BF<sub>2</sub><sup>+</sup>-implanted silicon. Distribution of fine clusters is centered at ~25 nm below oxide (dark-band)-silicon interface. Interstitial loops are visible at ~400 nm below surface. Inset XHRTEM micrograph shows fine cluster at a depth of 14.5 nm.
- Fig. 4. Fluorine and boron SIMS profiles from sample imaged in Fig. 3. Note fluorine peak and pronounced in-diffusion and surface segregation of boron.

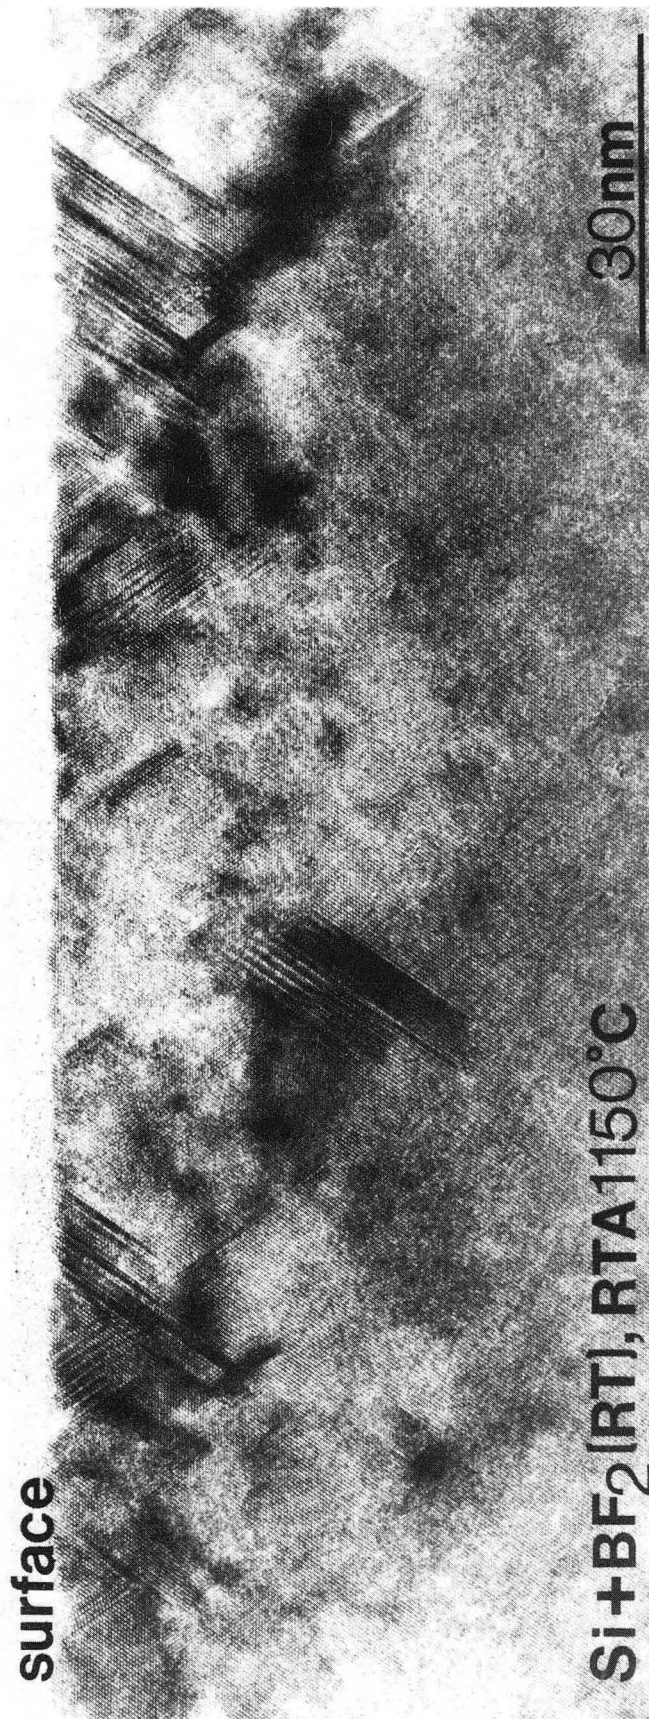

XBB 845-3278

Fig. 1

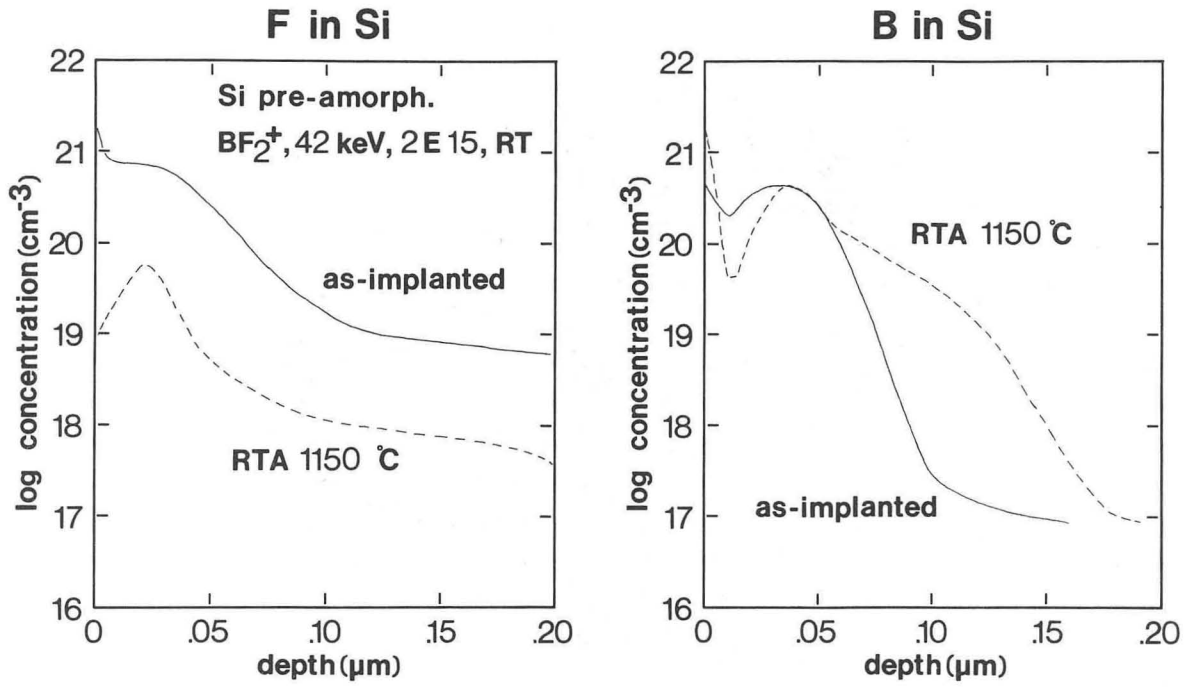

XBL 845-1882

Fig. 2



surface →


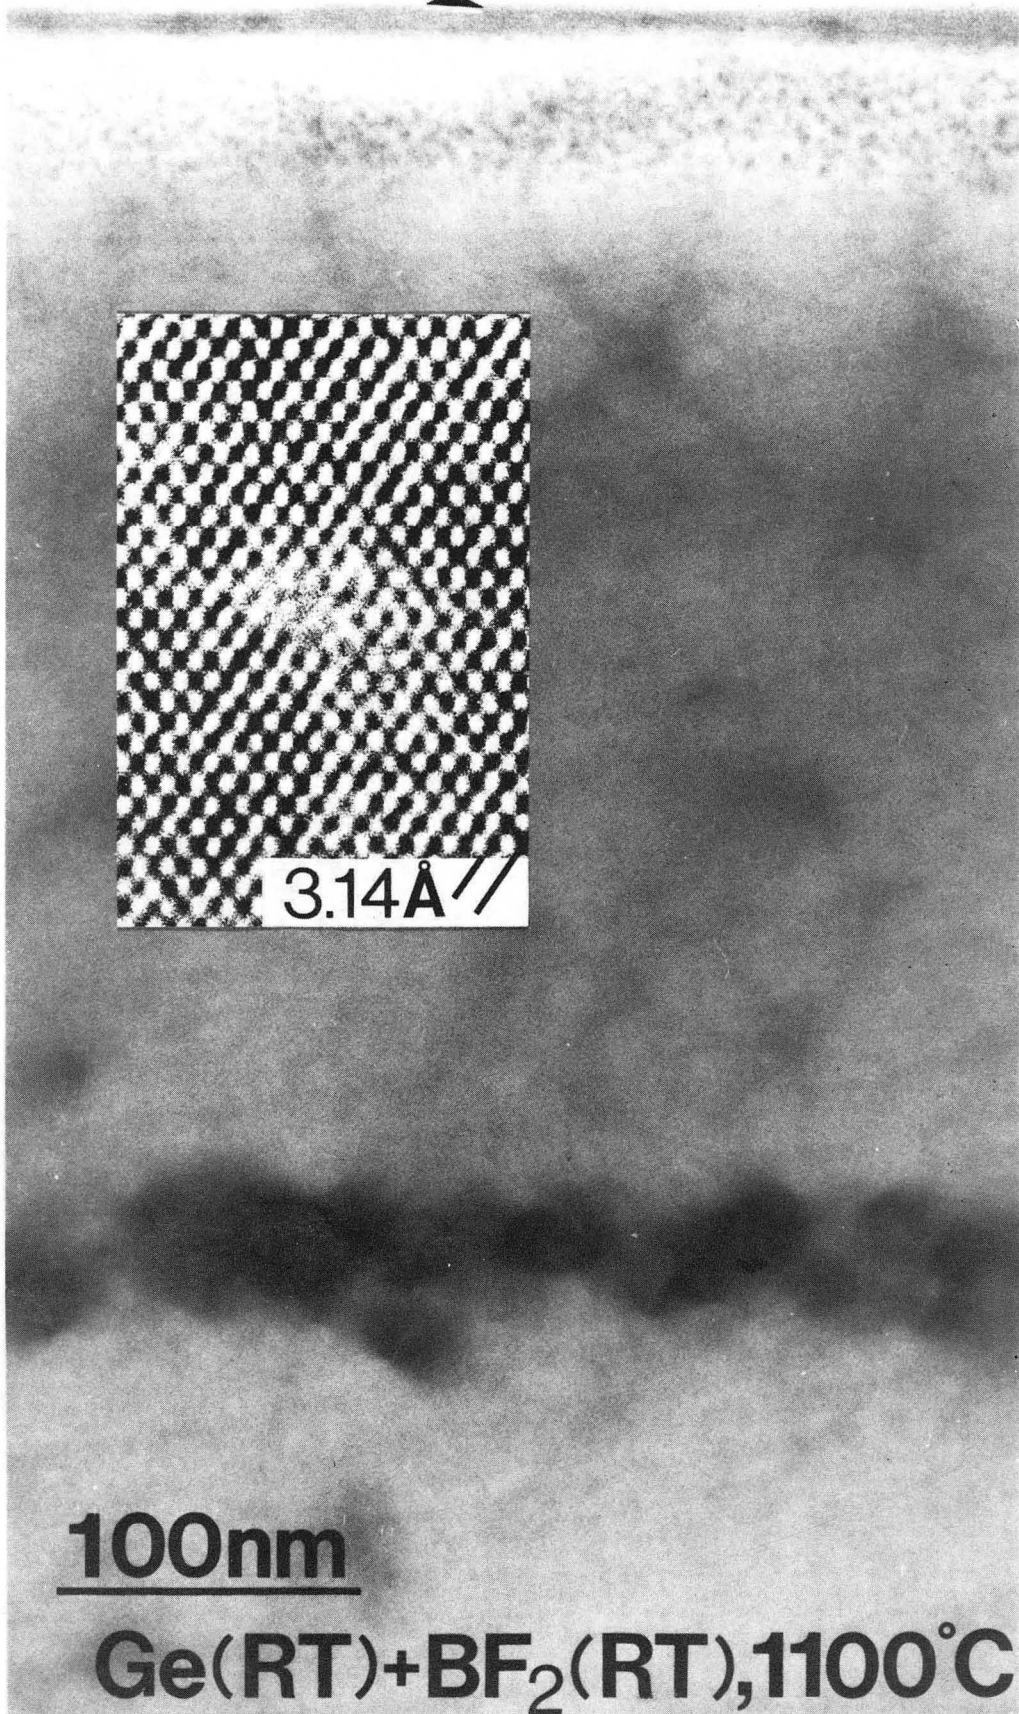


Fig. 3

XBB 845-3281A

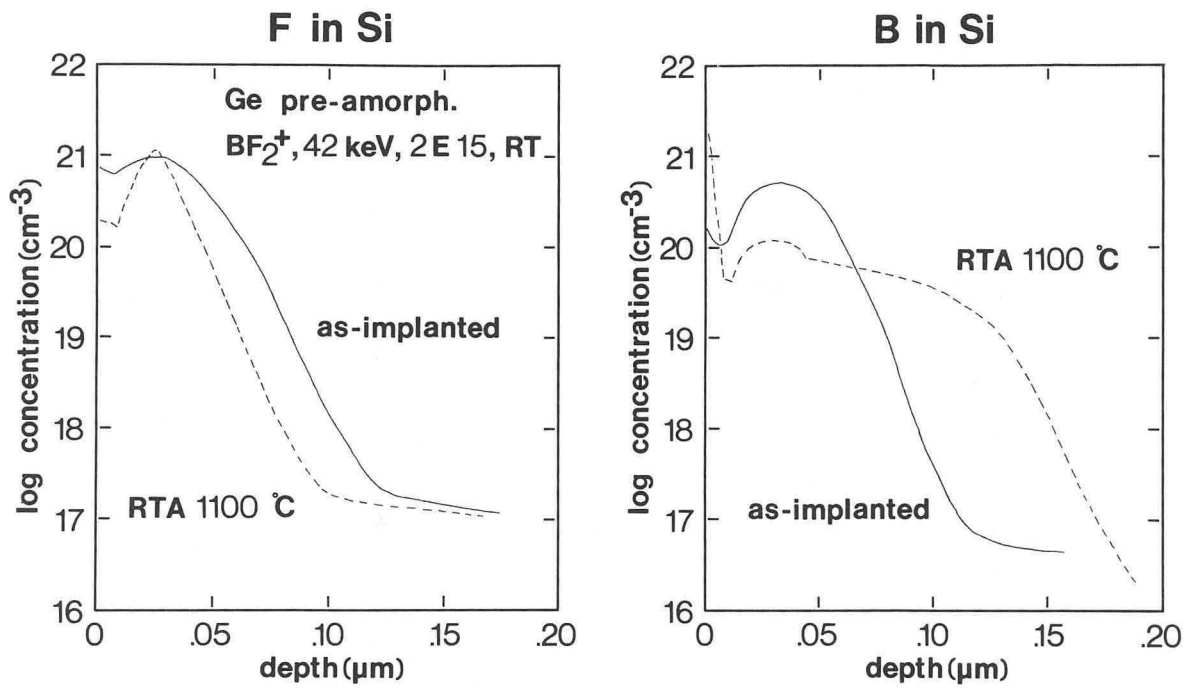

XBL 845-1881

Fig. 4

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DEPARTMENT  
LAWRENCE BERKELEY LABORATORY  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720