

# Lawrence Berkeley National Laboratory

## LBL Publications

### Title

Energy and CO2 implications of decarbonization strategies for China beyond efficiency: Modeling 2050 maximum renewable resources and accelerated electrification impacts

### Permalink

<https://escholarship.org/uc/item/2gn255q5>

### Authors

Khanna, Nina  
Fridley, David  
Zhou, Nan  
[et al.](#)


### Publication Date

2019-05-01

### DOI

10.1016/j.apenergy.2019.03.116

Peer reviewed



# Energy and CO<sub>2</sub> implications of decarbonization strategies for China beyond efficiency: Modeling 2050 maximum renewable resources and accelerated electrification impacts



Nina Khanna<sup>\*</sup>, David Fridley, Nan Zhou, Nihan Karali, Jingjing Zhang, Wei Feng

Lawrence Berkeley National Laboratory, 1 Cyclotron Road, MS 90R2121, Berkeley, CA 94720, USA

## HIGHLIGHTS

- China LEAP model used to assess multi-sector decarbonization strategies to 2050.
- Energy, CO<sub>2</sub> impacts of accelerated electrification and renewables are assessed.
- 2025 CO<sub>2</sub> peak feasible under 4 strategies, peak levels vary from 10.2 to 10.7 GtCO<sub>2</sub>.
- Faster electrification's CO<sub>2</sub> impact depend on pace of power sector decarbonization.
- Demand-side renewable has similar CO<sub>2</sub> reduction impact as power decarbonization.

## ARTICLE INFO

### Keywords:

China bottom-up model  
Electrification  
Renewables  
CO<sub>2</sub> emissions

## ABSTRACT

Energy efficiency has played an important role in helping China achieve its domestic and international energy and climate change mitigation targets, but more significant near-term actions to decarbonize are needed to help China and the world meet the Paris Agreement goals. Accelerating electrification and maximizing supply-side and demand-side renewable adoption are two recent strategies being considered in China, but few bottom-up modeling studies have evaluated the potential near-term impacts of these strategies across multiple sectors. To fill this research gap, we use a bottom-up national end-use model that integrates energy supply and demand systems and conduct scenario analysis to evaluate even lower CO<sub>2</sub> emissions strategies and subsequent pathways for China to go beyond cost-effective efficiency and fuel switching. We find that maximizing non-conventional electric and renewable technologies can help China peak its national CO<sub>2</sub> emissions as early as 2025, with significant additional CO<sub>2</sub> emission reductions on the order of 7 Gt CO<sub>2</sub> annually by 2050. Beyond potential CO<sub>2</sub> reductions from power sector decarbonization, significant potential lies in fossil fuel displaced by renewable heat in industry. These results suggest accelerating the utilization of non-conventional electric and renewable technologies present additional CO<sub>2</sub> reduction opportunities for China, but new policies and strategies are needed to change technology choices in the demand sectors. Managing the pace of electrification in tandem with the pace of decarbonization of the power sector will also be crucial to achieving CO<sub>2</sub> reductions from the power sector in a scenario of increased electrification.

## 1. Introduction

In support of the Paris Agreement, China has committed to peak its carbon dioxide (CO<sub>2</sub>) emissions by 2030 or earlier and to reduce its CO<sub>2</sub> per unit of GDP intensity by 60–65% from 2005 levels by 2030 [1]. China's 13th Five-Year Plan for 2016 to 2020 includes an energy intensity per unit of GDP reduction target of 15% and CO<sub>2</sub> intensity reduction target of 18% by 2020 [2]. These recent targets follow years of

government-driven efforts to improve energy efficiency across all demand-side sectors while attempting to decarbonize the power sector. While China's energy consumption per unit of GDP declined by 37% from 2005 to 2016, total primary energy consumption increased by 167% over the same time period and coal consumption is still 62% of primary energy consumption in 2016 [3]. Although coal consumption's share of total energy consumption has declined significantly over the last decade, other significant near-terms actions beyond energy

<sup>\*</sup> Corresponding author.

E-mail address: [xzheng@lbl.gov](mailto:xzheng@lbl.gov) (N. Khanna).

<https://doi.org/10.1016/j.apenergy.2019.03.116>

Received 18 June 2018; Received in revised form 14 February 2019; Accepted 10 March 2019

0306-2619/ Published by Elsevier Ltd.

efficiency are needed to help China achieve its 2020 and 2030 targets and contribute to global efforts to limit the average global temperature increase to 2 °C or lower.

Two near-term strategies that are currently being pursued in China beyond energy efficiency include promoting the adoption of renewable sources, particularly in the power sector, and electrification. Renewable installed capacity targets for 2020 were laid out in the Strategic Energy Action Plan (2014–2020) and updated under the 13th Five Year Plan for 2016 to 2020 along with target of 15% non-fossil share of primary energy consumption [4,5]. In January 2017, the National Energy Administration announced that China is planning to spend at least 2.5 trillion yuan on renewable energy in the 13th Five Year Plan period [6]. Significant policy focus has also been placed on power sector reform, in order to increase renewable energy utilization by addressing overcapacity and reducing curtailment [7]. China is also pursuing greater electrification through sectoral policies including increasing the use of electric vehicles in the transport sector, electrification of rural households and industrial processes, and promoting the adoption of more efficient, end-use equipment such as heat pump technology in Chinese buildings. The indirect push for electrification coincides with the emergence of the concept of environmentally beneficial electrification in the United States (U.S.) and Europe, or “electrification of energy end uses that have been powered by fossil fuels in order reduce greenhouse gas emissions” [8–10]. While U.S. electricity and energy consumption have remained fairly stagnant since 2013, favorable conditions for a future shift towards environmentally beneficial electrification have emerged, including: recent public policy goals for reducing greenhouse gas emissions, declines in power sector’s CO<sub>2</sub> intensity due to technological advancements, fuel switching, cost reductions for renewable power, increased efficiency of electric end-use equipment, and growing need for flexible loads to help integrate intermittent renewable energy into the electric grid [9]. For China, environmentally beneficial electrification will likely gain more traction in the near future as China has already adopted policy goals aimed at reducing CO<sub>2</sub> emissions and decarbonizing its power sector.

This paper focuses on the feasibility for further lowering China’s future CO<sub>2</sub> emissions by accelerating electrification in parallel with power sector decarbonization and maximizing demand-side utilization of renewable technologies. We use a bottom-up national end-use model that integrates energy supply and demand systems and conduct scenario analysis to evaluate even lower CO<sub>2</sub> emissions strategies and subsequent pathways for China to go beyond cost-effective efficiency and fuel switching. We developed individual scenarios of low carbon strategies including energy efficiency, fossil fuel switch, demand and supply-side renewables, and accelerated electrification (with maximized technically feasible electrification rates for selected end-uses) to evaluate the potential energy and CO<sub>2</sub> impacts of these key strategies. By comparing these alternative technology scenarios against a Reference scenario of existing policies, we are able to assess alternative CO<sub>2</sub> pathways if China is able to rapidly decarbonize its power sector while accelerating electrification, and the additional opportunity from maximizing the use of biomass and low temperature renewable heat in industry, and solar heating, cooling and water heating technologies in buildings.

This study contributes to the existing body of energy modeling literature focused on China in several different ways. From a methodological perspective, we use a bottom-up end-use model built using the Long-range Energy Alternatives Planning (LEAP) system software that is able to differentiate nuances at the level of end-uses and individual technologies beyond macroeconomic modeling approaches in existing Chinese modeling studies [11–15]. Our study further contributes to the bottom-up energy modeling field by evaluating newer, multi-sectoral strategies beyond cost-effective efficiency improvements and fuel switching strategies typically considered in the few existing bottom-up China modeling studies [16], and with longer time frame out to 2050 [17–19]. Compared to other existing LEAP-based 2050 China models

[20,21], our model is distinct in the level of complexity and detail in modeling the building sector [22] and in using physical drivers such as building floorspace and infrastructure needs for projecting heavy industrial production that captures saturation points [23]. Other China modeling studies have evaluated the potential impacts of accelerated electrification, but most focused on transport without consideration for industry or commercial buildings, two dominant and rapidly growing sectors in China’s energy system [12,24–26]. Most other studies also do not explicitly model the linkage between electrification and power sector decarbonization [27], or have done so only for other regions [28–31] or only for selected sectors [24,32,33]. Other studies have estimated economy-wide electrification rates through historical extrapolation and regression analysis focused on per capita electricity consumption [34,35]. But these often result in relatively high forecasts that overlook longer term changes such as saturation effects in equipment stock or autonomous efficiency improvements that are considered in bottom-up projections.

While several earlier studies have considered pathways of high renewable penetration for China [20,36,37], and combined pathways of efficiency improvement, fuel switching and electrification [19,21], we add to these existing outlooks by evaluating and comparing the individual contributions of demand-side utilization of newer renewable technologies to efficiency, fossil fuel switching, and accelerated electrification. More specifically, we considered technologies such as low temperature renewable heat and solar thermal heating and cooling technologies that have only been deployed in some European countries as discussed later in Section 3.3, but not yet considered in most future renewable scenario outlooks for China [33,38]. By also considering the combined and separate impacts of efficiency, electrification and adoption of non-conventional renewable resources such as renewable heat on China’s total energy-related CO<sub>2</sub> emissions through 2050, we fill a key research gap in existing modeling studies of China’s climate change mitigation strategies and pathways. Through a cursory comparison of our scenarios with two recent outlooks for China [19,21], our scenario results distinctly highlight a possible pathway of lower CO<sub>2</sub> emissions and peak in electricity demand before 2050 with the concurrent adoption of efficiency, electrification and non-conventional renewable resources.

The remainder of this paper is organized as follows: Section 2 reviews the LEAP modeling framework, data validation and projection methodology; Section 3 details the specific storylines and key assumptions for our five different scenarios; Section 4 presents the energy and CO<sub>2</sub> emissions results by sector with overall CO<sub>2</sub> outlook for each scenario; and Section 5 provides an overall discussion of results and policy implications.

## 2. Methods

### 2.1. Modeling framework

The China 2050 Demand Resources Energy Analysis Model (DREAM) was used to evaluate China’s future energy and CO<sub>2</sub> emissions trajectories and the potential impacts beyond cost-effective efficiency. The foundation for the China 2050 DREAM model is an accounting framework of China’s energy and economic structure using the LEAP software platform developed by Stockholm Environment Institute. LEAP is a medium to long-term integrated modelling platform that can be used to track energy consumption, production and resource extraction in all sectors of an economy as well as conduct long-range scenario analysis. It allows for integrated, scenario-based modeling and characterization of technological development down to the end-use level, and has been adopted and used in more than 190 countries worldwide [39,40]. The China 2050 DREAM model was developed in 2005 and has been used in earlier national outlook studies for China [41,42] and sector-specific policy impact evaluation studies [43,44]. While technology costs are considered exogenously in setting specific assumptions

for certain scenarios as further discussed in Section 3, costs are not explicitly and endogenously modeled in the current China 2050 DREAM model.

## 2.2. Data and historical calibration

Historical data published in various national statistical yearbooks are used to calibrate the China 2050 DREAM model inputs to the latest available reported statistics, including for both energy demand and supply-side activity variables such as population, floorspace, industrial production, transport vehicle stock, and fossil fuel and electricity production [3,45]. For reported years, the model calculated energy consumption by fuel and by sector are compared to and validated against national energy balances in terms of fuel consumption by sectors [45]. For calculating energy-related CO<sub>2</sub> emissions, China-specific fuel energy and heat content are entered into the model and multiplied by the IPCC default CO<sub>2</sub> emissions factors for specific fossil fuels [46]. The underlying assumptions of earlier versions of the model were previously compared with other bottom-up energy and emission models for China [47], and have been validated by other modeling studies [48,49].

## 2.3. Demand sectors

The China 2050 DREAM model includes a demand module consisting of four<sup>1</sup> demand subsectors (residential buildings, commercial buildings, industry, transportation) and a transformation module consisting of energy production, transmission and distribution subsectors. Using LEAP, the China 2050 DREAM model captures the diffusion of end-use technologies and macroeconomic and sector-specific drivers of energy demand as well as the energy required in the extraction of fossil fuels and in non-power transformation sectors and a power sector with distinct generation dispatch algorithms. Using the Impact = Population × Affluence × Technology (IPAT) framework related to the Kaya Identity, this model captures macroeconomic and physical drivers of energy-using activity with detailed consideration of technological development at the end-use level. Based on specific scenario assumptions about activity growth and technology choices, the model is able to calculate and evaluate the total primary and final energy consumption and energy-related CO<sub>2</sub> emissions impacts for China's development to 2050 [50].

The demand module of the China 2050 DREAM model includes the four main economic sectors of residential buildings, commercial buildings, industry, and transportation. Key macroeconomic parameters that drive energy-using activity such as economic growth, population, and urbanization are aligned with international sources [51] as well as Chinese sources [37,42,52,53]. For the residential building sector, urbanization and growth in household income drive energy consumption because urban households generally consume more commercial energy than rural households, and rising household incomes correspond to increases in housing unit size (and thus in heating, cooling, and lighting loads) and appliance ownership. Similarly, commercial building energy demand is driven by two key factors: building area (floor space) by building type and end-use intensities such as heating, cooling, and lighting (e.g., in megajoules per square meter). The buildings sectors are also differentiated by three main climate zones, new versus existing buildings and five building efficiency vintages.

For the industrial sector, the model includes 12 energy-intensive industrial subsectors characterized by physical production including key heavy industries such as cement, iron and steel, aluminum, ammonia, and ethylene. These subsectors are driven by key physical drivers such as the new built environment needed to house growing urban populations, vehicle production, sown area and fertilizer intensity, and

per-capita demand for plastics. In addition, there are 18 light industrial subsectors characterized by value-added production such as various manufacturing industries, food, beverage and tobacco, textiles, medicine and metal products with purely economic driven activity projections from our collaborator's computable general equilibrium model for China [42]. Transportation demand is driven by freight and passenger transport demand, where freight transport is calculated as a function of economic activity, measured by value-added GDP, and passenger transport is based on average vehicle-kilometers traveled, by specific modes of transportation (e.g., bus, train, private car). Within the energy demand module, the model is able to address sectoral patterns of energy consumption in terms of end-use, technology and fuel shares including trends in saturation and usage of energy-using equipment, technological change including efficiency improvements, and complex linkages between economic growth, urban development and energy demand.

## 2.4. Transformation sector

On the supply side, the energy transformation sector includes a power-sector module that can be adapted to reflect changes in generation-dispatch algorithms, efficiency levels, generation mix, and demand-side management. The power generation sector models different power generation technologies including coal, natural gas, biomass, nuclear, wind, hydro, solar, and geothermal power generation. Coal generation is further distinguished into six categories by size and efficiency, ranging from less than 100 MW generation units with average efficiency of 32% to greater than 1000 MW ultra-supercritical generation units with average efficiency of 40%. For each technology type, the model includes parameters on total installed capacity, load factors, and dispatch order. Following specified power sector module parameters, the model uses algorithms to calculate the amount and type of capacity required to be dispatched to meet the final electricity demand from the economic sectors. The model also follows different rules for dispatching electricity to meet demand: a proportional dispatch order which dispatches electricity generation following proportional shares from each fuel source, an environmental or green dispatch order that dispatches generation based on their environmental (i.e. low carbon) merit by prioritizing non-fossil generation before fossil generation, or cost-optimization dispatch.

## 3. Scenarios and assumptions

Five main scenarios are developed to evaluate the potential CO<sub>2</sub> reductions if China is able to rapidly decarbonize its power sector while accelerating electrification across all sectors and the additional opportunity from maximizing biomass and emerging renewable technologies in industry and building sectors. The scenarios developed are not driven by climate end-point such as the international goals of keeping global temperature increases to 1.5 °C or 2 °C or intended to reflect certain policy outcomes such as the Nationally Determined Contribution (NDC) commitments and targets, but rather, are based on bottom-up assumptions for activity and technology trends, including differing trends in efficiencies and fuel mixes. However, the results from the different scenarios can be compared to other studies where scenarios are developed based on meeting specific climate end-points, such as the Sustainable Development Scenario included in the International Energy Agency's most recent World Energy Outlook.

The Reference and Cost-Effective Efficiency and Fossil Fuel Switch Scenarios were developed primarily as part of the "Reinventing Fire: China" study [42]. The Reference Scenario considers small incremental energy efficiency improvements due to autonomous technological change, generally on the order of 1% per year that is consistent with estimated rates of technology improvement from analysis of cross-section of countries [54]. The current costs of energy technologies, as well as projected energy prices, were used to evaluate the cost-effectiveness of efficient and alternative energy (including renewables and electric)

<sup>1</sup> Agriculture is also included in the model but is not discussed here as it has marginal and declining share of energy use in China.

**Table 1**  
Overview of scenario analysis and key parameter differences.

Scenarios	Macroeconomic Assumptions	Sectoral Activity Levels	Cost-effective Efficiency Improvements	Cleaner Fossil Fuel Switch	Demand-side Renewables	Supply-side Renewables	Accelerated Electrification
Reference Efficiency and Fossil Fuel Switch	Reference levels	Reference levels	Not included	Not included	Not included	Not included	Not included
Efficiency, Fossil Fuel Switch and Demand RE	Same as Reference	Structural shifts included	Included	Included	Not included	Not included	Not included
Efficiency, Fossil Fuel Switch and All RE	Same as Reference	Same as Efficiency and Fossil Fuel Switch	Included	Included	Included	Included	Not included
All Strategies Plus Accelerated Electrification	Same as Reference	Same as Efficiency and Fossil Fuel Switch	Included	Included	Included	Included	Included

technologies for the Cost-Effective Efficiency and Fossil Fuel Switch Scenarios. As further documented in the previous study, cost-effectiveness of the proposed technological options for each sector were evaluated using life-cycle and system analysis that includes calculating the needed investment cost, possible operational and maintenance cost, and energy-saving benefits [22,42]. The Cost-Effective Scenario then assumes that China will adopt the maximum economically feasible share of cost-effective energy efficiency and renewable supply through 2050, taking into account ongoing cost-reductions consistent with recent trends.

In addition, three new scenarios were developed to evaluate the additional maximum *technical* potential beyond cost-effective measures for reducing CO<sub>2</sub> emissions by more aggressively electrifying all end-use sectors (with decarbonized power sector), maximizing demand-side renewable technologies and maximizing supply-side renewable technologies. The goal of these three additional scenarios is to evaluate the technically feasible potential for accelerating electrification and maximizing demand-side renewable technology adoption, beyond existing strategies of increasing energy efficiency, fuel switching towards cleaner fossil fuels and decarbonizing the power sector. Because these three new scenarios are intended to evaluate the technical, not economic, potential of additional energy reduction and climate mitigation strategies, their costs were not modeled. Activity data in all scenarios have been updated and calibrated to the latest available year at the time of analysis, including data through 2014 or 2015.

All five scenarios have the same macroeconomic drivers such as population, urbanization, and GDP growth. Based on data from China's National Bureau of Statistics (NBS), we assume China's population will peak in 2030 at 1.43 billion and then decline to 1.37 billion in 2050, and reach urbanization rate of 78% in 2050. For GDP, we project average annual growth rates as shown in Table S-1 of 5.9% through 2020, and slow to 2.9% from 2040 through 2050 based on data from China's NBS and the China Microeconomic Information Network [52,53]. However, the activity level in industrial subsectors differ between the Reference Scenario and the other four "alternative" scenarios with expected industrial structural shift as a result of continued policy push and economic development. Faster growth in light manufacturing industry and slower growth in heavy industry are expected under the alternative scenarios when compared to the Reference Scenario due to structural shift from energy-intensive heavy industries to higher value-added, light industries. The industrial total and subsector activity level (both physical production and value-added production) between the four alternative scenarios are the same.

Similarly, the installed capacities of power generation technologies also vary between two sets of scenarios with and without more aggressive adoption of renewable power supply beyond current targets, reflecting different paces of power sector decarbonization. Under the Reference Scenario (as well as Cost-Effective Efficiency and Fossil Fuel Switch scenario and Efficiency, Fossil Fuel Switch and Demand-side Renewables scenario), non-fossil (including nuclear) capacity grows to meet China's announced non-fossil targets with 62% of generation capacity coming from non-fossil sources by 2050. Under the Fossil Fuel Switch and All Renewables Scenario and All Strategies Plus Accelerated Electrification scenario, over 2940 GW of solar and wind capacity are added to the power system by 2050 with non-fossil resources accounting for 83% of total generation capacity. The large and rising future shares of solar and wind in our scenarios' assumed installed capacity and power generation will require a strong grid and dispatchable power plants – notably hydropower but also retrofitted thermal power plants - to provide flexibility [55]. Demand-side options including demand response and efficiency and new energy storage technologies can further help support the large-scale integration of variable renewables, but power sector market reform and supporting policies and mechanisms are needed to support their development [19]. Green or environmental merit dispatch is used for all five scenarios given Chinese power sector policies with the impact of different

dispatch orders having been already evaluated in [44].

Table 1 summarizes the major changes in parameters between each scenario as discussed below in each specific scenario.

### 3.1. Reference Scenario

The Reference Scenario serves as the baseline scenario and assumes that all policies currently in place will continue to have impact on all energy demand, supply and transformation sectors. This includes meeting all of the energy and CO<sub>2</sub> intensity reduction targets that China has adopted under the 12th Five-Year plan, as well as the announced non-fossil power generation capacity targets for the power sector. This scenario is intended to reflect all policies that have been adopted to date, including those adopted in support of China's NDC commitments for 2030, but is not intended to reflect the outcome of the NDC commitments or targets. As a counterfactual baseline scenario, the Reference Scenario assumes no additional policies will be adopted in the future, but autonomous technological improvement is expected to occur through 2050.

### 3.2. Cost-effective efficiency and fossil fuel switch scenario

This scenario assumes that China adopts the maximum feasible share of today's commercially available and cost-effective energy efficiency technologies by 2050 while also maximizing the adoption of cleaner fossil fuel (e.g. natural gas) by shifting away from dirtier fossil fuels such as coal and coke. Because this scenario is intended to quantify the impact of only efficiency and fossil fuel switching, it assumes no additional electrification or adoption of renewables beyond the Reference scenario. For example, in the buildings sector, the most efficient appliances and equipment that are still cost-effective<sup>2</sup> today are assumed to reach 100% market saturation by 2050. Accelerated adoption of high efficiency and cleaner fossil fuel technologies is assumed to occur across all end-uses.

More details on the sector-specific assumptions about cost-effective technology uptake and fuel switching is discussed in the Reinventing Fire: China Executive Summary [42].

### 3.3. Efficiency, fossil fuel switch and demand-side renewables scenario

Beyond cost-effective efficiency and cleaner fossil fuel switching, this scenario considers the impact of adoption of additional renewable resources across applicable end-uses as well as maximized renewable adoption across selected end-uses in the buildings and industry sectors. More specifically, for selected industries and commercial buildings, this scenario considers additional adoption of non-conventional renewable heat and biomass in industry and solar thermal technologies in commercial buildings based off of the Cost-effective Efficiency and Renewables scenario. The assumed additional uptake of non-conventional renewable energy in demand sectors for China by 2050 are based on existing international applications of these technologies. Additional adoption of renewable energy on the supply-side (including in the power sector) are not considered, and the power generation fuel mix for this scenario is the same as the Cost-effective Efficiency and Renewables scenario.

#### 3.3.1. Renewable heat applications in industry

In industry, low grade heat defined as below the 100 °C temperature range can be found in process steam, process cooling and HVAC system, with process steam dominating low grade heat demand [56]. Process heat is required for industrial processes such as hot water or steam

<sup>2</sup> Cost-effectiveness is defined as technologies or processes where the cost of conserved energy is less than today's energy prices. In other words, the financial savings from energy saved exceed the incremental cost for higher efficiency.

demand processes, drying and dehydration processes, preheating, pasteurization and sterilization, washing and cleaning, and chemical reaction [57].

In Europe, about 30% of the total industrial heat demand is required at temperatures below 100 °C and 57% at temperatures below 400 °C [58]. The key sectors identified for application of low grade heat include food, pulp and paper, textile, chemical, machinery, transport equipment, and mining and quarrying. Given the similar processes utilized for specific industrial subsectors, we assume that the share of low grade heat demand found in European industries is representative of corresponding sub-sectors around the world and therefore applies to Chinese industrial sectors (Fig. 1).

Globally, renewable energy is estimated to account for 10% of total industrial heat use, of which 99% is bioenergy-based [59]. The availability of biomass process residues in certain sub-sectors, such as pulp and paper and the food industry, has been the main driver for using biomass to produce process heat [59]. This study assumes that, by 2050, the low temperature heat demand portion of energy demand from the industrial sectors shown in Fig. 1 is fully supplied by an assumed fuel mix of renewables based on the fuel mix result for low temperature process heat in IRENA's AmbD 2030 scenario [60]. Specifically, the assumed mix of renewable sources for low grade heat includes 63% biomass, 30% solar thermal and 7% geothermal, and is expected to remain constant from the base year through 2050 in the absence of detailed projections.

#### 3.3.2. Biomass use for high temperature industrial heat

Currently, biomass is the only available renewable energy option for providing high-temperature (i.e., > 400 °C) heat in the industrial sector with limited applications in steelmaking and cement production processes. It is considered attractive in regions with favorable bioenergy resource bases, such as northern Europe, Brazil, sub-Saharan Africa and developing Asia, but can face competition from other prioritized end-uses in regions with limited resource base [19]. For steelmaking, biomass can be introduced in integrated steelmaking through two technological upgrades:

1. Blending biomass during coke making to produce bio-coke, with a maximum of 5% biomass blend to maintain coke properties without compromising mechanical strength [61–64]. We assume 5% biomass addition to the coal blend for coke making with a coke/biomass replacement ratio of 1/0.67 based on [62].
2. Biomass replacement of pulverized coal in blast furnaces has been utilized in the Brazilian steel industry [62]. Based on the Brazilian experience, we assume a biomass/pulverized coal replacement rate of 1/1 with 75% maximum deployment by 2050.

For cement production, biomass is used as an alternative fuel in Netherlands and Finland [64,65]. Based on the Dutch and Finnish pilot plants, we assume 50% deployment rate in Chinese kiln combustion by 2050.

In considering the increased biomass usage for industrial applications, we assume biomass will only be sourced domestically and consider a conservative total biomass resource of 800 million metric tons of coal equivalent (Mtce<sup>3</sup>) limit for residential, industrial and power sector use. The assumed deployment rates are also based only on technical potential and do not consider technological costs or deployment barriers.

#### 3.3.3. Solar thermal applications for commercial buildings

We considered increased adoption of solar thermal technologies for heating and cooling only for commercial buildings because of the

<sup>3</sup> Mtce is the standard Chinese unit for energy. 1 Mtce = 29.27 million gigajoules.

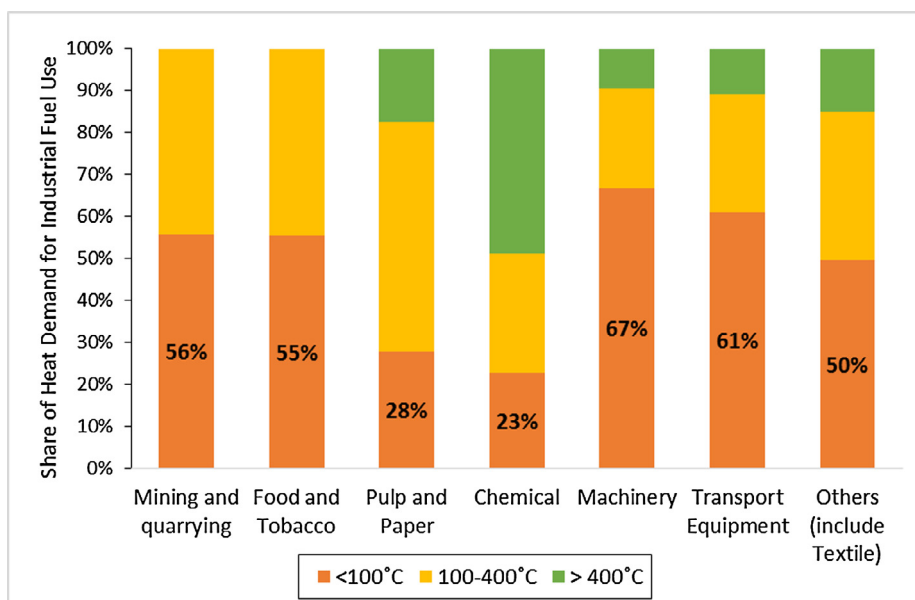


Fig. 1. Low temperature grade heat demand shares of industrial fuel use in key industrial subsectors. Note: Recreated based on data from [58].

limited rooftop space availability in multi-story Chinese residential buildings due to widespread utilization of solar water heaters. Based on the United Kingdom's experience with decarbonizing buildings sector, we assume solar thermal can replace coal boilers in Northern China, and gas boilers in Transition and South climate regions with 8% share by 2050 [66].

Solar cooling in Chinese commercial buildings are assumed to vary by climate with 15% and 20% penetration in North and Transition regions of China, respectively, based on the Swedish example [67] and 30% penetration in Southern China by 2050 [68]. We assume moderate levels of solar thermal cooling adoption in Chinese commercial buildings because larger shifts in the Chinese cooling market is unlikely to occur without significant long-term policy changes targeting solar cooling technologies, which is not considered in this study.

We also assumed 30% of water heating in commercial buildings will be from solar water heaters, which are already prevalent in the residential sector, by 2050 based on [69]. Together with large use of air source heat pumps (48% by 2050) for commercial water heating, solar water heating can provide almost 80% of the water heating need under this scenario.

### 3.4. Efficiency, fossil fuel switch and all renewable scenario

Building off the previous scenario that includes demand-side renewables, this scenario helps evaluate the total impact of renewables by adding in a decarbonized power sector with growing penetration of renewable and non-fossil generation. The total final energy demand for this scenario is the same as the previous scenario of Efficiency, Fossil Fuel Switch and Demand-side Renewables Scenario but the generation profile for the power sector is markedly different. Table 2 compares the installed capacity between the two scenarios. Energy storage technologies are not considered beyond limited capacities for pumped hydro in the power sector.

### 3.5. All strategies plus accelerated electrification scenario

In order to evaluate the additional CO<sub>2</sub> reduction from accelerating electrification in all demand sectors beyond cost-effective efficiency and renewable technologies, the All Strategies Plus Accelerated Electrification scenario considers additional electrification beyond the level of the Reference Scenario for all end-use sectors. Increased

electrification across all end-uses is first incorporated into this scenario to the degree that it is cost-effective based on detailed review of technology-specific capital and operating costs and energy use, international experiences, input from sectoral stakeholders and expert opinion [38]. Then, additional assumptions about maximized technically feasible electrification of selected key building end-uses, transport modes, and industrial processes were developed based on evaluation and analysis of international adoption rates and policy trends. This scenario assumes that accelerated electrification will only occur in step with an increasingly decarbonized power sector, consistent with the increasingly popular concept of “environmentally beneficial electrification.”<sup>4</sup>

#### 3.5.1. Transport

For passenger transport, the maximum electrification of taxi and fleet cars assumes that policies will be adopted requiring 100% electric vehicles (EV) by 2050. Nearly 40 Chinese cities have already set 30% electric vehicle share targets for municipal fleets for 2015 and additional growth is expected with continued subsidies through 2020 [70]. Supporting policies and infrastructure are also needed to rapidly increase private EV adoption from now through 2050. Recently, 21 cities of the 40 cities have adopted both monetary and non-monetary incentive policies for electric vehicles including matching local subsidies to national subsidies and exemptions from local license plate restrictions [71]. Similarly, accelerated penetration of battery electric vehicles are also considered for both heavy-duty and light-duty intracity buses. For freight transport, the expected driving range of light-duty and medium-duty trucks were considered in setting the maximum technically feasible penetration rate of plug-in hybrid diesels in the truck fleet by 2050.

#### 3.5.2. Industry

The maximum electrification of glass, food and beverage, and pulp and paper industrial processes are based on the industrial decarbonization and energy efficiency roadmaps of the Government of United Kingdom in the absence of China or Asia specific information. Three specific applications are considered, including:

<sup>4</sup> The concept of environmentally beneficial electrification was first introduced in [8], and refers to the electrification of energy end-uses that have been powered fossil fuels in order to reduce greenhouse gas emissions.

**Table 2**  
Assumptions for power sector installed capacities.

Unit: GW of installed capacity	Reference; Efficiency and Fossil Fuel Switch; Efficiency, Fossil Fuel Switch and Demand-side Renewable Scenario					Efficiency, Fossil Fuel Switch and All Renewables; All Strategies Plus Accelerated Electrification Scenarios				
	2010	2020	2030	2040	2050	2010	2020	2030	2040	2050
Distributed Solar PV	0	15	48	120	251	0	19	69	223	504
Geothermal	0	0	0	0	0	0	0	0	0	1
Biomass	4	15	25	34	47	4	15	19	22	34
Solar	0	95	216	432	704	0	124	313	801	1416
Wind	30	210	366	559	721	30	271	482	1002	1217
Nuclear	11	58	130	220	350	11	58	100	155	221
Hydro	216	380	398	444	501	216	380	410	444	501
Natural Gas	17	110	133	157	207	17	110	161	225	294
Diesel	9	13	17	19	17	9	11	11	10	6
Coal	559	1051	1358	1449	1274	559	855	904	833	442

1. Replacing fossil fuel melting with electricity in the Glass sector
2. Replacing coal firing with electricity in the Food and Beverage sector
3. Replacing heat dryers with electricity in the Pulp and Paper sector

Although none of these applications are currently widely available or utilized at a commercial scale, studies expect these to be deployed in large-scale after 2030 [72–75]. Our specific assumption rates for China are shown in Table 3 below, and are relatively conservative, given that most of these technologies are all currently still in the research stage and there is no knowledge on incremental costs.

In addition, electric arc furnace (EAF) process has historically been responsible for around 15% share of Chinese steel production, although its share has experienced a decline in recent years [75]. China currently depends heavily on import for steel scrap, the main raw material for the EAF production process. This lack of adequate scrap contrasts with large reserves for coking coal, the dominant Basic Oxygen Furnace production process (BOF). Combined with newly added BOF production capacities, we expect BOF to remain dominant through 2050, with 10 percentage point increase in EAF production to 40% share of steel production by 2050.

**Table 3**  
Key sectoral technology adoption assumptions in scenario analysis.

	2010	2050 Reference	2050 with Accelerated Electrification
<i>Transport</i>			
Passenger Vehicles	0% EV shares	10% EV share in private cars, 30% EV share in taxis and fleet car markets	75% EV share in private cars, 100% EV share in taxi and fleet car markets
Trucks	0% plug-in hybrid diesels	0% plug-in hybrid diesels	18% plug-in hybrid diesel share in medium-duty trucks, 50% plug-in hybrid diesel share in light-duty trucks
Buses	3% EV share of heavy-duty buses	24% EV share of heavy-duty buses, 16% EV share of light-duty buses	35% EV share of heavy-duty buses, 22% EV share of light-duty buses
<i>Industry</i>			
Glass Industry	0% electric melting	0% electric melting	30% electric melting to replace fossil fuel melting
Food and Beverage Industry	0% electrification of firing	0% electrification of firing	10% electrification of firing to replace coal-firing
Pulp and Paper Industry	0% electric dryers	0% electric dryers	5% electric dryers to replace heat dryers
Steel Production	13% share for Electric Arc Furnace (EAF)	30% share for EAF	40% share for EAF
<i>Commercial Buildings</i>			
Heating	1.5% air source heat pump	10–25% share for air source heat pump depending on climate zone	40–90% share for air source heat pump depending on climate zone
Cooling	0.5% ground source heat pump share	0% ground source heat pump share	20–25% share for ground source heat pump depending on climate zone
Water Heating	0% heat pump water heater share	0% heat pump water heater	48% heat pump water heaters
<i>Residential Buildings</i>			
Heating	1.5% air source heat pump	10%–80% share for air source heat pump depending on climate zone	40–100% share for air source heat pump depending on climate zone

### 3.5.3. Buildings

For commercial buildings, geographic limitations and different climate zone conditions are considered in developing the maximum technically feasible adoption of air source and ground source heat pumps for heating and cooling, respectively, since current technologies for air source heat pump are not effective under very cold temperatures. In particular, heat pump characteristics and adoption in North, Transition, and South China climate zone regions are based on Norway and Sweden, France, and Italian benchmarks, respectively (see Table 3). Similarly, the adoption of air source heat pumps for residential heating is also maximized taking into consideration geographic limitations and local climate zone conditions.

Table 3 summarizes the key assumptions of the selected sectors with maximized electrification under the Accelerated Electrification scenario.

## 4. Results

We present our results in two ways: first in terms of the energy impacts of the two key strategies of maximizing supply and demand-side renewable deployment and accelerating electrification, and then by comparing the CO<sub>2</sub> results of different scenarios modeled to understand the CO<sub>2</sub> implications of different low carbon strategies.



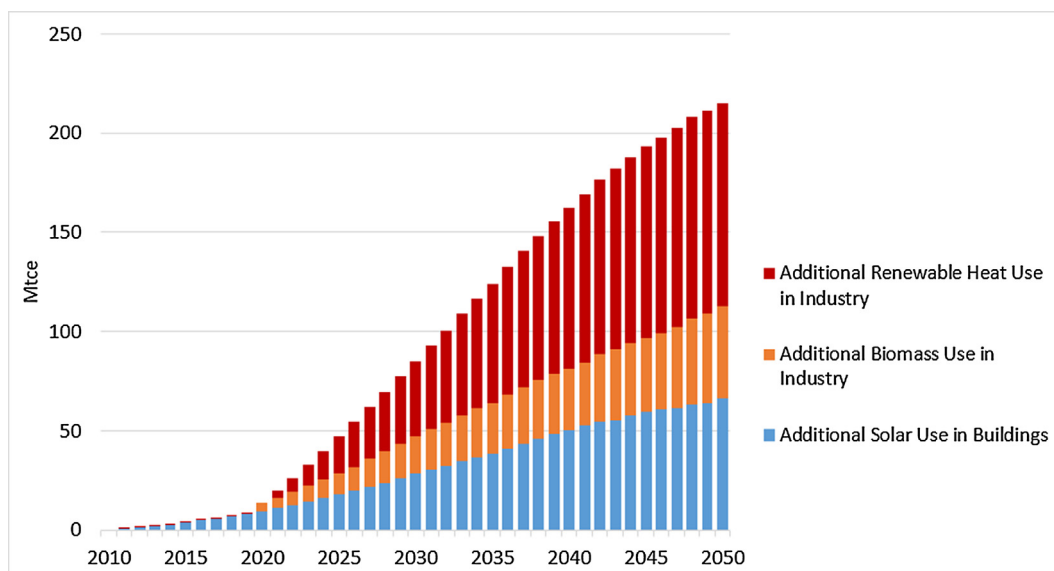


Fig. 2. Additional renewable energy utilization under maximum demand-side renewable scenario to 2050.

#### 4.1. Energy results

##### 4.1.1. Maximum renewable deployment

Maximizing the deployment of demand-side renewable technologies in China’s commercial and industrial sectors results in the additional utilization of 216 Mtce of renewable energy by 2050, compared to the Efficiency and Fuel Switching Scenario without additional renewables. Renewable heat use in industry (as shown in red) becomes the largest source of additional renewable resource utilized by Chinese demand sectors in 2025, when it overtakes the steadily growing utilization of solar energy in the commercial building sector (Fig. 2). The large growth in renewable heat utilization can be traced back to the industrial sector’s dominating, albeit decreasing share, of China’s final energy consumption with 47% share in 2050, as well as growth in the industries that are able to utilize low grade temperature, renewable heat. In particular, food, beverage and tobacco, transport equipment and machinery manufacturing are some of the leading industries utilizing greater shares of renewable heat under this scenario.

From the sectoral perspective, the commercial building sector holds greater potential for utilizing new solar thermal technologies that are already commercialized prior to 2022. After 2022, however, the growing adoption of renewable heat and biomass technologies in the industrial sector overtakes the steady deployment of solar thermal technologies in commercial buildings. By 2050, the industrial sector holds 69% of the additional renewable heat utilization potential, compared to 31% in commercial buildings for heating. Most of the additional industrial renewable utilization potential is from increased renewable heat use generated from biomass (63%), solar thermal (30%) and geothermal heat (7%).

Most of the additional renewable energy utilized replaces coal and coke, fossil fuel generated heat, and natural gas, with smaller amounts used to replace electricity and heat. The mix of fuels being replaced by demand-side renewable energy utilization is important as it directly affects the CO<sub>2</sub> reduction potential of the additional renewable energy used. By 2050, 87 Mtce of coal, 54 Mtce of natural gas, 45 Mtce of heat, 26 Mtce of electricity and 4 Mtce of oil products can be replaced on an annual basis by the 216 Mtce of solar thermal, biomass and renewable heat energy (Table 4). This translates into 634 Mt of CO<sub>2</sub> reduction per year in 2050, or 13% reduction when compared to the Efficiency and Fossil Fuel Switch Scenario.

Table 4

CO<sub>2</sub>-emitting fuels displaced by additional demand-side renewable utilization.

Unit: Mtce	2020	2030	2040	2050
Coal and Coke	4.1	43.8	65.4	87.0
Natural Gas	2.7	15.9	36.9	54.1
Oil Products	–	2.6	4.6	4.3
Heat	1.0	12.6	30.4	45.0
Electricity	3.0	8.6	20.5	26.2
Total Displaced	10.8	83.6	157.8	216.5

##### 4.1.2. Accelerated electrification

We find that for all four sectors, there is significant near-term potential for increasing electrification cost-effectively beyond the Reference level. While residential and commercial building sectors were already electrified in 2010 with electrification rates of 22% and 44%, respectively, the industry and transport sectors were electrified to a lesser extent with electrification rates of only 19% and 1% in 2010. Most of the increased electrification will occur as a result of technological change, such as the increasing adoption of electrical appliances in residential buildings as a result of urbanization and growing household incomes (Fig. 3). This is reflected in the higher electrification rates across all sectors and overall electrification rate of 38.6% in a previous study that only considered adoption of today’s cost-effective technologies under [42].

However, our additional scenario analysis finds that when considering the increasingly decarbonized power sector expected in coming years, additional electrification can occur in all four sectors to varying degrees (Fig. 3). Under the Accelerated Electrification Scenario, there is limited potential for additional electrification in the industrial sector because of the limited applicability to only the pulp and paper, food and beverage, and glass industries. Similarly, additional electrification is also limited in residential buildings because of the continued wide application of centralized district heating for meeting heating demand in Northern China, 100% reliance on electric air conditioners for cooling, and the continued use of other fuels in rural households. For commercial buildings and transport sectors, however, there is significant potential for increasing electricity’s share of total final energy demand to 83% and 25% by 2050, respectively. Compared to the 2018 China Energy and Electricity Outlook (CEEO)’s Re-electrification Scenario, we find similar levels of electrification for transport but higher potential for electrification in buildings with 74% averaged for all

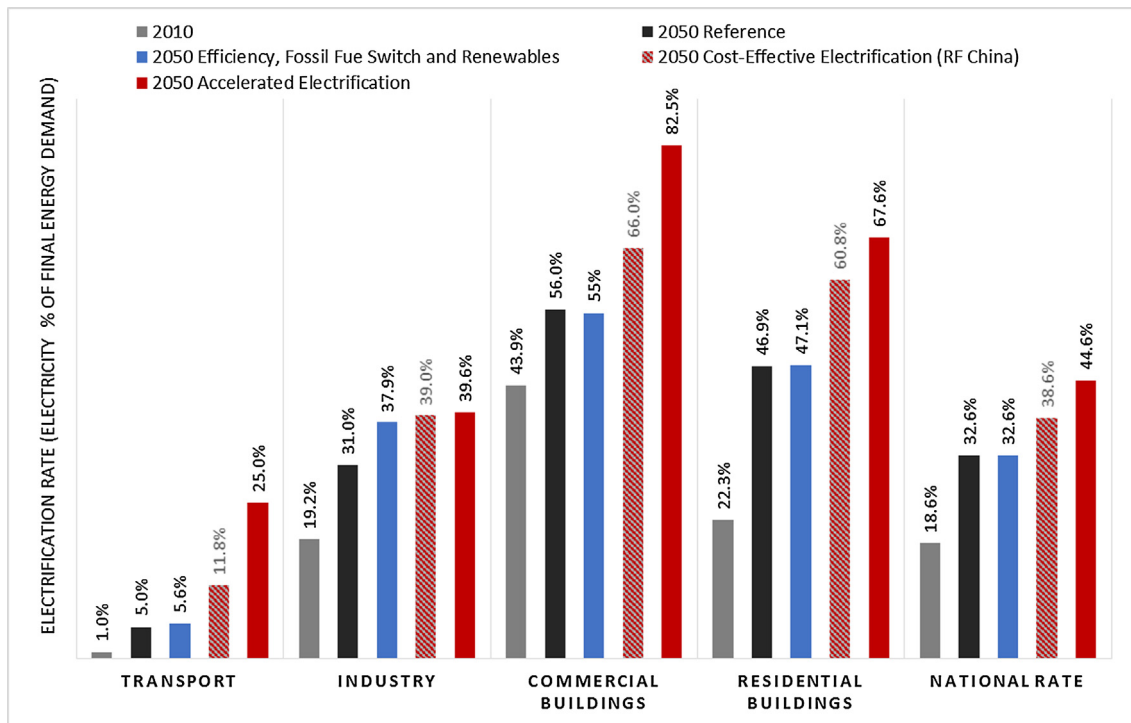


Fig. 3. 2010 and 2050 Sectoral electrification rates by scenario. Note: Electrification rate is electricity’s share of total final energy demand. RF China is the Reinvesting Fire: China study [38].

buildings versus their finding of 63% electrification for buildings in 2050 [21].

We also find lower total final energy demand under the Efficiency and Fossil Fuel Switch and Accelerated Electrification Scenarios as a result of more aggressive efficiency improvements, and with substantially lower coal and coke as well as oil products demand due to fuel switching across all sectors (Fig. 4). While the trend of final energy demand under this scenario is similar to 2018 CEEO’s Re-electrification Scenario, our final energy demand peaks at a much lower level of 3300 Mtce in 2033, versus CEEO’s peak of 3900 Mtce in 2030 [21]. Compared to both 2018 CEEO and 2017 WEO’s New Policies Scenario, our 2040 final energy demand is also the lowest at 3210 Mtce, versus 3800 Mtce in CEEO and 3600 Mtce in WEO [19,21]. China’s total final energy demand is the lowest under the Accelerated Electrification Scenario with 2718 Mtce of total annual energy demand in 2050, compared to demand of 4266 Mtce under the Reference Scenario and 2732 Mtce under the Efficiency, Fossil Fuel Switch and Demand Side Renewables Scenario, due to additional adoption of higher efficiency electrical equipment.

For electricity, in particular, we find that a peak in electricity

demand is possible under all scenarios with an earlier and more pronounced peak of 8000 TWh in 2040 under our Efficiency and Fuel Switch Scenario, 8200 TWh under our Efficiency, Fuel Switch and Demand-side Renewables Scenario, and a 2042 peak of 10,100 TWh in 2042 under the All Strategies Plus Electrification Scenario. This differs from both the 2017 WEO’s New Policies Scenario, which does not find a peak before 2040, and the 2018 CEEO’s projection of rapid rising electricity demand through 2050 with a total of 13,900 TWh by 2050 [19,21].

These results suggest that the CO<sub>2</sub> impact associated with accelerated electrification and decarbonized power sector can only be realized if total energy demand can first be lowered through energy efficiency improvement and then through additional fuel switching. Concurrently pursuing efficiency and fossil fuel switching can help lower total energy demand, and reduce the total electricity demand needed to meet accelerated electrification. In other words, fully deploying supply-side renewables without concurrently pursuing efficiency improvements will limit the potential for electrification and utilization of clean electricity.

The energy benefits of accelerating electrification are shown by the

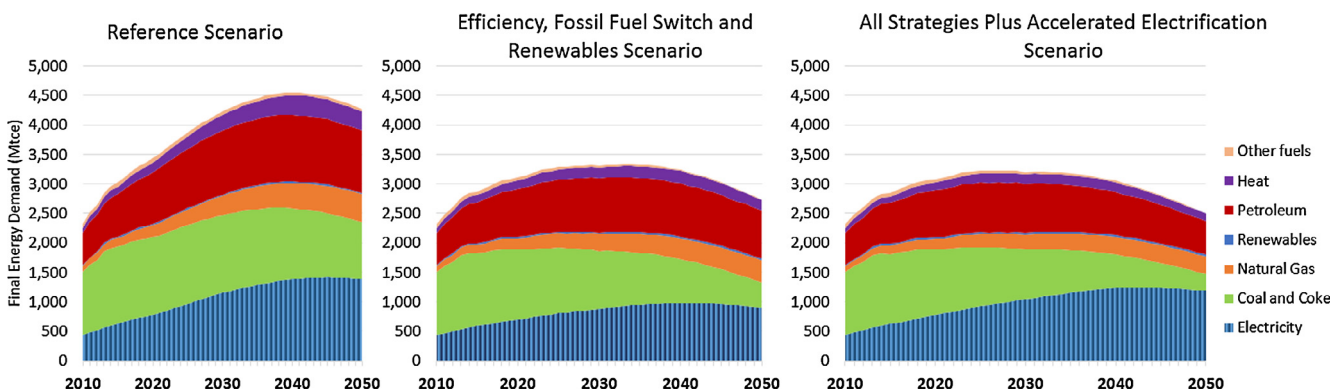


Fig. 4. Final energy demand by fuel by scenario, 2010–2050.

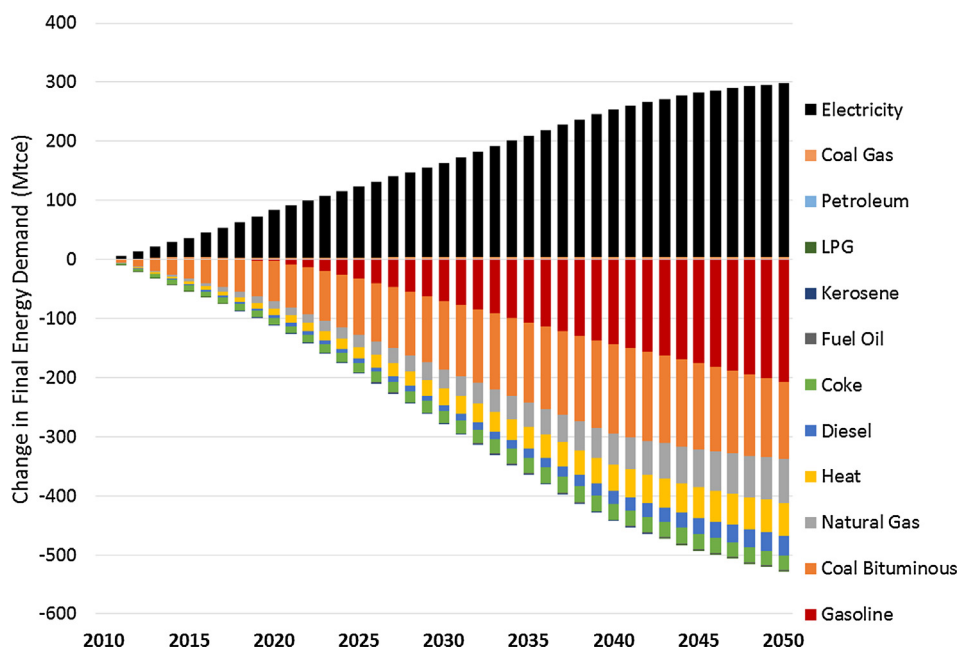


Fig. 5. Final energy demand impacts of accelerated electrification.

relatively small increase in electricity demand due to additional electrification, which can be offset by reduction in the consumption of coal, gasoline, natural gas, heat, coke and other fossil fuel resources (Fig. 5). By 2050, there is a net reduction of 231 Mtce of final energy demand, with the increased demand for 293 Mtce of electricity offset by 522 Mtce savings in fossil fuel consumption.

However, despite an increasingly decarbonized power sector, the additional electricity generated to meet more aggressive electrification is still mostly derived from coal-fired generation. This is because despite rapid increases in installed capacities for renewables, there is still insufficient renewable-based power generation to meet the additional electricity demand associated with increased electrification. Under the Accelerated Electrification Scenario, additional electricity generated to meet accelerated electrification is all generated by coal-fired power

through 2044 because all of the new incremental non-fossil power generation has already been used to meet the higher electricity demand (Fig. 6). Compared to the Efficiency, Fossil Fuel Switch and All Renewables Scenario, there is a slow-down in the decline in use of fossil fuels such as coal, with larger amount of coal not displaced by the growth of renewables due to extra demand for electricity. Based on our assumed installed capacity for non-fossil generation – which already accounts for the maximum supply-side renewable capacities in the Efficiency, Fossil Fuel Switch and Renewables Scenario - and accelerated electrification rates, the year 2045 appears to be a turning point where there is finally sufficient non-fossil power generation to offset the increase in electricity demand from accelerated electrification. After 2045, more of the additional electricity generated can be met by solar power (both on-grid and distributed photovoltaic) and biomass power,

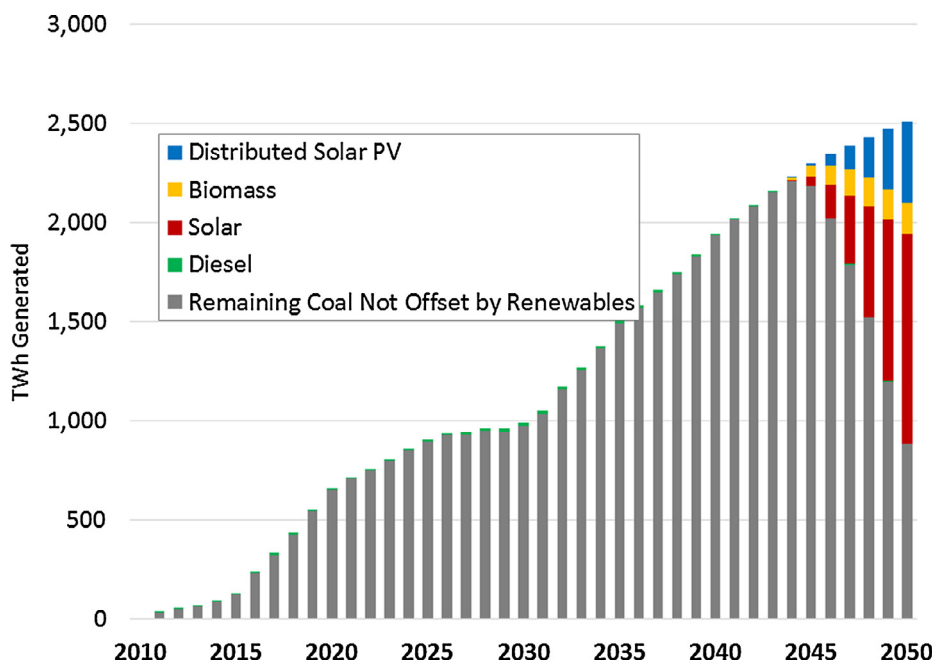


Fig. 6. Generation fuel mix of additional electricity demand under accelerated electrification scenario.

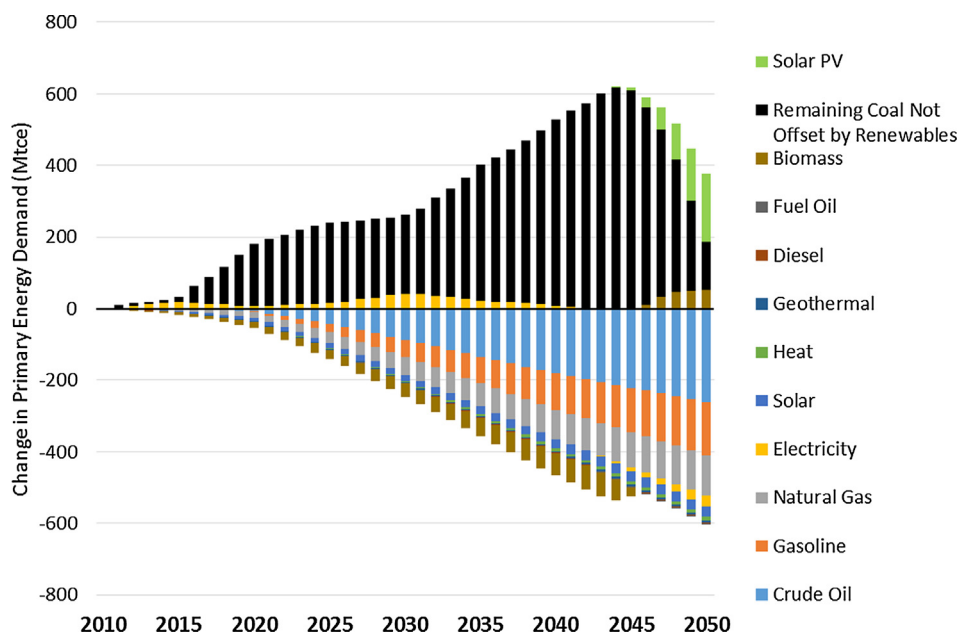


Fig. 7. Primary energy demand impacts of accelerated electrification by fuel type.

resulting in greater offset of coal-fired power. This suggests that managing the pace of electrification in tandem with the roll-out of additional non-fossil power generation is crucial in the resulting CO<sub>2</sub> impact of electrification as further discussed in the next section.

The overall energy impact of accelerated electrification is shown in Fig. 7, which compares the change in primary energy use by fuel type of All Strategies Plus Accelerated Electrification Scenario with the Efficiency, Fossil Fuel Switch and All Renewables Scenario. The reduction in crude oil, gasoline, and natural gas from additional electrification is offset by the net increase in coal use for power generation when compared to the Efficiency, Fossil Fuel Switch and All Renewables Scenario. As discussed previously, this net increase in coal use results from offset to the decline in demand for fossil fuels made possible in other scenarios because of the need for additional coal-based generation to meet higher electricity demand.

#### 4.2. CO<sub>2</sub> results and implications

Under the Reference Scenario, China’s CO<sub>2</sub> emissions will grow from 8.35 gigatonnes (Gt) CO<sub>2</sub> in 2010 to 11.57 Gt CO<sub>2</sub> in 2050, with CO<sub>2</sub> emissions peaking at 14.64 Gt CO<sub>2</sub> in 2036 (Fig. 8). The four alternative scenarios follow similar CO<sub>2</sub> emissions trajectory from 2010 through 2030, with all four scenarios reaching a CO<sub>2</sub> peak in 2025, eleven years earlier than the Reference CO<sub>2</sub> peak year of 2036. The CO<sub>2</sub> peak level varies slightly between the four scenarios, with the lowest CO<sub>2</sub> peak level of 10.17 Gt CO<sub>2</sub> achieved under the Efficiency, Fossil Fuel Switch and All Renewables scenario and the highest peaking level of 10.73 Gt CO<sub>2</sub> reached under the Efficiency and Fossil Fuel Switch scenario. Compared to the New Policies Scenario in the 2017 World Energy Outlook, we find a higher CO<sub>2</sub> peak level – but earlier peak year – than their 2028 peak level of 9.2 Gt CO<sub>2</sub> [19]. Compared to the Re-Electrification Scenario in the 2018 China Energy and Electricity Outlook, we find a similar CO<sub>2</sub> peak level of 10.3 Gt CO<sub>2</sub>, but three years earlier peak in 2025 instead of 2028 [21].

After 2030, there is greater divergence between the CO<sub>2</sub> pathways of the four alternative scenarios, with the Efficiency and Fossil Fuel Switch scenario having the highest CO<sub>2</sub> emissions with 9.3 Gt CO<sub>2</sub> in 2040 and the Efficiency, Fossil Fuel Switch and All Renewables Scenario having the lowest CO<sub>2</sub> emissions of the four alternative scenarios with 7.6 Gt CO<sub>2</sub> in 2040. The New Policies Scenario’s 2040 CO<sub>2</sub> emissions of 8.6 Gt CO<sub>2</sub> falls in the range of our four alternative

scenarios [19]. Similarly, the 2018 CEEO’s projected 2050 CO<sub>2</sub> emissions of 5.3 Gt CO<sub>2</sub> for the Re-Electrification Scenario also falls between our Efficiency and Fossil Fuel Switch scenario and the Efficiency, Fossil Fuel Switch and Demand-side Renewables Scenario [21]. Accelerating electrification in all sectors with maximized electrification for key end-uses under the All Strategies Plus Accelerated Electrification scenario results in generally higher CO<sub>2</sub> emissions than the Efficiency, Fuel Switch and All Renewables Scenario through 2045, as a result of the increased coal-fired power generation to meet additional electricity demand seen in Fig. 6. By 2050, however, the All Strategies Plus Accelerated Electrification scenario results in slightly lower annual CO<sub>2</sub> emissions. In 2050, the combination of efficiency, fuel switching including aggressive electrification and maximized renewable deployment embodied in the All Strategies Plus Accelerated Electrification Scenario results in total annual CO<sub>2</sub> emissions of 4.39 Gt CO<sub>2</sub>, or 62% reduction from the total annual emissions of 11.57 Gt CO<sub>2</sub> under the Reference Scenario.

Compared to renewables and electrification, adopting cost-effective efficiency improvements and switching to cleaner fossil fuels will result in the largest annual and cumulative CO<sub>2</sub> emissions reduction from 2010 through 2050 (Fig. 9). In 2050, adopting additional efficiency improvements and fossil fuel switching will lower annual total CO<sub>2</sub> emissions by 52% compared to the Reference Scenario. Further integrating demand-side renewables will result in an additional 0.79 Gt CO<sub>2</sub> emissions annual reduction in 2050, with additional 0.04 Gt CO<sub>2</sub> emissions reduction if supply-side renewables are also successfully deployed. Cumulatively from 2010 through 2050, introducing demand-side and supply-side renewables will result in total CO<sub>2</sub> emissions reductions of 16.8 Gt CO<sub>2</sub> and 18.5 Gt CO<sub>2</sub> emissions, respectively.

Accelerating electrification for all end-uses with maximized electrification for some end-uses, on the other hand, will result in net CO<sub>2</sub> emissions increases through 2048 despite an increasingly decarbonized power sector based on our assumed non-fossil capacity growth shown in Table 2. This net CO<sub>2</sub> increase results from offsets in the decline of coal-fired power generation made possible in other scenarios with increased renewable capacities. The higher electricity demand resulting from accelerated electrification results in more coal-fired power generation being deployed compared to the Efficiency, Fossil Fuel Switch and All Renewable Scenario, after all non-fossil capacities have already been fully deployed. While the fossil fuel replaced by electricity – notably gasoline, diesel and coke – will result in CO<sub>2</sub> emissions reductions, the

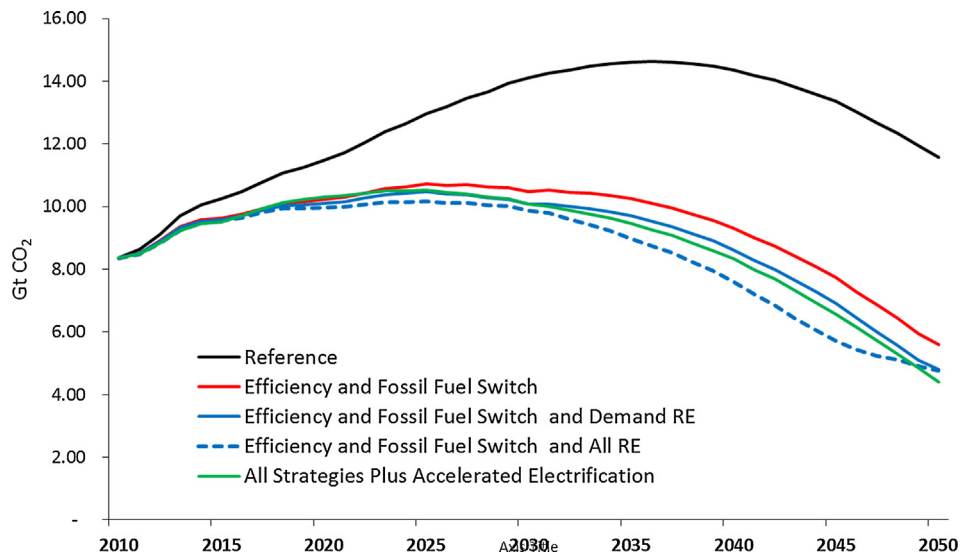


Fig. 8. China’s projected CO<sub>2</sub> emissions from 2010 to 2050 under different scenarios.

greater increase in CO<sub>2</sub> emissions from coal use for power generation will result in net CO<sub>2</sub> increase from 2010 through 2048 (Fig. 10). By 2050, accelerated electrification will result in a slight net reduction of 0.38 Gt CO<sub>2</sub> emissions. However, there is a net increase of 14.31 Gt CO<sub>2</sub> emissions cumulatively from 2010 through 2050 associated with accelerated electrification under our assumed pace of power sector decarbonization. This shows that if accelerated electrification does not match the pace of non-fossil generation expansion, it can lead to unintended consequences such as a slow-down in the decline in the use of fossil fuels and particularly coal for power generation.

The close linkage between increased electricity demand and subsequent CO<sub>2</sub> emissions intensity of electricity generated is further illustrated in Fig. 11. As total electricity demand is reduced from the Reference Scenario to the Efficiency and Fossil Fuel Switch Scenario, the CO<sub>2</sub> emissions intensity of the electricity generated decreases significantly because much of the electricity generated is coming from non-fossil resources. The CO<sub>2</sub> emissions intensity of electricity generated is further reduced with more aggressive deployment of supply-side

renewables in the power sector under the Efficiency, Fossil Fuel Switch and All Renewables Scenario. However, when aggressive electrification is pursued as a strategy across all end-use sectors, the CO<sub>2</sub> emissions intensity of electricity generation rises again to a level similar to the Efficiency and Fossil Fuel Switch scenario without additional supply-side renewables. This suggests that the increased electricity demand from accelerating electrification is offsetting any potential CO<sub>2</sub> reductions in the power sector from deploying additional supply-side renewables.

### 5. Discussion

Our results show that there are several different strategies for China to achieve its target of peaking its CO<sub>2</sub> emissions by 2030 or earlier, and a combination of all strategies including accelerated electrification can help significantly reduce China’s future CO<sub>2</sub> emissions by as much as 62% annually by 2050 when compared to a Reference Scenario of no new policies. While China’s CO<sub>2</sub> emissions can peak as early as 2025 by

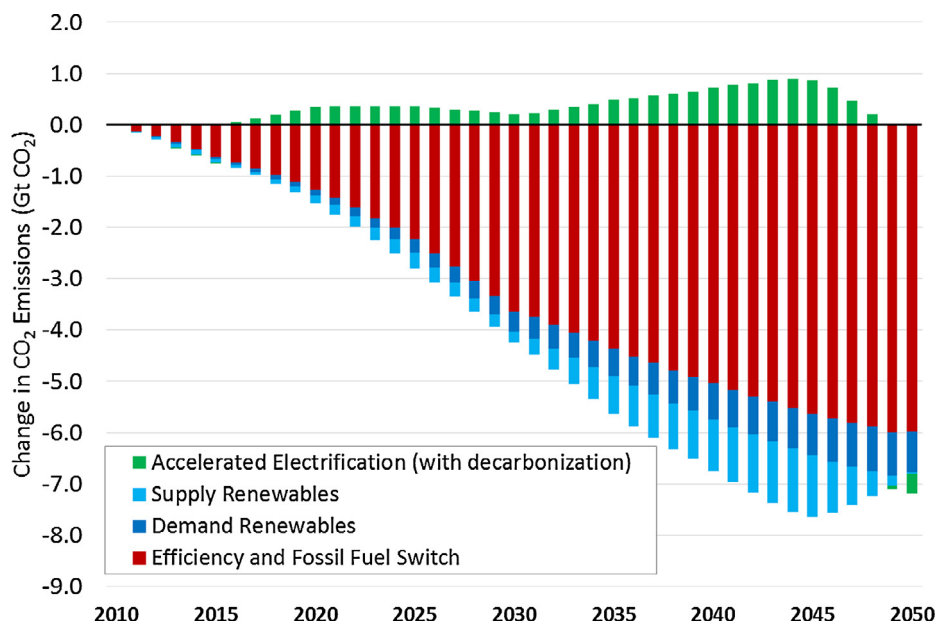


Fig. 9. CO<sub>2</sub> emissions impacts of efficiency, fuel switch, renewables and accelerated electrification strategies. Note: the emissions impact is calculated relative to the previous scenario without the specific strategy as shown in Table 1.

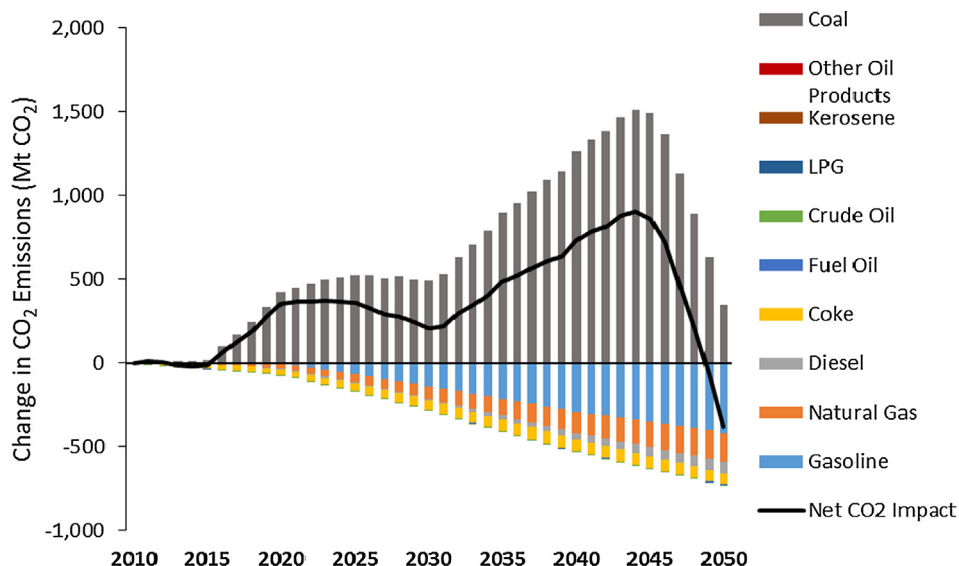


Fig. 10. CO<sub>2</sub> emissions impact of accelerated electrification. Note: CO<sub>2</sub> emissions impact shown are compared to efficiency, fossil fuel switch and all renewables scenario, not compared to reference scenario.

only pursuing cost-effective efficiency measures and fuel switching to cleaner fossil fuels, further integrating demand-side and supply-side renewables (including non-conventional demand-side renewables) can result in sizable additional CO<sub>2</sub> emissions reductions. However, achieving the CO<sub>2</sub> emissions reductions associated with each of the alternative scenarios requires overcoming significant barriers. Even for the Energy Efficiency and Fossil Fuel Switch Scenario, a multitude of barriers exist including lack of resources and knowledge for pursuing efficiency improvements, lack of coordination and enforcement of standards for strengthening efficiency, distorted tariff and energy prices, and concerns with regional unemployment issues and limited alternatives in some sectors for fuel switching [42].

Beyond energy efficiency and fossil fuel switching, deploying more demand-side renewables and maximizing the adoption of non-conventional renewables such as renewable heat and biomass for industry and solar thermal applications for buildings can result in additional CO<sub>2</sub> emissions reductions that is comparable in scale to traditional supply-side renewables for the power sector. Cumulatively from 2010 to 2050,

maximizing the deployment of renewables in the demand sectors can contribute to CO<sub>2</sub> emissions reductions of 16.8 Gt CO<sub>2</sub> beyond efficiency and fossil fuel switching, with additional reductions of 18.5 Gt CO<sub>2</sub> possible from increased utilization of renewable power generation. However, maximizing demand-side renewables requires a shift in policy focus on not only expanding supply-side renewables, but also in promoting adoption and utilization of distributed demand-side renewables such as solar thermal heating, cooling and water heating technologies for the commercial buildings sector.

Supporting policies, programs and measures such as subsidies and pilot demonstration projects are needed to promote both new electric technologies such as heat pumps and electric vehicles and demand-side renewables. In addition, greater awareness and capacity building on possible applications for low temperature renewable heat in the industrial subsectors are also key to achieving the large potential for additional CO<sub>2</sub> emissions reductions from the industrial sector. Nevertheless, full realization of the potential for low temperature renewable heat will likely take time to achieve given the large scale and

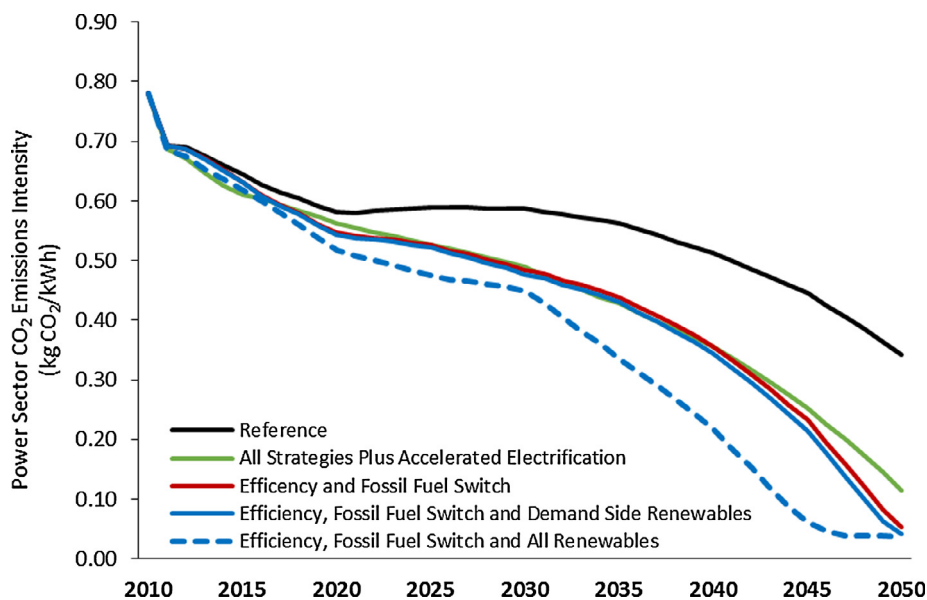


Fig. 11. CO<sub>2</sub> emissions intensity trends of electricity generation by scenario.

relatively decentralized nature of Chinese manufacturing industries so it is important to start as soon as possible. Globally, the development of low temperature renewable heat used in industry remains slow, but there may be applicable lessons learned from renewable deployment in other demand-side sectors such as buildings in European countries such as Finland, Sweden and Austria [60,64,76,77].

There is significant potential for cost-effectively increasing the electrification of all four demand sectors as well as additional potential for adopting maximum technically feasible electrification to replace direct use of fossil fuels with electricity for key end-uses, but increasing electrification face key challenges. One key challenge highlighted by the modeling results is the CO<sub>2</sub> impacts of increased electrification with a power sector that is still transitioning to more non-fossil power generation sources. Our results show that even with rapid deployment of new wind and solar generation capacities, particularly after 2030, concurrently increasing electrification across all demand sectors will result in net CO<sub>2</sub> increase through 2045. Although non-fossil sources accounts for more than half of total power generation installed capacity by 2030, the incremental supply of electricity from these sources is insufficient to supply the incremental demand under this scenario; consequently, demand for thermal generation increases, increasing CO<sub>2</sub> emissions. Managing the pace of electrification in tandem with the pace of decarbonization of the power sector will be crucial to achieving CO<sub>2</sub> reductions from the power sector in a scenario of increased electrification. This interdependence between electrification and the successful decarbonization of the power sector—achieving “beneficial electrification”—constitutes a key barrier to minimizing the CO<sub>2</sub> emissions impact of rapid electrification in China and may require greater policy coordination across power sector planners and demand-side policymakers. In addition, there are also existing barriers to increasing electrification in China. For example, while some sectoral policies have been introduced to promote electrification in the transport sector, greater policy focus is needed to increase the adoption of electric heating, cooling and water heating technologies in the buildings sector and electrified industrial processes.

The four alternative scenarios included in this study represent four possible policy-driven pathways for China’s future energy and CO<sub>2</sub> emissions development that can help peak national total energy-related CO<sub>2</sub> emissions as early as 2025. Three of the four alternative scenarios represent technically feasible pathways for China, but were limited in that costs were not modeled or explicitly considered in the development of these scenarios. If costs such as the related consumer prices of non-conventional electric or renewable technologies or the costs of renewable system integration were considered, these scenarios may result in high economic costs that make them very difficult to achieve.

While the extent that each of these strategies will be deployed in China remains to be determined, our attempt to quantify and compare the CO<sub>2</sub> impacts of each individual strategy is intended to help guide policy development and prioritization. It sheds light on the possible role for demand-side renewables, particularly non-conventional renewables that are not yet widely considered in China, in contributing to additional CO<sub>2</sub> emissions reductions. It also emphasizes the possible challenges and uncertain CO<sub>2</sub> emissions impacts associated with rapidly increased electrification, including maximized electrification for key end-uses in the transport, buildings and selected industrial sectors, given expected developments in China’s power sector. Additional research and future modeling that explores newer and emerging technologies for accelerated electrification, particularly in the industry sector, and greater analysis of the costs, development status, and specific sectoral applicability of non-conventional renewable and electric technologies within China are needed to understand these challenges. The need to manage the pace of electrification in tandem with the extent of power sector decarbonization will be crucial to mitigating possible net CO<sub>2</sub> emission increases that result from greater electrification.

## Acknowledgments

The work described in this study was funded by Energy Foundation China under Lawrence Berkeley National Laboratory Contract No. DE-AC02-05CH11231.

## Appendix A. Supplementary data

Supplementary data to this article can be found online at <https://doi.org/10.1016/j.apenergy.2019.03.116>.

## References

- [1] National Development and Reform Commission of China. China intended nationally determined contributions; 2015.
- [2] State Council of PR China. Notice on state council release of the ‘13th Five Year Plan’ greenhouse gas emissions control workplan; 2016. [http://www.gov.cn/zhengce/content/2016-11/04/content\\_5128619.htm](http://www.gov.cn/zhengce/content/2016-11/04/content_5128619.htm).
- [3] National Bureau of Statistics of China (NBSC). China statistical yearbook. Beijing: National Bureau of Statistics of China; 2017.
- [4] State Council of PR China. Strategic action plan for energy development (2014–2020); 2014. [http://www.gov.cn/zhengce/content/2014-11/19/content\\_9222.htm](http://www.gov.cn/zhengce/content/2014-11/19/content_9222.htm).
- [5] National Energy Administration of China. 13th Five Year Plan for renewable energy development (2016–2020); 2016. [http://www.nea.gov.cn/2016-12/19/c\\_135916140.htm](http://www.nea.gov.cn/2016-12/19/c_135916140.htm).
- [6] National Energy Administration of China. Total investment of renewable energy will reach 2.5 trillion yuan during the 13th Five-Year Plan period, 2017. [http://www.nea.gov.cn/2017-01/05/c\\_135956835.htm](http://www.nea.gov.cn/2017-01/05/c_135956835.htm).
- [7] Zeng M, Yang Y, Wang L, Sun J. The power industry reform in China 2015: policies, evaluations and solutions. *Renew Sustain Energy Rev* 2016;57:94–110.
- [8] Dennis K. Environmentally beneficial electrification: electricity as the end-use option. *Electr J* 2015;28(9):100–12.
- [9] Dennis K, Colburn K, Lazar J. Environmentally beneficial electrification: the dawn of ‘emissions efficiency’. *Electr J* 2016;29:52–8.
- [10] Weiss J, Hledik R, Hagerty M, Gorman W. Electrification: emerging opportunities for utility growth. The Brattle Group White Paper; 2017. [http://files.brattle.com/files/7376\\_electrification\\_whitepaper\\_final\\_single\\_pages.pdf](http://files.brattle.com/files/7376_electrification_whitepaper_final_single_pages.pdf).
- [11] Li J, Ma Z, Zhang Y, Wen Z. Analysis on energy demand and CO<sub>2</sub> emissions in China following the energy production and consumption revolution strategy and China dream target. *Adv Clim Change Res* 2018;9:16–26.
- [12] Zhao W, Cao Y, Miao B, Wang K, Ming Y. Impacts of shifting China’s final energy consumption to electricity on CO<sub>2</sub> emission reduction. *Energy Econ* 2018;71:359–69.
- [13] Mu Y, Evans S, Wang C, Cai W. How will sectoral coverage affect the efficiency of an emissions trading system? A CGE-based case study of China. *Appl Energy* 2019. [in press]. <https://doi.org/10.1016/j.apenergy.2017.08.072>.
- [14] Qi T, Winchester N, Karplus V, Zhang D, Zhang X. An analysis of China’s climate policy using the China-in global energy model. *Econ Model* 2016;52:650–60.
- [15] Dai H, Masui T, Matsuoka Y, Fujimori S. Assessment of China’s climate commitment and non-fossil energy plan towards 2020 using hybrid AIM/CGE model. *Energy Policy* 2011;39(5):2875–87.
- [16] Zhao T, Liu Z, Zhao C. Research on the prospects of low-carbon economic development in China based on LEAP model. *Energy Procedia* 2011;5:695–9.
- [17] Tan X, Hu Z, Shan B, Xu M. Study on the mid-long term electrification level of China. *Energy Procedia* 2012;14:1439–44.
- [18] Liu Q, Lei Q, Xu H, Yuan J. China’s energy revolution strategy into 2030. *Resour Conserv Recycl* 2018;128:78–89.
- [19] International Energy Agency (IEA). World energy outlook 2017. Paris: OECD/IEA; 2017.
- [20] China National Renewable Energy Centre of Energy Research Institute of Academy of Macroeconomic Research/National Development and Reform Commission. China renewable energy outlook 2017; 2017. Retrieved from <http://boost.cnreac.org.cn/wp-content/uploads/2017/10/CREO-2017-EN-20171113-1.pdf>.
- [21] State Grid Energy Research Institute (SGERI). China energy & electricity outlook. Beijing: China Electric Power Press; 2018. [in Chinese].
- [22] Zhou N, Khanna N, Wei F, Ke J, Levine M. Scenarios of energy efficiency and CO<sub>2</sub> emissions reduction potential in the buildings sector in China to year 2050. *Nat Energy* 2018;3:978–84.
- [23] Hong L, Zhou N, Feng W, Khanna N, Fridley D, Zhao Y, et al. Building stock dynamics and its impacts on materials and energy demand in China. *Energy Policy* 2016;94:47–55.
- [24] Peng W, Yang J, Lu X, Mauzerall D. Potential co-benefits of electrification for air quality, health, and CO<sub>2</sub> mitigation in 2030 China. *Appl Energy* 2018;218:511–9.
- [25] Peng T, Ou X, Yuan Z, Yan X, Zhang X. Development and application of China provincial road transport energy demand and GHG emissions analysis model. *Appl Energy* 2018;222:313–28.
- [26] Yuan X, et al. Energy and environmental impact of battery electric vehicle range in China. *Appl Energy* 2015;157:75–84.
- [27] Gambhir A, Schulz N, Napp T, Tong D, Riahi K. A hybrid modelling approach to develop scenarios for China’s carbon dioxide emissions to 2050. *Energy Policy* 2013;59:614–32.

- [28] Handayani K, Krozer Y, Filatova T. Trade-offs between electrification and climate change mitigation: an analysis of the Java-Bali power system in Indonesia. *Appl Energy* 2017;208:1020–37.
- [29] Vaillancourt K, Bahn O, Frenette E, Sigvaldason O. Exploring deep decarbonization pathways to 2050 for Canada using an optimization energy model framework. *Appl Energy* 2017;195:774–85.
- [30] Davis M, Ahiduzzaman M, Kumar A. How will Canada's greenhouse gas emissions change by 2050? A disaggregated analysis of past and future greenhouse gas emissions using bottom-up energy modelling and Sankey diagrams. *Appl Energy* 2018;220:754–86.
- [31] Ebrahimi S, MacKinnon M, Brouwer J. California end-use electrification impacts on carbon neutrality and clean air. *Appl Energy* 2018;213:435–49.
- [32] Shi J, Chen W, Yin X. Modelling buildings' decarbonization with application of China TIMES model. *Appl Energy* 2016;162:1303–12.
- [33] Tan X, Lai H, Gu B, Zeng Y, Li H. Carbon emission and abatement potential outlook in China's building sector through 2050. *Energy Policy* 2018;118:429–39.
- [34] Lin J, He G, Yuan A. Economic rebalancing and electricity demand in China. *Electr J* 2016;29(3):48–54.
- [35] Cao J, Ho M, Li Y, Newell R, Pizer W. China residential electricity consumption: Estimate and forecast using micro-data. *Resour Energy Econ* 2017. <https://doi.org/10.1016/j.reseneeco.2017.10.003>. [in press].
- [36] International Renewable Energy Agency (IRENA). Renewable roadmap 2030 renewable energy prospects: China; 2014. Retrieved from [http://www.irena.org/remap/IRENA\\_REmap\\_China\\_report\\_2014.pdf](http://www.irena.org/remap/IRENA_REmap_China_report_2014.pdf).
- [37] Energy Research Institute of China (ERI). China 2050 high renewable energy penetration scenario and roadmap study; 2015. Retrieved from <http://www.efchina.org/Attachments/Report/report-20150420/China-2050-High-Renewable-Energy-Penetration-Scenario-and-Roadmap-Study-Executive-Summary.pdf>.
- [38] Wang X, Teng F, Yang X, Wei R. Assessing the role of electricity storage in China's high renewable energy penetration future. *Energy Procedia* 2017;105:4084–9.
- [39] Heaps C. Long-range energy alternatives planning (LEAP) system; 2017 [Software version: 2017.0.5].
- [40] Stockholm Environment Institute. LEAP; 2018. Retrieved from <https://www.energycommunity.org>.
- [41] Zhou N, Fridley D, Khanna NZ, Ke J, McNeil M, Levine MD. China's energy and emissions outlook to 2050: perspectives from bottom-up energy end-use model. *Energy Policy* 2012;53:51–62.
- [42] Energy Research Institute (ERI), Lawrence Berkeley National Laboratory (LBNL), and Rocky Mountain Institute (RMI). Reinventing fire: China – a roadmap for China's revolution in energy consumption and production to 2050, executive summary; 2016. Retrieved from [http://www.rmi.org/energy\\_roadmap\\_china](http://www.rmi.org/energy_roadmap_china).
- [43] McNeil MA, Feng W, de la Rue du Can S, Khanna NZ, Ke J, Zhou N. Energy efficiency outlook in China's buildings sector through 2030. *Energy Policy* 2016;97:532–9.
- [44] Khanna NZ, Zhou N, Fridley D, Ke J. Quantifying the potential energy and CO<sub>2</sub> emissions impacts of China's power sector policies to 2050: a bottom-up perspective. *Utilit Policy* 2016;41:128–38.
- [45] National Bureau of Statistics of China (NBSC). China energy statistical yearbook 2016. Beijing: National Bureau of Statistics of China; 2017.
- [46] Intergovernmental Panel on Climate Change (IPCC). 2006 IPCC guidelines for national greenhouse gas inventories; 2007.
- [47] Zheng N, Zhou N, Fridley D. Comparative analysis of modeling studies on china's future energy and emissions outlook. Berkeley (CA): Lawrence Berkeley National Laboratory (LBNL-4032E); 2010.
- [48] Li H, Qi Y. Comparison of China's carbon emission scenarios in 2050. *Adv Clim Change Res* 2011;2:193–202.
- [49] Bellevrat E. Which decarbonization pathway for China? Insights from recent energy-emissions scenarios. Paris: The Institute for Sustainable Development and International Relations; 2012. [working paper 18].
- [50] IPCC. Emissions scenarios: summary for policymakers. Cambridge University Press; 2000.
- [51] United Nations (UN). World population prospects: 2015 revision; 2016. <https://esa.un.org/unpd/wpp/>.
- [52] NBSC. China statistical yearbook 2017. Beijing: National Bureau of Statistics of China; 2018.
- [53] LI Jingwen. "National Economic Management" Chinese academy of social sciences institute of quantitative and technical economics. 《国民经济管理》中国社科院数量经济与技术研究所研究员 李京文. <http://www.macchina.com.cn/zht/000086/009/20010828017609.shtml>.
- [54] IEA. Achievements of appliance energy efficiency standards and labeling programs: a global assessment. Paris: OECD/IEA; 2015.
- [55] IEA. Status of power system transformation 2018: advanced power plant flexibility. Paris: OECD/IEA; 2018. <https://webstore.iea.org/status-of-power-system-transformation-2018>.
- [56] United States Environmental Protection Agency (US EPA). Renewable industrial process heat; 2016. Retrieved from <https://www.epa.gov/rhc/renewable-industrial-process-heat#Footnotes>.
- [57] Mekhilef S, Saidur R, Safari A. A review on solar energy use in industries. *Renew Sustain Energy Rev* 2011;15(4):1777–90. <https://doi.org/10.1016/j.rser.2010.12.018>.
- [58] Caludia V, Battisti R, Drigo S. Potential for solar heat in industrial processes. Rome (Italy): CIEMAT; 2008.
- [59] Eisentraut A, Brown A. Heating without global warming: market developments and policy considerations for renewable heat; 2014. Retrieved from [https://www.iea.org/publications/freepublications/publication/FeaturedInsight\\_HeatingWithoutGlobalWarming\\_FINAL.pdf](https://www.iea.org/publications/freepublications/publication/FeaturedInsight_HeatingWithoutGlobalWarming_FINAL.pdf).
- [60] IRENA. A background paper to "Renewable Energy in Manufacturing". Abu Dhabi: IRENA; 2015. <http://www.irena.org/publications/2014/Jun/Renewable-Energy-in-Manufacturing>.
- [61] MacPhee JA, Gransden JF, Giroux L, Price JT. Possible CO<sub>2</sub> mitigation via addition of charcoal to coking coal blends. *Fuel Process Technol* 2009;90(1):16–20.
- [62] Wei W, Mellin P, Yang W, Wang C, Hultgren A, Salman H. Utilization of biomass for blast furnace in Sweden – Report I: Biomass availability and upgrading technologies; 2013 [KTH 35819-1].
- [63] Suopajärvi H, Fabritius T. Towards more sustainable ironmaking—an analysis of energy wood availability in Finland and the economics of charcoal production. *Sustainability* 2013;5:1188–207. <https://doi.org/10.3390/su5031188>.
- [64] EUBionet3. Biomass to replace fossil fuels in cement industry. Finnsementti Oy, Parainen, Finland Biomass in Cement Industry; 2009.
- [65] EUBionet3. Biomass use in the Dutch cement industry. Maastricht (The Netherlands): ENCI; 2009.
- [66] UK Department of Energy and Climate Change and Department of Business, Innovation and Skills. Decarbonizing heat in buildings: 2030–2050: Summary Report; 2015; Retrieved from <https://www.theccc.org.uk/archive/aws/IA&S/Element%20Energy%20-%20Decarbonising%20heat%20to%202050%20-%20Report.pdf>.
- [67] Gustavsson M, Särholm E, Stigsson P, Zetterberg L. Energy scenario for Sweden 2050 based on renewable energy technologies and sources. Göteborg and Stockholm: IVL Swedish Environment Institute and WWF Sweden; 2011.
- [68] International Energy Agency (IEA). Technology roadmap – solar heating and cooling; 2012. Retrieved from [https://www.iea.org/publications/freepublications/publication/Solar\\_Heating\\_Cooling\\_Roadmap\\_2012\\_WEB.pdf](https://www.iea.org/publications/freepublications/publication/Solar_Heating_Cooling_Roadmap_2012_WEB.pdf).
- [69] Faninger G. The potential of solar thermal technologies in a sustainable energy future. IEA Solar Heating & Cooling Programme; 2010. [www.iea-shc.org](http://www.iea-shc.org).
- [70] Ministry of Industry and Information Technology (MIIT). Notice on the efforts to continue promoting new energy vehicles deployment and use; 2013. Retrieved from: <http://zbs.miit.gov.cn/n11293472/n11295142/n11299183/15628903.html> [in Chinese].
- [71] Shi H, Wang H, Ouyang M, Jiang F. Analysis of response of China new energy vehicle markets to government policies. Presented at the 28th international electric vehicle symposium & exhibition, Seoul, Korea: 3–6 May 2015. 2015.
- [72] United Kingdom (UK) Department of Energy and Climate Change and Department of Business, Innovation and Skills. Industrial decarbonisation and energy efficiency roadmaps to 2050: glass sector; 2015. Retrieved from [https://www.gov.uk/government/uploads/system/uploads/attachment\\_data/file/416675/Glass\\_Report.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/416675/Glass_Report.pdf).
- [73] UK Department of Energy and Climate Change and Department of Business, Innovation and Skills. Industrial decarbonisation and energy efficiency roadmaps to 2050: food and drink sector; 2015. Retrieved from [https://www.gov.uk/government/uploads/system/uploads/attachment\\_data/file/416672/Food\\_and\\_Drink\\_Report.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/416672/Food_and_Drink_Report.pdf).
- [74] UK Department of Energy and Climate Change and Department of Business, Innovation and Skills. Industrial decarbonisation and energy efficiency roadmaps to 2050: Pulp and paper sector; 2015. Retrieved from <https://connect.innovateuk.org/documents/17009435/29075831/Paper+and+pulp/a756a257-f2bb-4648-b748-a03a32ef73b7>.
- [75] EUWID Recycling and Waste Management. EAF crude steel production continues to fall worldwide; 2016. Retrieved from <https://www.euwid-recycling.com/news/full/worldwide/Artikel/eaf-crude-steel-production-continues-to-fall-worldwide.html>.
- [76] Kranzl L, et al. Renewable energy in the heating sector in Austria with particular reference to the region of Upper Austria. *Energy Policy* 2013;59:17–31.
- [77] Shakeel S, Takala J, Zhu L. Commercialization of renewable energy technologies: A ladder building approach. *Renew Sustain Energy Rev* 2017;78:855–67.