

Lawrence Berkeley National Laboratory

Recent Work

Title

SUPERCRITICAL FLUID EXTRACTION WITH MIXED SOLVENTS

Permalink

<https://escholarship.org/uc/item/2mz8v4cm>

Authors

Joshi, D.K.

Prausnitz, J.M.

Publication Date

1983-12-01



Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

Materials & Molecular Research Division

RECEIVED
LAWRENCE
BERKELEY LABORATORY
FEB 21 1984
LIBRARY AND
DOCUMENTS SECTION

To be submitted for publication


SUPERCRITICAL FLUID EXTRACTION WITH MIXED SOLVENTS

D.K. Joshi and J.M. Prausnitz

December 1983

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 6782.*

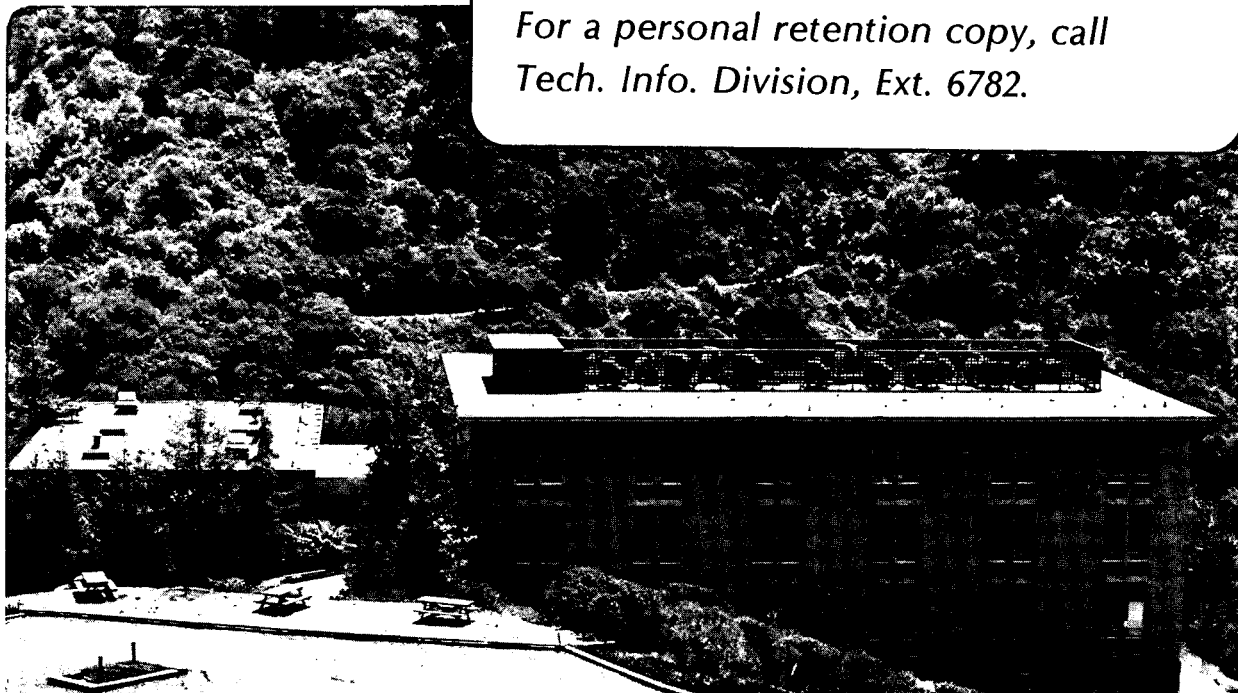

LBL-17154
c.2

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

SUPERCRITICAL FLUID EXTRACTION WITH MIXED SOLVENTS

D.K. Joshi and J.M. Prausnitz

Chemical Engineering Department and
Molecular and Materials Research Division,
Lawrence Berkeley Laboratory,
University of California
Berkeley, CA 94720

ABSTRACT

The solubility of a high-boiling solid or liquid in a compressed gas can be raised substantially where a suitable entrainer is added to the compressed gas. Illustrative calculations for several cases indicate that solubilities can be raised by one or two orders of magnitude.

This work was supported by the Director, Office of Energy Research, Office of Basic Energy Sciences, Chemical Sciences Division of the US Department of Energy under Contract Number DE-AC03-76SF00098.

(Revised 12/83)

In recent years there has been a revival of interest in supercritical fluid extraction, i.e. in the separation of condensed-phase mixtures by extraction, using a compressed gas (rather than a liquid) as the selective solvent (Schneider et al 1980). Pertinent phase equilibria have been reported by numerous authors, including, for example, Mackey and Paulaitis (1979), Johnston and Eckert (1981), Kurnik and Reid (1981) and Kurnik et al (1981). Since the density of a fluid near its critical point is sensitive to small changes in pressure and temperature, and since solubility is strongly dependent on the solvent's density, it is sometimes attractive to use a fluid near its critical state as an extraction solvent because solvent regeneration is then easily achieved.

Most phase-equilibrium studies related to supercritical extraction have been restricted to single-solvent systems. However, under certain conditions, it may be advantageous to use a mixed solvent. This note discusses some of the fundamental considerations leading to such advantages and presents a few examples.

Advantages of Mixed Solvents

To minimize operating costs in a continuous extraction process, it is desirable to keep solvent flows as low as possible. Low solvent flows require high solubility of the solute in the gaseous solvent.

Since the vapor pressure of a condensed component always rises with temperature, it is frequently desirable to operate supercritical extraction at as high a temperature as possible, subject to other considerations, such as thermal stability. However, for maximum solubility it is also desirable to operate at a temperature close to (usually slightly above) the critical temperature of the solvent because it is in the critical region of the solvent where the particular advantages of supercritical extraction are maximized.

Using a single solvent, it is often not possible to meet both desired operating conditions.

For example, suppose we have a condensed component whose thermal-stability properties are such that the maximum allowable operating temperature is 341 K. We would then want to use a solvent whose critical temperature is about 335 K. There is no suitable single solvent which meets that requirement but it is possible to use a solvent mixture whose effective critical temperature is at the desired level. The critical temperature of carbon dioxide is 304 K; that of propane is 370 K. Depending on composition, a mixture of carbon dioxide and propane could provide an optimum solvent at 341 K.

Another advantage of a mixed solvent may be achieved through the entrainer effect where a relatively small amount of a second solvent is added to a primary solvent to raise the solute's solubility through preferential intermolecular forces, such as hydrogen-bonding. For example, suppose we want to extract benzoic acid at 394 K. A possible primary solvent is propane. (Butane is not suitable because its critical temperature is too high, 425 K). To enhance the solubility of benzoic acid, it is advantageous to add to propane a small amount of some volatile fluid which can hydrogen-bond with benzoic acid. Particularly desirable would be a fluid which hydrogen-bonds with benzoic acid but not with itself. Possible candidates are ammonia, sulfur dioxide and dimethyl ether. These fluids cannot be used as primary solvents because their critical temperatures are too high.

Thermodynamic Analysis

Consider a solid material i which is to be dissolved in a dense-gas solvent at temperature T and pressure P . Assuming that the solvent is not

soluble in the solid phase, the only equation of equilibrium is

$$f_i^\Delta = f_i^v \quad (1)$$

where f is fugacity and where superscripts Δ and v denote solid phase and vapor phase, respectively.

If solid i is pure and incompressible,

$$f_i^\Delta = P_i^s \phi_i^s \exp \left[v_i^\Delta \frac{(P - P_i^s)}{RT} \right] \quad (2)$$

where P_i^s is the saturation (vapor) pressure, ϕ_i^s is the fugacity coefficient at saturation (ϕ_i^s is often very close to unity) and v_i^Δ is the molar volume, all at system temperature T .

The fugacity of i in the vapor phase is given through fugacity coefficient ϕ_i and vapor-phase mole fraction y_i ,

$$f_i^v = \phi_i y_i P \quad (3)$$

The fugacity coefficient is obtained from an equation of state for the gas-phase mixture containing component i and any number of gaseous solvents as discussed elsewhere (Prausnitz 1969).

[If component i is not a pure solid but in a condensed-phase mixture, well-known modifications in Equation (2) are required. Further, if component i is in a liquid phase, consideration must be given to the solubilities of the gaseous solvents in that liquid phase. In that event there are m equations of equilibrium in addition to Equation (1), where m is the number of gaseous solvents.]

Illustrative Examples

While experimental data are now available for a variety of solutes in single gaseous solvents (mostly carbon dioxide or ethylene), such data are rare in solvent mixtures. To illustrate possible advantages of mixed solvents, we present some calculated results. Lacking experimental verification, these calculated results are necessarily approximate but the trends, which are of importance here, are probably reliable.

We calculate fugacity coefficient ϕ_i using Chueh's modification of the Redlich-Kwong equation (Chueh and Prausnitz 1967):

$$\ln \phi_i = \ln \frac{v}{v-b} + \frac{b_i}{v-b} - \frac{2}{RT^{3/2} b} \left(\sum_{\ell=1}^{m+1} y_{\ell} a_{i\ell} \right) \ln \frac{v+b}{v} \\ + \frac{ab_i}{RT^{3/2} b^2} \left(\ln \frac{v+b}{v} - \frac{b}{v+b} \right) - \ln \frac{Pv}{RT} \quad (4)$$

where v is the molar volume of the mixture at P and T and where the summation is for all components, including i . Constants a and b , given by conventional mixing rules, are evaluated using the procedure described by Chueh.

Figure 1 shows calculated solubilities for phenanthrene at 341 K. Since the normal melting point is 374 K, we expect that at 341 K and at the pressures indicated, no liquid phase is present, consistent with the results of Johnston and Eckert (1981) who reported the solubility of solid phenanthrene in ethylene at 343 K. Figure 1 shows that, at high pressures, the solubility of phenanthrene in mixtures of carbon dioxide and propane is one order of magnitude larger than that in carbon dioxide alone. Gaseous propane alone cannot be used as a solvent at high pressures because propane condenses at 341 K.

Figure 2 shows similar results for phenanthrene in mixtures of ethylene and propylene.

Figures 3 and 4 show calculated solubilities of benzoic acid at 394 K in mixtures of propane and a suitable entrainer. Since polar components are now included, Chueh's method can be used only for evaluating pure-component constants a and b . For all cross coefficients a_{ij} and a_{jk} (where j and k are solvents), we use the approximations

$$a_{ij} = \gamma_{ij} (a_i a_j)^{\frac{1}{2}} ; a_{jk} = \gamma_{jk} (a_j a_k)^{\frac{1}{2}} \quad (5)$$

For γ_{jk} we use unity. For γ_{ij} we use unity when j is propane and we use 2 when j is the entrainer.

Calculated results are sensitive to the choice of γ_{ij} when j is the entrainer, as shown in Table 1. We use a conservative value ($\gamma_{ij} = 2$) which reflects the desirable property of the entrainer; the entrainer does not hydrogen-bond with itself but it does hydrogen-bond with benzoic acid. When j is the entrainer, it is likely that γ_{ij} is much larger than 2. Solubility rises rapidly with γ_{ij} as indicated in Table 1.

The calculations shown here assume that, at the conditions indicated, the only phases present are a (pure) solid and a gas. That assumption may not be valid because, at high pressures, the phase diagram of a binary (or ternary) system (containing one solid and one or two gases) may become complex, including a liquid phase. Little is known about these phase diagrams but a striking example has been presented by Van Welie and Diepen (1961) who showed that for ethylene-naphthalene a liquid phase appears at high pressure and 320 K, 33 degrees below the normal melting point of naphthalene. Paulaitis (1982) indicates that for carbon dioxide-naphthalene at high pressures, a liquid phase appears at 325 K.

In our calculations we have estimated the dew point of the (subcritical) solvent k from the relation

$$\phi_k y_k P = \left[P^S \phi^S \exp(v^L (P - P^S) / RT) \right]_{\text{pure } k} \quad (6)$$

where v^L is the molar liquid volume and P^S is the saturation (vapor) pressure.

The examples presented here suggest that, in a continuous extraction process, solvent flows can be significantly decreased by careful selection of mixed solvents. Since solvent flow is often a critical design parameter, mixed solvents may offer important economic advantages in supercritical fluid extraction.

Acknowledgment

The authors are grateful to the donors of Petroleum Research Fund, administered by the American Chemical Society, for partial financial support.

Notation

a, b constants in the Redlich-Kwong equation of state for the mixture
f fugacity
m number of solvents
P total pressure
R gas constant
T temperature
v molar volume
y mole fraction in gas phase
 β_{ij} binary constant

Greek Letters

ϕ fugacity coefficient

Superscript

L liquid phase
 δ solid phase
s saturation
v vapor phase

Subscripts

i solid component
j gaseous solvent
k gaseous solvent
l any component

Table 1

EFFECT OF z_{ij} ON CALCULATED VAPOR-PHASE MOLE FRACTION
OF BENZOIC ACID (i) IN A 90-10 MOLE PERCENT MIXTURE
OF PROPANE-SULFUR DIOXIDE (j) at 394 K

Pressure, MPa	Mole Fraction Benzoic Acid in Vapor $\cdot 10^3$		
	$z_{ij} = 1.5$	2.0	2.5
4	0.918	1.02	1.13
5	1.59	1.87	2.19
6	4.06	5.20	6.67
7	6.26	8.41	11.3

LITERATURE CITED

- Chueh, P.L. and J.M. Prausnitz, "Vapor Liquid Equilibria at High Pressures. Vapor-Phase Fugacity Coefficients in Nonpolar and Quantum-Gas Mixtures", In. Eng. Chem. Fund. 6 492 (1967).
- Johnston, K.P. and C.A. Eckert, "An Analytical Carnahan-Starling-van der Waals Model for Solubility of Hydrocarbon Solids in Supercritical Fluids", AIChE Journal 27, 773 (1981).
- Kurnik, R.T. and R.C. Reid, "Solubility Extrema in Solid-Fluid Equilibria", AIChE Journal 27, 861 (1981).
- Kurnik, R.T., Holla, S.J. and R.C. Reid, "Solubility of Solids in Supercritical Carbon Dioxide and Ethylene", J. Chem. Eng. Data 26, 47 (1981).
- Mackay, M.E. and M.E. Paulaitis, "Solid Solubilities of Heavy Hydrocarbons in Supercritical Solvents", Ind. Eng. Chem. Fund. 18, 149 (1979).
- Paulaitis, M.E., Private Communication (1982).
- Prausnitz, J.M. "Molecular Thermodynamics of Fluid Phase Equilibria", Prentice Hall, N.J. (1969).
- Schenider, A.M., Stahl, E. and G. Wilke (Editors) "Extraction with Supercritical Gases", Verlag Chemie, Weinheim, (1980).
- Van Welie, G.S.A. and G.A.M. Diepen, "The P-T-x Space Model of the System Ethylene-Naphthalene (III)", Rec. Trav. Chim. 80, 673 (1961).

FIGURE CAPTIONS

Figure 1: Calculated Solubilities of Phenanthrene in Carbon Dioxide and in Mixtures of Carbon Dioxide and Propane at 341 K .

Figure 2: Calculated Solubilities of Phenanthrene in Ethylene and in Mixtures of Ethylene and Propylene at 341 K .

Figure 3: Calculated Solubilities of Benzoic Acid in Propane and in Mixtures of Propane with Sulfur Dioxide or Dimethyl Ether at 394 K .

Figure 4: Calculated Solubilities of Benzoic Acid in Propane and in Mixtures of Propane and Ammonia at 394 K .

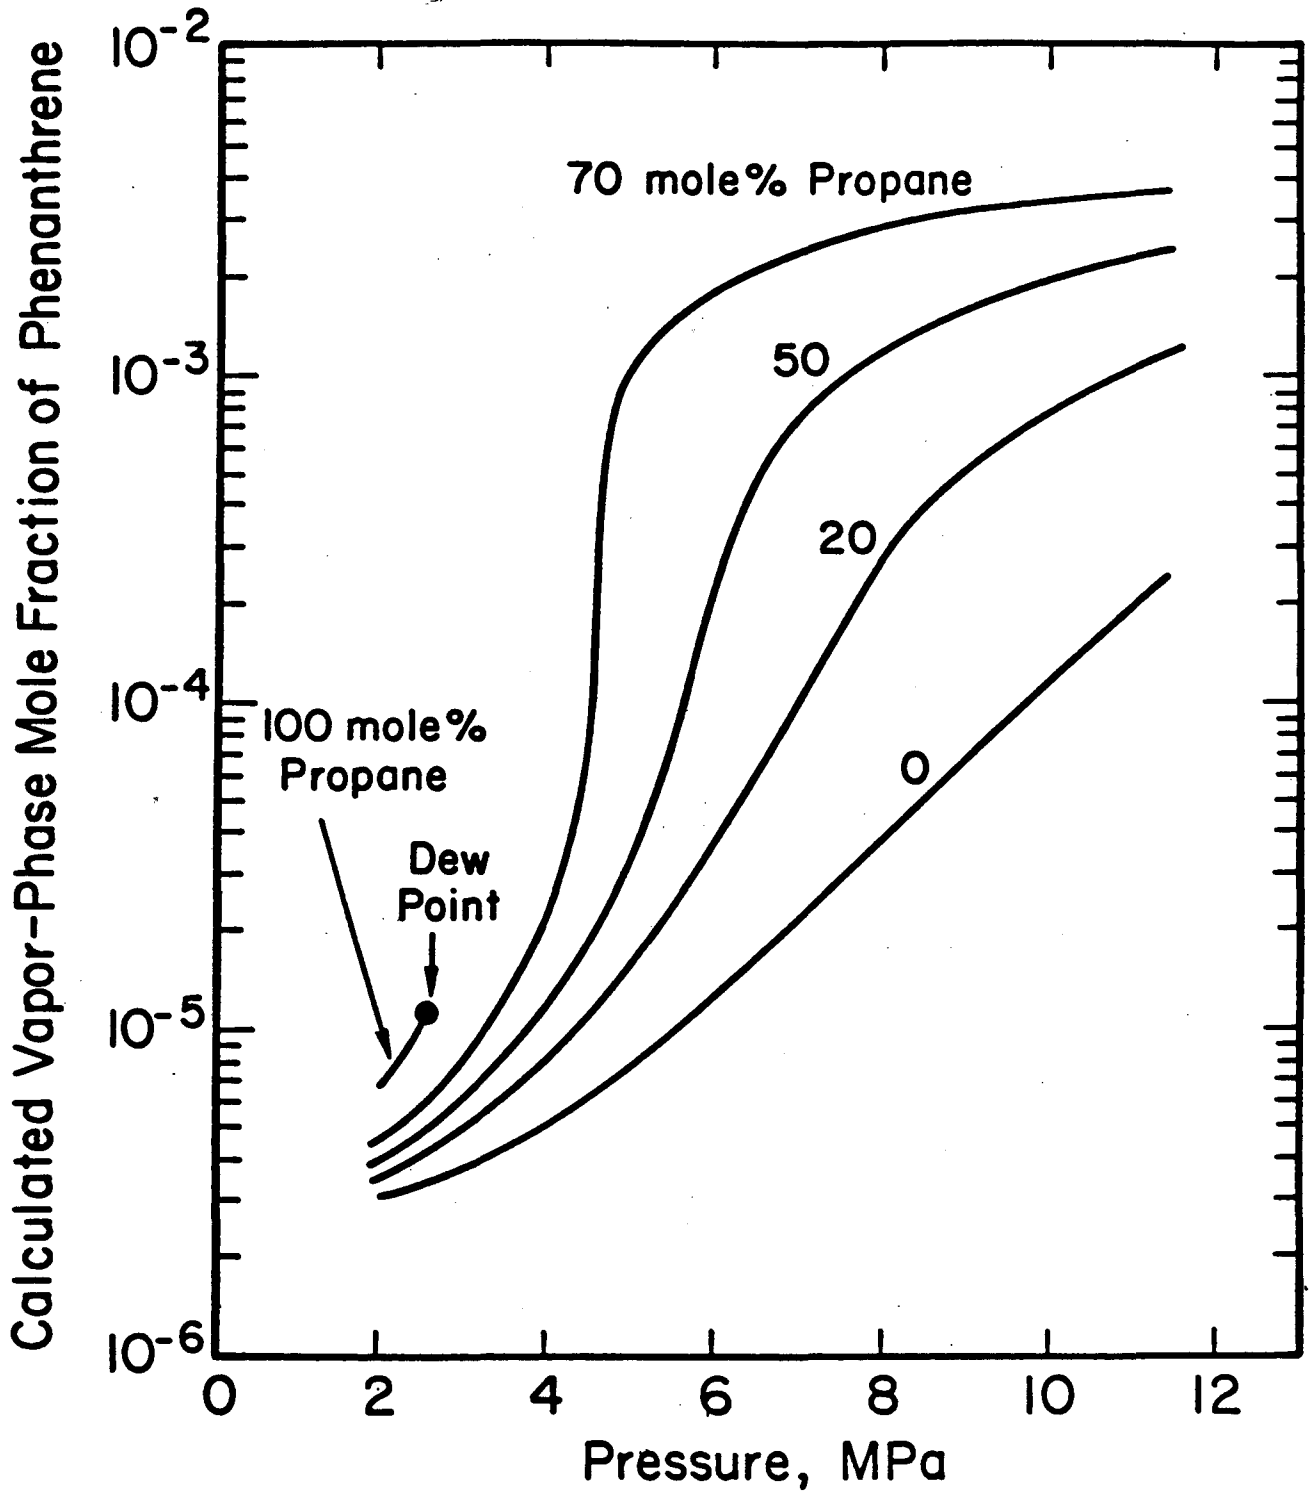


Figure 1

CALCULATED SOLUBILITIES OF PHENANTHRENE IN CARBON DIOXIDE AND IN MIXTURES OF CARBON DIOXIDE AND PROPANE AT 341 K.

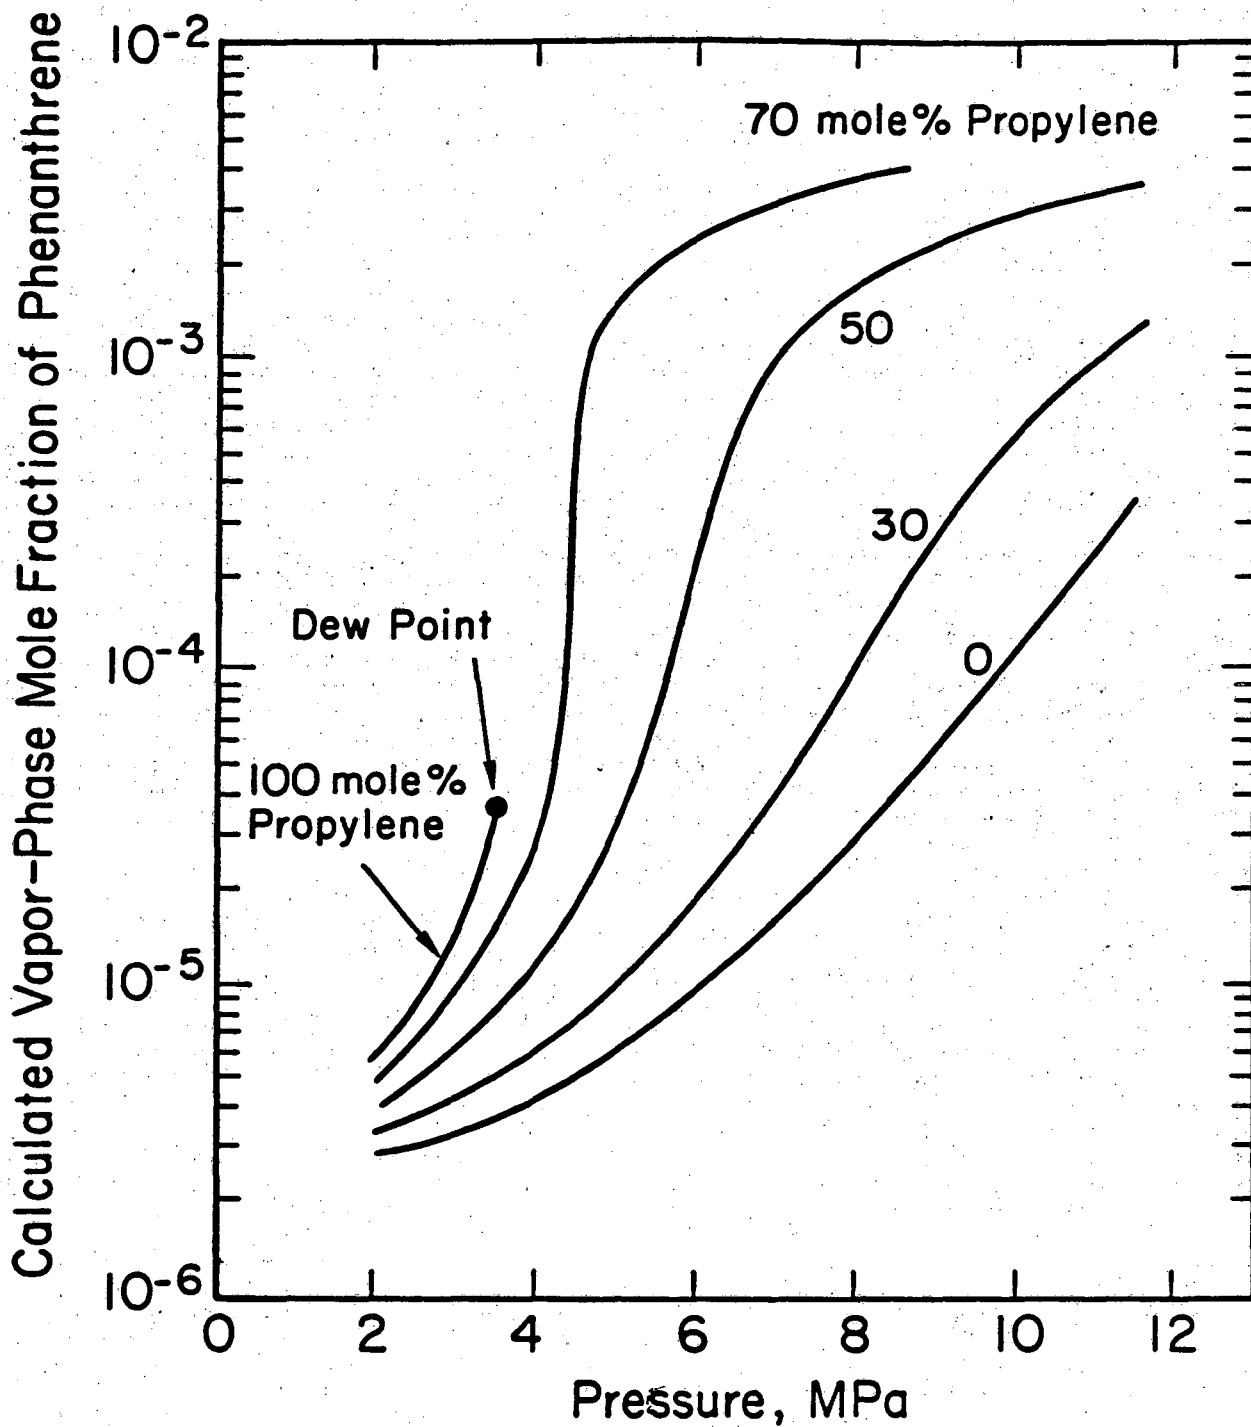


Figure 2

CALCULATED SOLUBILITIES OF PHENANTHRENE IN ETHYLENE AND IN MIXTURES OF ETHYLENE AND PROPYLENE AT 341 K.

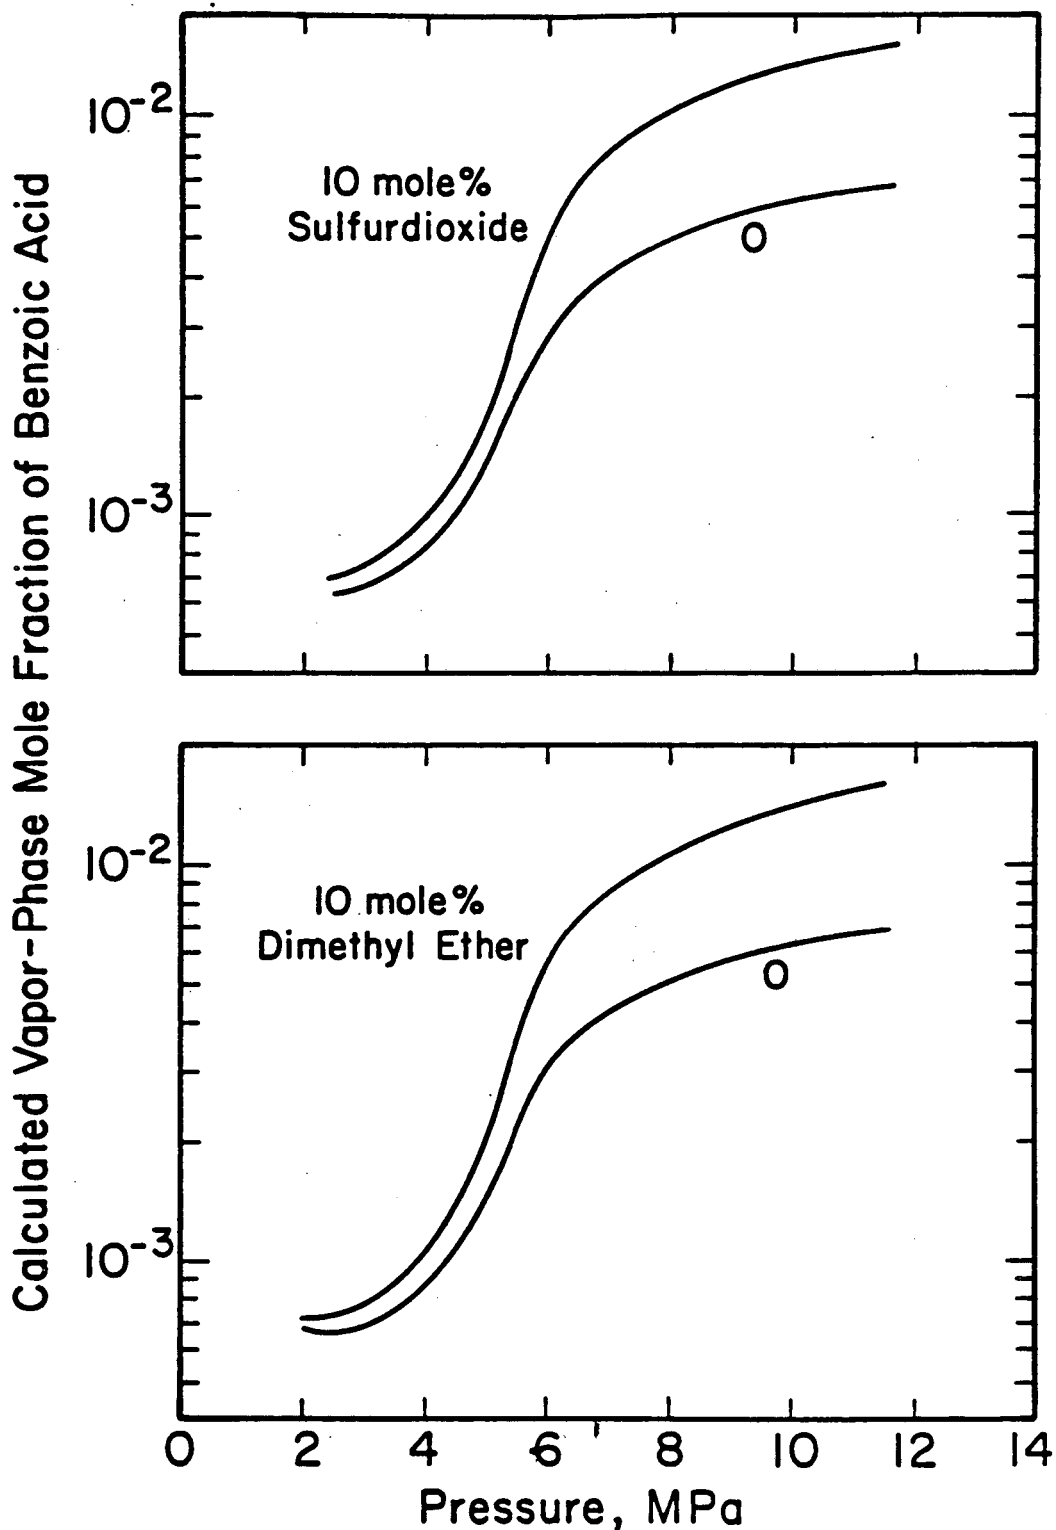


Figure 3

CALCULATED SOLUBILITIES OF BENZOIC ACID IN PROPANE AND IN MIXTURES OF PROPANE WITH SULFUR DIOXIDE OR DIMETHYL ETHER AT 394 K.

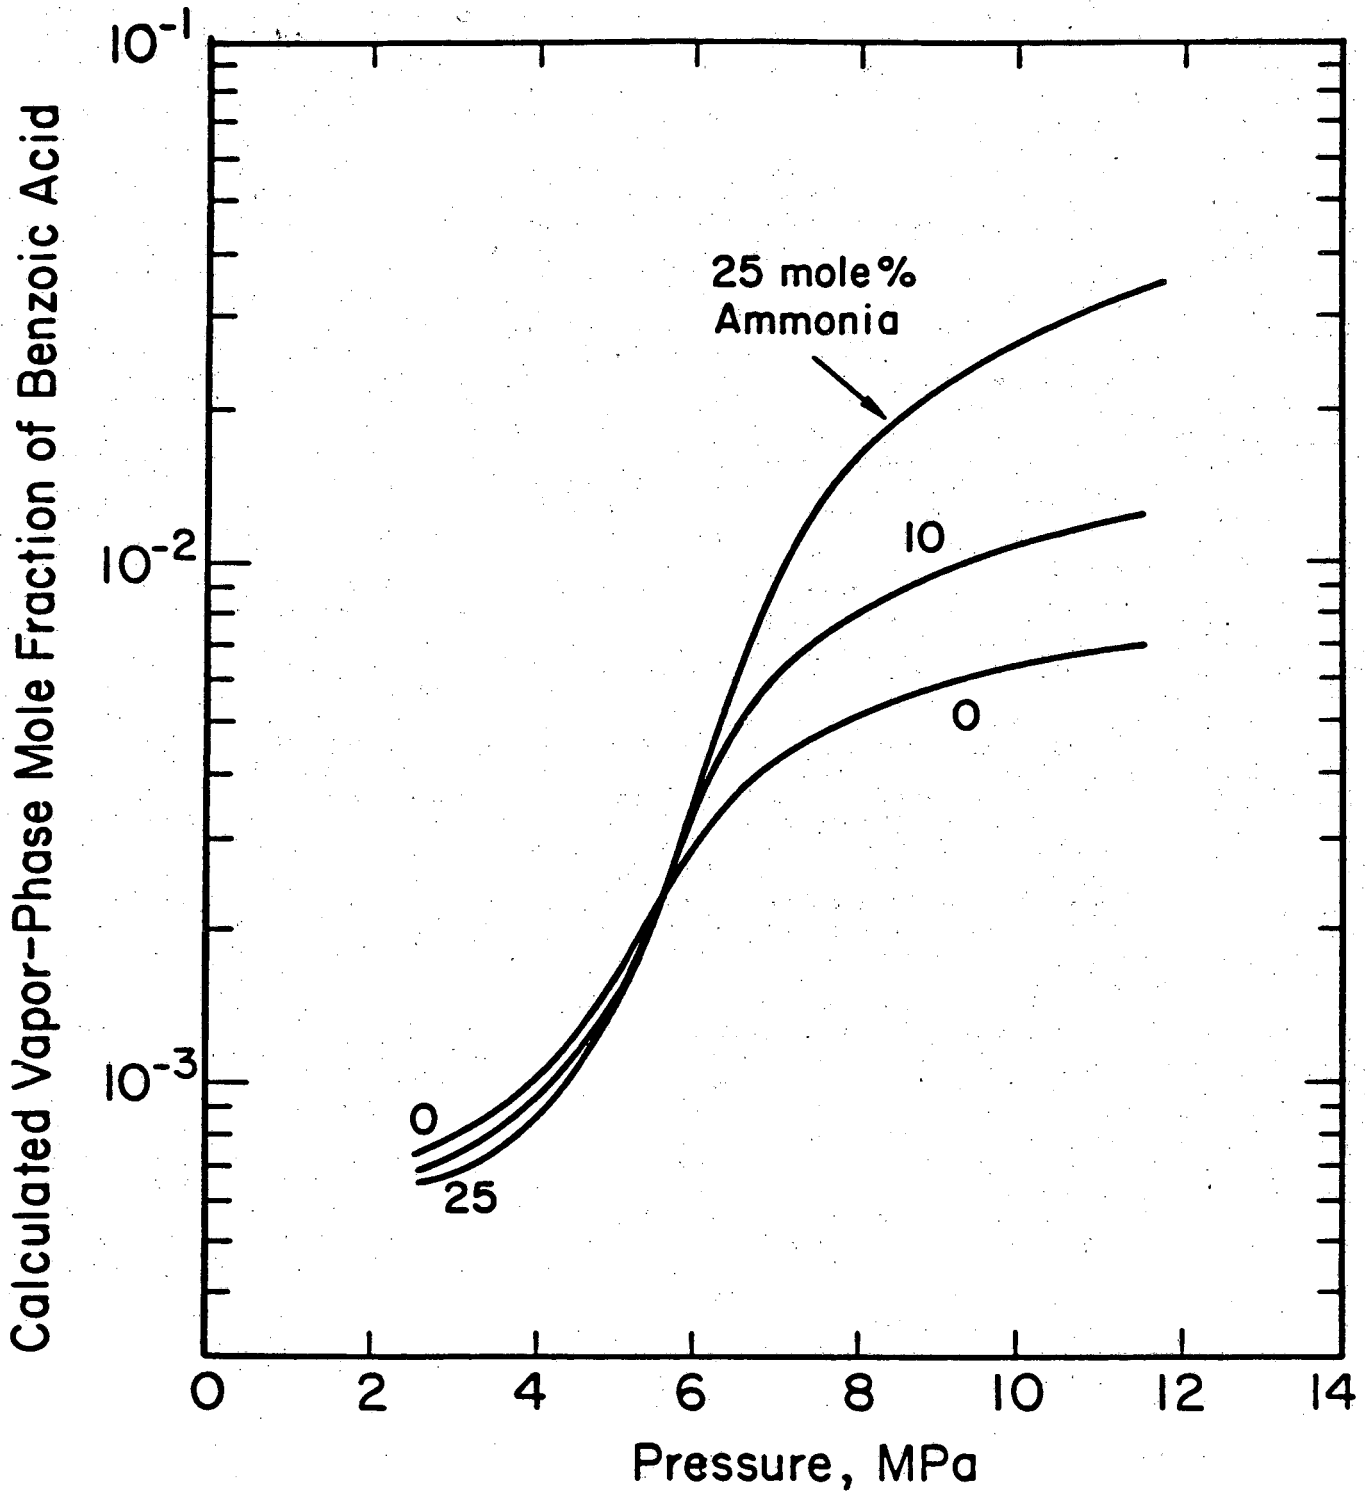


Figure 4

CALCULATED SOLUBILITIES OF BENZOIC ACID
IN PROPANE AND IN MIXTURES OF PROPANE
AND AMMONIA AT 394 K.

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DEPARTMENT
LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720