

Presented at the U. S. -Japan Seminar
on High-Energy Accelerator Science,
Tokyo and Tsukuba, Japan,
November 5-9, 1973

LBL-2422

2

PEP PROJECT STATUS


G. Lambertson

November 1, 1973

Prepared for the U. S. Atomic Energy Commission
under Contract W-7405-ENG-48

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 5545*

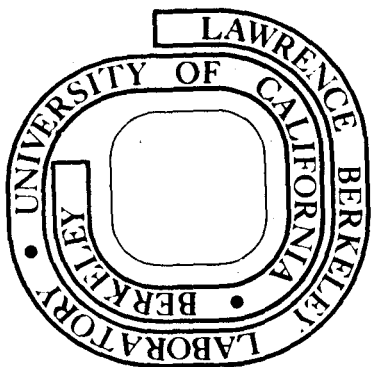

LBL-2422

2

28

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

PEP PROJECT STATUS *

G. Lambertson

Lawrence Berkeley Laboratory, University of California,
Berkeley, California, U.S.A.

The colliding beam system that provides both proton-electron collisions and electron-positron collisions has been called PEP by its originators at the Stanford Linear Accelerator Center and the Lawrence Berkeley Laboratory.⁽¹⁾ The study of its design and its utilization for high energy physics has been a joint effort by these two laboratories.

The very differing requirements of an electron storage ring and a ring for protons have been made compatible in a design having two rings in a common tunnel. The electron energy at 15 GeV would be governed by the practical level of power lost as synchrotron radiation; the proton energy at about 150 GeV would be limited by the need for high magnetic guide field. To reduce problems associated with a high circulating charge, it was proposed to utilize strong bunching of the beams and to provide low β at the interaction points. The bunching also permits the intersection region to have zero crossing angle but requires a system for bunching the protons. For proton-electron collisions, the luminosity needed has been set at $10^{32} \text{ cm}^{-2} \text{ sec}^{-1}$.

*Work done under the auspices of the U. S. Atomic Energy Commission.

Until recently, the PEP designs had for each type of particle only a single circulating bunch.^(1,2) With the high peak currents this provided, the desired luminosity could be attained with only 5×10^{12} protons and 5×10^{12} electrons. Further studies of the collective interactions between beams has brought attention to an uncertainty in the intensity limit that may apply for the proton beam. Therefore, to reduce this beam-beam effect, the design of PEP has moved toward more bunches and wider beams at the interaction points; there has been a consequent increase in the number of protons. I believe Dr. Morton will discuss these considerations in his report on the recent PEP Summer Study.

The basic arrangement of the two rings remains unchanged, as shown in Fig. 1. Magnets in the electron-positron ring are conventional with field strengths of about 3 kilogauss. The proton ring employs superconducting magnets with field near 40 kilogauss. A tentative list of parameters is given in Table I. The reader will note that there are now

bunches of protons. Each straight section contains two interaction regions, for a total of eight. Not listed are the parameters of the special magnets in the straight sections where the beams are brought to coincide and matched to the low- β region.

In 1974 it is expected that SLAC and LBL will submit a joint proposal for the construction of PEP. The proposal will be based on a 2-stage design in which the first stage of construction will omit the full-energy proton ring. It will consist of a 15 GeV electron-positron ring and possibly a 50 GeV proton ring with conventional magnets. These first rings and the tunnel would be made compatible with the final arrangement that would have a superconducting ring for protons. The development of the design and the 2-stage approach is proceeding through


the joint studies underway and the experimental work at SPEAR and at ESCAR.

References

1. C. Pellegrini et al., "A High Energy Proton-Electron-Positron Colliding Beam System", Proceedings of the 8th International Conference on High-Energy Accelerators, CERN, 1971, p. 153.
2. T. Elioff, "Proton-Electron-Positron Design Study", Proceedings of 1973 Particle Accelerator Conference, San Francisco, Calif., March 5-7, 1973, p. 1039.

Table I. Mod 8 PEP Parameters, p-e Operation

	<u>p⁺</u>	<u>e[±]</u>	
Maximum Momentum	200	15	GeV/c
Number of Particles	3.5×10^{13}	7.5×10^{12}	-
Number of Bunches	28	28	-
Number of Interaction Points	8		m
Length each Int. Region	20		m
Luminosity per Crossing	10^{32}		$\text{cm}^{-2} \text{sec}^{-1}$
Number of Straight Sections	4		-
Length of Straight Section	185		m
Radiated Power	0	4.5	MW
Circular Quadrants ---			
Radius	216		m
Dipole Field	41.6	2.91	kG
Half Aperture-Radial	6	5.1	cm
-Axial	3	1.6	cm
Intersection Points ---			
Crossing Angle	0	0	deg
Beta Function-Radial	4	1.0	m
-Axial	1	0.25	m
Dispersion	0	0	m
RMS Bunch Length (σ_ℓ)	25	2.6	cm
RMS Beam Width-Radial (σ_x)	0.07	0.07	cm
-Axial (σ_z)	0.018	0.011	cm
Normalized Emittance-Radial ($\beta\gamma\epsilon_x$)	0.016π	8.0π	cm rad
-Axial ($\beta\gamma\epsilon_z$)	0.004π	0.8π	cm rad
Beam-Beam Tune Shift-Radial ($\Delta\nu_x$)	0.002	0.031	-
per crossing			
-Axial ($\Delta\nu_z$)	0.004	0.038	-

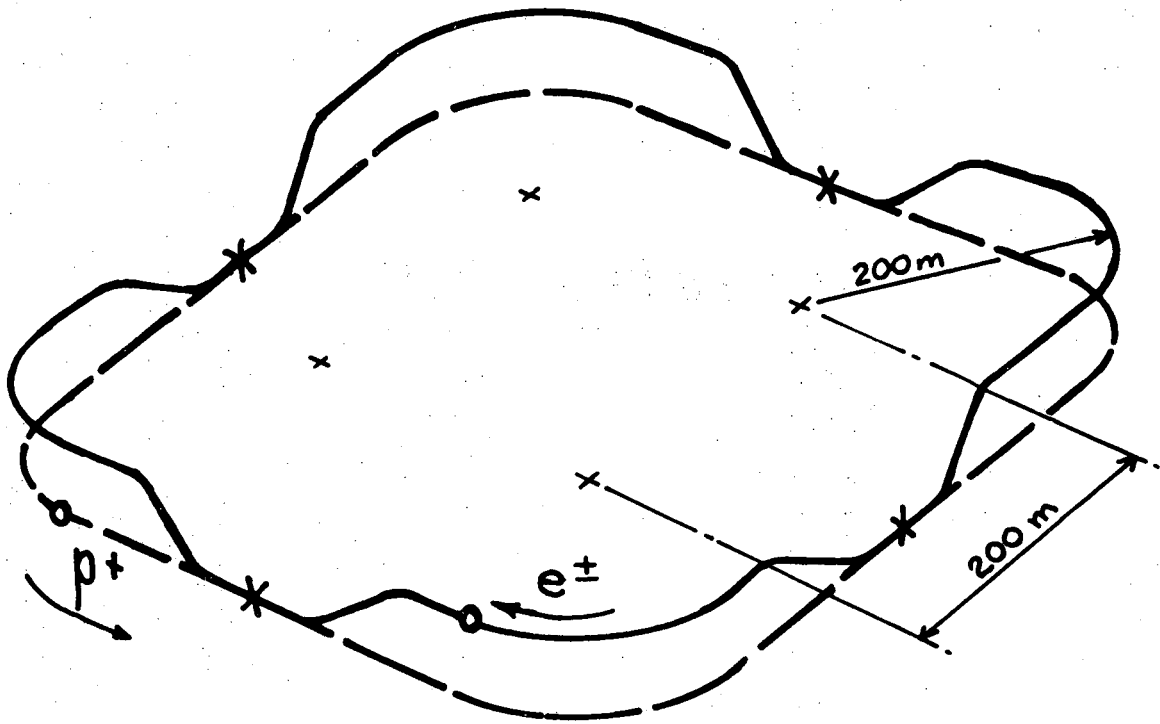

P.E.P. Configuration

XBL 7310-1388

Fig. 1
Schematic of PEP Configuration

LEGAL NOTICE

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Atomic Energy Commission, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

TECHNICAL INFORMATION DIVISION
LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720