

1 Chloride-Mass-Balance for Predicting Increased Recharge after Land-Use Change

2
3 G. W. Gee¹, (glendon.gee@pnl.gov); Z. F. Zhang (fred.zhang@pnl.gov)
4 Pacific Northwest National Laboratory, Richland, Washington

5
6 S. W. Tyler (tylers@unr.edu); W. H. Albright (bill@dri.edu)
7 University of Nevada and Desert Research Institute, Reno, Nevada

8
9 M. J. Singleton (mjsingleton@lbl.gov)
10 Lawrence Berkeley Laboratory, Berkeley, California

11
12
13 ¹Corresponding Author

14 Key Words: precipitation, dry fallout, lysimeter, drainage, extraction, centrifuge, semi-
15 arid climate.

16
17
18 ABSTRACT

19
20 The chloride-mass-balance (CMB) method has been used extensively to estimate
21 recharge in arid and semi-arid environments. Required data include estimates of annual
22 precipitation, total chloride input (from dry fallout and precipitation), and pore-water
23 chloride concentrations. Typically, CMB has been used to estimate ancient recharge but
24 recharge from recent land-use change has also been documented. Recharge rates below a
25 few mm/yr are reliably detected with CMB; however, estimates above a few mm/yr
26 appear to be less reliable. We tested the CMB method against 26 years of drainage from a
27 7.6-m-deep lysimeter at a simulated waste-burial ground, located on the Department of
28 Energy's Hanford Site in southeastern Washington State, USA where land-use change
29 has increased recharge rates. Measured drainage from the lysimeter for the past 26 years
30 averaged 62 mm/yr. Precipitation averaged 190 mm/yr with an estimated chloride input
31 of 0.225 mg/L. Initial pore-water chloride concentration was 88 mg/L and decreased to
32 about 6 mg/L after 26 years, while the drainage water decreased to less than 1 mg/L. A

1 recharge estimate made using chloride concentrations in drain water was within 20% of
2 the measured drainage rate. In contrast, recharge estimates using 1:1 (water: soil)
3 extracts were lower than actual by factors ranging from 2 to 8 or more. The results
4 suggest that when recharge is above a few mm/yr, soil water extracts can lead to
5 unreliable estimates of recharge. For conditions of elevated recharge, direct sampling of
6 pore water is the preferred method, because chloride concentrations are often 20 to 50
7 times higher in directly-sampled pore water than in pore-water extracts.

8

9 INTRODUCTION

10

11 In the chloride mass balance (CMB) method, measurements of chloride in pore water are
12 used to estimate the recharge rate when both precipitation and chloride inputs are known.
13 The CMB for a soil profile at steady state can be written as:

14

$$15 \quad P (Cl_p) = R (Cl_s) \quad (1)$$

16

where P = average annual precipitation (mm/yr)

Cl_p = average chloride input from all sources (mg/L)

Cl_s = average chloride concentration of pore water below the root zone
(mg/L)

R = average annual recharge rate (mm/yr).

17

18 Key assumptions are: 1) steady influx of water and chloride; 2) steady, vertical efflux
19 (recharge) of chloride below the root zone; 3) no soil sources or sinks for chloride, and

1 4) piston flow of chloride such that point measurements of solute concentrations can be
2 used to represent a true spatial average of the soil chloride flux. CMB has been used to
3 estimate recharge in arid and semi-arid regions throughout the world (Allison et al. 1994;
4 Prych 1995; Murphy et al. 1996; Hendrickx and Walker 1997; Scanlon et al. 1997). The
5 CMB method appears to be useful in estimating paleoclimate recharge rates dating back
6 thousands of years (Stone 1984; Murphy et al. 1996; Tyler et al. 1996), but CMB also has
7 been used for estimating modern recharge rates, including those that have increased in
8 response to land-use change (Jolly et al. 1989; Walker et al. 1991). Because of its
9 simplicity, CMB is an attractive method. With proper assumptions about average annual
10 precipitation and chloride inputs, the only direct measurement required is the chloride
11 concentration of the pore water.

12

13 The general principles of the CMB method have been known and practiced in irrigation
14 management for years (U.S. Department of Agriculture [USDA] Handbook 60, 1954). In
15 a manner similar to the CMB method, salt mass balance in irrigation water is often
16 expressed as the leaching requirement (LR), defined as the applied water volume (Q)
17 times the input salt concentration (Ci) divided by the drainage volume (D) times the salt
18 concentration (Cs) of the drainage water i.e.,

19

$$20 \quad LR = \frac{Q \times C_i}{D \times C_s} \quad (2)$$

21

22 For an LR of 1 and considering only chloride, Equation 1 is identical to Equation 2.

1

2 Pore water chloride is typically obtained from soil samples taken at depths well below the
3 root zone and analyzed first for water content (gravimetrically) and then for chloride with
4 chloride determined typically from a 1:1, 2:1 or sometimes 3:1 (solution: soil) extract
5 (Murphy et al. 1997; Scanlon and Goldsmith 1997). The chloride concentration, Cl_s (in
6 mg Cl/L soil solution), is subsequently computed by dividing the measured extract
7 concentration by the gravimetric water content (g water/ g oven-dry soil) and multiplying
8 by the solution: soil ratio.

9

10 This method works best at high-salt concentrations and low recharge rates because, as the
11 chloride concentration approaches the detection limit of the analytical method used,
12 analytical errors significantly increase the uncertainty of the recharge estimate (Tyler
13 et al. 1999). Also, at low concentrations, systematic contamination of sample and
14 extracts can become an important source of error. Because most analytical methods
15 have an operational resolution for chloride between 0.02 mg/L and 1 mg/L, it should be
16 apparent that for estimates of soil pore water chloride, uncertainties mount rapidly as the
17 recharge rate increases above 1 mm/yr and extract concentrations drop below 1 mg/L. In
18 many soils, there are chloride minerals that have varying dissolution rates. In addition,
19 treatment of a soil low in chloride with deionized water can potentially release mineral
20 chloride (Murphy et al. 1996). For finer textured soils, such as silts or clays, the practical
21 recharge limit increases because the field water content increases. Another consideration
22 for soils with much clay is the possibility of anion exclusion, which could adversely
23 affect the recharge estimate using the CMB method (Gee and Hillel 1988). This is true

1 because anion exclusion from the clay double-layer creates elevated chloride
2 concentrations in the pore water resulting in an underestimation of recharge rate. The
3 impact is greatest when the water content is lowest. For clay-rich soils, pore water
4 samples obtain from direct extraction (e.g., centrifugation) would be impacted the most.

5

6 In some coarse-textured soils there is evidence that unstable (e.g., finger) flow, funnel
7 flow or preferential flow through worm holes, or root channels, may cause non-piston
8 type flow of solutes in and below the root zone. Allison et al. (1994) provide examples
9 of extreme heterogeneities in field soils giving rise to highly variable chloride
10 concentrations. McCord et al. (1997) showed that textural variations can lead to zones of
11 slowly leached soil under steady-flux conditions. Roth (1995) also showed that flow
12 channeling can occur in mildly heterogeneous soils, which can significantly increase the
13 time required for solute concentrations to equilibrate throughout the soil profile. The
14 successful application of CMB at a given site is therefore dependent upon site conditions
15 which may or may not cause preferential flow of solutes.

16

17 Chloride mass balance has been applied for years to estimate recharge, but in situations
18 where there has been land-use change and recharge has increased, there has been few if
19 any attempts to compare CMB with independent estimates of recharge. In this paper, we
20 tested the CMB method for predicting recharge in a semi-arid climate setting, where land
21 use has changed and where the chloride flux could be quantitatively checked with
22 lysimetry, a method that can be used to directly measure the percolation of water through

1 soils and determine both the flux rate and soluble constituents removed in the drainage.
2 (Gee and Hillel 1988; Gee et al. 2003).

3

4 METHODS

5

6 The study was conducted at the U. S. Department of Energy's Hanford Site, near
7 Richland, Washington, USA. The Hanford Site has a northern, steppe (semi-arid)
8 climate typified by dry, hot summers and cool, wet winters (Hoitink et al. 2003). For the
9 past 25 years, the precipitation at the Hanford Meteorological Station has averaged
10 180 mm/yr, about two thirds of this amount coming in winter months (Nov. through
11 Mar). Potential evaporation, controlled by the aridity of the climate, is about 1600
12 mm/yr, nearly 9 times the annual precipitation (Gee et al. 1989). Actual evaporation (AE)
13 is significantly different than potential at Hanford. For undisturbed sites, with shrub-
14 steppe vegetation, AE is approximately equal to annual precipitation, so we would expect
15 little drainage. Chloride measurements made at the Hanford site in areas of undisturbed
16 shrub-steppe vegetation growing on coarse soils have shown significant bulges of high
17 chloride (> 100 mg/L) at shallow depths with corresponding recharge rates estimated to
18 be less than 1 mm/yr (Prych 1995, Murphy et al. 1996, Fayer et al. 1999). In contrast, for
19 disturbed sites with little or no vegetation and coarse soils, AE can be less than two-
20 thirds of the annual precipitation (Gee et al. 1992) resulting in drainage rates that exceed
21 50 mm/yr for the Hanford Site.

22

1 The Hanford Meteorological Station (HMS) is located about 15 km northwest of the
2 simulated waste site. Continuous records of precipitation have not been kept at the
3 lysimeter test site because of a hiatus in project funding over the years. However,
4 precipitation at the lysimeter test site was previously found to be about 6% more than at
5 the HMS (Gee et al. 1989), so we have estimated the precipitation to be 190 mm/yr for
6 the past 20 years. Effective chloride concentration in precipitation has been studied
7 extensively by Murphy et al. (1996) and found to range from 0.220 mg/L to 0.226 mg/L.
8 For the purposes of this study we selected 0.225 mg/L for the effective chloride
9 concentration of precipitation at the lysimeter site.

10

11 Soil samples were taken at a simulated waste-burial-ground about 5 km north of Richland
12 from two sand-filled, 7.6-m-deep, lysimeters that were kept vegetation free for the past
13 25 years. The sand is screened material containing only 1% gravel (material between 2
14 mm and 10 mm) taken from the lysimeter excavation and is Hanford formation material
15 that is largely granitic in origin (Baker et al. 1991). The lysimeters were installed in
16 1978 and began draining in 1981 (Gee et al. 1989, Tyler et al. 1999). . Figure 1 shows
17 the cross-section of the lysimeters along with an instrument caisson that provided entry
18 for collecting drainage water and for soil sampling. Most of the sampling was done in the
19 south lysimeter (Figure 1) by coring through the side ports (in 1996, 1998) or by direct
20 coring using a split-spoon sampler (in 2002). Some check samples for chloride analysis
21 of the pore water were also taken from the north lysimeter. The lysimeter soil is classified
22 as a sand, and key hydraulic properties are listed in Table 1. During the past 20 years,

1 the lysimeter drainage has averaged 34% of the total precipitation or about 55% of the
2 winter precipitation.

3

4 In December 1996, soil cores were taken from the south lysimeter at 10 depths, from the
5 surface to a depth of 7.1 m. Each soil sample was analyzed for water content and then a
6 1:1 (solution:solid) extract was prepared and analyzed for chloride using a Dionex ion
7 chromatograph with a resolution of ± 0.02 mg/L chloride. Similarly, samples were taken
8 in March 1998 and then again in September of 2002. Samples in 1996 and 1998 were
9 taken from the side ports of the south lysimeter. Samples taken in 2002 were taken using
10 a split-spoon sampler from the center of the south lysimeter. The samples taken in March
11 1998 were analyzed in an aseptic environment free from significant potential for chloride
12 contamination. The samples taken in March 1998 were also not oven dried but brought
13 to 1:1 dilution using known water contents obtained from sub samples. The other two
14 sampling sets (December 1996 and September 2002) were oven dried and analyzed in
15 conventional laboratory settings.

16

17 RESULTS AND DISCUSSION

18

19 Table 2 shows the chloride concentrations for the soil samples and drainage water
20 collected at three dates. Recharge estimates from soil cores are presented in Table 3
21 along with recharge estimates based on chloride in the drainage water. These values are
22 compared to the measured drainage rate. It is apparent that the soil-core estimates

1 underestimate the recharge by a factor of 7 or more. In an attempt to explain the
2 underestimation, we compared the soil pore-water estimates with numerical simulations.
3
4 The simulations were done for a period of 26 years (1978 through 2003). Using the
5 available soil hydraulic properties from the lysimeter and assuming a constant recharge
6 flux of 62.5 mm/year, numerical simulations of the leaching of the lysimeter were
7 conducted using STOMP (White and Oostrom, 2004), which is designed to solve a
8 variety of nonlinear, multiple-phase, multi-dimensional flow and transport problems for
9 unsaturated porous media. The transport was modeled as a one-dimensional process and
10 we assumed transport to be controlled by advection and dispersion alone. The initial
11 chloride concentration in the lysimeter in 1978 was taken to be 88 mg/L based on
12 chloride analysis of archived soil from the lysimeter, and the chloride input was assumed
13 to be steady at 0.225 mg/L based on the analysis of Murphy et al. (1996).
14 We ran the simulations two ways. Case 1 assumed the net infiltration was steady at 62.5
15 mm/yr. Case 2 assumed the net infiltration varied with precipitation input, with the net
16 infiltration mimicking the variability observed in the annual drainage rates. Figure 2
17 shows the simulated chloride concentrations in the drainage water as a function of time
18 and Figure 3 the chloride concentration profiles at two selected times. The variable net
19 infiltration case (case 2) yielded the lowest chloride concentrations and approached a
20 steady state lowest value more quickly than when the net infiltration was assumed to be
21 steady. By 1998 and subsequently as late as Sept. 2002, the drainage water
22 concentrations simulated in the model ranged from 0.8 mg/L to 0.7 mg/L. The measured
23 value in the drainage water for the same time period ranged from 0.8 to 1.0 mg/L. In

1 contrast the 1:1 pore water extracts gave concentration estimates of 5 mg/L chloride,
2 more than 6 times that measured in the drainage water.
3
4 To further investigate the discrepancy between the soil chloride concentrations and the
5 observed drainage flux, chloride transport was modeled using a mobile/immobile water-
6 transport approach (van Genuchten and Wagenet, 1989). Simulations were conducted
7 with CXTFIT (Toride et al., 1995) under conditions of steady drainage (65 mm/year)
8 over 19 years of drainage (1978 through 1996). Previous laboratory data (Gee and
9 Campbell, 1980) suggested that the ratio of mobile water to total water content was
10 approximately 0.65. Simulations using this ratio failed to produce any similarities to the
11 observed drainage and soil-sample concentrations. Only when the ratio of mobile to total
12 water content was increased to 0.9 and an extremely slow exchange between the mobile
13 and immobile phase was chosen, could simulated soil-water and drainage-water
14 concentrations be well matched to those observed in the 1:1 dilutions and drainage water.
15 It should also be noted that the simulated lower boundary condition was that of unit
16 gradient condition; however, this is not sufficient to explain the need for very small
17 immobile water contents nor the extremely slow exchange between the phases.
18
19 We also ruled out preferential flow as an explanation of the high chloride concentrations
20 found in the soil samples. The chloride concentrations of side port samples taken in 1996
21 were nearly the same as those found in borehole samples taken from the center of the
22 lysimeter in 2002. If there were wall effects or other preferential flow occurring, it should
23 have shown up as marked differences in the two tests.

1

2 The reported 1:1 soil chloride concentrations are always too high to correctly predict the
3 drainage. To match the measured recharge rate, the 1:1 extract chloride concentrations
4 would have to be 0.041 mg/L or lower, compared to measured values, which were as
5 high as 0.5 mg/L or more. Table 4 shows what the pore water and 1:1 concentrations
6 would be for various recharge rates. It is clear that as the recharge rate increases, the pore
7 water chloride becomes more dilute. At 100 mm/yr, 1:1 extracted chloride is at the
8 detection limit for the Dionex ion chromatograph. Care must be taken to obtain reliable
9 results because the 1:1 chloride values are in the few mg/L range or less for all recharge
10 values above 1 mm/yr. The data from Mar. 1998, where samples were run in an aseptic
11 manner in a low chloride environment, suggests that chloride additions from sources
12 other than precipitation and fallout is likely the explanation for the higher chloride
13 numbers found in Dec. 1996 and Sept. 2002. Even the 1998 soil chloride data
14 underestimate the measured drainage rate by more than a factor of 2.

15

16 We have considered mineral dissolution as a possible mechanism for some of the high
17 chloride numbers. Fayer et al. (1999) reported chloride concentrations in Hanford
18 formation minerals ranging from 100 ppm to 230 ppm. If 0.1% of the chloride leached
19 from the mineral, this would account for a soil-solution concentration ranging from 0.100
20 mg/L to 0.230 mg/L. Such levels of chloride could possibly have leached from the
21 samples, particularly after they had been dried and subsequently wetted with DI water.
22 The fact that the samples in 1998 were not oven dried and gave the best results, suggest
23 that oven drying may release chloride from the sediments tested. While we have not

1 exhaustively tested this hypothesis, we suspect that mineral dissolution contributed to the
2 high chloride values obtained with the 1:1 extracts. Additional chloride contamination
3 from outside sources at the very low levels of chloride is also possible.

4
5 Table 2 shows the chloride results of samples taken from the lysimeter in 1996, 1998, and
6 2002, 5 years apart, and Table 3 shows the estimates of recharge using the soil cores and
7 the drainage water. Differences in soil-water concentrates are attributed to differences in
8 laboratory analysis. Samples taken in March 1998 were run in an aseptic environmental
9 laboratory in Reno, Nevada; the other two sets were run in more conventional laboratory
10 settings. Table 3 shows the estimated recharge values determined from the soil cores and
11 the drain water. The average values of these recharge estimates are then compared to the
12 measured value (62.5 mm/yr). The drainage water is within 22% of the measured value,
13 while the pore water underestimates the actual drainage by values ranging from more
14 than a factor of 2 to more than 8 fold. Scanlon and Goldsmith (1997) observed similar
15 underestimation of recharge from 3:1 chloride extracts in a playa lake study in Texas.

16
17 Based on these observations, we recommend caution in using soil pore-water sampling in
18 the CMB method for recharge rates much above a few mm/yr. It is further recommended
19 that minimum soil-water dilutions be used when measuring chloride concentrations in
20 soils to reduce the impacts of analytical errors and possible dissolution. It is possible that
21 dilution errors can be eliminated in the laboratory by centrifuging field-most samples
22 (when the sample is wet enough), or by obtaining pore water directly in the field using
23 solution sampling or wick lysimetry (Gee et al. 2003). It is clear for our study that at

1 concentrations below 1 mg/L, chloride sources other than from precipitation and fallout
2 may contribute to errors in estimating recharge using the CMB method.

3

4 CONCLUSIONS

5

6 The CMB method was tested using a deep lysimeter at a site where land-use changes
7 increased recharge from a very low rate (less than a few mm/yr) to a much higher rate
8 (more than 60 mm/yr). Using the chloride data from the lysimeter drainage as the true
9 estimate of the pore water, recharge estimates agreed within 20% of the measured
10 drainage rate. In contrast, soil samples subjected to leaching (1:1) yielded pore-water
11 estimates that always underestimated the drainage by a factor of 2 or more. The apparent
12 error in pore-water chloride concentrations is attributed to dilution effects coupled with
13 mineral dissolution and possibly other external sources of chloride in sampling low
14 concentration chloride. The data show that the CMB method can be used where land use
15 has caused increased recharge rates over relatively short time periods (decades) but that
16 collecting pore-water samples from drainage is preferred over conventional soil-water
17 extraction procedures. When recharge rates are much above a few mm/yr, it appears that
18 dilution effects and possible chloride contamination from mineral dissolution and others
19 sources can cause pore-water extracts to give unreliably low estimates of recharge.

20

21

22 ACKNOWLEDGMENTS

23

1 We thank Ray Clayton and Karen Waters-Husted of Pacific Northwest National
2 Laboratory for technical support in collecting and pre-treating the soil samples. The study
3 was conducted as part of an overall recharge evaluation effort for the Hanford Site, and
4 the work was supported by the Hanford Science and Technology Initiative sponsored by
5 the U.S. Department of Energy under contract DE-AC06-76RL01830.

6

7 REFERENCES

8

9 Allison, G. B., G. W. Gee, and S. W. Tyler. 1994. Vadose zone techniques for estimating
10 groundwater recharge in arid and semiarid regions. *Soil Sci. Soc. Am. J.* 58: 6-14.

11

12 Baker, V. R., B. N. Bjornstad, A. J. Busacca, K. R. Fecht, E. P. Kiver, U. L. Moody, J. G.
13 Rigby, D. F. Stradling, and A. M. Tallman. 1991. Quaternary geology of the Columbia
14 Plateau. pp. 215-250. In R. B. Morrison (ed.) . *Quaternary Nonglacial Geology:*
15 *Conterminous U. S. The Geology of North America. v. K-2.* Geological Society of
16 America, Boulder, Colorado.

17

18 Gee, G. W., and A. C. Campbell. 1980. *Monitoring and Physical Characterization of*
19 *Unsaturated Zone Transport-Laboratory Analysis.* PNL-3304. Pacific Northwest National
20 Laboratory, Richland, Washington.

21

22 Gee, G. W., and D. Hillel. 1988. Groundwater recharge in arid regions: review and
23 critique of estimation methods. *J. Hydrol. Proc.* 2: 255-266.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23

Gee, G. W., M. L. Rockhold, and J. L. Downs. 1989. Status of FY 1988 Soil-Water Balance Studies on the Hanford Site. PNL-6750 Pacific Northwest Laboratory, Richland, Washington.

Gee, G. W., M. J. Fayer, M. L. Rockhold, and M. D. Campbell. 1992. Variation in recharge at the Hanford Site. Northwest Sci. 66:237-250.

Gee, G. W., Z. F. Zhang, and A. L. Ward Ward. 2003. Modified water fluxmeter with solution collection capability. Vadose Zone J. 2:627-632.

Hendrickx, J. M. H., and G. R. Walker. 1997. Recharge from precipitation. Ch 2. pp. 19-111. In I. Simmers (ed.). Recharge of Phreatic Aquifers in (Semi-) Arid Areas. A.A. Balkema, Rotterdam.

Hoitink, D. J., K. W. Burk, J. V. Ramsdell, and W. J. Shaw. 2003. Hanford Site climatological summary 2002 with historical data. PNNL-14242, Pacific Northwest National Laboratory, Richland, Washington.

Jolly, I. D., P. G. Cook, G. B. Allison, and M. W. Hughes. 1989. Simultaneous water and solute movement through an unsaturated soil following an increase in recharge. J. Hydrol. 111:391-396.

1 McCord, J. T., C.A. Gotway and S.H. Conrad. 1997. Impact of geologic heterogeneity on
2 recharge estimation using environmental tracers: Numerical modeling investigation.
3 Water Resour. Res. 33(6):1229-1240
4

5 Murphy, E. M., T. R. Ginn, and J. L. Phillips. 1996. Geochemical estimates of recharge
6 in the Pasco basin: Evaluation of the chloride mass balance technique. Water Resour.
7 Res. 32: 2853-2868.
8

9 Prych, E. A. 1995. Using chloride and chlorine-36 as soil-water tracers to estimate deep
10 percolation at selected locations on the U. S. Department of Energy Hanford Site,
11 Washington. U. S. Geological Survey Open-File Report 94-514. Tacoma, Washington.
12

13 Roth, K. 1995. Steady state flow in an unsaturated two dimensional, macroscopic
14 homogeneous Miller-similar medium. Water Resour. Res. 31(9): 2127-2140
15

16 Scanlon, B. R., S. W. Tyler, and P. J. Wierenga. 1997. Hydrologic issues in arid,
17 unsaturated systems and implications for contaminant transport. Rev. of Geophys. 35 (4):
18 461-490.
19

20 Scanlon, B. R., and R. S. Goldsmith. 1997. Field study of spatial variability in
21 unsaturated flow beneath and adjacent to playa lakes. Water Resour. Res. 33: 2239-2252.
22

1 Stone, W. J. 1984. Recharge in the Salt Lake coal field based on chloride in the
2 unsaturated zone. Open File Rep. 214. N.M. Bureau of Mines and Miner. Resour.
3 Socorro, NM.
4
5 Toride, N., F. J. Leij, and M. Th. van Genuchten. 1995. The CXTFIT code for estimating
6 transport parameters from laboratory or field tracer experiments. Research Report 137.
7 U.S. Salinity Laboratory. Riverside, CA, 121 pp.
8
9 Tyler, S. W., J. B. Chapman, S. Conrad, D. P. Hammermeister, D. O. Blout, J. J. Miller,
10 M. J. Sully and J. Ginanni. 1996. Soil water flux on the Nevada Test Site: temporal and
11 spatial variations over the last 120,000 years. Water Resour. Res. 32 (6): 1481-1499.
12
13 Tyler, S. W., B. R. Scanlon, G. W. Gee, and G. B. Allison. 1999. Water and Solute
14 Transport in Arid Vadose Zones: Innovations in Measurement and Analysis. In: J. W.
15 Hopmans and M. B. Parlange (eds.) Vadose Zone Hydrology: Cutting Across
16 Disciplines. Oxford University Press.
17
18 U.S. Department of Agriculture (USDA). 1954. Diagnosis and Improvement of Saline
19 and Alkali Soils. Agricultural Handbook 60. U, S. Salinity Laboratory Staff. U.S.
20 Government Printing Office. Washington, D. C.
21

- 1 van Genuchten, M. Th., and R. J. Wagenet. 1989. Two-site/two region models for
2 pesticide transport and degradation: Theoretical development and analytic solutions. *Soil*
3 *Sci. Soc. Amer. J.* 53: 1303-1310.
- 4
- 5 Walker, G. R., I. D. Jolly, and P. G. Cook. 1991. A new chloride leaching approach to the
6 estimation of diffuse recharge following a change in land use. *J. Hydrol.* 128: 49-67.
- 7
- 8 White, M. D., and M. Oostrom. 2003. STOMP - -Subsurface Transport Over Multiple
9 Phases, Version 3.1, User's guide. PNNL-14478, Pacific Northwest National
10 Laboratory, Richland, Washington.

1 Figures

2

3 Figure 1. Schematic of the cross-section of two deep lysimeters at a simulated waste
4 burial ground at the U. S. Department of Energy's Hanford Site near Richland,
5 Washington.

6

7 Figure. 2. Time course of the simulated chloride concentration at the drainage.

8

9 Figure 3. Simulated chloride concentration profile in March 1998 and September 2002.

10

11 Tables

12

13 Table 1. Soil texture and hydraulic properties of the south lysimeter soil.

14

15 Table 2. Pore-water chemistry of soils taken from the south lysimeter for selected times.

16

17 Table 3. Comparison of measured and estimated drainage rate (mm/yr) from CMB
18 recharge estimates using drain-water and pore-water data sets. Assumes 190 mm/yr
19 average precipitation with a) 0.225 mg/L average chloride input or b) 0.275 mg/L
20 average chloride input.

21

22 Table 4. Recharge rates and chloride concentrations expected for 1:1 extracts under
23 Hanford climate and estimated chloride input.

1
2

Table 1. Soil texture and hydraulic properties of the south lysimeter soil.

<u>Texture (USDA)</u>	<u>K sat (cm/s)</u>	<u>K unsat (cm/s) at-5 kPa</u>	<u>Theta at-5 kPa</u>
Sand*	2E-03	1E-07	0.10

3 * Separates: Gravel, 1%; Sand 95%, Silt 3%, Clay 1%

- 1 Table 2. Chloride concentrations (mg/L) found in soils and drain water taken from the
- 2 south lysimeter at selected times.

Sample Depth (m)	Dec. 1996	Mar. 1998	Sept. 2002
0.0–0.5 m	7.0	-	-
0.5–1.0 m	5.0	-	-
1.0–1.5 m	3.2	1.5	6.1
1.5–2.0 m	4.8	1.6	5.6
2.0–2.5 m	5.8	-	3.9
3.0–3.5 m	6.7	-	6.7
4.0–4.5 m	5.7	1.5	4.6
5.5–6.0 m	7.8	1.6	4.9
6.5–7.0 m	7.4	-	4.7
7.0–7.5 m	4.5	-	5.2
Drain Water	1.2	0.8	0.9

3

- 1 Table 3. Comparison of measured and estimated drainage rate (mm/yr) from CMB
 2 recharge estimates using drainage water and 1:1 extract (pore water) data sets. Assumes
 3 190 mm/yr average precipitation with a) 0.225 mg/L average chloride input or
 4 b) 0.312 mg/L average chloride input.

a) 0.225 mg/L				
Chloride Input	Dec. 1996	Mar. 1998	Sept. 2002	Average
Soil Samples	7	25	8	13
Drain Water	37	53	48	46
Measured	64	66	61	62*
b) 0.275 mg/L				
Chloride Input	Dec. 1996	Mar. 1998	Sept. 2002	Average
Soil Samples	10	37	11	19
Drain Water	50	74	66	62
Measured	64	66	61	62*


5 * 26 year average

- 1 Table 4. Recharge rates and chloride concentrations expected for 1:1 extracts under
- 2 Hanford climate and estimated chloride input.

Recharge Rate (mm/yr)	Pore Water Chloride (mg/L)	1:1 Extract (mg/L)
1	40	2.0
3	14	0.68
10	4	0.20
30	1.4	0.068
100	0.4	0.020

3

1

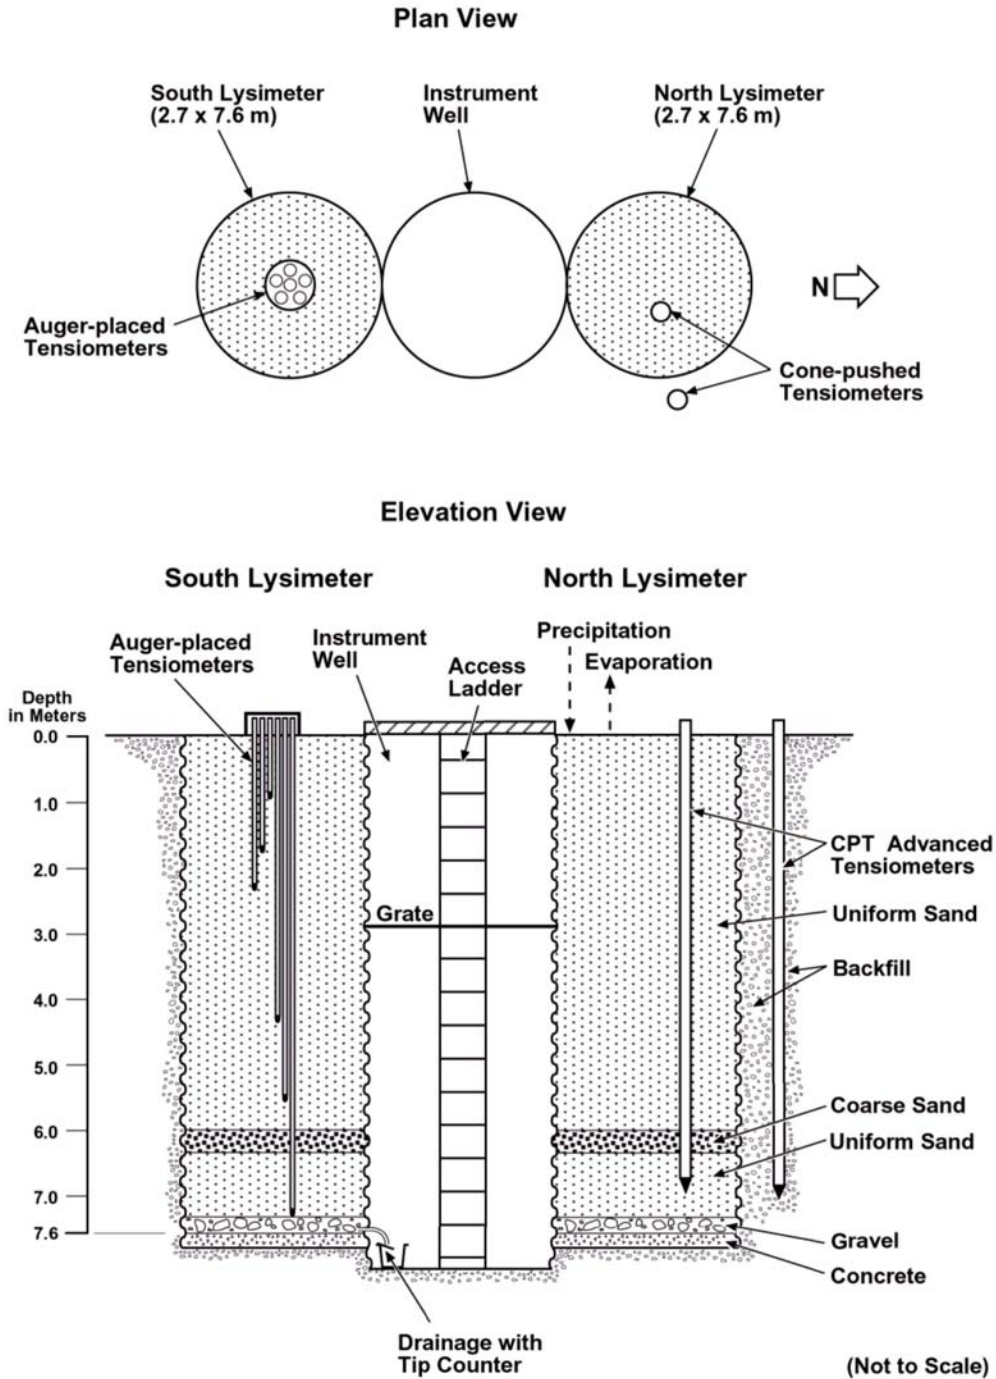

2


3

4 Figure 1. Schematic of the cross-section of two deep lysimeters at a simulated waste

5 burial ground at the U.S. Department of Energy's Hanford Site near Richland,


6 Washington.

1

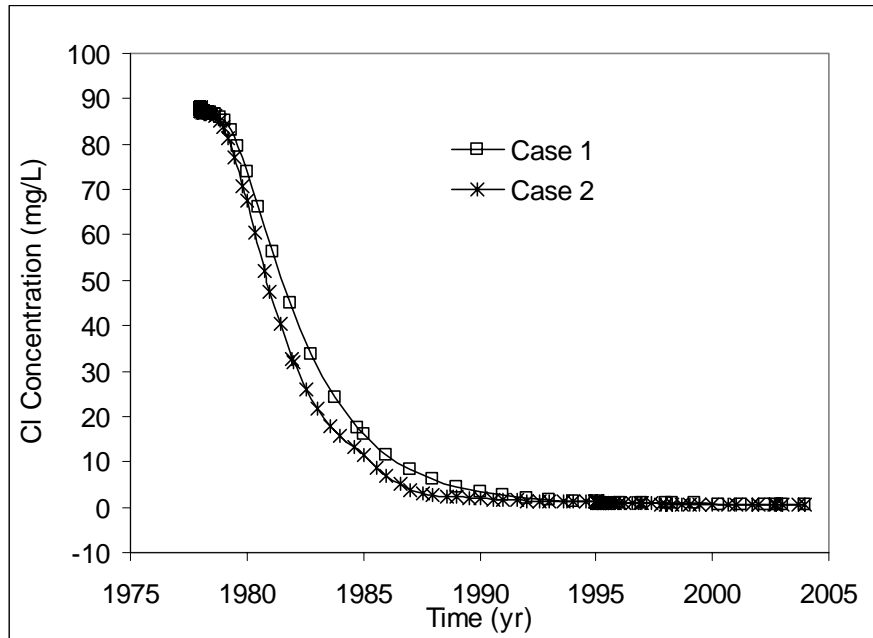


2

3 Figure. 2. Time course of the simulated chloride concentration at the drainage.

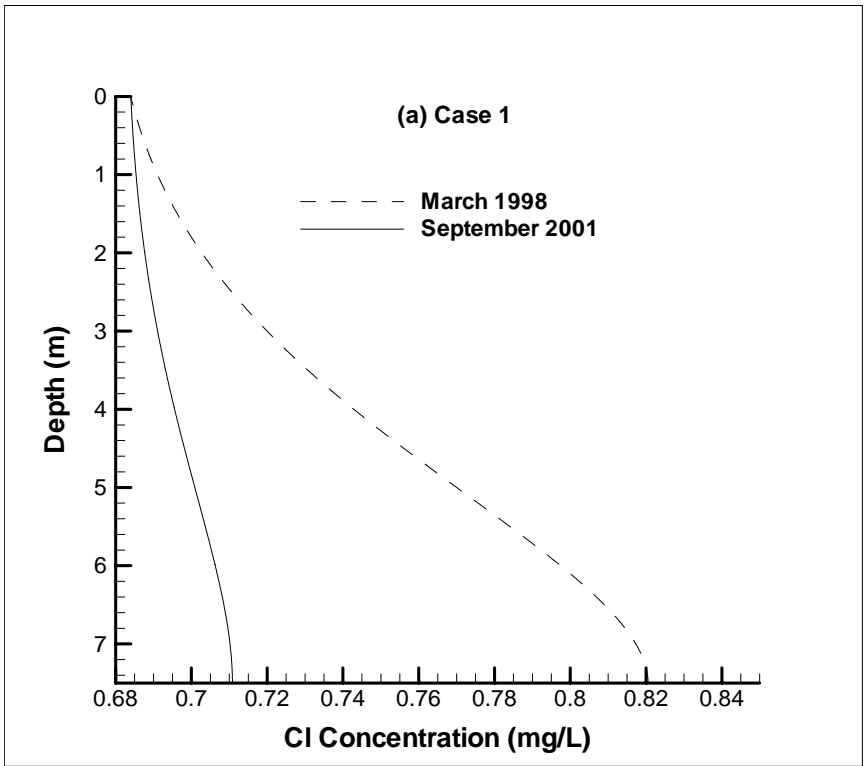

1

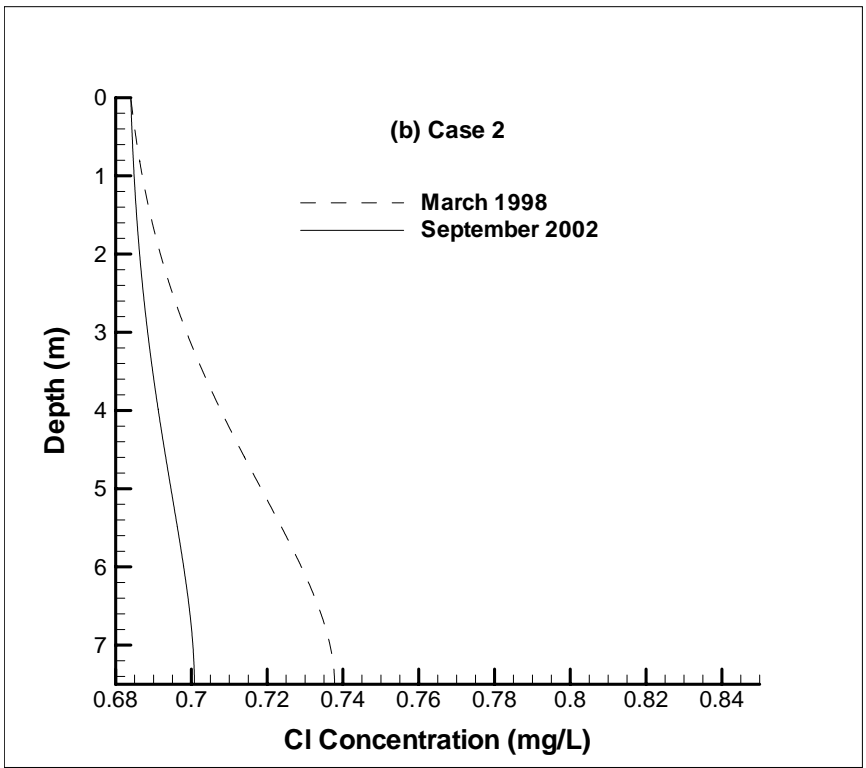

2

3 Figure 3. Simulated chloride concentration profile in March 1998 and September 2002.