

Lawrence Berkeley National Laboratory

Recent Work

Title

TOTAL CROSS SECTIONS OF NUCLEI FOR 280 MEV NEUTRONS - I

Permalink

<https://escholarship.org/uc/item/3wj2h9nw>

Authors

Fox, R.
Leith, C.
Wouters, L.
et al.

Publication Date

1950-01-26

UNIVERSITY OF
CALIFORNIA

*Radiation
Laboratory*

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 5545*

BERKELEY, CALIFORNIA

UCRL-637
C.2

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

TOP SECRET

LY

UCRL 637
Physics-General Distribution

UNIVERSITY OF CALIFORNIA
Radiation Laboratory

DECLASSIFIED

Contract No. W-7405-eng-48

TOTAL CROSS SECTIONS OF NUCLEI FOR 280 MEV NEUTRONS - I

R. Fox, C. Leith, L. Wouters,
and K. R. MacKenzie

January 26, 1950

Berkeley, California

DECLASSIFIED
Copy Numbers

Standard Distribution: Series A

Argonne National Laboratory	1-12
Armed Forces Special Weapons Project	13
Atomic Energy Commission, Washington	14-15
Battelle Memorial Institute	16
Brookhaven National Laboratory	17-20
Bureau of Ships	21
Carbide & Carbon Chemicals Corporation (K-25 Plant)	22-25
Carbide & Carbon Chemicals Corporation (Y-12 Plant)	26-29
Columbia University (Dunning)	30
General Electric Company, Richland	31-34
Hanford Operations Office	35
Idaho Operations Office	36-37
Iowa State College	38
Knolls Atomic Power Laboratory	39-42
Los Alamos	43-45
Mallinckrodt Chemical Works	46
Mound Laboratory	47-49
National Advisory Committee for Aeronautics	50
National Bureau of Standards	51
Naval Radiological Defense Laboratory	52
NEPA Project	53
New Brunswick Laboratory	54
New York Operations Office	55-56
North American Aviation, Inc.	57
Oak Ridge National Laboratory	58-65
Patent Branch, Washington	66
Sandia Laboratory	67
Technical Information Branch, ORE	68-82
UCLA Medical Research Laboratory (Warren)	83
University of California Radiation Laboratory	84-88
University of Rochester	89-90
Westinghouse Electric Corporation	91-94
<hr/>	
Total	94

INFORMATION DIVISION
Radiation Laboratory
Univ. of California
Berkeley, California

FOIA b7C, b7D, b7E, b7F, b7G, b7H, b7I, b7J, b7K, b7L, b7M, b7N, b7O, b7P, b7Q, b7R, b7S, b7T, b7U, b7V, b7W, b7X, b7Y, b7Z

TOTAL CROSS SECTIONS OF NUCLEI FOR 280 MEV NEUTRONS - I

R. Fox, C. Leith, L. Wouters
Radiation Laboratory, Department of Physics
University of California, Berkeley, California

and

K. R. MacKenzie
Department of Physics, University of California
at Los Angeles, California

January 26, 1950

Abstract

The measurement of 280 Mev neutron cross sections of various nuclei is described. The neutron beam used results from 340 Mev protons in the 184-inch cyclotron striking a 2 in. Be target. The neutron detector consists of a double coincidence anthracene scintillation counter telescope which counts recoil protons scattered at 15° from a paraffin cylinder placed in the collimated neutron beam. A 2 in. Cu absorber placed between the counters assures that only protons of energy greater than 250 Mev are counted. The cross sections for all nuclei measured from Li to Pb are smaller than the corresponding cross sections measured at 90 Mev⁽¹⁾ by factors between 0.5 and 0.6.

¹Cook, McMillan, et al., Phys. Rev. 75, 1 (1949)

TOTAL CROSS SECTIONS OF NUCLEI FOR 280 MEV NEUTRONS - I

R. Fox, C. Leith, L. Wouters
Radiation Laboratory, Department of Physics
University of California, Berkeley, California

and

K. R. MacKenzie
Department of Physics, University of California
at Los Angeles, California

January 26, 1950

DECLASSIFIED

I. Introduction

When the total cross sections of various elements for 85 Mev neutrons were measured a year ago⁽¹⁾ it was noticed that elements of low atomic weight behaved as if they were at least partially transparent. Therefore, when the 280 Mev neutron beam became available after conversion of the 184-inch cyclotron, it was considered advisable to examine this effect at the higher energy. The measurements also would add to our knowledge of the fundamental properties of nuclei; a correct theory should be able to predict these cross sections and their functional dependence upon energy and atomic number in an unambiguous manner. Conversely, knowledge of these values may furnish additional clues leading to the correct nuclear model. These measurements were made using two independent detection methods. In Article I measurements made using scintillation counters are described, and in Article II measurements made using bismuth fission counters are described.

II. Source of Neutrons

The neutron beam used for these measurements was produced by bombarding a 2 in. thick beryllium target in the cyclotron vacuum chamber with 350 Mev protons. Charge exchange leads to the production of a neutron beam of about 270

Mev mean energy and angular width at half maximum intensity of about 58° . The central forward section of this beam was selected by a collimating system, consisting firstly of a $1/2$ in. hole through a 7 foot cube of concrete placed between the cyclotron and the surrounding concrete shielding wall and secondly by means of an exchangeable steel plug with any desired aperture inserted into a 3 in. hole in the 10 foot shielding wall itself. In this experiment, a $2-5/8$ in. x $1-3/8$ in. aperture was employed.

The energy distribution of the neutron beam was obtained by measuring the range distribution, and hence deducing the energy distribution, of recoil protons from hydrogen, at a fixed angle with respect to the beam. The range-energy curves used were calculated from the theoretical formula of Livingston and Bethe⁽²⁾ using $I = 11.5Z$ ev. Paraffin and carbon scatterers were used alternately to obtain the hydrogen difference. The range distribution was determined by varying the absorber thickness between two scintillation counters in coincidence counting the recoil protons as illustrated in Figure 1. To each thickness there corresponds a minimum proton energy E_{p1} for penetration, so that all protons with energy $E_p = E_{p1}$ passing through both counters were counted. This number is proportional to the number of neutrons of energy $E_n > E_{n1} = \frac{E_{p1}}{\cos^2 \theta}$, θ being the laboratory scattering angle with respect to the forward direction.

There is one serious difficulty. At these energies, the absorber thickness required is an appreciable fraction of a mean free path for a nuclear encounter, so that a fraction of the protons of energy $E_p > E_{p1}$ are not counted. If the cross section for these processes which remove protons were known, an accurate correction could be made; however, only an estimated correction is

²Bethe, Rev. Mod. Phys. 9, 263 (1937) Eq. 9.263

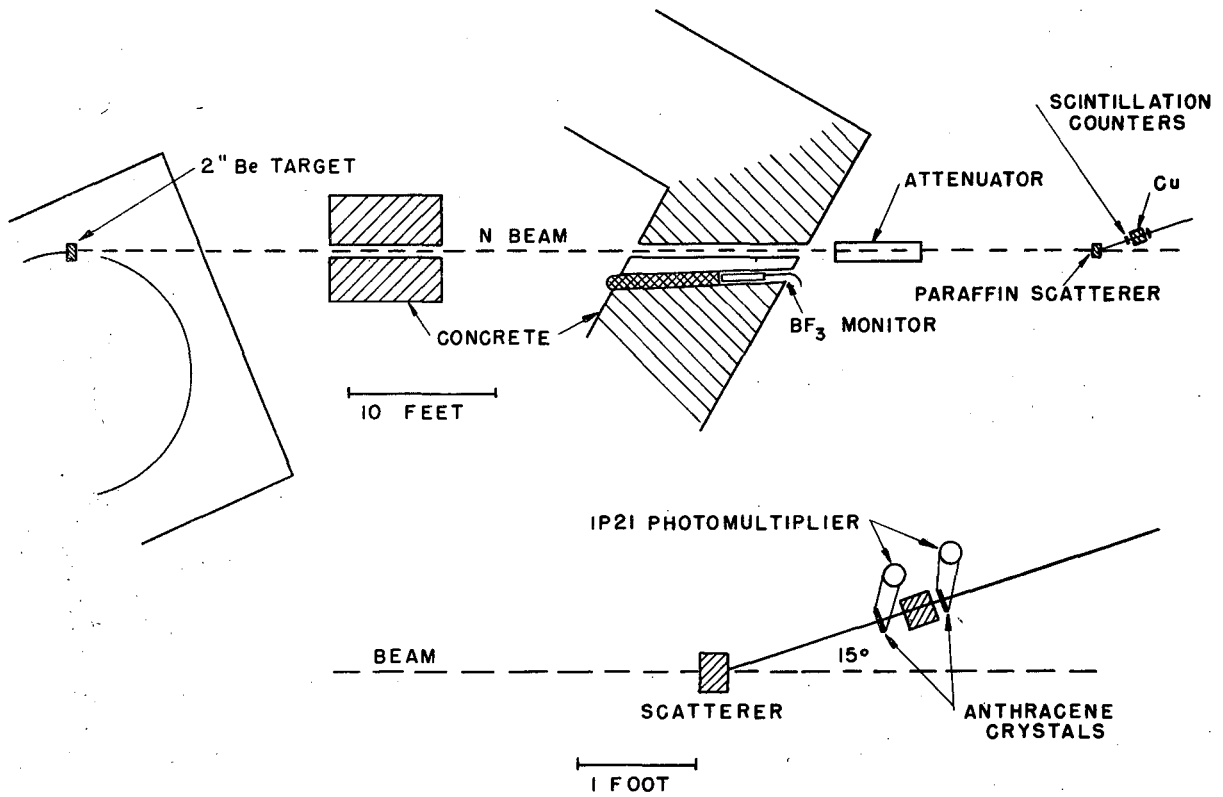


FIG. 1

Mu 89

possible at present.

Incorporating this estimated correction and differentiating the resulting distribution, it is found to have a peak at 270 Mev (± 15 Mev) with an estimated width of 30 Mev as shown in Figure 2.

III. Method

1. Principle. - To measure the total cross sections of various elements for high energy neutrons, use is made of the exponential decrease in intensity of a monoenergetic beam in the forward direction as the thickness of matter traversed (X) is increased:

$$I(X) = I(0)e^{-X/\lambda}$$

where λ is the mean free path, related to the total cross section by:

$$1/\lambda = N\rho/A \sigma_t$$

N being Avogadro's number, ρ the density, and A the atomic weight. Then the total cross section is:

$$\sigma_t = A/N\rho X \ln \left[\frac{I(0)}{I(X)} \right].$$

Numbers proportional to the beam intensities $I(0)$, $I(X)$ are obtained by counting the recoil protons generated at a fixed angle (usually 15°) by a small paraffin cylinder placed in the neutron beam behind the samples. The recoil protons were counted by means of two scintillation counters in coincidence in much the same way as described above.

This paraffin proton generator was placed in the neutron beam 12 feet from the last collimator; the sample, about one mean free path in length and 3 in. in diameter, was placed in the beam 2 feet from the last collimator. A BF_3 slow-neutron counter was located in a hole in the concrete wall adjacent

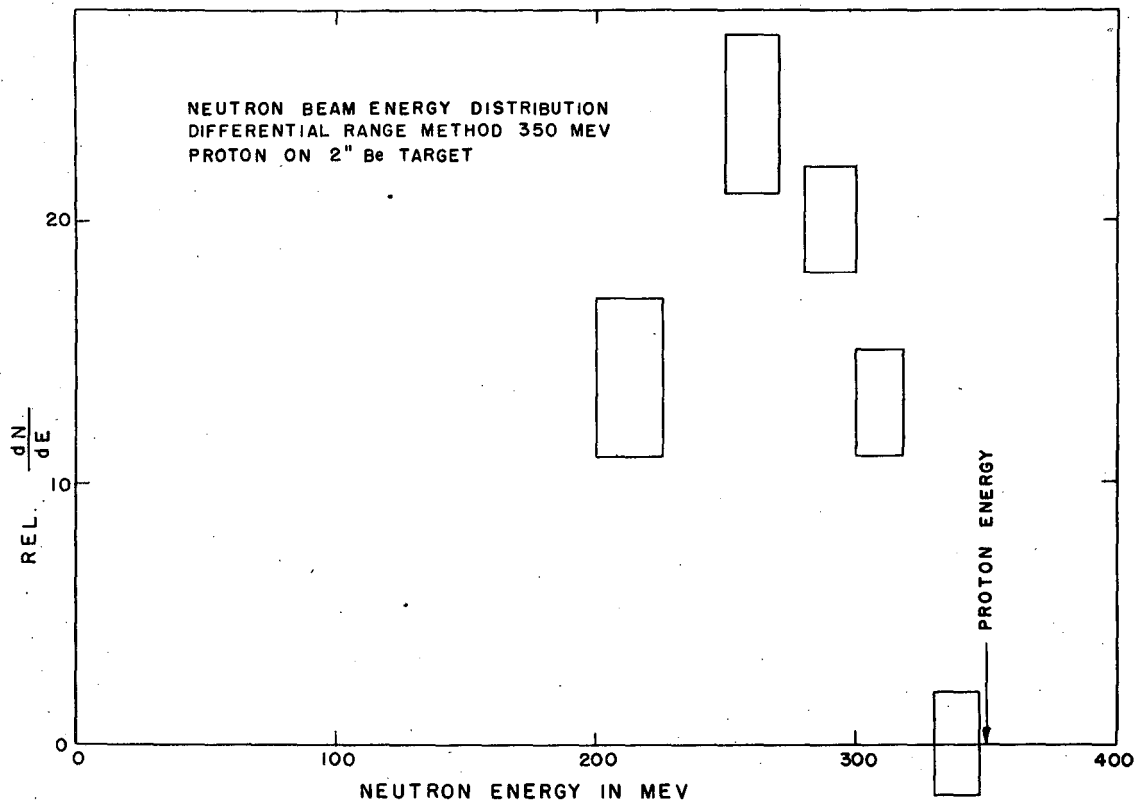


FIG. 2

Mu 90

to that collimator for monitoring purposes. With these arrangements the ratio $R(X)$ of detector to monitor counting rates is proportional to $I(X)$, a second ratio $R(0)$, proportional to $I(0)$, is obtained by removing the sample. When these ratios are corrected for background, we get new ratios $R'(0)$, $R'(X)$. Then,

$$\frac{I(0)}{I(X)} = \frac{R'(0)}{R'(X)}$$

2. Counter. - (See also Figure 1.) The individual scintillation counters consisted of uniform anthracene crystals 3/16 in. thick and 1 sq. in. in area mounted in light-tight polished aluminum boxes, each in turn facing a 1P21 photomultiplier tube. Two such units were mounted as a coincidence telescope looking at the paraffin recoil proton generator at 15° laboratory angle. In order to confine coincidences to protons generated by high energy neutrons, a 2 in. Cu absorber was placed between the crystals, thus providing an equivalent neutron threshold of 250 Mev. (2)

The geometry was arranged so that the path of the counted recoil protons passes normally through the crystals and through a uniform, known thickness of aluminum. Fast (10^{-8} sec.) light pulses were produced due to the excitation and subsequent fluorescence induced in the anthracene by the protons. The photomultipliers convert these into electric signals which are further amplified and mixed in a coincidence circuit. This system has a .25 μ sec. resolving time. The output was counted by a standard scaler.

When plotting counting rate versus photomultiplier voltage (or gain), a flat plateau is observed as shown in Figure 3, corresponding to the detection of virtually all protons, but no other particles. Above this proton plateau γ -rays, β -particles, noise, etc., begin to be counted. Since the plateau width is 300 volts (corresponding to a gain ratio of about eight), constant

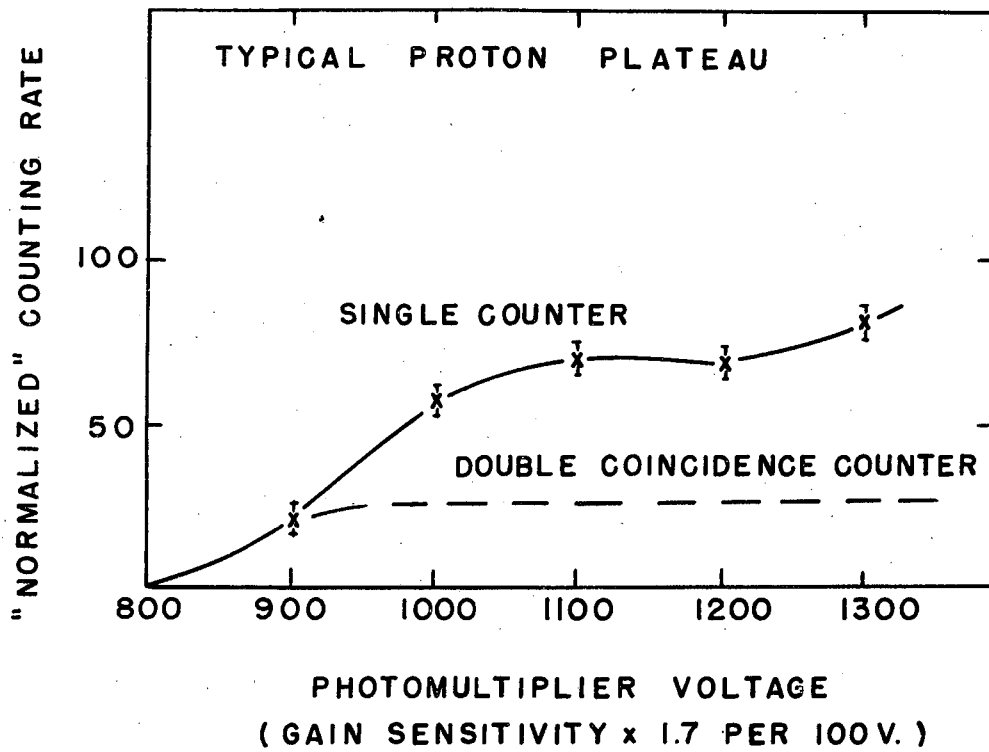


FIG. 3

Mu 91

-11-

detector efficiency is assured by setting the photomultiplier voltage at its center.

3. Monitor. - The BF_3 monitor counted slow neutrons leaking through the concrete from the collimator. Since the background flux was several orders of magnitude smaller than the slow neutron flux originating at the collimator, its counting rate was satisfactorily proportional to the latter. This monitor was shielded from back-scattering by a 2 foot Cu plug between it and the sample. The chief problem with such a monitor is the finite slope and narrow width of its plateau, in contrast to the wide, flat plateau of the scintillation counters. Accordingly very good voltage regulation must be provided or the efficiency will vary. Any significant variations due to this or other causes affecting the entire experiment can be checked by a statistical analysis of groups of counts.

4. Technique.

(a) Alignment. The equipment was mounted in such manner as to permit accurate centering of the paraffin generator in the neutron beam. This alignment was checked by means of a cathetometer previously aligned with the inner collimator and the central point of emergence of the neutron beam at the vacuum tank. Likewise the alignment of the samples could be similarly checked, to see that no neutron path could reach the generator without passing through the sample.

In operation, the counting rate is maximized as a function of cyclotron target position to ensure that the beam is not emerging obliquely. The entire alignment was further checked by exposing film in the beam, at the generator.

(b) Geometry. The beam area was 3.6 square inches and the sample to generator distance varied from 7 to 9 feet depending on sample length. This gives a solid angle of from 3×10^{-4} to 5×10^{-4} steradian, which is sufficiently "good" to avoid scattering correction in case of the light elements. For the heavy elements, a small scattering correction is necessary.

(c) Accidental Coincidences. Background.

During early runs, the coincidence counting rate was of the order of 3 c.p.s. with single counting rates of $N_1 \sim 800$ c.p.s. in the first counter and $N_2 \sim 150$ c.p.s. in the second counter. Calling the accidental coincidence rate N_c and using the relation $N_c = 2N_1N_2\tau A$, where τ is the resolving time of .25 μ sec. and A (~ 300) is the reciprocal beam duty factor, we get $N_c \sim .06$ c.p.s. This is about 2 percent of the observed total coincidence rate. Therefore, for later runs, N_c was measured experimentally by placing sufficient absorber between the crystals to eliminate true coincidences. The beam intensity was then reduced until N_c was less than .5 percent of the total coincidence rate.

The principal source of background was due to diffracted neutrons reaching the first crystal directly and there producing recoil protons which were counted. With the sample in place, these neutrons came from the sample. With the sample removed, they came from the iron collimator. This background was measured directly before and after all runs by removing the paraffin proton generator and determining the coincidence rate. This was done with the sample in place and with the sample removed. Detector to monitor ratios thus obtained were subtracted from the ratios $R(X)$ and $R(0)$ to yield $R'(X)$ and $R'(0)$.

In order to check for other sources of background, the following experiment was performed. First, a run was made with one mean free path of carbon and 24 inches of lead as the sample and with the paraffin in place. A second run was made with the paraffin removed. Then a third run was made with both paraffin and lead removed. Normalizing the coincidence counts to equal monitor counts, the following numbers were obtained.

1st run:	12 counts
2nd run:	6 counts
3rd run:	92 counts

-13-

The first setup detects diffracted neutrons which pass through several mean free paths of sample to the first crystal, neutrons scattered by air around the sample into the first crystal, neutrons scattered by air around the sample into the paraffin, and neutrons from the beam which reach the paraffin through about seven mean free paths of sample. The second setup detects only the first and second of these. The third setup detects neutrons scattered by air around the sample into the first crystal and diffracted neutrons which have passed through less than a mean free path of sample on the average and then reach the first crystal of the counter.

While the difference between the first two runs is not statistically significant, it is about what one would expect due to attenuation of the beam in the sample. Comparison of these runs with the third one shows the background due to beam neutrons scattered around the sample into the paraffin is negligible compared to that due to diffracted neutrons reaching the first crystal. The latter is just the background measured for all runs.

The background correction thus measured ranged from less than 1 percent for light elements up to 10 percent for heavy elements. It was proportional to the total cross section of the sample used as would be expected if it were due to diffracted neutrons.

Another check on accidental coincidence rate was made at the beginning of all runs by checking linearity of counting rate with beam intensity. This also proved to be a critical check on equipment performance and in addition showed that the factors of proportionality $\frac{R^0(X)}{I(X)}$ and $\frac{R^0(0)}{I(0)}$ must be the same.

(d) Counting. Since long runs were needed to obtain cross section values with reasonable accuracies, it was not feasible to repeat each run many times. Instead, they were broken up into short equal periods, so that any significant drifts could be noticed. $R(0)$ and $R(X)$ were calculated, both for each short

-14-

run and for the entire group, together with their statistical error and standard deviation. In only one case did the fraction of short runs lying outside the standard error of the mean exceed the expected 30 percent. In that case, a monitor voltage drift was found, and the run discarded.

(e) Samples. With the exception of lithium and uranium, all samples were 3 in. in diameter and about one mean free path long. Liquids were held in brass cylinders 3 in. in diameter of appropriate length, having 1/16 in. walls; empty cylinders were used for the blank run. In the case of lithium, the 2 in. square blocks already available were employed.⁽¹⁾ The uranium cylinder was about 2 in. in diameter, so that a smaller beam collimator was used, and an individual film exposure made to insure that it intercepted all of the beam.

Hydrogen was done by a difference method, using pentane and carbon; this gave both σ_H and σ_C . The deuteron cross section was done by a similar method using water and heavy water; this gave σ_D and σ_O , using σ_H determined above. Such procedures lead to reduced accuracy, so that the purity, density and dimensions of all these materials were checked. For all samples used, the thickness (in gm/cm²) was established to better than 1 percent, in most cases to .2 percent.

(f) Scattering Correction. For elements of high atomic weight, a small correction for neutron scattering is necessary. This was calculated in the manner of Cook, McMillan, et al.⁽¹⁾

The values of the various constants are:

$$\begin{aligned} a &= 1.5 \text{ in.} & k &= 3.94 \times 10^{13} \text{ cm}^{-1} \\ x_1 &= 100 \text{ in.} \\ x_2 &= 480 \text{ in.} \end{aligned}$$

It turns out fortuitously that the correction to the cross section in percent is just the value of the cross section in "barns," except for uranium, for which the correction was 1.5 percent.

III. Discussion of Results

The results are tabulated in Table I together with the 90 Mev results⁽¹⁾ for comparison. The errors are those computed from counting statistics alone.

At present, no nuclear model theories fit these data very well. The results of Cook, McMillan, et al., at 90 Mev show a nuclear transparency in terms of a "mean free path within the nucleus."⁽³⁾ They also show agreement with the consequent prediction that the transparency should be greatest for elements of low atomic weight, as shown by the deviation from a straight line in Figure 4. However, at 280 Mev, the transparent nucleus theory predicts a higher cross section for elements of high atomic weight than is actually observed.

The group wishes to thank Professor E. O. Lawrence for suggesting and encouraging the work, and members of the Laboratory for assistance. The work was carried out under the auspices of the Atomic Energy Commission.

Information Division
scb/3-29-50

³Fernbach, Serber, et al., Phys. Rev. 75, 1352 (1949)

TABLE I

Total Cross Sections at 280 Mev with Those at 85⁽⁴⁾ Mev Included for Comparison. Errors are Calculated from Counting Statistics Alone.

Element	A	A ^{1/3}	280 Mev		85 Mev	
			$\sigma \times 10^{24} \text{ cm}^2$	$\sqrt{\frac{\sigma}{2\pi}} \times 10^{13} \text{ cm}$	$\sigma \times 10^{24} \text{ cm}^2$	$\sqrt{\frac{\sigma}{2\pi}} \times 10^{13} \text{ cm}$
H ¹	1.008	1.00	.033 ± .003	.725 ± .04	.083 ± .004	1.15
H ²	2.015	1.26	.049 ± .005	.884 ± .04	.117 ± .005	1.36
Li	6.940	1.91	.164 ± .007	1.62 ± .04	.314 ± .006	2.24
Be	9.02	2.08	.225 ± .004	1.89 ± .02	.431 ± .008	2.26
C	12.01	2.29	.279 ± .004	2.11 ± .01	.550 ± .011	2.96
O	16.00	2.52	.380 ± .008	2.46 ± .03	.765 ± .020	3.49
Al	26.97	3.00	.566 ± .018	3.00 ± .05	1.12 ± .02	4.22
Cu	63.57	3.98	1.19 ± .02	4.35 ± .04	2.22 ± .04	5.95
Sn	118.7	4.92	1.85 ± .03	5.40 ± .11	3.28 ± .06	7.23
Hg	200.6	5.85	2.80 ± .03	6.69 ± .11		
Pb	207.2	5.92	2.89 ± .03	6.79 ± .10	4.53 ± .09	8.49
U	238.1	6.20	3.14 ± .05	7.02 ± .21	5.03 ± .10	8.95

⁴ Later considerations have shown that the mean detection energy was actually 85 Mev and not 90 Mev as stated in Ref. 1.

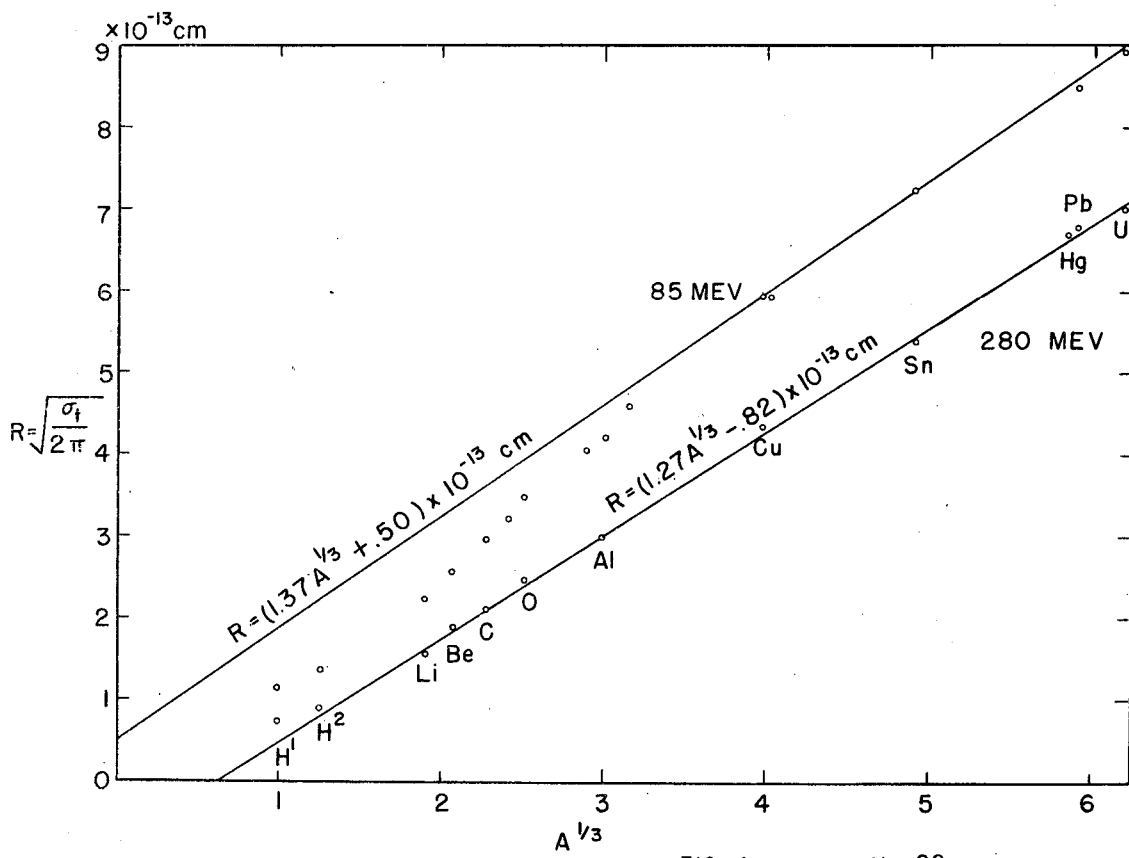


FIG. 4

Mu 92

14644-1

████████████████████LY