

Lawrence Berkeley National Laboratory

Lawrence Berkeley National Laboratory

Title

ASSESSMENT AND CONTROL OF OTEC ECOLOGICAL IMPACTS

Permalink

<https://escholarship.org/uc/item/4cj2h4t8>

Author

Wilde, P.

Publication Date

1978-12-01

Presented at the U. S. DOE Environmental
Control Symposium, Washington, D. C.,
November 28-30, 1978

LBL-8967 *evr*

ASSESSMENT AND CONTROL OF OTEC ECOLOGICAL IMPACTS

RECEIVED
LAWRENCE
BERKELEY LABORATORY

MAY 9 1979

LIBRARY AND
DOCUMENTS SECTION


P. Wilde, J. Sandusky, and A. Jassby

December 1978

Prepared for the U. S. Department of Energy
under Contract W-7405-ENG-48

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 6782*

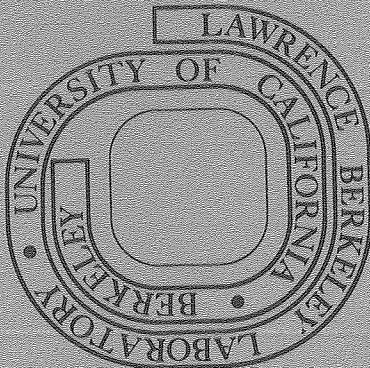

LBL-8967-02

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

ASSESSMENT AND CONTROL OF OTEC ECOLOGICAL IMPACTS

P. Wilde, J. Sandusky, and A. Jassby
Lawrence Berkeley Laboratory
University of California
Berkeley, California 94720

ABSTRACT

Ecologically sound operations of projected Ocean Thermal Energy Conversion (OTEC) plants can be insured by careful attention to the marine environment during the design phase. This requires quality information from regions of potential OTEC interest. Currently, preliminary or actual surveys and laboratory studies are being conducted in the waters of Puerto Rico, the Gulf of Mexico, Hawaii, and Guam for potential moored OTEC plants and in the equatorial South Atlantic for proposed plant-ship operations to provide such benchmark and baseline data. These data plus existing archival information can be used to model effects of OTEC operations based on projected design schemes. Four major areas of concerns (1) redistribution of oceanic properties, (2) chemical pollution, (3) structural effects, and (4) socio-legal-economic; and 11 key issues associated with OTEC deployment and operation have been identified. In general mitigating strategies can be used to alleviate many deleterious environmental effects of operational problems as biostimulation, outgassing, etc. Various research studies on toxicity, biocide releases, etc., are under way or are planned to investigate areas where no clear mitigating strategy is available. A Master Plan listing procedures to be followed to identify and evaluate potential concerns at any OTEC proposed site is proposed for discussion and refinement in advance of any real OTEC test operations.

PURPOSE

The goals of this paper are to present a logical strategy for the evaluation and eventual monitoring at Ocean Thermal Energy Conversion (OTEC) sites or regions so that

- the effects of an OTEC plant on the environment, and
 - the influence of the environment on OTEC operations
- can be assessed.

This should result in information which can be used by engineers, designers, and planners to insure practical, safe, and efficient operations of any OTEC plant and provide sufficient justification for operational permits for OTEC plants from the involved regulatory agencies.

OTEC PROGRAM

Ocean Thermal Energy Conversion is a technology using the temperature difference between warm surface and cold deep water to produce electric power with a gas or steam turbine. An OTEC plant can be operated in either a "closed" or "open" cycle. In the closed cycle configuration, warm surface water heats an evaporator containing an appropriate working fluid, and the vaporized working fluid drives a gas turbine. After passing through the

turbine, the vapor is condensed by cold deep water and then returned to the evaporator for reuse (Fig. 1). In the open cycle configuration, sea water is used as the working fluid, warm surface water being brought to a boil in a partially evacuated evaporator and the steam produced being used to drive the turbine. Once again, cold deep water is drawn up to condense the steam after passage through the turbine.

OPTIONS

At present there are three basic options proposed which use OTEC systems.

- Moored/electric - the OTEC plant is attached to the bottom with a combined mooring/electrical transmission cable. The OTEC plant is used to generate electricity which is connected to the power grid system via a submarine transmission line. In essence the OTEC plant is at a fixed geographic location, so its effects would be a point source in the horizontal plane and a line source in the vertical plane. With the present considerations of (1) 20°C Δ temperature as the limiting case for the commercial resource and (2) ocean engineering capabilities for size and mooring of potential OTEC plants; the depth of water for operations the moored electric OTEC plant is between 800 and 1500 M. Accordingly, the distance off-shore for the location of any potential OTEC plants would be a function of bathymetry or having the appropriate thermal resource in a designated range of depths of water. As the plant is moored its operations would come under the jurisdiction of the nearest nation regardless of the boundaries of any economic zone.

- Grazing/manufacturing - the OTEC plant is located on a floating maneuverable platform or ship. The OTEC plant is used to generate power which in turn is used to manufacture a product such a hydrogen or ammonia from sea water, or alumina or aluminum from raw material brought to the ship. For the grazing/manufacturing option, the commercial product is not electricity but some goods exported via surface ships to markets. The plant with its own motive power essentially grazes the thermal resource without regard to bathymetry, except that the water depth must be greater than the depth of the cold water pipe. Obviously this opens up a much larger area which can be used for OTEC. However, it vastly increases the area of potential concerns. With only a minimum depth limitation, the grazing plant could operate either in the economic zone of near-by nations or strictly in international waters. The environmental impacts of an operating OTEC grazing plant could be transferred by ocean currents into neighboring economic zones even though the plant itself was in international waters, thus potentially causing complex jurisdictional problems.

- Seaside/electric or manufacturing - this type of OTEC plant is land-based and the water is pumped to the generating plant either by pipelines along the sea floor, tunnels, or is delivered to the site as "waste" heat from a seaside power plant. Such a plant could generate power for the electrical grid or for manufacturing purposes as in the grazing option. This type of plant has the basic attributes of conventional seaside power plants so it would have the same environmental concerns.

ENVIRONMENTAL CONCERNS

The four major classes of environmental concerns and the key issues in these classes associated with OTEC deployment and operation are:

SCHEMATIC DIAGRAM OF CLOSED CYCLE OTEC POWER SYSTEM

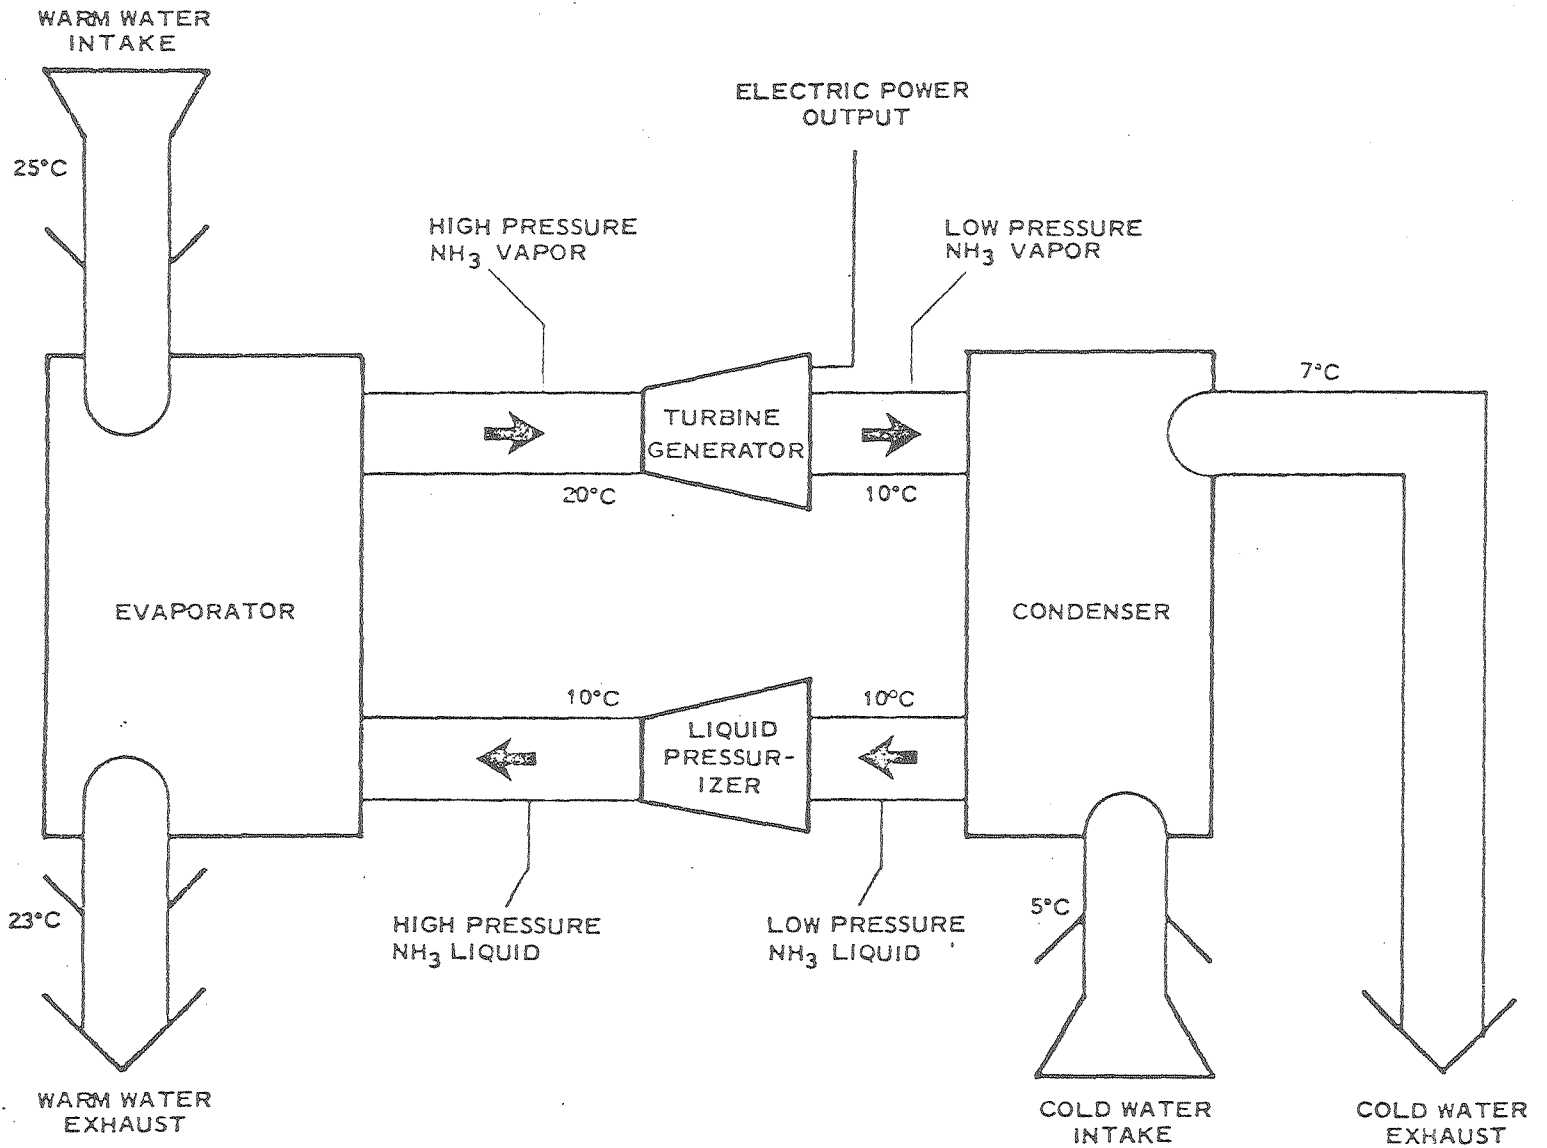


Figure 1
(from DOE/EDP 0006, March 1978)

Redistribution of Oceanic Properties

Ocean water mixing
 Impingement/entrainment
 Climatic/thermal

Chemical Pollution

Biocides
 Working fluid leaks
 Corrosion

Structural Effects

Artificial reef
 Nesting/migration

Socio-Legal-Economic

Worker Safety
 Enviro-Maritime law
 Secondary economic impacts

The potential changes in the oceanographic properties of sea water due to OTEC pumping operations are a major environmental concern. Because large amounts of cold, deep water and warm shallow water will be pumped to the heat exchangers, likely at some third depth; parameters such as temperature, salinity, density, dissolved oxygen, nutrients, carbonates, particulates, etc., will be modified by mixing with ambient ocean water in the vicinity of the eventual discharge. Discharges in the photic zone may cause biostimulation due to the increased nutrient contribution from the deep waters, with potential changes in either the size, relative abundance or species composition with respect to the resident marine population resulting in secondary effects on the food web. Displacement of sea water also could have toxic effects on ambient species by the introduction of trace chemical substances such as trace metals, organic decay products, etc., from other depths. Certain species, particularly those with low mobility, will be harmed by impingement/entrainment in the pumping system either by contact with the screens and walls of the pipe-heat exchanger system or by the pressure and temperature changes encountered in transit of the system from intake to discharge. Surface discharges may produce climatic effects by alteration of the air/surface water temperature ratio. Such an alteration, at sufficient scale such as in an OTEC park, could affect the microclimate by modification of locally generated winds and currents. Long-term operation of a large number of OTEC plants could result in reduced available heat due to the thermal extraction. Surface discharges also could enhance the release of CO₂ and other gases dissolved in cold deep waters with potential climatic effects for large scale operations. This is particularly true for open cycle systems where gases, even normally dissolved in the surface ocean, must be separated from vaporized sea water so that gas bubbles do not impede plant efficiency. Such gases will be vented into the atmosphere potentially modifying the local microclimate as discussed above. However, subsurface discharges below the surface mixed layer in the pycnocline could mitigate all or most of the potential problems associated with surface discharges.

Chemical pollution could result as functions of various OTEC plant operations and maintenance procedures. Of major concern are biocides proposed

to keep the system components clean of biological growth. There are alternative ways (various mechanical systems) to clean heat exchanger systems, but these may not clean surfaces to the extent necessary for efficient operation. The major problem with biocides is the levels of concentration needed to impede biological growth in the system which unquestionably will affect organisms in the vicinity of the discharge. Furthermore, if chlorine is used as a biocide and ammonia as a working fluid, accidental combinations of these chemicals can produce compounds even more toxic to ambient organisms than the separate chemicals. Leaks of the working fluid of a closed cycle system also will pollute ambient ocean water. The effects and chemical fate of proposed working fluid leaks into sea water are not well understood. Ammonia, for example, is a nutrient in proper amounts and could stimulate marine growth complicating the biofouling problem. However, the excessive doses associated with a major leak is both toxic to marine and human life. Chemical pollution also will be produced by the corrosive effect of sea water passing through the heat exchanger system. Corrosion would produce metallic ions, and scale particles which could have direct toxic effects or long term effects through incorporation of corrosion products into the particulate food supply of marine organisms through the process of bioaccumulation.

The physical presence in the ocean of a structure the size of an OTEC system itself has an impact on the ocean. The structure of whatever configuration will become an attractive habitat for a wide range of organisms based on experience from artificial reefs. The long-term effects of the structure on the environment will depend on the types, size, and abundance of the organisms attracted to or attached to the structure and this will modify the local population. Regional effects on populations might occur by either interference with, or modification of, nesting habits or migration pathways.

The first three major classes of concerns chiefly dealt with impacts on marine life. However, there are human consequences of OTEC operations which are grouped here as socio-legal-economic issues. Worker safety is of prime concern regulated by the Occupational Health and Safety Administration (OSHA) and the Coast Guard for strictly marine occupational concerns. Potential work hazards are the chemicals used or produced by the OTEC system such as ammonia, chlorine, foul weather during marine operations, collision, and systems accidents. Because of the novelty of OTEC operations standard safety procedures will be augmented by procedures unique to OTEC. The siting of OTEC facilities either in international waters or where the downstream effects of OTEC operations might intrude into international waters, will raise the issues of international rights and responsibilities beyond those treated by conventional maritime law and treaties. At present the law of the sea is in a state of flux so that the resolution of potential international issues may be complicated and time-consuming. Probably multilateral agreements or treaties among concerned parties, as is done for fishing rights, may be the interim solution of potential legal problems which may impeded OTEC operations. Finally, the construction and operations of an OTEC facility may affect existing social and institutional structures. New jobs will be created and shore-based "boomtown" growth may occur with its associated impacts on housing, education, sanitation, etc. The electrical energy produced by OTEC plants may be transmitted to consumers either by

A.C. or D.C. transmission lines. The cable needed to transmit this power could have impacts on marine ecosystems at the sea bed and at the shoreline. D.C. transmission will require two converter facilities, one at sea and one on shore, causing land use problems. If OTEC systems are used to produce energy-intensive products, they will produce air/water emissions typical of those produced in similar land based industries.

The present and projected status of the resolution of these issues is listed in Table 1. Detailed discussion of these issues is found in the 1978 Environmental Development Plan (EDP) for OTEC.

PRESENT AND PROJECTED MONITORING PROGRAM

The monitoring strategies are designed for shipboard operations, manned platforms as well as instrumented buoys (Table 2). This program is to be integrated with those proposed by OTEC groups for bio-fouling and corrosion, and by NOAA for synoptic oceanographic parameters. An additional goal is to develop a packaged monitoring program which can be mobilized rapidly to aid in site selection for larger OTEC platforms (Fig. 2). Data collection and monitoring strategies will be done in view of compliance with NEPA and EPA, Corps of Engineers, Coast Guard, etc., regulations.

Specifically the program initiated pre-operational studies in four areas:

- o Hawaii - one site near Keahole Point
- o Puerto Rico - one site near Punta Tuna
- o Gulf of Mexico - regional survey using two station locations:
 - (1) west of Tampa
 - (2) south of Biloxi
- o South Atlantic - regional survey, 5-10°S, 20-30°W and affected zone.

In the areas considered for the moored OTEC option - Hawaii, Gulf of Mexico, and Puerto Rico - a program has been initiated to take background data before placement of any operating OTEC system in these areas. This is required to insure that baseline information is available to evaluate the effects of OTEC on the ambient environment and to provide environmental data useful in the design of the operating system. At this time, only attractive thermal regions are known with any certainty. It is premature, therefore, to pick exact sites for potential OTEC plants until knowledge of other important environmental siting factors is obtained. Accordingly, for the initial studies each thermal region is divided into subregions in which it is expected that the basic environmental conditions relating to OTEC are spatially homogeneous, although likely to vary seasonally. To characterize each subregion a reconnaissance benchmark is located. A benchmark is defined as a specific location, typical of a subregion, where serial data are taken and to which historical data may be referred. Because of the lack of serial, long term records of any kind in attractive thermal regions, we believe that the benchmark approach is more valuable in the long term than initiating broad regional surveys where variations in measurements may be attributed to site as well as time variability. Where substantial subregional variability is found, the benchmarks will be used as starting points for potential regional surveys. The intent of taking measurements at benchmarks is to provide data, at a specific location, which will form the basis, in conjunction with previously obtained data from the area, for defining longer term and more comprehensive environmental

Table 1

ISSUES, REQUIRED RESEARCH, AND PROJECTS

ISSUES	REQUIRED RESEARCH	Status of Projects		
		COMPLETED	CURRENT	PLANNED
OCEAN WATER MIXING	● Develop computer model to predict the impact of OTEC operations on oceanographic characteristics	2	3	3
	● Establish baseline oceanographic data at potential OTEC test sites	3	2	7
	● Characterize changes in oceanographic characteristics resulting from OTEC test operations	2	2	1
	● Determine impacts of oceanographic changes on site-specific marine ecosystems		4	2
IMPINGEMENT/ENTRAINMENT	● Search existing literature to determine extent of impact at similar ocean water pumping operations.		2	1
	● Monitor impacts at OTEC testing sites and define factors responsible for attraction of organisms		2	1
CLIMATIC/THERMAL	● Develop computer models to predict impacts of OTEC operation on micro- and macroclimate	2	2	1
	● Characterize site-specific climatic impacts resulting from OTEC test module operations	1	2	1
	● Determine potential increase in levels of atmospheric CO ₂ resulting from OTEC operations			1
	● Determine potential microclimate effects of degassing during open cycle OTEC operations			

Table 1 (continued)

ISSUES	REQUIRED RESEARCH	Status of Projects		
		COMPLETED	CURRENT	PLANNED
BIOCIDES	<ul style="list-style-type: none"> ● Survey existing literature to determine impacts of biocides on marine species 		2	1
	<ul style="list-style-type: none"> ● Monitor, sample, and characterize biocide discharges during OTEC testing operations 		2	1
	<ul style="list-style-type: none"> ● Conduct laboratory tests to determine the effects of varying levels of biocide use on marine ecosystems. 		6	1
WORKING FLUID LEAKS	<ul style="list-style-type: none"> ● Survey existing literature to characterize impacts of various levels of potential working fluid leaks on marine ecosystems. 		2	1
	<ul style="list-style-type: none"> ● Monitor, sample, and characterize the extent of working fluid leaks during OTEC operations 		2	1
CORROSION	<ul style="list-style-type: none"> ● Survey existing literature to determine effects on marine species of metallic element compounds discharged from heat exchangers constructed of various metals. 		2	1
	<ul style="list-style-type: none"> ● During OTEC testing operations, monitor, sample, and characterize metallic elements discharged and dispersed into ambient ocean water, and determine the impacts of these discharges on indigenous marine species. 		1	2
ARTIFICIAL REEF NESTING/MIGRATION	<ul style="list-style-type: none"> ● Define Factors responsible for attraction of organisms 		3	1

Table 1 (continued)

ISSUES	REQUIRED RESEARCH	Status of Projects		
		COMPLETED	CURRENT	PLANNED
WORKER SAFETY	<ul style="list-style-type: none"> ● Develop worker safety programs for OTEC facilities using input from land based facilities using/producing the same chemicals 		1	1
	<ul style="list-style-type: none"> ● Develop a warning system for OTEC facilities to prevent collisions with other ocean vessels 		1	1
ENVIRO-MARITIME LAW	<ul style="list-style-type: none"> ● Conduct survey of international law of the sea applicable to OTEC operations; update biennially ● Conduct in-depth study of potential legal/institutional issues involving the particular site(s) chosen for OTEC operations 	1		1
9 SECONDARY ECONOMIC IMPACTS	<ul style="list-style-type: none"> ● Assess the secondary impacts (e.g., land use, air/water emissions, solid wastes) associated with construction of OTEC plants 		1	1
	<ul style="list-style-type: none"> ● Assess the socioeconomic impacts of OTEC development 	1	1	1
	<ul style="list-style-type: none"> ● Assess the ecological and secondary impacts of electricity transmission 			
	<ul style="list-style-type: none"> ● Survey existing literature to characterize air/water emissions expected to be encountered in the production of chemicals at OTEC plants; develop applicable control technologies 			1

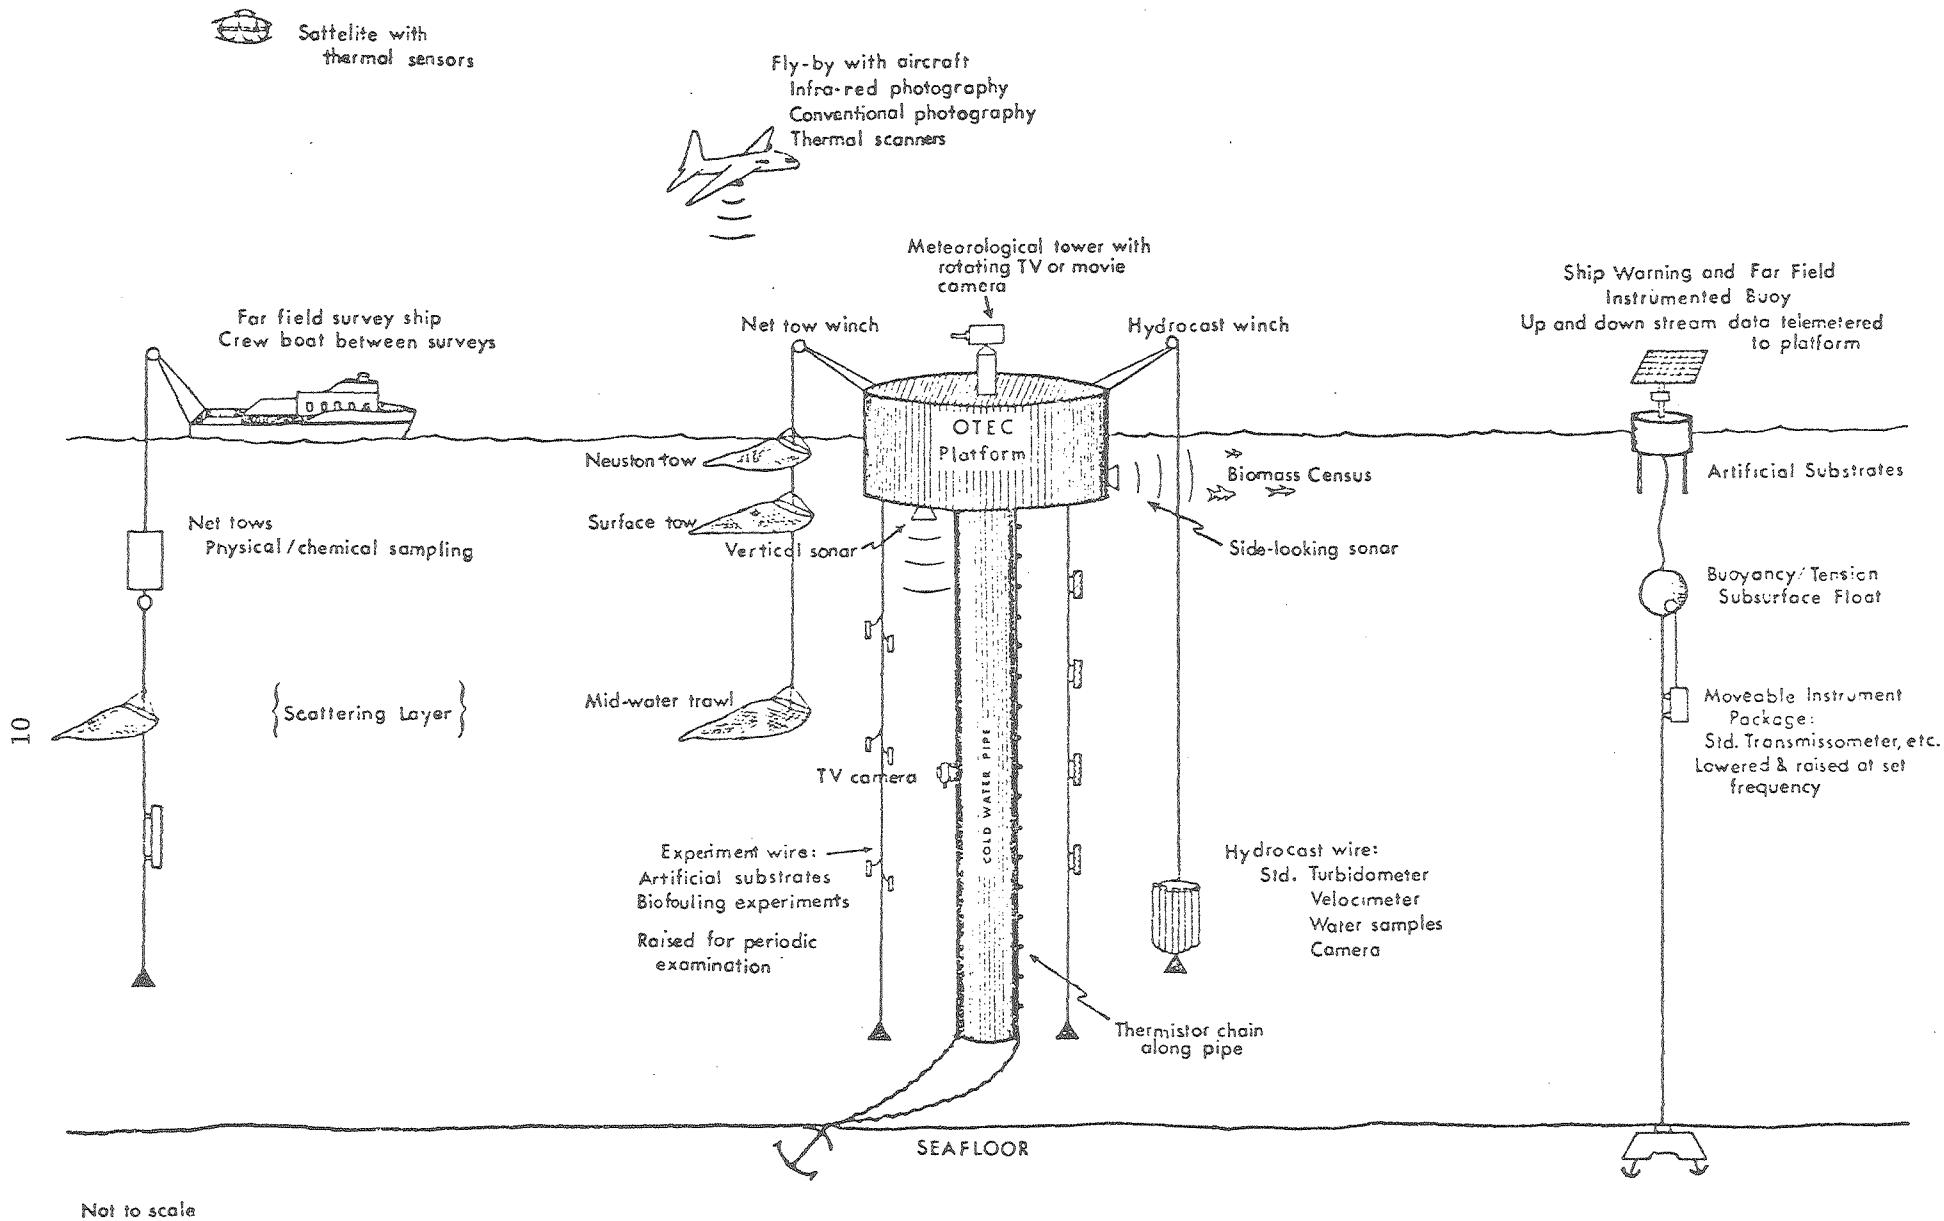


Figure 2-OTEC

Table 2

PROPOSED ECOLOGICAL MONITORING STRATEGIES

Time Schedule

STEP I	<p>- PRE-OTEC site occupation studies; background sampling of significant ecological and chemical parameters in conjunction with a literature review to define pre-operational environmental conditions.</p> <p>Sampling from survey ships or from fixed moorings Sampling frequency bi-monthly initially for one year, further sampling frequency to be determined by experience</p>	<p>Initiated FY 78 in Hawaii, Puerto Rico, Gulf of Mexico, South Atlantic (contractor operated, LBL monitored)</p>
STEP II	<p>- Non-interference with Platform Operations No permanent work space on platform Sampling equipment self-contained and transported to and from site Sampling frequency a function of operations schedule All analyses done on beach</p>	<p>Initiated FY 79 Platform</p>
STEP III	<p>- Limited interference with platform operations Limited permanent work space on platform Sampling equipment and some analytical equipment on site Most analyses done on beach</p>	<p>Plan FY 79 RFP late FY79 or early FY 80 Operational FY 80 (Contractor operated, LBL monitored)</p>
STEP IV	<p>- Limited interference with platform operations (Crane operations, etc.) Permanent work space in container/vans Power/water from platform but with backup systems</p>	<p>Plan FY 79-80 (Experience from Phase I and II) RFP late FY 80</p>

TABLE 2
(continued)

STEP IV
(continued)

Operations Van (sensor packages on buoy)

- A. Wet Lab - sample preparation - gross equipment repairs
- B. Dry Lab I - instruments/analyses/electronic repairs
- C. Dry Lab II - data reduction/storage/remote monitors

Time Schedule
Operational FY 81
(first unit)
Additional units as required

Storage Van (not applicable to buoy)

- A. Wet Storage - nets, over the side gear
- B. Dry Storage - equipment, paper
- C. Sample Storage - refrigerator

Real time operations with rotating permanent technicians
Essentially all analyses and data processing done on site

surveys required for the siting and permitting OTEC plants in the designated thermal regions. Station operations at the reconnaissance benchmark sites are given in Tables 3 and 4. In addition to this station operation each benchmark, a current meter array will be deployed to complement current profiler runs during station operations. Satellite data, when available, will be used to assist the interpretation of data from the arrays. Because of costs and reliability factors, measurements for the initial surveys will be mainly from survey ships rather than from instrumented buoys. The survey ship will occupy each benchmark site bi-monthly for a minimum of three days with augmented sampling every four months. Sampling at each station occupation is designed to give, at a minimum, day-night variations as well as bi-monthly variations for the biologically significant parameters. Parameters sampled bi-monthly are thought to have variations which may be detected at that frequency. Parameters sampled every four months are thought:

- (1) to have less variation annually; or
- (2) to have potential but unresolved significance to OTEC.

The augmented sampling every four months also is done to develop optimal measurement and sampling techniques for parameters which may become routine during future site occupations. Upon completion of the initial study (actually, during the surveys) the sampling frequencies and choice of parameters will be re-examined. Results from augmented samplings, from serial samplings and historical data reviews will be used to design subsequent site data collections.

MASTER PLAN - OUTLINE OF CRITICAL PATH

Given a candidate site or region, the following gives a proposed outline of the ideal progression of steps to be taken in the evaluation of the environmental concerns for that site or region. It is assumed that the primary selection of sites is a policy function of OTEC headquarters. The procedures presented here are designed to be applicable to any candidate site or region to insure the quality and uniformity of information with respect to scope and kind available to regulatory agencies, policy makers, engineers/designers, concerned citizens groups, etc. However, we realize that each site or region is to some degree unique with its own characteristics not found elsewhere. Accordingly the suggestions here are to be considered only as a minimum, with any site or region specific information to be included where applicable.

PHASE I - Pre Go-Ahead Decision

● LITERATURE SURVEY AND OTHER PREVIOUS WORK

Published and unpublished literature, pertinent to the selected site or region, will be compiled and searched for data of potential interest to OTEC. Experts in the area will be identified. Agencies, institutions, schools, etc., with data bases, collections, etc., will be identified and contacted with the availability of their information ascertained.

● ORGANIZATION INTO A STANDARD FORMAT

All data obtained from Step I will be collated and displayed on a uniform base. This includes base maps of appropriate scale, uniform graphics and tabular material where appropriate. Such material and non-standard material such as photographs, keys to collections, etc., will be compiled into Source Volumes for the candidate area or region.

TABLE 3

STATION OPERATION

PROFILER	VERTICAL PROFILES OF HORIZONTAL CURRENTS
HYDROCAST	DISCRETE SAMPLES AT DEPTH OF:
	A. Temperature
	B. Salinity
	C. Dissolved Oxygen
	D. Nutrients
	E. Phytoplankton
STD	VERTICAL PROFILES OF SALINITY, TEMPERATURE
NET TOWS	BIOLOGICAL SAMPLES
XBT	VERTICAL PROFILES OF TEMPERATURE TO 750 M
CURRENT METER ARRAYS	DISCRETE MEASUREMENTS OF HORIZONTAL WATER CURRENTS AT DEPTH
TRANSMISSOMETER	VERTICAL PROFILES OF LIGHT TRANSMITTANCE

CLASS OF STATIONS

<u>PRIMARY</u>	<u>3 DAY DURATION</u>
Occupied in locations of prime OTEC interest - sampling frequency to ascertain diurnal changes	2 Deep Hydrocasts 2 Shallow Hydrocasts 2 Oblique Net Tows 4 Current Profilers 12 XBT 4 STD
<u>CURRENT PROFILER</u>	<u>2-1/2 HOUR DURATION</u>
Occupied to determine spatial variability of current regime	1 Current Profile

TABLE 4

ECOLOGICAL/CHEMICAL PARAMETERS

<u>PARAMETER</u>	<u>STATION OPERATION</u>	<u>STATION FREQUENCY</u>	<u>SAMPLING FREQUENCY</u>
Temperature	hydrocast	bi-monthly	all hydrocasts
Temperature	STD, XBT	bi-monthly	4 STD, 12 XBT
Salinity	hydrocast	bi-monthly	all hydrocasts
Salinity	STD	bi-monthly	4 STD
Water Currents	current meter	continuous	one per 30 minutes
	profiler	bi-monthly	4
Light transmittance	transmissometer	bi-monthly	2 traces per cruise
Dissolved Oxygen	hydrocast	bi-monthly	2 casts
Orthophosphate	hydrocast	bi-monthly	2 casts
Total Phosphate	hydrocast	every 4 months	2 casts
Silicate	hydrocast	bi-monthly	2 casts
Nitrate	hydrocast	bi-monthly	2 casts
Ammonia	hydrocast	every 4 months	2 casts
Urea	hydrocast	every 4 months	2 casts
Total Nitrogen	hydrocast	every 4 months	2 casts
Alkalinity	hydrocast	yearly	2 casts
Trace Metals	hydrocast	yearly	1 cast
Chlorophyll/Phaeophytin	hydrocast	bi-monthly	2 shallow casts
ATP	hydrocast	every 4 months	2 shallow casts
Phytoplankton census	hydrocast	bi-monthly	1 shallow cast
C ¹⁴ uptake	hydrocast	every 4 months	1 cast
POC	hydrocast	yearly	1 cast
DOC	hydrocast	yearly	1 cast
Zooplankton census	net tow	bi-monthly	6 tows

● COMPARISON WITH ACCEPTABILITY MATRIX

Information in the source volumes will be scrutinized parameter by parameter with respect to its validity, accuracy, precision so generalities will be drawn from data of similar quality.

● CONSTRUCTION OF ADEQUACY MATRIX

Data of comparable quality will be examined as a function of quantity of measurement, frequency and time history of sampling by a panel of experts to determine for each critical area whether sufficient data exists for a preliminary decision on the acceptability of the site or region. In this step data gaps will be identified.

● PRELIMINARY DECISION

On site/region as a candidate for OTEC operations. Options: a) *Definite No* - overriding negative factors; b) *Qualified No* - Negative factors present which may be mitigated by design strategies; c) *Ambiguous* - potential negative factors or conflicting data which cannot be resolved by information to date; d) *Neutral*; e) *Qualified Yes* - positive factors with ambiguous unknowns.

● POLICY DECISION

Yes/No on continuation of consideration of site/region as candidate for OTEC operations. If yes - proceed.

PHASE II - Pre-Operational

● INITIATE EIA/EIAS FOR SITE/REGION

Based on the current level of technological development of OTEC. Begin fulfilling the legal requirements for eventual permitting of the site.

● DESIGN CORRECTION STRATEGIES

Based on the adequacy matrix design a measurement and assessment program which eventually will provide information to reduce the level of uncertainty about site/region.

● DESIGN SERIAL PRE-PLANT MONITORING STRATEGIES

In conjunction with correction strategies, design a measurement and assessment program which will augment existing or begin serial data collections required to provide sufficient background information to assess impact of any future OTEC operations at the site.

● INITIATE ONE YEAR PILOT PROGRAM

At site to ascertain environmental variability. As it is unlikely that sufficient data exists on annual and seasonal variability at any given site, the initial sampling frequencies must be estimated for most parameters. The intent of this program is to sample at high enough frequencies to justify the choices used in the long-term monitoring program. This program also will be used to test new or improved methods of sampling and to verify the utility of other parameters to assess the environmental concerns.

● DESIGN LONG-TERM MONITORING/ASSESSMENT PROGRAM

As a result of the previous work and the one-year variability study, develop a long range monitoring/assessment program which will lead to compliance with regulatory requirements and facilitate production of the appropriate EIA/EIS.

● DESIGN LONG TERM MONITORING/ASSESSMENT PROGRAM FOR OTEC PLANT

This program is a companion to the one above except it is designed to be operated from the actula plant. The primary purpose of this program is to monitor the intakes and outputs of the plant as well as the near plant environmental conditions.

● POLICY DECISION

Request OTEC operations at site/region

● OBTAIN COMMENCEMENT PERMITS

Submit final EIA/EIS for action by appropriate regulatory group.

AFTERWORD

As the initial OTEC test module contract has just been let (September, 1978) it is too early to determine if the environmental strategies advocated here need to be augmented or modified greatly. Unquestionably strong interactions among environmental groups, regulatory agencies, designers and engineers, and DOE will be required to insure the success of the OTEC environmental program in attaining the goal of ecological compatability and economical viability for OTEC systems.

To insure continuity among stated DOE program positions and interim reports of this nature, portions of existing documents such as the OTEC Program Summary (1976 and 1977) and the OTEC Environmental Development Plan (1977 and 1978) have been quoted here exactly or with minor modifications.

BIBLIOGRAPHY

OTEC General Documents

Ocean Thermal Energy Conversion (OTEC) Power Plant Technical and Economical Feasibility, 2 volumes, Lockheed Missiles and Space Co., Inc., April, 1975.

Ocean Thermal Energy Conversion, 5 Volumes, TRW Systems Group, June 1975.

Dugger, G.L. Maritime and Construction Aspects of OTEC Plant-Ships. Johns Hopkins University, Applied Physics Laboratory, Laurel, MD 20810 April 1976. Detailed Report. (APL/JHU-SR-76-1B).

Program Summary: Ocean Thermal Energy Conversion (OTEC). Energy Research and Development Administration, Division of Solar Energy. ERDA 76-142, October, 1976.

FY77 Program Summary, Ocean Thermal Energy Conversion (OTEC) Program. Department of Energy, Division of Solar Technology. DOE/ET-0021/1, January 1978.

Solar Program Assessment: Environmental Factors - Ocean Thermal Energy Conversion. Energy Research and Development Administration, Division of Solar Energy, Environmental and Resource Assessments Branch. ERDA 77-47/8, March 1977.

OTEC Annual Conferences

Lavi, A. (ed) Proceedings, Solar Sea Power Plant Conference and Workshop. Carnegie-Mellon University, Pittsburgh, PA 15213. June 1973, 287 pp. (PB-228066)(NTIS, \$6.75).

Harrenstein, Howard (ed), Second Ocean Thermal Energy Conversion Workshop, September 26-28, 1974.

Dugger, G.L. (ed), Proceedings, Third Workshop on Ocean Thermal Energy Conversion (OTEC), Houston, Texas, May 8-10, 1975, August, 1975. Third Workshop on OTEC, Houston, Texas, sponsored by the Applied Physics Laboratory, Johns Hopkins University.

Ioup, Goerge E. (ed). Proceedings, Fourth Annual Conference on OTEC; University of New Orleans, New Orleans, LA. March 22-24, 1977.

Veziroglu, T.N. (ed). Proceedings, Fifth Annual Conference on OTEC, University of Miami. Miami, Florida. February 20-22, 1978.

OTEC Topical Workshops

Legal, Political, and Institutional Aspects of OTEC, American Society of International Law Workshop, January 15-16, 1976.

Lewis, L. and McCluney, R. (eds) Proceedings: OTEC Resource and Environmental Assessment Workshop, June 22-28, 1977. Florida Solar Energy Center, Cape Canaveral, FL (Report RD-77-2).

Molinari, R.L., J. Sandusky, P. Wilde. OTEC Oceanographic Data Reports. Proceedings of OTEC Data Users Workshop, February 23, 1978, Miami Florida. National Oceanographic and Atmospheric Administration/Lawrence Berkeley Laboratory, August 1978.

Gray, R. (ed). Proceedings: OTEC Biofouling and Corrosion Symposium. October 10-12, 1977. Seattle, Washington. Battelle Northwest (in press).

OTEC Compliance Documents

Environmental Development Plan (EDP) 1977. Ocean Thermal Energy Conversion. U.S. Department of Energy, March 1978.

Environmental Development Plan (EDP) 1978. Ocean Thermal Energy Conversion. U.S. Department of Energy (in prep. Oct 1978).

Sands, M.D. and others, Environmental Impact Assessment Ocean Thermal Energy Conversion (OTEC). Preoperational Test Platform, Department of Energy, Division of Solar Technology, October 1978.

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

TECHNICAL INFORMATION DEPARTMENT
LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720