

# Lawrence Berkeley National Laboratory

## Recent Work

### **Title**

NUMERICAL STUDIES OF ENTHALPY AND CO-TRANSIENTS IN TWO-PHASE WELLS

### **Permalink**

<https://escholarship.org/uc/item/4m92r8hq>

### **Author**

Bodvarsson, G.S.

### **Publication Date**

1984-04-01



# Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

## EARTH SCIENCES DIVISION

RECEIVED  
LAWRENCE  
BERKELEY LABORATORY

MAY 30 1984

LIBRARY AND  
DOCUMENTS SECTION


To be presented at the Geothermal Resources  
Council 1984 Annual Meeting, Reno, NV,  
August 26-29, 1984

NUMERICAL STUDIES OF ENTHALPY AND CO<sub>2</sub>  
TRANSIENTS IN TWO-PHASE WELLS

G.S. Bodvarsson

April 1984

**TWO-WEEK LOAN COPY**  
*This is a Library Circulating Copy  
which may be borrowed for two weeks.  
For a personal retention copy, call  
Tech. Info. Division, Ext. 6782.*

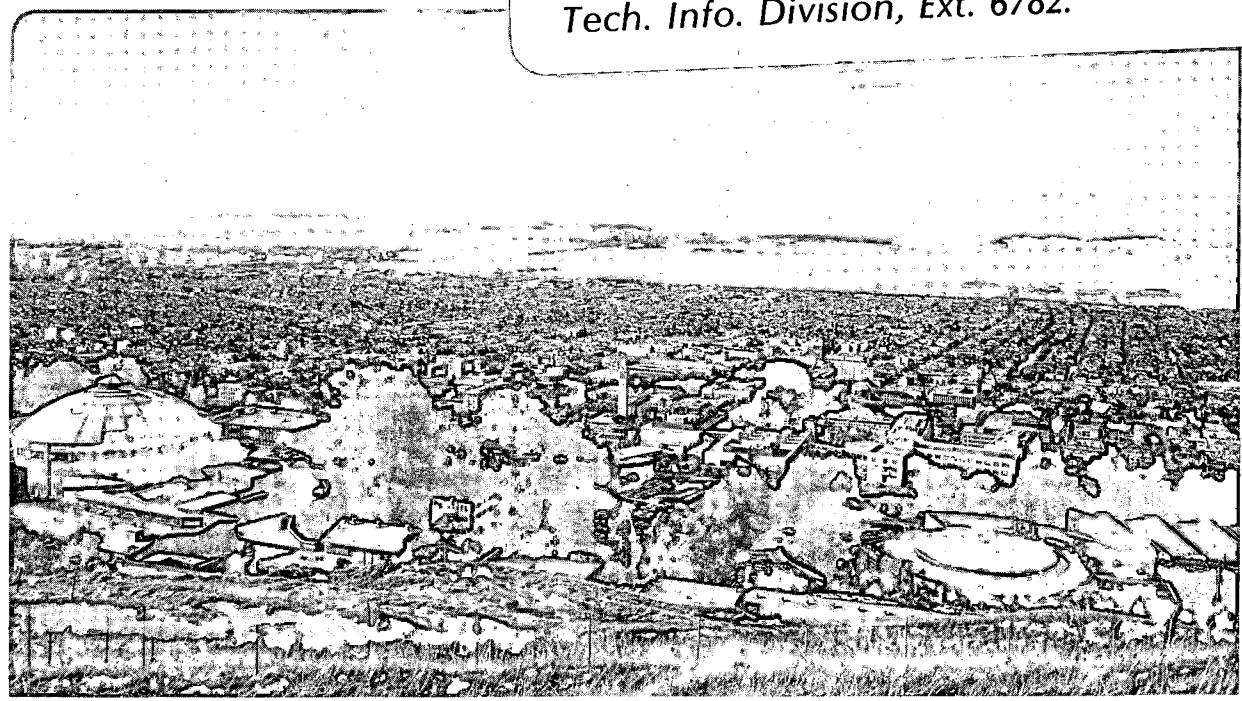

LBL-17694 c.2

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

# NUMERICAL STUDIES OF ENTHALPY AND CO<sub>2</sub> TRANSIENTS IN TWO-PHASE WELLS

Gudmundur S. Bodvarsson

Earth Sciences Division, Lawrence Berkeley Laboratory  
University of California, Berkeley, California 94720

## Abstract

Numerical studies of enthalpy and CO<sub>2</sub> transients for wells completed in composite reservoir systems are carried out. Both constant rate and constant pressure production are considered. The results show that relatively small variations in hydrologic parameters and vapor saturation can have large effects on the enthalpy and CO<sub>2</sub> content of the produced fluids. Field data are presented that illustrate the theoretical results obtained.

## Introduction

For wells penetrating a two-phase reservoir with both phases (liquid and steam) mobile, significant transient changes in enthalpy and CO<sub>2</sub> content of the produced fluids can occur. Model studies have shown that for a constant rate production the enthalpy will increase at early times and then stabilize (O'Sullivan, 1980; Sorey et al., 1980). The rise in flowing enthalpy depends on various factors such as porosity, permeability (or flow rate), initial vapor saturation and relative permeabilities (Sorey et al., 1980; Bodvarsson et al., 1980). Enthalpy increases of over 1000 kJ/kg have been observed for some wells completed in the Krafla reservoir in Iceland (Stefansson and Steingrimsson, 1980). Many wells which exhibit a large early enthalpy rise will show gradual decline in the long run.

In general, little is known about the transient behavior of non-condensable gases in produced fluids. Many reservoirs contain large amounts of noncondensable gases, particularly carbon dioxide (CO<sub>2</sub>). Pritchett et al. (1981) studied the transient CO<sub>2</sub> content during discharge of a well completed in a homogeneous porous medium reservoir. They found that the CO<sub>2</sub> content of the produced fluids can not readily be correlated with the in-situ content, and may be either greater or less than that insitu. O'Sullivan et al. (1983) states that the CO<sub>2</sub> content of the produced fluids, like the enthalpy, will reach a stable value after an initial short transient period (see also Grant, 1979). They also found that the stable CO<sub>2</sub> content does primarily depend upon the initial partial pressure of CO<sub>2</sub>, the relative permeability functions, and the initial vapor saturation. The effects of porosity and flow rate on the stable CO<sub>2</sub> content are secondary.

Grant and Glover (1984) present enthalpy and CO<sub>2</sub> transient data from well BR-21 in Broadlands, New Zealand. They investigate various models, including homogeneous porous medium and fracture models, in order to analyze the data. They conclude that the enthalpy transients can only be explained in terms of a fracture model because of the long period of enthalpy rise.


Most of the work to date on enthalpy and CO<sub>2</sub> transients has considered only constant rate testing in homogeneous porous media. The purpose of this paper is to investigate enthalpy and CO<sub>2</sub> transients in more heterogeneous formations, allowing for variable flow rates. Some of the questions to be addressed are:

- (i) How do variations in hydrologic parameters such as porosity and permeability affect the stable enthalpy and CO<sub>2</sub> content?
- (ii) Can enthalpy and CO<sub>2</sub> data give an estimate for the extent of the two phase zone?
- (iii) How do enthalpy and CO<sub>2</sub> transients for constant pressure production differ from those observed during constant rate production?

In order to answer some of these questions, numerical modeling techniques are employed.

## Approach

In the present work a single-layer radial model is used for the simulations. It is a composite reservoir model, with two zones of different hydrologic properties (porosity and permeability) or initial vapor saturation (Figure 1). The radial distance to the boundary between the two zones is fixed at  $r = 100$  m. The reservoir parameters and initial conditions of the inner zone are the same in all simulations and are given in Table 1. Various different cases are considered where the properties of the outer zone are varied and the resulting enthalpy and CO<sub>2</sub> transients calculated. As a base case for comparison, the homogeneous reservoir case (identical properties of inner and outer zones) is modeled. In addition, the two extreme cases of no-flux and constant-pressure inner boundary (at  $r = 100$  m) are simulated.

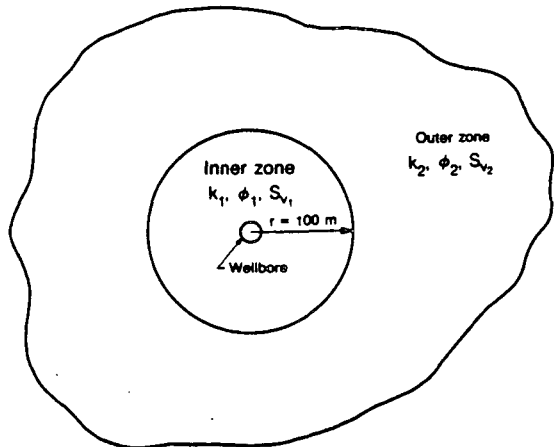

XBL 844-10435

Figure 1. Radial model for simulation studies.

The mesh used consists of logarithmically-spaced elements with five elements per log cycle of radial distance. It extends to a radial distance of 4000 m, which is sufficient for simulating 1 year of production without outer boundary effects being felt. The pressure pulse travels slowly because of the high compressibility of two-phase mixtures (Grant and Sorey, 1979). A realistic wellbore radius of 0.1 m is used. In cases where the flow rate is assumed constant it is fixed at 0.15 kg/s·m. Linear relative permeability curves are used, with immobile liquid cutoff fixed at 0.65 vapor saturation and the residual steam cutoff at 0.05 vapor saturation. These relative permeability curves have been found to be consistent with production data from wells located at the Krafla field in Iceland (Pruess et al., 1983), as well as with the natural state conditions of the field (Bodvarsson et al., 1984). In the present work the multi-component simulator MULKOM (Pruess, 1983) is used, with an equation of state for H<sub>2</sub>O-CO<sub>2</sub> mixtures developed by O'Sullivan et al. (1983).

Enthalpy transients - Constant Rate Production

In the first series of simulations, only the enthalpy transients are considered; the effects of non-condensable gases (CO<sub>2</sub>) are neglected. The

Table 1. Reservoir parameters and initial conditions of the inner zone.


permeability:	$1.5 \times 10^{-14}$ m <sup>2</sup> (15 md)
porosity:	2 percent
rock density:	2650 kg/m <sup>3</sup>
rock heat capacity:	1000 J/kg
thermal conductivity:	2.0 W/m·°C
initial pressure:	97 bars
initial vapor saturation:	0.10
initial partial pressure CO <sub>2</sub> *:	10 bars

\*Only used when CO<sub>2</sub> transients are considered.

cases modeled are listed in Table 2. Note that for cases B through F all parameters are identical to those of the base case except for the parameter value given. The results obtained for the six cases are summarized in Figures 2-4.


If we first consider the base case, the figures show an early non-linear behavior in pressure during which the vapor saturation and the enthalpy rise. After that both the saturation and enthalpy stabilize, as one would expect for constant rate production (O'Sullivan, 1980; Sorey et al., 1980), and the pressure decline becomes near-linear on the semilog time plot. Note also in Figure 4 that the enthalpy rise occurs very early because of the rapid thermal equilibrium in porous media. Enthalpy transients for wells completed in fractured reservoirs can last much longer (Grant and Glover, 1984). Also, in many cases the enthalpy transients may be prolonged because of non-uniform vapor saturation conditions near wells when they first come on line, if drilling fluids and injected water remain in the vicinity of the well during the heating-up period (Pruess et al., 1983).

As shown in Figures 2-4, all of the cases (except for case G) show identical response until the effects of the outer zone are felt (radius of influence exceeds 100 m). For the no-flux boundary conditions (case B) the results are as expected; a rapid pressure decline along with a rapid increase in vapor saturation and enthalpy of the produced fluids is observed. Also as expected, the effect of the constant pressure boundary is to stabilize the well pressure and lower the vapor saturation and flowing enthalpy, since the recharge enthalpy from the boundary will equal the initial flowing enthalpy in the system. When the outer zone has a higher initial vapor saturation (case C) the pressure decline is slightly higher than that of the base case, due to the reduced overall mobility caused by the increasing vapor saturation. The enthalpy reaches a stable value that is identical to that observed if the vapor saturation is initially 20% everywhere.

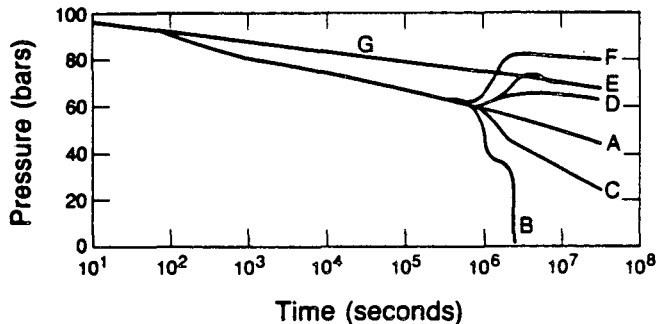

XBL 844-10434

Figure 2. Constant rate production. Pressure variation with time for the different cases.

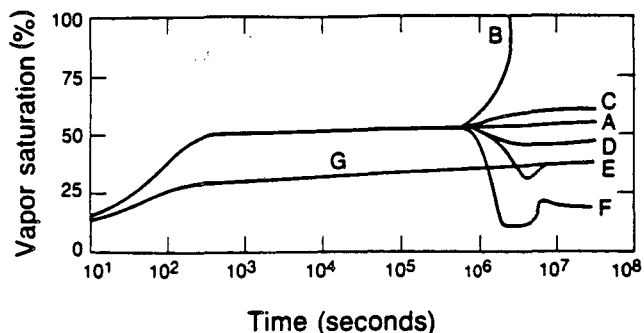


XBL 844-10385

Figure 3. Constant rate production. Vapor saturation variations with time for the different cases.

The effects of porosity and permeability on enthalpy transients were studied by Sorey et al. (1980) and Bodvarsson et al. (1980). In general, the rise in enthalpy is inversely proportional to permeability but directly proportional to  $(1-\phi)/\phi$ , where  $\phi$  is the porosity (Bodvarsson et al., 1980). This is evident in Figures 2-4, as both doubling the permeability and increasing the porosity of the outer zone causes a large decrease in the stable enthalpy. Note also the large increase in the pressure at the well due to the increased fluid mobility associated with lower vapor saturation.

In case G the porosity is fixed at 0.10 over the entire reservoir. Because of this higher porosity, the vapor saturation and enthalpy rise are much less, as evidenced in Figures 3 and 4. However, it is interesting to note that the long term behavior of this case is identical to case E (inner region porosity of  $\phi = 0.02$ ). This implies that the long-term flow characteristics of a well are independent of the near-well porosity, although it dominates the early time enthalpy rise. This is not the case with permeability, since the pressure decline at the well reflects the harmonic mean permeability of all rocks within the radius of influence.

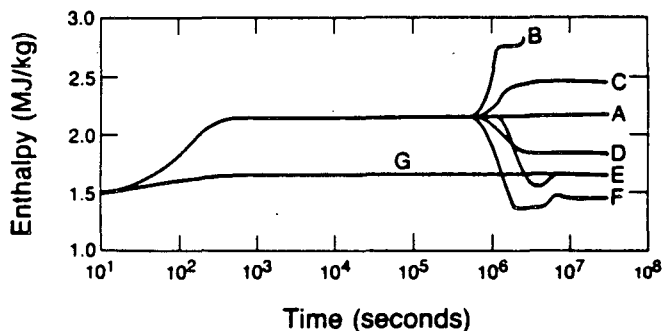

XBL 844-10433

Figure 4. Constant rate production. Enthalpy variations with time for the different cases.

Table 2. Different cases simulated.

Case	Value for outer zone/boundary conditions
A	base case
B	no-flux boundary ( $r = 100$ m)
C	initial vapor saturation: .20
D	permeability: 30 md
E	porosity: 0.10
F	constant pressure boundary ( $r = 100$ m)
G	porosity: 0.10 everywhere

In summary, spatial variations in porosity, permeability and vapor saturation can greatly effect the enthalpy of the produced fluids. Proper analysis of such enthalpy transient data may give useful information on reservoir conditions; for example, the extent of two-phase zones. Because of uncertainties regarding relative permeabilities, the enthalpy transients cannot give quantitative information on changes in the hydraulic parameters. However, the radial distance to the discontinuity can be estimated from the equation for the radius of influence (Earlougher, 1977):

$$r = \sqrt{4\alpha t} \quad (1)$$

where  $t$  is the time when enthalpy changes due to the presence of the discontinuity and  $\alpha$  is the hydraulic diffusivity. The hydraulic diffusivity for two-phase mixtures is given by Grant and Sorey (1979). It can be estimated from pressure transient data, although such estimates are generally not very accurate (Sorey et al., 1980). We have also found that applying equation (1) to the simulated data gives only a very coarse estimate of the radial distance to the discontinuity.

#### Constant Pressure Production

In the last section a constant flow rate is assumed, but in most cases geothermal wells are produced at constant downhole pressure. Here we neglect the effects of enthalpy variations on the downhole pressure. In order to model constant pressure production a deliverability model is used, where the flow rate ( $q_t$ ) at any time is calculated based upon the productivity index PI and the bottomhole pressure  $P_{wb}$ :

$$q_t = \sum_{\beta = \text{liquid, vapor}} \frac{k_{r\beta}}{\mu_{\beta}} \cdot \rho_{\beta} \cdot PI \cdot (p_{\beta} - p_{wb}) \quad (2)$$

Here  $k_{r\beta}$  is the relative permeability of the  $\beta$  phase,  $\mu_{\beta}$  is its dynamic viscosity and  $\rho_{\beta}$  the density.  $p_{\beta}$  is the pressure in the well element. In the simulations the values used for the bottomhole pressure and the productivity index are 35 bars and  $4 \times 10^{-14} \text{ m}^3$ , respectively.

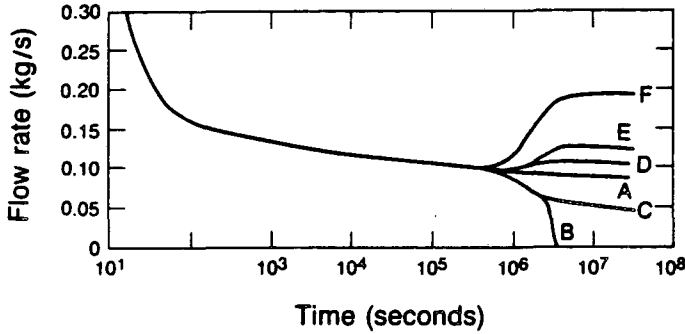


Figure 5. Constant pressure production. Flow rate variations with time for the different cases.

The same cases are simulated as those modeled using the constant flow rate (Table 2), except for case G. The results are shown in Figures 5-8. Because of the constant downhole pressure, the flow rate will initially be high and then decline with time. The high initial flow rate results in early peaks in vapor saturation and enthalpy, but then both gradually decline due to the decreasing flow rates (Figures 7 and 8). The enthalpy never quite stabilizes as in the case with constant rate production (Figure 4).

When one compares the results for the different cases it is interesting to note that the well element pressure is practically identical for all cases with the exception of the two extreme cases (no-flux and constant pressure boundary). In the closed boundary case (case B), the pressure falls to the well bottomhole pressure (35 bars) soon after the effects of the boundary are felt, and the flow rate falls to zero. In the constant pressure boundary case, the flow rate drastically increases when the boundary is felt and the vapor saturation decreases (low enthalpy inflow from the boundary). The enthalpy declines steeply as for the constant rate case and stabilizes at the value of the recharge enthalpy from the boundary. For all other cases (cases C, D and E) the results are similar to those obtained using the constant rate production except that stable enthalpy values are never reached.

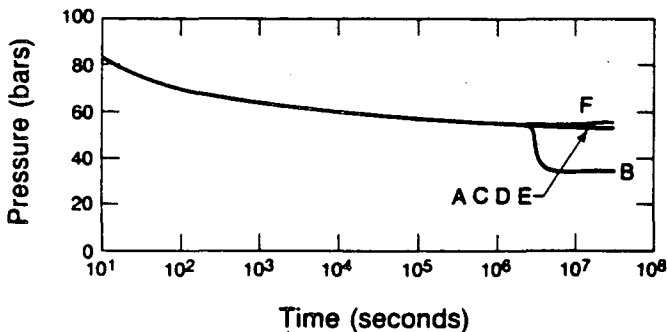


Figure 6. Constant pressure production. Pressure variations with time for the different cases.

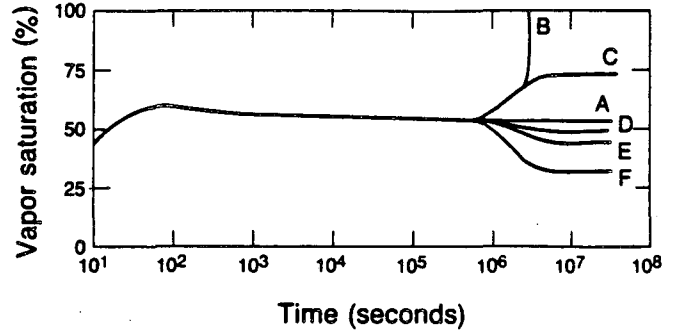


Figure 7. Constant pressure production. Vapor saturation variations with time for the different cases.

CO<sub>2</sub> Transients

In the simulations with CO<sub>2</sub>, a partial pressure of CO<sub>2</sub> of 10 bars is assumed; this corresponds to approximately 0.008% CO<sub>2</sub> per mass, which is the estimated CO<sub>2</sub> content of reservoir fluids at the Baca field, New Mexico (Pritchett et al., 1981). The production is again modeled using the deliverability model, but this time with a five-times greater productivity index ( $PI = 2 \times 10^{-13} \text{ m}^3$ ). The presence of CO<sub>2</sub> reduces greatly the rise in enthalpy of the produced fluids, so that the productivity index is increased in order to obtain a reasonable rise in enthalpy. Again the same cases as those listed in Table 2 are simulated (with the exception of case G). The computed flow rates, enthalpies and CO<sub>2</sub> content of the produced fluids are given in Figures 9-11. In general the figures show much smaller variations in enthalpy and flow rates between cases than when no gas is present (Figures 5-8). The presence of the gas compresses changes in enthalpy which in turn result in smaller mobility changes and consequently smaller flow rate changes. In general, the enthalpy and flow rate transients for the different cases are consistent with those obtained without the gas.

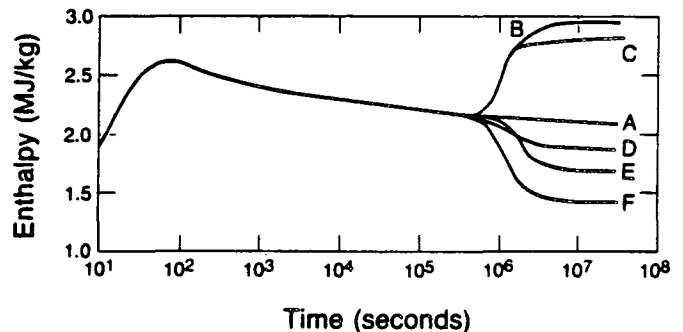


Figure 8. Constant pressure production. Enthalpy variations with time for the different cases.

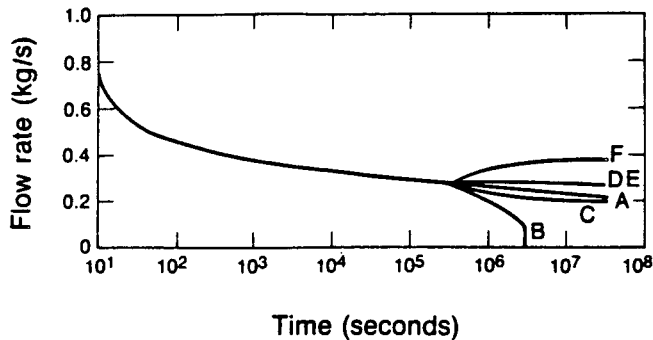


Figure 9. Constant pressure production with CO<sub>2</sub>. Flow rate variations with time for the different cases.

Figure 11 shows that for the base case stable CO<sub>2</sub> content exceeds that in-situ; the rise in the CO<sub>2</sub> content is 0.5 percent. In case of the closed reservoir (case B) the CO<sub>2</sub> content goes to zero when the vapor saturation approaches unity. On the other hand, the CO<sub>2</sub> content increases greatly when the effects of the higher vapor saturation in the outer zone are felt (case C). In this case the stable CO<sub>2</sub> content increases 1.1% for only a 0.1 change in the initial vapor saturation. This is due to the low solubility of CO<sub>2</sub> in the liquid phase; most of the CO<sub>2</sub> is in the gas phase. Also of interest is the fact that the stable CO<sub>2</sub> content does not significantly depend upon the porosity and permeability of the medium. This is consistent with results of O'Sullivan et al. (1983). Theoretically this implies that careful monitoring of enthalpy and CO<sub>2</sub> content of the produced fluids can help identify radial vapor saturation changes or changes in hydrologic parameters. If the enthalpy changes, but the CO<sub>2</sub> content remains the same, spatial variations in the hydrologic parameters may be the cause. However, if the CO<sub>2</sub> content also changes, this would imply spatial changes in vapor saturation.

Field Data

Reliable enthalpy and CO<sub>2</sub> transient data from two-phase reservoirs is scarce. Probably, the best data available are those from well BR-21 at

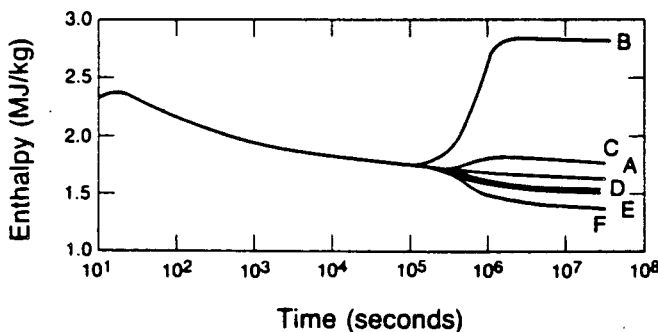


Figure 10. Constant pressure production with CO<sub>2</sub>. Enthalpy variations with time for the different cases.

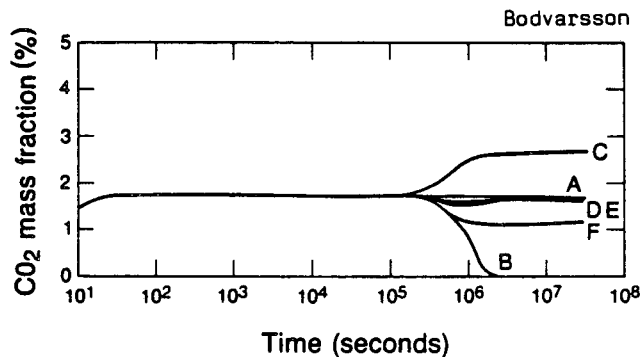


Figure 11. Constant pressure production with CO<sub>2</sub>. CO<sub>2</sub> content variations with time for the different cases.

Brooklands, New Zealand (Grant and Glover, 1984). Figure 12 shows the downhole pressure, enthalpy and CO<sub>2</sub> data for one period of the test; the flow rate is kept constant during this period. The enthalpy transients occur at rather late time, which may indicate fracture effects (Grant and Glover, 1984). The figure also shows an apparent radial change in vapor saturation, starting at approximately 7000 minutes. This causes an additional rise in both enthalpy and CO<sub>2</sub> content of the produced fluids. The pressure decline also increases due to the lower mobility of the reservoir fluids at higher vapor saturation. Note that the changes in enthalpy cannot be explained by changes in hydrologic parameters because the CO<sub>2</sub> content also changes.

A coarse estimate of the radial distance to the discontinuity in vapor saturation can be made using the data shown in Figure 12. Assuming zero skin, one can estimate the hydraulic diffusivity,  $\alpha$ , from the zero drawdown intercept of the pressure transient data. This yields a value of  $\alpha = 4 \times 10^4 \text{ m}^2/\text{s}$ , which is reasonable for a 260°C feed. Then using the transition time ( $t = 7000 \text{ minutes}$ ) and equation 1, the radius to the discontinuity of 13 meters can be calculated.

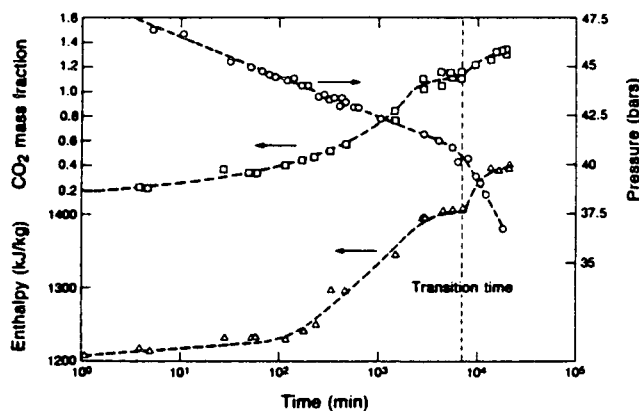


Figure 12. Downhole pressure, CO<sub>2</sub> content and enthalpy variations with time for well BR-21 (from Grant and Glover, 1984).



Bodvarsson

Note that in the absence of enthalpy and CO<sub>2</sub> transient data we would probably interpret the changing slope in the pressure transient data in terms of a barrier boundary. However, no such boundaries are present in earlier flow test data (Grant and Glover, 1984).

### Conclusions

From the numerical simulation studies the following conclusions can be made:

1. Radial variations in hydrologic parameters and vapor saturation have large effects on the enthalpy of the produced fluids.
2. The near-well porosity and vapor saturation have strong effects on the rise in flowing enthalpy, but the long-term stable enthalpy is independent of both.
3. The enthalpy transients for a well produced at a constant bottomhole pressure show a sharp initial rise due to high flow rates, but a gradual decline thereafter. This is consistent with data from many geothermal wells.
4. Radial variations in hydrologic parameters cause rapid changes in flow rates for wells produced at constant pressure. Most of the flow rate changes are due to mobility effects.
5. Radial variations in vapor (gas) saturation have large effects on the CO<sub>2</sub> content of produced fluids, but it is unaffected by variations in permeability and porosity.
6. Careful monitoring of both enthalpy and CO<sub>2</sub> content of produced fluids may help determine the extent of two phase zones and variations in hydrologic parameters.

### Acknowledgement

The author thanks M. J. Lippmann and K. Pruess for critical review of this manuscript. This work was supported by the Assistant Secretary for Conservation and Renewable Energy, Office of Renewable Energy, Division of Geothermal and Hydropower Technologies of the U. S. Department of Energy under Contract DE-AC03-76SF00098.

### References

- Bodvarsson, G.S., O'Sullivan, M.J., and Tsang, C.F., 1980, The sensitivity of geothermal reservoir behavior to relative permeability parameters, Proceedings of the 6th Workshop on Geothermal Reservoir Engineering, Stanford University, Stanford, California, P. 224-237.
- Bodvarsson, G.S., Pruess, K., Stefansson, V., and Eliasson, E.T., 1984, The Krafla geothermal field, 2. The natural state of the reservoir: To be published in Water Resources Research.
- Earlougher, Jr., R.C., 1977, Advances in Well Test Analysis, Society of Petroleum Engineers, Monograph 5.
- Grant, M.A., 1979, "Water Content of the Kawah Kamojang Geothermal Reservoir", Geothermics, 8, 21-30.
- Grant, M. A., and Glover, R. B., 1984, Two-phase heat and mass transfer experiment at well BR-21, Broadlands, to be published in Geothermics.
- Grant, M.A., and Sorey, M.L. 1979, "The Compressibility and Hydraulic Diffusivity of Water-Steam Flows," Water Resources Research, vol. 15, no. 3, p. 684-686.
- O'Sullivan, M.J., 1981, "A Similarity Method for Geothermal Well Test Analysis", Water Resour. Res., 17(2), 390-398.
- O'Sullivan, M.J., Bodvarsson, G.S., Pruess, K., and Blakeley, M.R., 1983, "Fluid and heat flow in gas-rich geothermal reservoirs", SPE-12102, paper presented at the 58th Annual Meeting of the Society of Petroleum Engineers, San Francisco, CA. Oct 5-8, 1983.
- Pritchett, J.W., Rice, M.H., and Riney, T.D., 1981, "Equation-of-State for Water-Carbon Dioxide Mixtures: Implications for Baca Reservoir", Report prepared by Systems, Science and Software, La Jolla, California.
- Pruess, K., 1982, Development of the general purpose simulator MULKOM, Annual report, Earth Sciences Division, Lawrence Berkeley Laboratory Berkeley, CA.
- Pruess, K., Bodvarsson, G.S. and Stefansson, V., 1983, Analysis of production data from the Krafla geothermal field, Iceland, Proceedings Ninth Annual Workshop on Geothermal Reservoir Engineering, Stanford University, Stanford CA., Dec. 13-15, 1983 (in press).
- Sorey, M.L., Grant, M.A., and Bradford, E., 1980, Nonlinear effects in two-phase flow to wells in geothermal reservoirs, Water Resources Research, vol. 16, no. 4, 767-777.
- Stefansson, V., and Steingrimsso, B., 1980, "Production characteristics of wells tapping two-phase reservoirs at Krafla and Namafjall" Proceedings. 6th Workshop Geothermal Reservoir Engineering, Stanford University, Stanford California, SGP-TR-50, 49-59.

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DEPARTMENT  
LAWRENCE BERKELEY LABORATORY  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720