

Lawrence Berkeley National Laboratory

LBL Publications

Title

Laboratory Investigation of Low-Swirl Injectors Operating with Syngases

Permalink

<https://escholarship.org/uc/item/4vw320tn>

Authors

Cheng, R.K.
Littlejohn, D.
Noble, D.R.
[et al.](#)

Publication Date

2008-04-15

GT2008-51298

LABORATORY INVESTIGATIONS OF LOW-SWIRL INJECTORS OPERATING WITH SYNGASES

David Littlejohn & Robert K. Cheng
Environmental Energy Technology Div.
Lawrence Berkeley National Laboratory
Berkeley, CA

D. R Noble & Tim Lieuwen
School of Aerospace Engineering
Georgia Institute of Technology
Atlanta, GA

ABSTRACT

The low-swirl injector (LSI) is a lean premixed combustion technology that has the potential for adaptation to fuel-flexible gas turbines operating on a variety of fuels. The objective of this study is to gain a fundamental understanding of the effect of syngas on the LSI flame behavior, the emissions and the flowfield characteristics for its adaptation to the combustion turbines in IGCC clean coal power plants. The experiments were conducted in two facilities. Open laboratory flames generated by a full size (6.35 cm) LSI were used to investigate the lean-blow off limits, emissions, and the flowfield characteristics. Verification of syngas operation at elevated temperatures and pressures were performed with a reduced scale (2.54 cm) LSI in a small pressurized combustion channel. The results show that the basic LSI design is amenable to burning syngases with up to 60% H₂. Syngases with high H₂ concentration have lower lean blow-off limits. From PIV measurements, the flowfield similarity behavior and the turbulent flame speeds of syngases flames are consistent with those observed in hydrocarbon and pure or diluted hydrogen flames. The NO_x emissions from syngas flames show log-linear dependency on the adiabatic flame temperature and are comparable to those reported for the gaseous fuels reported previously. Successful firing of the reduced-scale LSI at 330 < T < 446° F and 8 atm verified the operability of this concept at gas turbine conditions.

INTRODUCTION

The objective of our research is to adapt the low-swirl injector (LSI) concept to the combustion turbines in FutureGen power plant that burn syngases derived from gasification of coal. The low-swirl injector operates on a novel dry-low-NO_x

lean premixed combustion method that has been commercialized for industrial heaters. For gas turbines low-swirl injectors have been developed for natural-gas engines of 5 – 7 MW in partnership with Solar Turbines of California and for microturbines of 100 kW in partnership with Elliott Energy Systems of Florida [1, 2].

To verify the feasibility of the low-swirl combustion concept for FutureGen combustion turbines, our previous study reported atmospheric laboratory experiments that demonstrate the LSI operating with H₂ and diluted H₂ [3]. The velocity data obtained from particle image velocimetry (PIV) showed that the overall flowfield features of the H₂ flames are not significantly different than those of the hydrocarbon flames. The turbulent flame speeds of the H₂ flames correlate linearly with turbulence intensity, u' . The value of the turbulent flame speed correlation constant is about 50% higher than the constant determined for the hydrocarbon flames. Comparison of the mean and rms velocity profiles show that the nearfields of the H₂ flames exhibit self-similarity features that are similar to those found in hydrocarbon flames. Therefore, the LSI mechanism is not sensitive to the differences in the hydrocarbons and H₂ flame properties. These results show that the LSI concept is amenable to burning of H₂.

This paper reports a study of LSI operation with syngases. The syngases derived from gasification of coal generally consist of a blend of H₂ and CO, CO₂, CH₄ and other diluents such as N₂ and steam. The concentration of each constituent varies depending on the type of coal that is being gasified and the heat content of the syngases is generally lower than natural gas. Our previous studies showed that the LSI can deliver < 5 ppm NO_x (@ 15% O₂) performance while burning fuels of a wide range of heating contents [2-5]. This can be explained by invoking an analytical model that describes the coupling of the self-similar

features of the LSI nearfield to the turbulent flame speed. Additionally, these studies showed that lean blow-off limits are insensitive to bulk flow velocity, U_0 and the NO_x emissions from atmospheric LSI flames have log-linear dependency on the adiabatic flame temperature, T_{ad} . The feasibility of operating the LSI with syngases has already been demonstrated in a study by Sequera & Agrawal [6]. The goal of this paper is to conduct laboratory experiments at atmospheric pressure to determine the lean blow-off and obtain more NO_x emissions from syngases to verify the log-linear dependency. Velocity statistics obtained by PIV were used to determine if the analytical model also applies to syngas operation. These were followed by verification of LSI operation at high temperatures and pressures using a reduced scale prototype.

NOMENCLATURE

$a_x = \frac{dU/dx}{U_0}$	normalized axial flow divergence (1/mm)
$a_r = \frac{dV/dr}{U_0}$	normalized radial flow divergence (1/mm)
L_i	swirler recess distance
$m = m_c/m_s$	mass flux ratio
m_c	mass flux through center channel
m_s	mass flux through swirl annulus
q'	2D turbulent kinetic energy = $\frac{1}{2}(u'^2 + v'^2)^{1/2}$
Re	Reynolds number $2R_i U_0/\nu$
$R = R_c/R_i$	ratio of the center channel radius, R_c to injector radius, R_i
r	radial distance
S	swirl number
S_L	laminar flame speed
S_T	turbulent flame speed
T_{ad}	adiabatic flame temperature
U_0	bulk flow velocity
U	axial velocity
u'	axial rms velocity
v'	radial rms velocity
uv	shear stress
x	axial distance from injector exit
x_f	leading edge position of the flame brush
x_o	virtual origin of divergent flow

BACKGROUND

The LSI is based on an aerodynamic flame stabilization method that utilizes a divergent flow to sustain a freely propagating premixed turbulent flame [7]. The divergent flow is formed only when the swirl intensities are well below the critical vortex breakdown threshold. Linear decay of the axial velocity within the divergent flow allows the flame to settle where the local velocity is equal and opposite to the turbulent flame speed. Matching the flowfield velocities to the turbulent flame speed is therefore the critical design criterion.

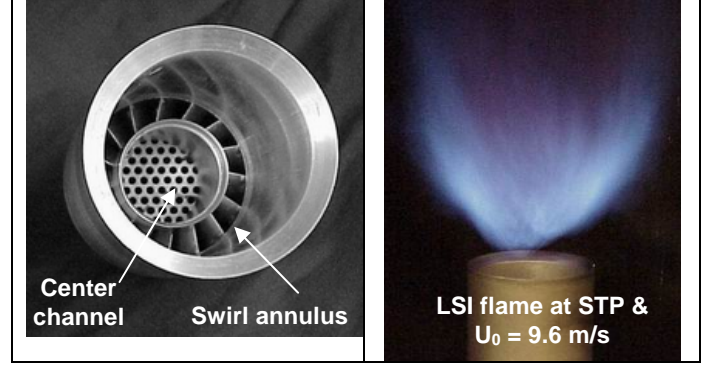


Fig. 1: The first prototype LSI for Taurus 70 engine

The key component of the LSI is a swirler that supplies the reactants through two passages: an outer annular region with swirl vanes and an open center-channel that allows a portion of the reactants to remain unswirled [8] (Fig. 1). The supply of unswirled reactants through its center is the unique feature of the LSI and its presence retards the formation of a central recirculation zone and promotes the formation of flow divergence. The flame is detached from the LSI. Its lift-off position is controlled by the divergence rate that can be adjusted by changing the flow split between the swirled and the unswirled flows. The most convenient means to change the flow split is by varying the blockage ratio of the perforated screen covering the center-channel.

The LSI of Fig 1 utilizes an annular vane swirler for Solar Turbine's T70 SoLoNO_x injector [1]. To convert the swirler from high-swirl to low-swirl operation, its center bluff body is removed and replaced by a perforated plate whose blockage ratio is selected to give a swirl number, S , of 0.4 to 0.55. The swirl number is defined as [8]

$$S = \frac{2}{3} \tan \alpha \frac{1 - R^3}{1 - R^2 + [m^2(1/R^2 - 1)^2]R^2} \quad \text{Eq. (1)}$$

where α is the vane angle and $R = R_c/R_i$. $m = m_c/m_s$ where m_c and m_s are respectively the mass fluxes of the unswirled and the swirled flows, and m is inversely proportional to the blockage ratio of the perforated plate. The SoLoNO_x swirler has an internal radius of 3.175 cm and consists of sixteen curved vanes with a discharge angle $\alpha = 40^\circ$. The center-channel to injector radius R is 0.63. As reported in Nazeer et. al. [2] a fully functional LSI has been developed. Test results showed that the LSI meet all the operational and performance requirements of the T70 engine.

The scientific foundation obtained for the LSI has provided useful insights for its adaptation to gas turbines (e.g. [9-14]). Analyses of the velocity measurements show that the LSI nearfield exhibits self-similarity behavior. Two parameters deduced from the centerline velocity profiles are invoked to characterize self-similarity [4, 5]. They are the virtual origin of the divergent flow, x_o , and the non-dimensional axial aerodynamic stretch rate, a_x . To characterize the flame, the local turbulent flame speeds, S_T , and the position of the leading edge of the flame brush, x_f , are used. Analysis of S_T shows a linear

dependency on turbulence intensity, u' . An analytical equation (Eq. 2) for the velocity balance at x_f , shows that a coupling of the self-similar flowfield and a linear turbulent flame speed correlations with u' is the reason why the LSI flame remains stationary through a wide range of velocities and fuel air equivalence ratios, ϕ .

$$1 - \frac{dU}{dx} \frac{(x_f - x_o)}{U_o} = \frac{S_T}{U_o} = \frac{S_L}{U_o} + \frac{K u'}{U_o} \quad \text{Eq. (2)}$$

The two terms on the far RHS simply state that S_T for hydrocarbon flames increases linearly with u' above the baseline value of the laminar flame speed, S_L , at a slope of K . This slope is an empirical correlation constant derived from the experimental measurements¹. The first term of RHS tends to a small value at large bulk flow velocity U_o because the laminar flame speeds of typical hydrocarbon and hydrogen flames at the ultra-lean operating conditions of gas turbines are on the order of 0.2 to 0.3 m/s. The second term on RHS is a constant because turbulence in the center core of the LSI is controlled by the perforated plate and scales with U_o . On the left hand side, self-similar means that $a_x = dU/dx/U_o$ in the second term is constant. The main consequence is that for a given value of K the flame position $x_f - x_o$ has an asymptotic value at large U_o . Therefore, when S_L is held constant at a certain ϕ , significant flame shift, i.e. changes in x_f , occurs only at low velocities where U_o is in the same order as S_L . When $U_o \gg S_L$, changing stoichiometry and/or U_o do not generate significant flame shift.

Eq. 2 is a simple linear analytical expression that describes the relationship between the LSI flowfield and the turbulent flame properties. Because the aerodynamic stretch rate is proportional to the swirl number [8], this expression is a convenient top order model to show how the LSI can be adjusted to accept different fuels.

EXPERIMENTAL APPARATUS & DIAGNOSTICS

The LSI referred to as LSI-LH1 in our previous study [3], was chosen for our atmospheric studies on syngas operation because it can accept fuels with high H_2 concentrations. It is 6.35 cm in diameter with a center-channel of 4 cm diameters. The swirler from Solar Turbines described earlier is recessed 9.5 cm from the exit. The center channel plate has variable hole sizes as shown in the insert of Fig. 2. By measuring the effective areas of the center channel covered by the plate and the swirl annulus, the ratio of the flows through the unswirled and the swirled passages m is 0.39 to give a swirl number of $S = 0.51$. The LSI was mounted vertically on top of a cylindrical settling chamber (Fig. 2). Air supplied by a fan blower entered at the side of a 25.4 cm diameter chamber and flowed into the LSI via a centrally placed 30 cm long straight feed-tube. To produce a uniform flow into the LSI, a perforated screen was placed 5 cm

upstream. The air flow rate was adjusted by a PC controlled valve and monitored by a turbine meter. Fuel was injected into a commercial venturi premixer to ensure a supply of homogeneous mixture to the injector. Both the fuel and the PIV seeder flows were controlled by electronic mass flow controllers and set according to a predetermined value of mixture compositions and ϕ . The fuel and air supply system had a maximum capacity of 65 g/s to deliver maximum bulk flow velocity $U_o = 22$ m/s.

Flowfield information on the open flames was obtained using Particle Imaging Velocimetry (PIV). The PIV system consists of a New Wave Solo PIV laser with double 120 mJ pulses at 532 nm and a Kodak/Red Lake ES 4.0 digital camera with 2048 by 2048 pixel resolution. The optics captured a field of view of approximately 13 cm by 13 cm covering the nearfield as well as the farfield of the flames with 0.065 mm/pixel resolution. A cyclone type particle seeder seeds the air flow with 0.6-0.8 μm Al_2O_3 particles which should track velocity fluctuations up to 10kHz [16].

Data acquisition and analysis were performed using software developed by Wernet [17]. Because of the complex and 3D nature of the swirling flow-field, care had to be taken to optimize interframe timing, camera aperture setting, light-sheet thickness, and seed density to ensure high data fidelity. Using a portion of the light sheet with approximately 1.1 mm thickness (away from the 0.3 mm waist produced by the 450 mm spherical lens) and a short interframe time (25 μs) helped to

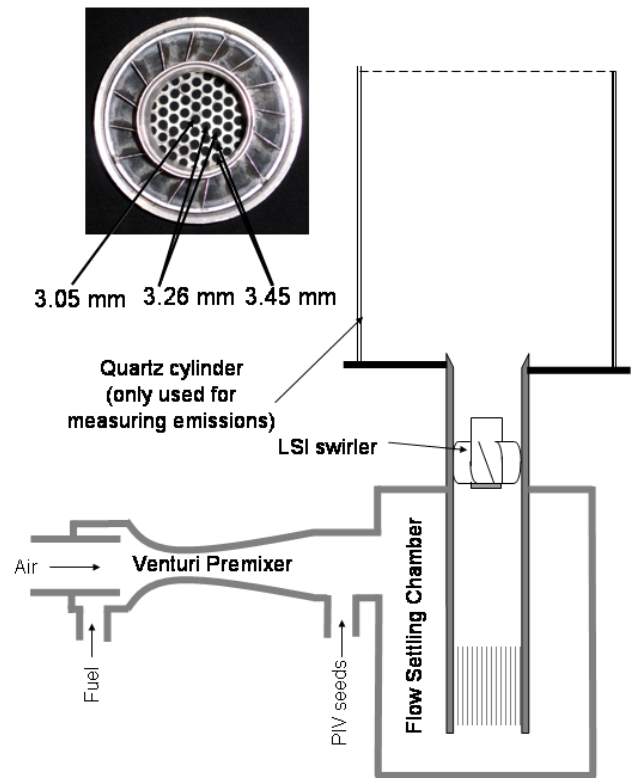


Fig 2 Schematics of the LSI setup for atmospheric laboratory studies

¹ Linear dependency of S_T on u' is not universal as S_T in other burners tends to be non-linear and shows "bending" 15. Lipatnikov, A.N. and J. Chomiak, *Turbulent flame speed and thickness: phenomenology, evaluation, and application in multi-dimensional simulations*. Progress in Energy and Combustion Science, 2002. 28(1): p. 1-74.

freeze the out-of-plane motion of seed particles. Sets of 224 image pairs were recorded for each experiment corresponding to minimum criterion required to produce stable mean and rms velocities. The PIV data were processed using 64x64 pixel cross-correlation interrogation regions with 25% overlap. This rendered a spatial resolution of approximately 2 mm. The velocity statistics were checked to ensure that significant spatial bias or “peak-locking” was not taking place.

The NO_x and CO emissions from the syngas flames were measured by enclosing the flame in a 30 cm long quartz cylinder of 20 cm in diameter (Fig. 2) to prevent the entrainment of ambient air into the combustion products. A water cooled sampling probe was placed at the center of the quartz tube at the exit. The samples were dried by a dessicant before being analyzed by a Horiba PG-250 analyzer that was calibrated using 7.9 ppm NO in nitrogen and 31.8 ppm CO in nitrogen (Scott Specialty Gases). The instrument has an accuracy of ± 0.5 ppm for NO_x measurements.

Tests of the LSI syngas operations at gas turbine conditions were performed in an optically accessible pressurized combustor. The facility uses a 7.6 cm diameter quartz tube to simulate the combustor casing. Therefore, it can only accommodate a reduced scale LSI. The LSI chosen for these pressurized tests is based on the design of Hwang et. al. [18]. It has a diameter of 2.54 cm with a swirler with a R = 0.55 center-channel and 8 straight blades at α = 45°. Hwang et. al. operated this reduced scale LSI at 1 to 5 atm but at a relatively low bulk flow velocity of 3 m/s. To configure the LSI for velocities > 25 m/s, laboratory atmospheric pressure tests were performed to select the perforated plate that will give an optimum flame positions and lean blow-off. The LSI configured with this process has a swirl number of 0.425.

RESULTS

Table I – Syngas compositions and conditions for the PIV experiments

Name	Composition	φ	T _{ad} (K)	S _L (m/s)
SG1	0.2 H ₂ – 0.4 CO – 0.4 CH ₄	0.52	1591	0.14
		0.58	1708	0.18
SG2	0.3 H ₂ – 0.4 CO – 0.4 CO ₂	0.55	1575	0.14
		0.64	1698	0.22
SG3	0.6 H ₂ – 0.4 CO	0.45	1586	0.22
		0.5	1696	0.29

Atmospheric Pressure Experiments

The compositions of the three simulated syngases chosen for the atmospheric pressure laboratory studies are listed in Table I. They represent the syngases generated by various gasification processes. The laminar flame speeds are determined from the PREMIX module of CHEMKIN, using GRI 3.0.

To start, lean blow-off limits for the three syngases were determined at bulk flow velocities of 7 < U₀ < 20 m/s. The

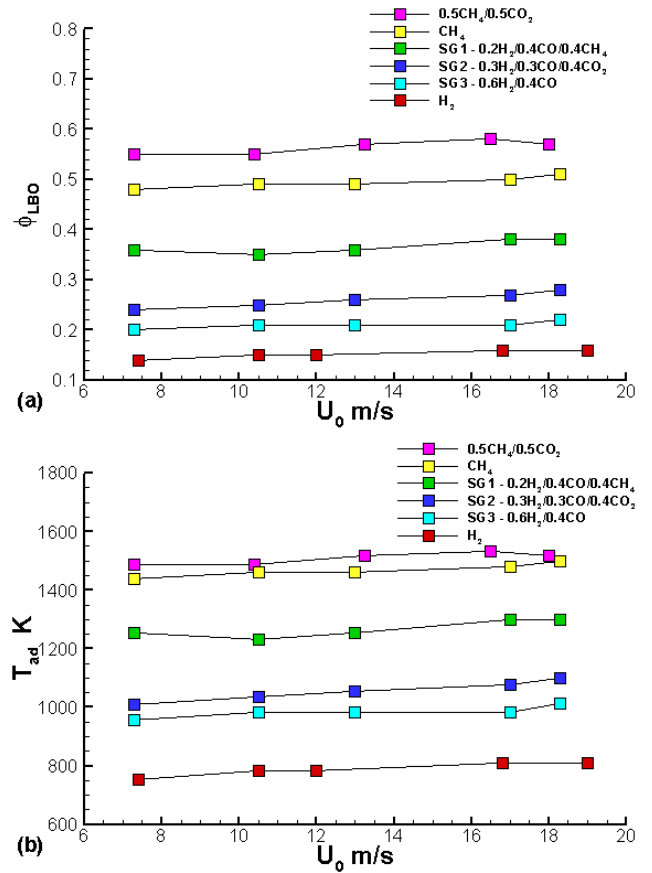


Fig. 3 Lean-blow off limits determined for simulated dry syngases, CH₄ and H₂

results are shown in Fig. 3 together with the blow-off limits obtained previously for CH₄, diluted CH₄ and H₂. From Fig. 3, it is clear that the lean blow-off limits of the syngases have the same trend as all the other fuels in that they are relatively insensitive to the bulk flow velocity U₀. The equivalence ratio, φ, and the adiabatic flame temperature, T_{ad}, at which blow-off occurs decrease with increasing H₂ concentration and provide more evidence to show that the addition of H₂ promotes flammability. A comparison of the lean blowoffs for SG1 and SG2 illustrates the effectiveness of H₂ addition. SG1 has a higher heat content and 10% less H₂ than SG2. But SG2 blows off at T_{ad} of about 100K lower than SG1.

The NO_x and CO emissions from the syngas flames are shown in Fig. 4. These measurements were made with the air supplied to the LSI at 27 g/s (U₀ ≈ 10 m/s). In Fig. 4a, the NO_x emissions from syngas flames are shown to be consistent with those from the hydrocarbon flames at STP and at gas turbine conditions [1, 4, 5]. This is the same conclusion from an earlier study by Sequera and Agrawal [6]. Due to the high flammability of the syngases, the flames burn at low T_{ad} where NO_x can be < 1 ppm (@ 15% O₂). Though the uncertainties of the emissions data at these conditions are relatively high (± 0.5 ppm) the NO_x

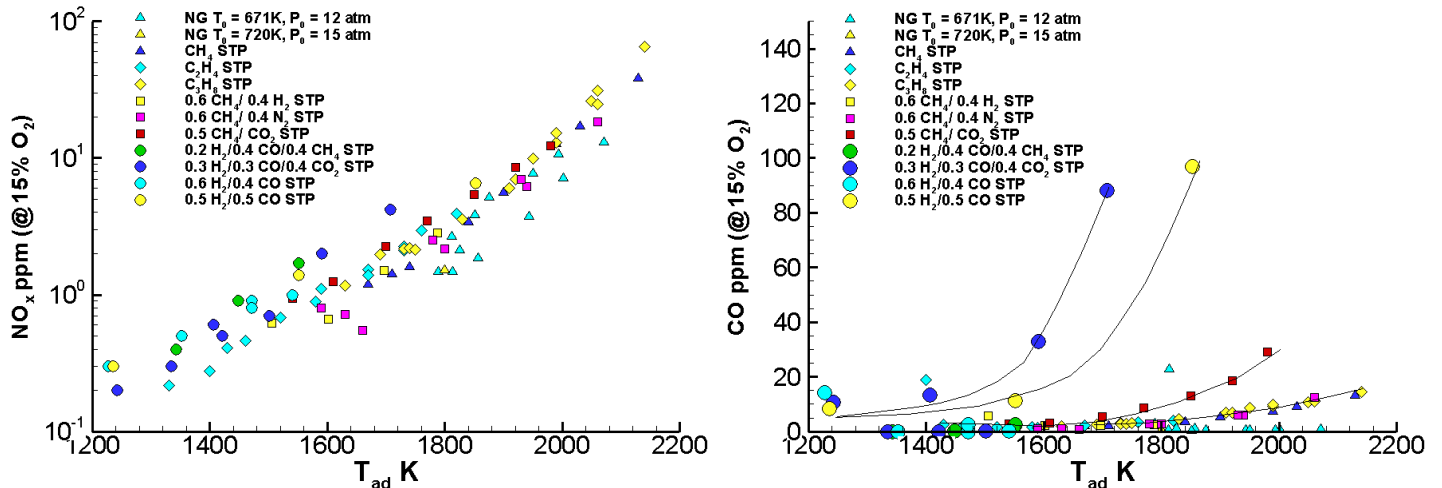


Fig. 4 NO_x and CO emissions of LSI fueled with syngases compared with results from other LSI tests with hydrocarbons and hydrogen at laboratory and gas turbine conditions.

data from syngases provide more evidence to support the log-linear dependency of LSI NO_x on T_{ad}.

The CO emissions shown in Fig. 4(b) are mostly below 20 ppm. The exceptions are for SG1 and a fuel with 0.5 H₂ / 0.5 CO at 1500 < T_{ad} < 1900K. These modest increases in CO concentrations do not seem to correspond to the CO concentrations in the fuels. But their trends (i.e. CO decreasing with decreasing T_{ad} and φ) are consistent with insufficient residence time for CO burnout to occur. In their study of LSI firing with syngases Sequera & Agrawal [6] reported NO_x and CO concentrations at different locations downstream of the flame. They found that the CO concentrations just downstream of syngas flames with the same T_{ad} can differ by almost an order of magnitude. But with sufficient residence time for burnout to occur, their CO concentrations are compatible at the enclosure exit. Therefore, the differences shown in Fig. 4(b) may be attributed to the short residence time of our experiments (about

10 msec) compared to the Sequera & Agrawal experiments (about 30 msec).

Table I also lists the mixtures used for the PIV experiments. The reactant compositions were set at the conditions corresponding to T_{ad} ≈ 1600 and 1700K. For each mixture, PIV measurements were made at three bulk flow velocity U₀ = 10, 14 and 18 m/s.

Shown in Fig. 5 are the normalized mean velocity vectors for the flames at U₀ = 14 m/s and T_{ad} ≈ 1600K. It can be seen that the overall features of the flowfields are not significantly different. In the nearfield (x/D < 0.5) the divergent nature of the flow is shown by the outward pointing vectors. The flow discharge angles (outlined by the blue and red contours of high shear stress region of the outer mixing layers) of the three cases are also quite similar. The main differences are shown in the farfield where the SG1 and SG2 flames generated small central recirculation zones while the SG3 flame did not generate

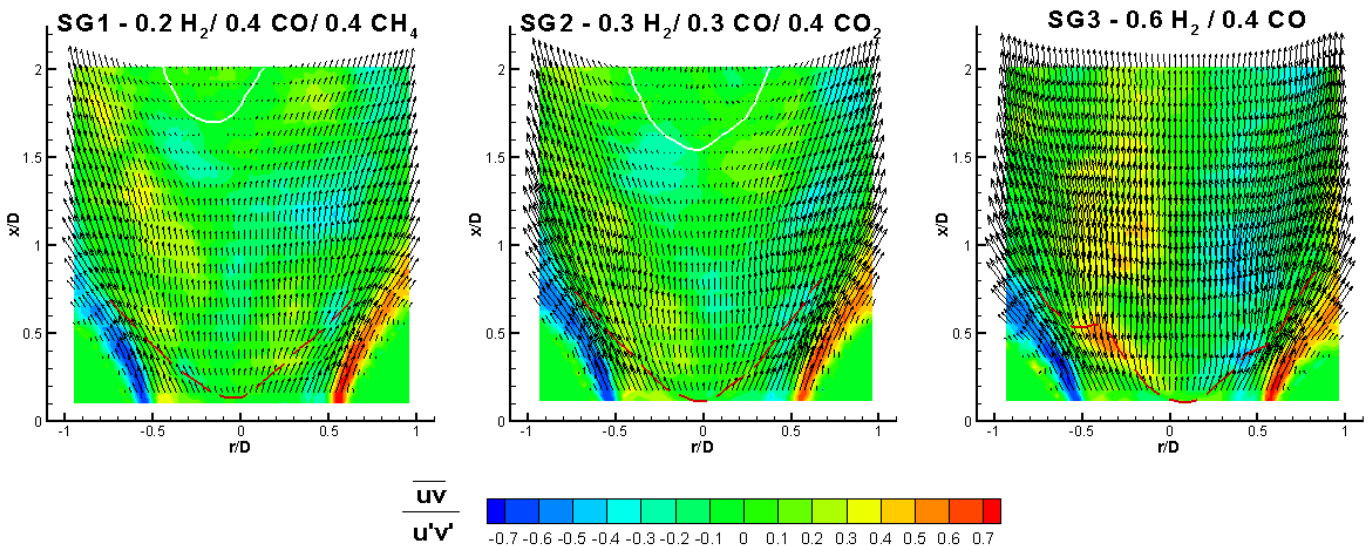


Fig 5 Normalized velocity vectors for syngas flames at U₀ = 14 m/s and T_{ad} ≈ 1700K Red dashed lines mark the leading edges of the flame brushes

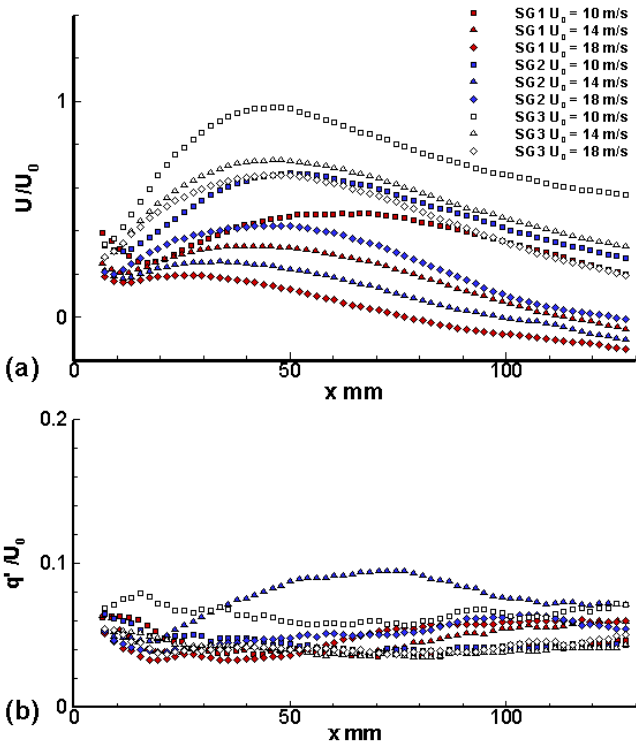


Fig. 6 Centerline profiles from the syngas flames with $T_{ad} \approx 1600K$

recirculation. The reason for the difference may be explained by the differences in their flame dynamics. In premixed turbulent flames, heat release through the thin reaction zone is accompanied by a sharp increase in the flow velocity [19]. This velocity jump, Δu , can be estimated by $\Delta u = S_L(\tau - 1)$ where τ is the expansion ratio T_{ad}/T_0 . For the three flames in Fig. 5, their τ values are the same but their S_L are not. From Table I, it can be seen that Δu in the SG3 flame is about 50% higher. The consequence of the larger velocity jumps across the flame fronts is evident by comparing the lengths of the velocity vectors at $x/D > 0.5$. Due to the higher axial momentum generated in the products region of SG3 the central recirculation is not formed as all the velocity vectors leaving the upper boundary of the PIV domain are positive. These results demonstrate that the farfield features of the LSI are coupled to the flame/turbulence interactions at the flame fronts. The presence and absence of the central recirculation zone is an artifact of the dynamic processes associated with the interactions.

The centerline profiles for the syngas flames with $T_{ad} \approx 1600K$ are shown in Figure 6. Because these flame brushes are close to the LSI exit, only a very small portion of their nearfield linear velocity decay regions is shown (Fig. 6a). As a consequence, the parameters to characterize the nearfield region, i.e. the virtual origin, x_0 , of the divergent flow and normalized axial divergence rate, $a_x = \delta U / \delta x / U_0$ [4] cannot be determined from these data with a high degree of confidence. Therefore, these axial profiles can only be used to compare the velocity distribution downstream of the flame brush where the

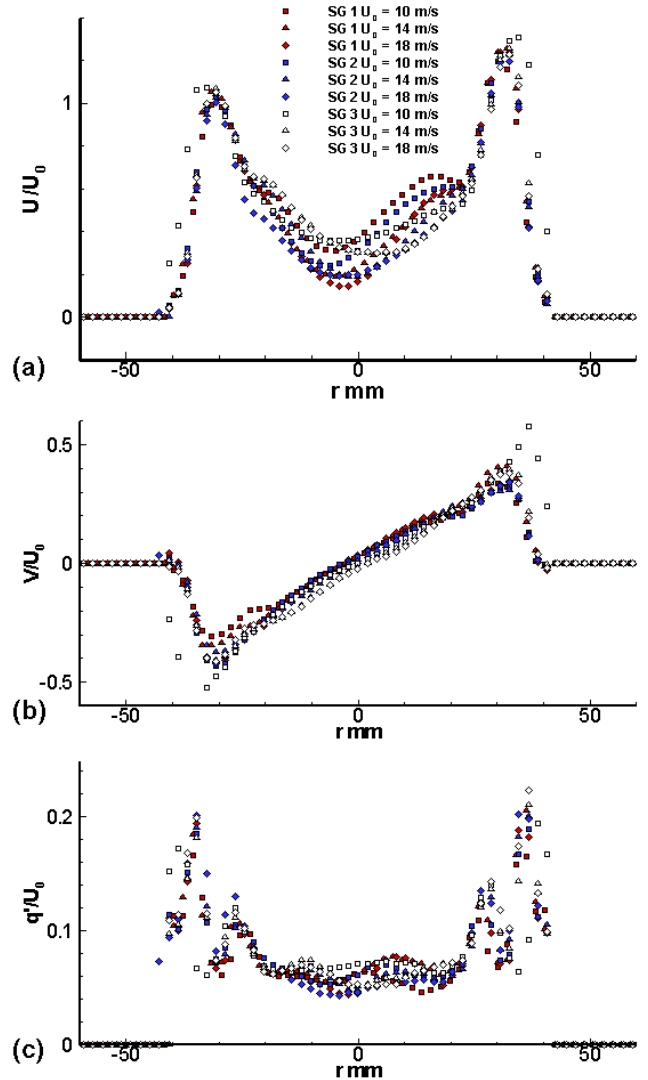


Fig. 7 Radial profiles (at $x = 10$ mm) from the syngas flames with $T_{ad} \approx 1600K$

flow accelerations associated with the higher Δu from the SG3 flames can be seen. Profiles of the normalized 2D turbulent kinetic energy, $q' = ((u'^2 + v'^2)^{1/2})/2$ of Fig 6(b) show that turbulence along the centerline remains relatively constant. This is same behavior observed in most other hydrocarbon flames.

Radial profiles for the syngas flames with $T_{ad} \approx 1600K$ are shown in Fig. 7. These profiles were extracted at $x = 10$ mm just below the flame brushes. Unlike the axial profiles, the radial profiles collapse onto consistent trends to show self-similar behavior. In Fig 7(a), the U/U_0 profiles have a central low velocity region that has a deficit corresponding to the non-swirling flow supplied through the center-channel. The central non-uniform distribution is a feature of this LSI that uses a perforated plate with varying hole size [3]. Variation in U/U_0 within the core regions corresponds to the scatter in U/U_0 as shown in Fig. 6 (a) at $x = 10$ mm. The two velocity peaks

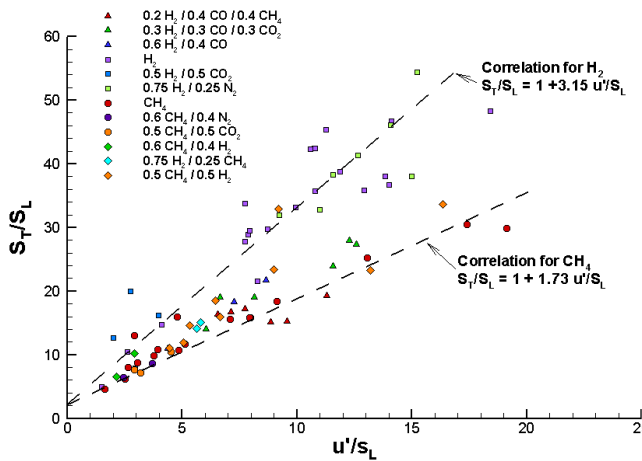


Fig. 8 Turbulent flame speed correlation for LSI flames firing with fuel blends consisting of H₂, CH₄, CO, N₂ and CO₂

flanking the central region correspond to the swirling flow. In Fig 7(b), the linear regions of the V/U_0 profiles within the center region ($-15 < r < 15$ mm) show that the normalized radial divergence rates $a_r = \delta V / \delta r / U_0$ are nearly the same for all cases and averaged about 0.012 mm^{-1} . In the absence of the normalized axial divergence rate data, the a_r data provide the evidence to show that the nearfields of the syngas flames are self-similar. However, the values of a_r are higher than those found in the hydrocarbon flames and seem to be a consequence of the close proximity of the flame brush to the LSI exit. The q'/U_0 profiles (Fig 7(c)) have relatively flat distributions in the center regions surrounded by intense turbulence peaks. These features are the same as those found in all other LSI flames.

The local turbulent flame speed, S_T at the LSI centerline is the basic turbulent flame property that explains the LSI stabilization mechanism because the freely propagating flame settles at the point within the center divergent flow region where the mean flow velocity is equal and opposite to S_T . From previous studies using low-swirl burners fitted with air-jets [9, 13], it has been shown that S_T/S_L correlates linearly with u'/S_L . More recent data from the CH₄/air LSI flames at $7 < U_0 < 22$ m/s [4] and from two 5.08 cm ID LSBs of $R = 0.8$ and 0.6 [8] give further support to this correlation.

The S_T for the syngas flames were also deduced from the current data set but because of the close proximity of the SG3 flames to the LSI exit, only three out of the six flames were deemed suitable for extracting reliable S_T information. Fig. 8 compares the S_T obtained for the fifteen syngas flames together with all previous S_T measurements from the LSI. This plot differs from previous S_T plots in two significant respects. First of all, it contains S_T data obtained only in the LSI where as previous plots include data from all other low-swirl burners. Second, recent S_L values for un-stretched laminar flames were used for the normalization [20]. The most significant change is the new S_L values at the ultra lean conditions are much higher

than the old. Due to this difference, the maximum values of S_T/S_L and u'/S_L for our data set are reduced. However, the adjustment does not change the linear increasing trend of S_T/S_L with u'/S_L or the correlation constant, K . The value of K for the methane/air flames generated by the LSI is 1.73. This is slightly lower than the value of 2.14 obtained by including the S_T data from all the other low-swirl burners. The correlation constant K of 3.15 for the H₂ flames is the same because only the LSI has been used for H₂ flame studies.

Fig 8 shows that the S_T of syngas flames are between those for methane and hydrogen and the results for each syngas exhibit linear dependencies on u' but with slight differences in their turbulent flame speed correlation constants. These trends show that the syngas turbulent flame speed behaves in ways that are consistent with previous conclusion. That is, the primary effect of H₂ addition is to increase the S_T correlation constant K . Based on the analytical model Eq (2), an increase in K implies a slight decrease in the flame brush position if the swirl number and the bulk flow velocity of the LSI are held constant. This is verified qualitatively by the lowered flame brush positions of the high H₂ content SG3 flames as mentioned above.

High Pressure Experiments

A series of tests were performed with CH₄ and H₂/CH₄ blends to verify the compatibility of the reduced-scale LSI with the pressurized combustor and to obtain baseline lean blow-off limits. The experimental conditions covered a nozzle exit velocity range of 20 to 40 m/s, temperatures at $450 < T < 505$ K and pressures at $1.5 < P < 14$ atm. The flame was monitored by a standard JVC camcorder at 30 fps and thermocouples mounted at various positions on the combustor and in the LSI. Although the lean blow-off limits of the reduced-scale LSI are consistent with those observed in other systems, the experience indicated that this LSI with straight swirler blades is not highly compatible with the pressurized combustor because the

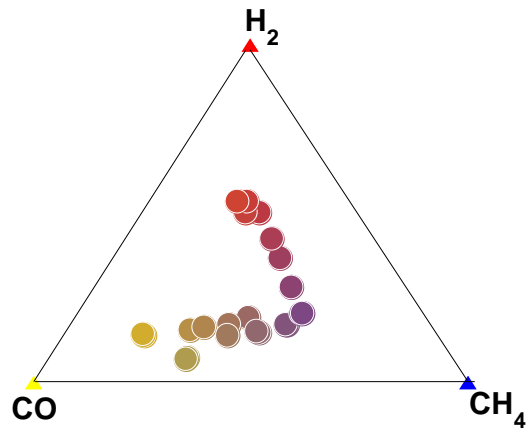


Fig 9 Syngas compositions evaluated at GIT's pressurized combustor


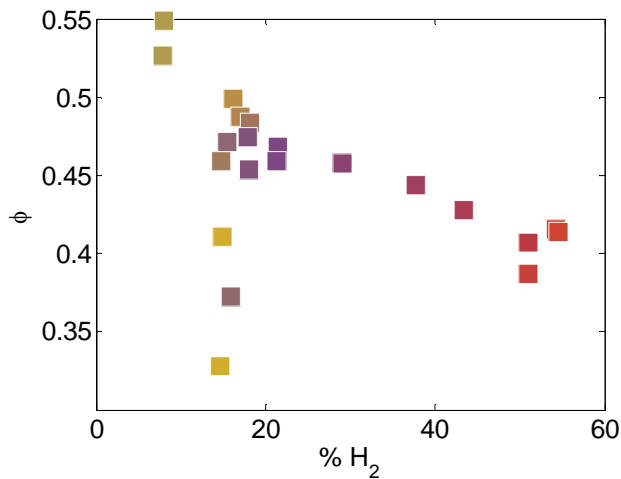


Fig 10 Equivalence ratios and adiabatic flame temperatures of the high pressured syngas experiments. Color code


optimum operating range is restricted to $U_0 < 20$ m/s. Therefore, the high pressure syngas experiments were mostly conducted at the low velocity range.

The compositions of the fuels tested at $450 \text{ F} < T < 505 \text{ K}$ and $P = 8 \text{ atm}$ are shown as circular dots in Fig. 9 where the corners of the triangle represent 100% concentration. The ranges of the concentrations for each component are $20\% < \text{H}_2 < 56\%$, $25\% < \text{CO} < 60\%$, $19\% < \text{CH}_4 < 51\%$. The equivalence ratios tested, shown in Fig. 10, varied from 0.3 to 0.55 corresponding to adiabatic flame temperatures of $1350\text{K} < T_{\text{ad}} < 1800\text{K}$. These experiments were performed by starting with a CH_4 flame and adding H_2 and CO into the fuel stream while the flame was lit.


Four representative images are shown in Fig. 11 to illustrate the flame shape as determined from a single video frame. Fig. 11 (a) shows a flame with low H_2 fuel concentration and it assumes a bowl shape similar to the open flame of Fig. 1. The flame is lifted from the LSI though it is not obvious from the camcorder image because the LSI exit is obscured by the lip of the mounting flange of the quartz liner. Fig 11 (b) shows one of the few syngas flames studied at higher velocity of 31 m/s. The shape and location of this lean $\phi = 0.28$ flame are not very different than the flame of Fig 11 (a). The flame in Fig. 11(c) is not very discernable due to the apparent increase in background luminosity by the camcorder's built-in auto-exposure feature that compensated for the reduction in luminosity of this flame burning a syngas with a higher 15% H_2 concentration. However, the region of high luminosity associated with the flame impingement on the quartz liner suggests that the position of the flame is relatively unaffected by the change in fuel composition. Fig. 11 (d) shows the image of a syngas flame with 51% H_2 that has very low luminosity. The useful information provided by this image is that significant flame shift does not seem to occur with the higher H_2 fuel concentration.

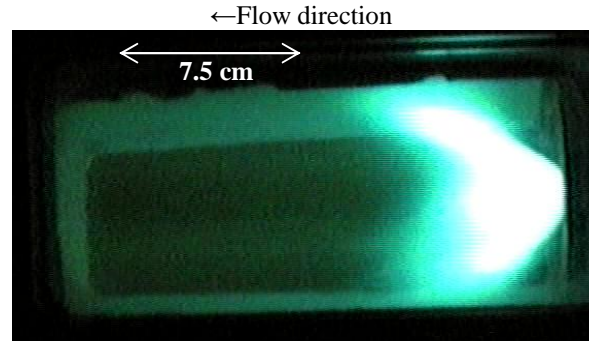


(a) 8% H_2 61% CO 31% CH_4 $\phi = 0.55$
 $T = 444\text{K}$ and $P = 7.9\text{atm}$, $U_0 = 17.0$ m/s

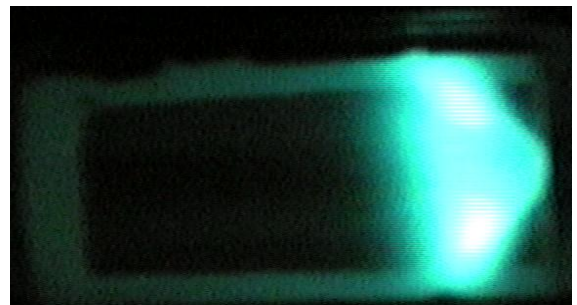

(b) 20% H_2 40% CO 40% CH_4 $\phi = 0.28$
 $T = 509 \text{ K}$ and $P = 7.8\text{atm}$, $U_0 = 31.8$ m/s,

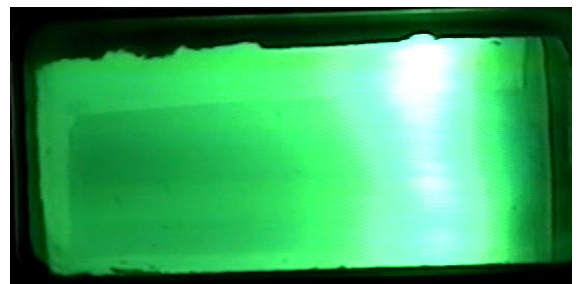

(c) 15% H_2 68% CO 17% CH_4 $\phi = 0.41$
 $T = 442\text{K}$ and $P = 7.87 \text{ atm}$, $U_0 = 16.87$ m/s

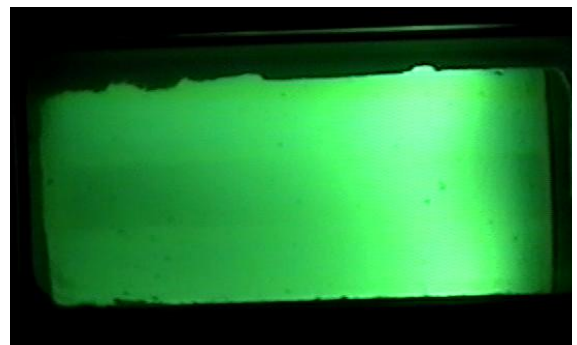

(d) 51% H_2 26% CO 23% CH_4 . $\phi = 0.39$
 $T = 442\text{K}$ and $P = 7.87\text{atm}$, $U_0 = 16.65$ m/s,

Fig 11 Luminosity images of syngas flames generated by a reduced scale LSI captured by a camcorder

These syngas flame images show that the flame position and to a lesser extent the flame shape are not significantly changed at high temperatures and pressures. Although the test conditions were limited, the range of the fuel compositions explored and the fact that the LSI can easily transition from one fuel composition to the next demonstrated the viability of this concept for syngases.

CONCLUSION

Open laboratory flames generated by a full size LSI (6.35 cm) were used to investigate the lean-blow off limits, emissions, and the flowfields characteristics. The results show that the basic LSI design is amenable to burning syngases with H₂ up to 60%. Syngases with high H₂ concentration have lower lean blow-off limits to show the effectiveness of H₂ addition to enhance flammability. The PIV measurements show that the overall features of the flowfields of the syngas flames are the same as those found in the hydrocarbon and the hydrogen flames. The nearfields show similarity behavior and the turbulent flame speeds correlate linearly with turbulence intensity u' . These results show that the analytical model developed for the LSI is also valid for syngases. The main implication is that the syngas flame positions changes with the H₂ concentration due to the increase in the turbulent flame speed correlation constant K. The NO_x emissions from syngas flames show log-linear dependency on the adiabatic flame temperature and are comparable to those reported for the gaseous fuels reported previously. Verification of syngas operation at elevated temperatures and pressures were performed with a reduced scale (2.54 cm) LSI in a small pressurized combustion channel. Successful firing of the reduced-scale LSI at 450 < T < 505 K and 8 atm verified the operability of this concept at gas turbine conditions.

ACKNOWLEDGMENTS

This work was supported by the US Dept. of Energy, Office of Fossil Energy under Contract No. DE-AC02-05CH11231.

REFERENCES

- Johnson, M.R., D. Littlejohn, W.A. Nazeer, K.O. Smith, and R.K. Cheng, *A Comparison of the Flowfields and Emissions of High-swirl Injectors and Low-swirl Injectors for Lean Premixed Gas Turbines*. Proc. Comb. Inst., 2005. **30**: p. 2867 - 2874.
- Nazeer, W.A., K.O. Smith, P. Sheppard, R.K. Cheng, and D. Littlejohn. *Full Scale Testing of a Low Swirl Fuel Injector Concept for Ultra-Low NO_x Gas Turbine Combustion Systems*. in *ASME Turbo Expo 2006: Power for Land, Sea and Air* Barcelona, Spain.
- Cheng, R.K. and D. Littlejohn, *Laboratory Study of Premixed H₂-Air & H₂-N₂-Air Flames in a Low-swirl Injector for Ultra-Low Emissions Gas Turbines*. Journal of Engineering for Gas Turbines and Power, 2008. **In press**: p. also ASME GT2007-27512.
- Cheng, R.K., D. Littlejohn, W.A. Nazeer, and K.O. Smith, *Laboratory Studies of the Flow Field Characteristics of Low-Swirl Injectors for Application to Fuel-Flexible Turbines*. Journal of Engineering for Gas Turbines and Power, 2008. **130**(2): p. 21501-21511.
- Littlejohn, D. and R.K. Cheng, *Fuel Effects on a Low-swirl Injector for Lean Premixed Gas Turbines*. Proc. Comb. Inst., 2007. **31**(2): p. 3155-3162.
- Sequera, D. and A.K. Agrawal. *Effects of Fuel Composition on Emissions from a Low-swirl Burner*. in *ASME Turbo Expo 2007*. Montreal, Canada.
- Chan, C.K., K.S. Lau, W.K. Chin, and R.K. Cheng, *Freely Propagating Open Premixed Turbulent Flames Stabilized by Swirl*. Proc. Comb. Inst., 1992. **24**: p. 511-518.
- Cheng, R.K., D.T. Yegian, M.M. Miyasato, G.S. Samuelsen, R. Pellizzari, P. Loftus, and C. Benson, *Scaling and Development of Low-Swirl Burners for Low-Emission Furnaces and Boilers*. Proc. Comb. Inst., 2000. **28**: p. 1305-1313.
- Bedat, B. and R.K. Cheng, *Experimental Study of Premixed Flames in Intense Isotropic Turbulence*. Combustion and Flame, 1995. **100**(3): p. 485-494.
- Cheng, R.K., *Velocity and Scalar Characteristics of Premixed Turbulent Flames Stabilized By Weak Swirl*. Combustion and Flame, 1995. **101**(1-2): p. 1-14.
- Plessing, T., C. Kortschik, M.S. Mansour, N. Peters, and R.K. Cheng, *Measurement of the Turbulent Burning Velocity and the Structure of Premixed Flames on a Low Swirl Burner*. Proc. Comb. Inst., 2000. **28**: p. 359-366.
- Shepherd, I.G. and R.K. Cheng, *The burning rate of premixed flames in moderate and intense turbulence*. Combustion and Flame, 2001. **127**(3): p. 2066-2075.
- Cheng, R.K., I.G. Shepherd, B. Bedat, and L. Talbot, *Premixed turbulent flame structures in moderate and intense isotropic turbulence*. Combustion Science and Technology, 2002. **174**(1): p. 29-59.
- Bell, J.B., M.S. Day, I.G. Shepherd, M.R. Johnson, R.K. Cheng, J.F. Grcar, V.E. Beckner, and M.J. Lijewski, *Numerical Simulation of a Laboratory-Scale Turbulent V-Flame*. Proc. Natl. Academy Sci. USA, 2005. **102**(29): p. 10006-10011.
- Lipatnikov, A.N. and J. Chomiak, *Turbulent flame speed and thickness: phenomenology, evaluation, and application in multi-dimensional simulations*. Progress in Energy and Combustion Science, 2002. **28**(1): p. 1-74.
- Mellings, A., *Tracer particles and seeding for particle image velocimetry*. Measurements Sci. & Tech., 1997. **8**: p. 1406-1416.
- Wernet, M.P. 'Fuzzy logic enhanced digital PIV processing software'. in *18th International Congress*

- on Instrumentation for Aerospace Simulation Facilities*. 1999. Toulouse, France.
18. Hwang, Y., A. Ratner, and B. Bethel. *Chamber Pressure Perturbation Coupling with a Swirl-Stabilized Lean Premixed Flame at Elevated Pressures*. in *5th U.S. Combustion Meeting*. 2007. San Diego: Western States Section of the Combustion Institute.
 19. Cheng, R.K., *Conditional Sampling of Turbulence Intensities and Reynolds Stress in Premixed Flames*. *Combustion Science and Technology*, 1984. **41**: p. 109.
 20. Jomaas, G., X.L. Zheng, D.L. Zhu, and C.K. Law, *Experimental determination of counterflow ignition temperatures and laminar flame speeds of C2-C3 hydrocarbons at atmospheric and elevated pressures*. *Proceedings of the Combustion Institute*, 2005. **30**(1): p. 193-200.