

# Lawrence Berkeley National Laboratory

## LBL Publications

### Title

Gas Flow in and out of a Nuclear Waste Container

### Permalink

<https://escholarship.org/uc/item/5b3086z5>

### Authors

Zwahlen, E D

Pigford, T H

Chambré, P L

et al.

### Publication Date

1989-05-01

### Copyright Information

This work is made available under the terms of a Creative Commons Attribution License, available at <https://creativecommons.org/licenses/by/4.0/>



# Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

## EARTH SCIENCES DIVISION

To be presented at the American Nuclear Society Winter Meeting,  
San Francisco, CA, November 26-30, 1989

### Gas Flow in and out of a Nuclear Waste Container

E.D. Zwahlen, T.H. Pigford, P.L. Chambré, and W.W.-L. Lee

May 1989



1 LOAN COPY 1  
1 Circulates 1  
1 for 2 weeks 1

Bldg. 50 Library.  
Copy 2

LBL-27225

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

## **Gas Flow in and out of a Nuclear Waste Container**

*E.D. Zwahlen, T.H. Pigford, P.L. Chambré, and W.W.-L. Lee*

Department of Nuclear Engineering  
University of California

and

Earth Sciences Division  
Lawrence Berkeley Laboratory  
1 Cyclotron Road  
Berkeley, California 94720

May 1989

This work was supported by the Director, Office of Civilian Radioactive Waste Management, Office of Systems Integration and Regulations, Licensing and Compliance Division, of the U.S. Department of Energy under Contract No. DE-AC03-76SF00098.

## **GAS FLOW IN AND OUT OF A NUCLEAR WASTE CONTAINER**

E.D. Zwahlen, T. H. Pigford, P. L. Chambré, and W. W.-L. Lee  
Department of Nuclear Engineering, University of California  
and

Lawrence Berkeley Laboratory, University of California, Berkeley, CA 94720

We analyze the flow of gases out of and into a high-level-waste container in the unsaturated tuff of Yucca Mountain. Containers are expected to fail eventually by localized cracks and penetrations. Even though the penetrations may be small, argon gas initially in the hot container can leak out. As the waste package cools, the pressure inside the container can become less than atmospheric, and air can leak in.  $^{14}\text{C}$  released from the hot fuel-cladding surface can leak out of penetrations, and air inleakage can mobilize additional  $^{14}\text{C}$  and other volatile radioactive species as it oxidizes the fuel cladding and the spent fuel. In an earlier paper<sup>1</sup> we studied the gas flow through container penetrations occurring at the time of emplacement. Here we analyze the flow of gas for various penetration sizes occurring at 300 years.

According to the Yucca Mountain Site Characterization Plan (SCP),<sup>2</sup> a waste container will have failed if the product of gas pressure and volumetric leakage rate exceeds  $10^{-4}$  atm-cm<sup>3</sup>/s.<sup>3</sup> This value divided by  $RT$ , where  $R$  is the gas constant and  $T$  the absolute temperature, gives the allowable molar leak rate, above which the container would be considered failed.

Assuming first penetrations at 300 years with no prior leakage, viscous flow through penetrations equivalent to a single hole of radius 5 or 10  $\mu\text{m}$ , or larger, and using the time variation of the average waste-package temperature given in the SCP,<sup>2</sup> we calculate the time-dependent inventory of gas within the waste container as a function of time after emplacement, shown in Figure 1. Curves are for a fill pressure of one atmosphere and fill temperatures of 298 K or 558 K, the maximum internal gas temperature predicted to occur after emplacement. The magnitude of the leak rate is shown as a function of these parameters in Figure 2, together with the SCP-limit leak rate. The container gas volume is 1 m<sup>3</sup>, and wall thickness is 1 cm.

Figure 1 shows that for a 5- $\mu\text{m}$  hole and a fill temperature of 298 K, argon slowly leaks out until well over 1000 years, after which repository cooling causes the internal pressure to fall below atmospheric, and air leaks in. For a 10- $\mu\text{m}$  hole or larger, the internal pressure rapidly falls to atmospheric, as early as 1 year for a 30- $\mu\text{m}$  hole. The rate of subsequent air inleakage is determined by the cooling rate and is not affected by larger holes. Figure 2 shows that the leak-rate limit is not exceeded by a 5- $\mu\text{m}$  hole, and it is exceeded only briefly by larger holes at this fill temperature.

For a 558 K fill temperature, penetration results only in inleakage of air. If intended to apply to inleakage as well, the leak-rate limit is exceeded only briefly for 10- $\mu\text{m}$  and larger holes.

These data provide the means of estimating release rates of gaseous radionuclides. Assuming that early heating of the waste package volatilizes 1 percent of the  $^{14}\text{C}$  inventory from the cladding surfaces, a 5- $\mu\text{m}$  hole and 298 K fill temperature result in an initial argon leak rate of 0.03 mole/yr, and a  $^{14}\text{C}$  fractional leak rate of  $7 \times 10^{-6}$ /yr. For a 10- $\mu\text{m}$  hole, the release rate would be 16-fold larger.

If the time and temperature of container penetration during repository cooling are known, initial filling at that temperature and one atmosphere will result in no outleakage. For an equivalent hole of 10  $\mu\text{m}$  or larger, the rate of subsequent inleakage will then be controlled by cooling rate and will be independent of hole size. For such penetrations the inleakage rate will not exceed the SCP limit. For a given temperature history, initial fill conditions and an initial penetration can be selected to eliminate outleakage and to control inflow through subsequent penetrations of any size, provided subsequent penetrations occur after the temperature maximum.

## References

1. E. D. Zwahlen, T. H. Pigford, and W. W.-L. Lee, Gas Flow Through Penetrations in a Nuclear Waste Container, Paper submitted to Scientific Basis for Nuclear Waste Management XIII, LBL-27201, UCB-NE-4148, 1989.
2. U.S. Department of Energy, *Site Characterization Plan, Yucca Mountain Site, Nevada Research and Development Area, Nevada*, DOE/RW-0199, 1988.
3. American Society of Mechanical Engineers, *Boiler and Pressure Vessel Code*, Sec. V, Art. 10, App. IV, 1986.

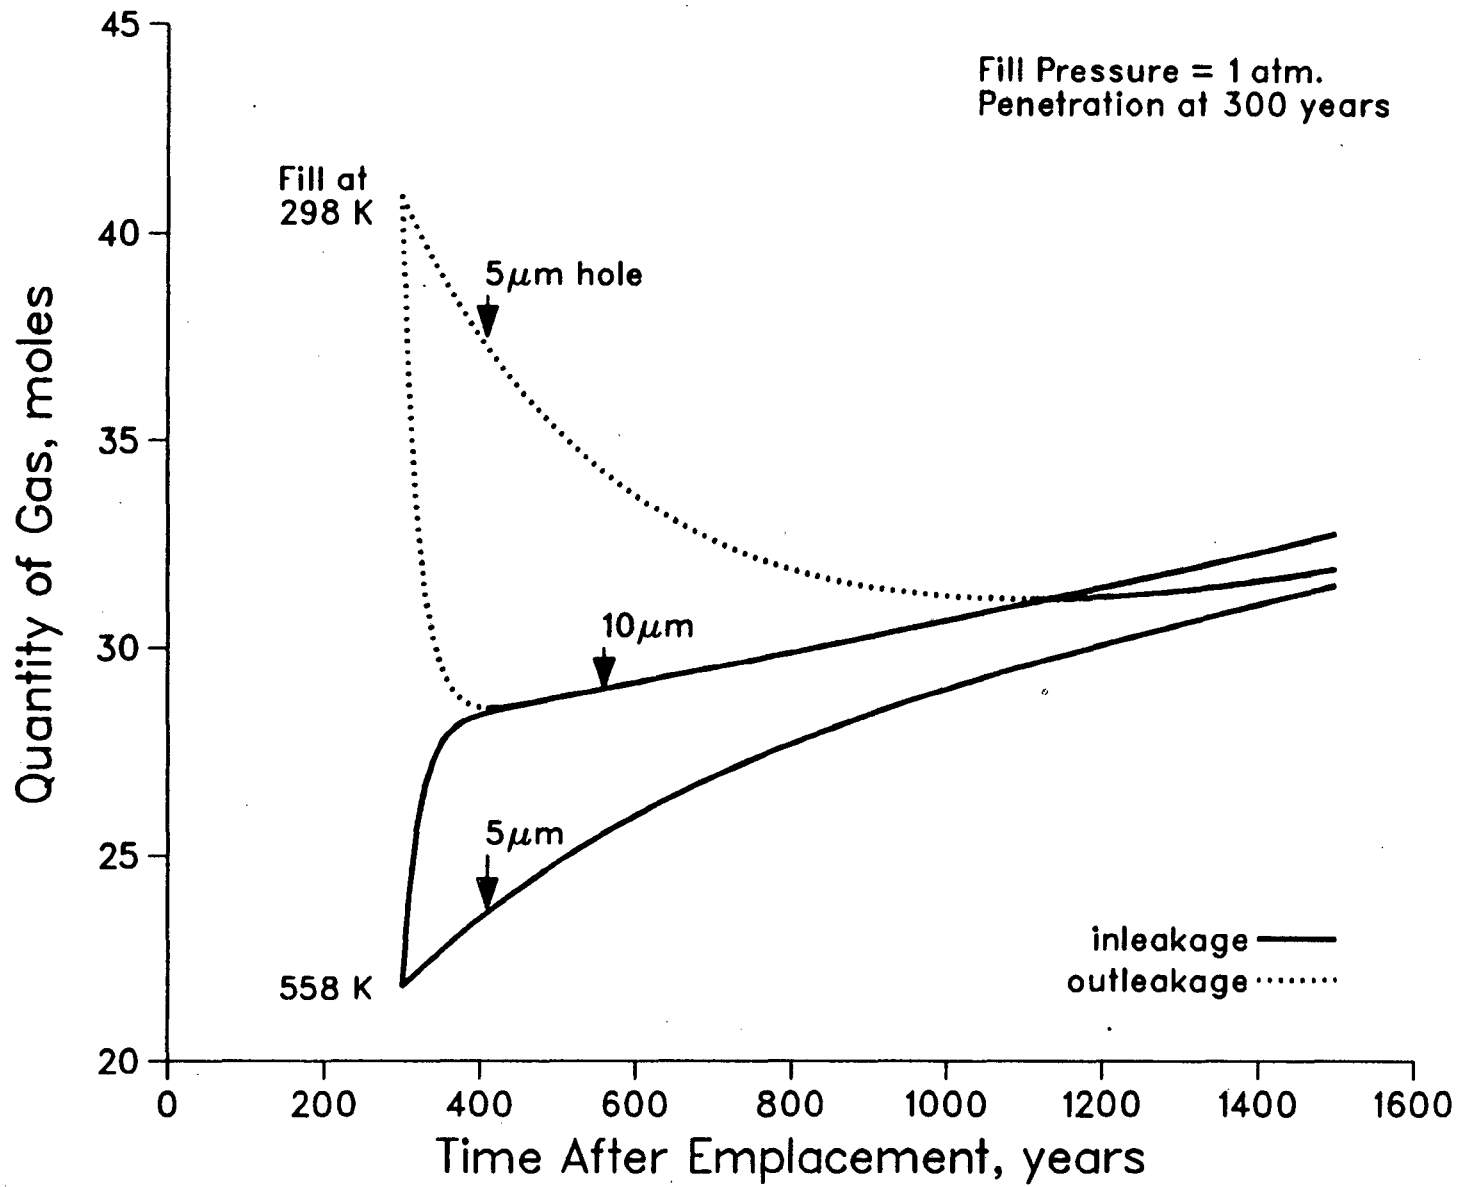


Figure 1: Quantity of Gas in a Container as a Function of Time

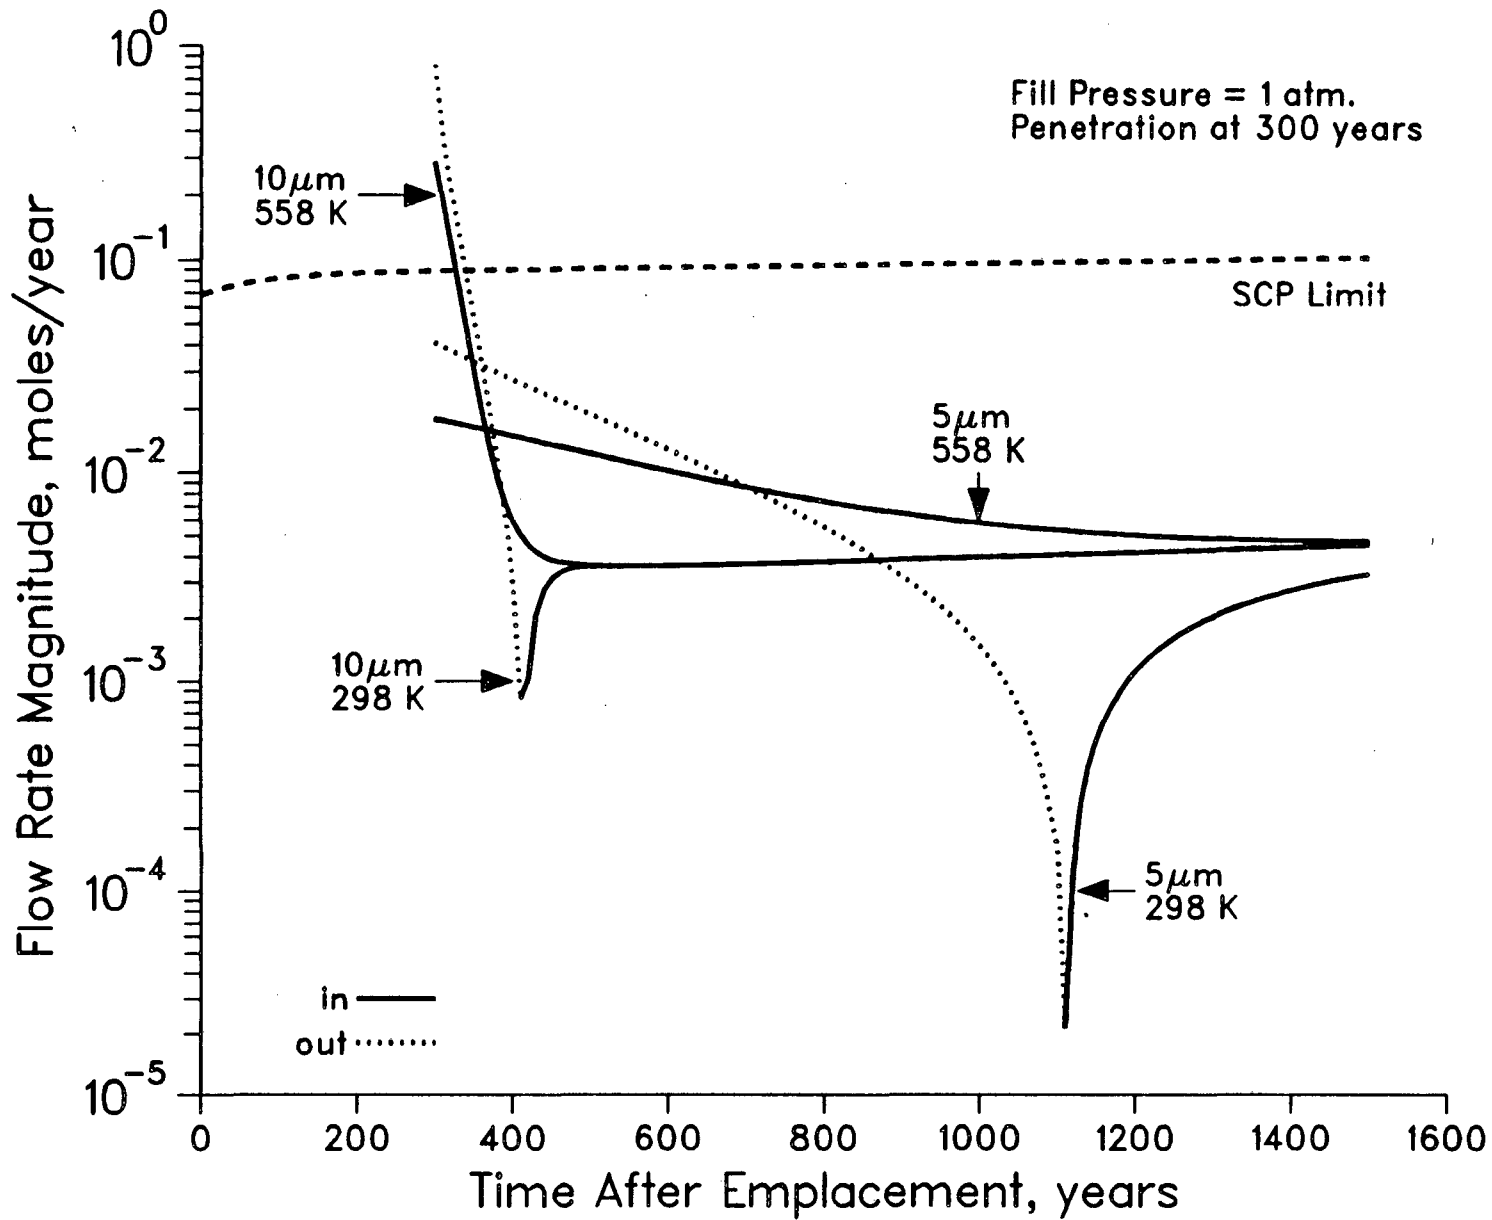


Figure 2: Magnitude of Flow Rate Through a Container Penetration as a Function of Time For Various Apertures and Fill Conditions



*LAWRENCE BERKELEY LABORATORY  
TECHNICAL INFORMATION DEPARTMENT  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720*