

Lawrence Berkeley National Laboratory

Recent Work

Title

SECOND-HARMONIC GENERATION FROM SUB-MONOLAYER MOLECULAR ADSORBATES
USING A CW DIODE LASER - MAUI SURFACE EXPERIMENT

Permalink

<https://escholarship.org/uc/item/5mn1d43k>

Authors

Boyd, G.T.

Shen, Y.R.

Hansch, T. W.

Publication Date

1985-06-01

c.2



Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

RECEIVED
LAWRENCE
BERKELEY LABORATORY

NOV 15 1985

LIBRARY AND
DOCUMENTS SECTION

Materials & Molecular Research Division

Presented at the 7th International
Conference on Laser Spectroscopy,
Maui, HI, June 24-28, 1985


SECOND-HARMONIC GENERATION FROM SUB-MONOLAYER
MOLECULAR ADSORBATES USING A CW DIODE LASER
- MAUI SURFACE EXPERIMENT

G.T. Boyd, Y.R. Shen, and T.W. Hansch

June 1985

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.*

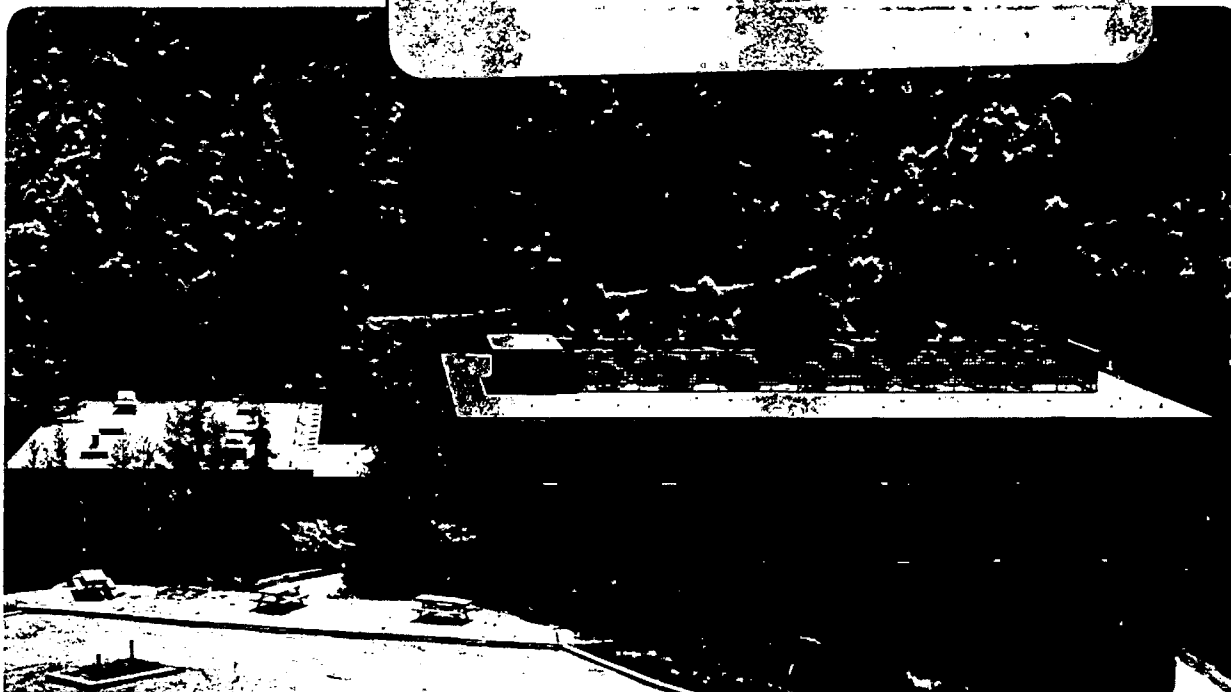

LBL-20068
c.2

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

Second-Harmonic Generation from Sub-Monolayer Molecular Adsorbates Using a CW Diode Laser - Maui Surface Experiment

G. T. Boyd and Y. R. Shen

Department of Physics, University of California, Berkeley, California 94720
Materials and Molecular Research Division, Lawrence Berkeley Laboratory
Berkeley, California 94720 USA

T. W. Hansch

Department of Physics, Stanford University, Palo Alto, California 94305 USA

Optical second-harmonic generation (SHG) can be an extremely sensitive tool for surface studies. The technique is capable of probing adsorbed molecules at various interfaces [1]. It is based on the idea that SHG is forbidden in a medium with inversion symmetry, but necessarily allowed at a surface. To see such a surface nonlinear optical effect, high laser intensity is often needed. Thus, in the experiments reported so far, pulsed lasers were used exclusively. From the consideration for practical applications, however, the technique would look much more attractive if the bulky pulsed laser can be replaced by a simple inexpensive CW diode laser. We demonstrate here at this conference that this is indeed possible. The work, described below, also constitutes the first experiment of surface SHG carried out with a CW laser.

The system we choose to probe is the surface of the silver electrode in an electrolytic cell containing a water solution of 0.1 M KCl and 0.1 M pyridine. Following appropriate electrolytic cycling, a sub-monolayer of pyridine can be adsorbed on or desorbed from Ag by applying proper biasing. It was shown earlier [2] that because of surface enhancement [3], such a system yields unusually strong SH signals. We therefore use it as our test system. We shall show, however, that with future improvement on the diode laser and the detection system, the surface enhancement will not be necessary.

The CW diode laser was purchased from Sharp (LT024MD). It emits 20 mW at 784 nm at room temperature. The laser beam is focused to a $\sim 100 \mu\text{m}^2$ spot on the Ag electrode and the diffuse second-harmonic light generated is collected by a photomultiplier with appropriate filtering. The laser is modulated at 500 Hz so that the signal can be processed by a lock-in amplifier.

Figure 1 shows the second-harmonic intensity and the electrolytic current as a function of time. We began with an SH signal from a monolayer of pyridine adsorbed on Ag with a negative bias potential, -0.78V , on Ag (relative to a standard calomel electrode). The signal corresponds to ~ 4000 photons/second at the photodetector. At $t = 0$, the bias potential is switched from -0.78 to $+0.08\text{V}$, and the SH signal drops abruptly as pyridine is desorbed from Ag. The residual signal at $t > 0$ arises from AgCl layers formed on Ag [2]. Since SHG is only sensitive to the first one or two surface AgCl layers, the signal does not vary appreciably with the multilayer formation or reduction of AgCl on Ag. At $t = 2$ min, the bias potential is switched from $+0.08$ to -0.01V , and the AgCl layers start being reduced. The reduction is complete at $t \sim 5$ min when the bias potential drops to -0.78V and the monolayer of pyridine again gets adsorbed on Ag. The process is readily repeatable. The signal is confirmed to be from SHG by its quadratic power dependence and spectral purity. The dominant noise source in the present case is the dark current in the photodetector.

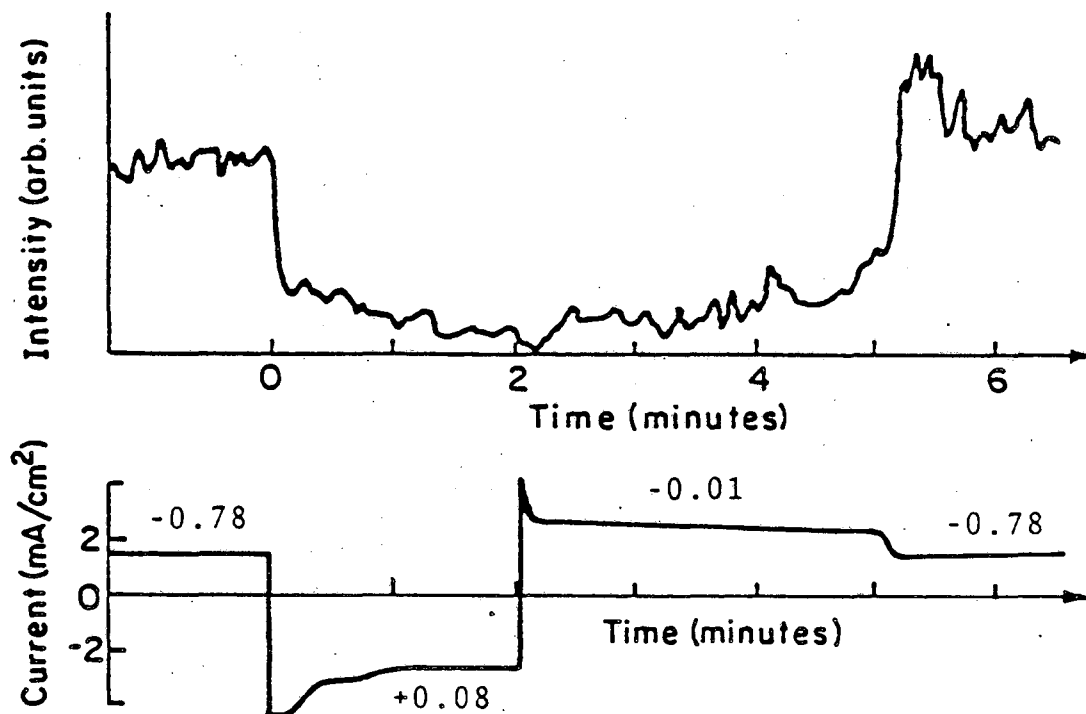


Fig. 1 SH intensity (top) from the Ag electrode and cell current (bottom) vs time. Ag bias potentials are relative to a standard calomel electrode

The above results indicate that one can indeed monitor the adsorption of a monolayer of molecules on an electrode in an electrolytic cell by SHG using a single diode laser. If 100-mW diode lasers become available and focusing of the laser beam to $10 \mu\text{m}^2$ is possible, then a signal of $\sim 4 \times 10^6$ photons/sec from pyridine on a Ag electrode could be obtained. With such a setup, even monolayer adsorbates on smooth substrates (without surface enhancement) would be easily detectable. Further improvement could be made by using a diode array and a photon counting detection system.

In conclusion, we have demonstrated that surface SHG using a CW diode laser to study surfaces and interfaces is feasible. Compactness of the setup could make this system an extremely attractive and useful surface tool. Among the many applications of such a system, we only mention here the possibility of an optical second-harmonic surface microscope, capable of displaying surface structure and morphology with sub-micron resolution.

This experiment was conceived at the Maui Surf Hotel, Kaanapali Beach, Maui, Hawaii. We wish to thank the Hotel for its hospitality in accomodating the preparation of this experiment in its Queen Suite and the subsequent demonstration in its conference hall. GTB and YRS acknowledge partial support from the U.S. Department of Energy under Contract No. DE-AC03-76SF00098, and TWH acknowledges partial support from the U.S. Office of Naval Research under Contract No. ONR N00014-C-78-0304.

References

1. T. F. Heinz, H. W. K. Tom, and Y. R. Shen, Laser Focus, May 1983.
2. C. K. Chen, T. F. Heinz, D. Ricard, and Y. R. Shen, Phys. Rev. Lett. 46, 1010 (1981).
3. G. T. Boyd, Th. Rasing, J. R. R. Leite, and Y. R. Shen, Phys. Rev. B 30, 519 (1984).

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

*LAWRENCE BERKELEY LABORATORY
TECHNICAL INFORMATION DEPARTMENT
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720*