

# Lawrence Berkeley National Laboratory

## Recent Work

### Title

ADVANCED LIGHT SOURCE STORAGE RING RF SYSTEM

### Permalink

<https://escholarship.org/uc/item/5q55w3v0>

### Authors

Taylor, B.  
Baptiste, K.  
Lancaster, H.

### Publication Date

1989-03-01



# Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

## Accelerator & Fusion Research Division

Presented at the 1989 IEEE Particle Accelerator Conference  
Chicago, IL, March 20-23, 1989


SEP 12 1989  
DOCUMENTS SECTION

### Advanced Light Source Storage Ring RF System

B. Taylor, K. Baptiste, H. Lancaster, and C.C. Lo

March 1989

**TWO-WEEK LOAN COPY**  
*This is a Library Circulating Copy  
which may be borrowed for two weeks.*

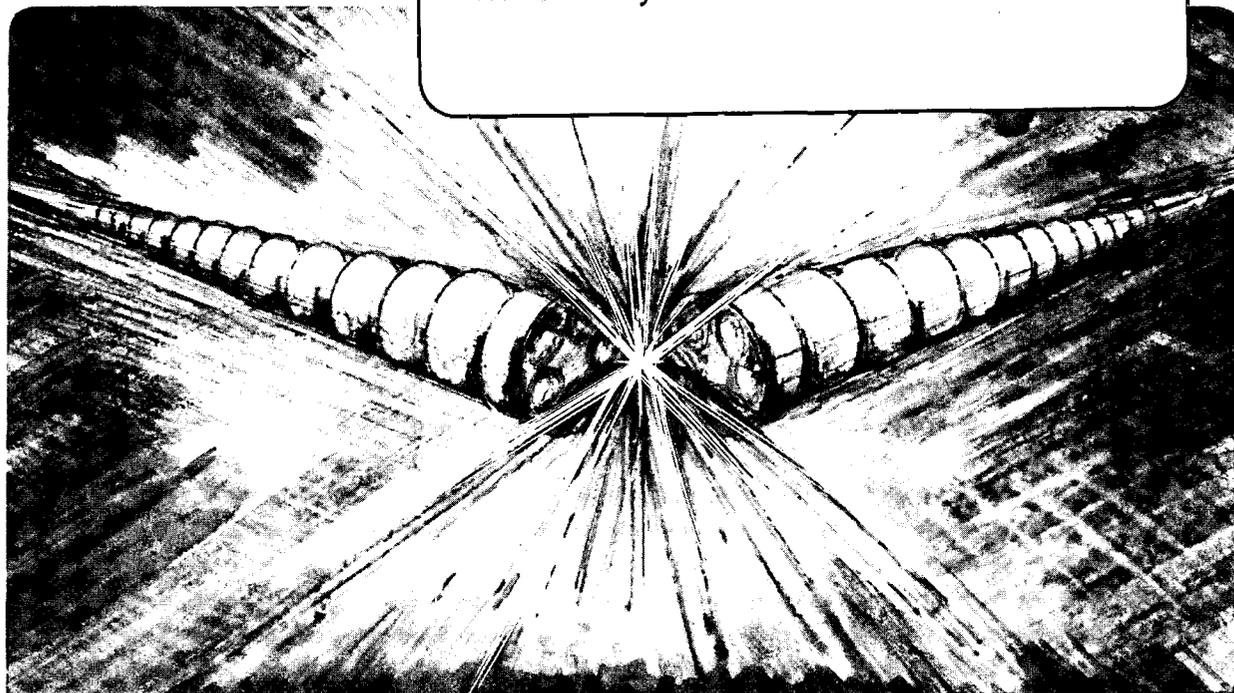

LBL-25978 c.2

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

# Advanced Light Source Storage Ring RF System

Brian Taylor, Ken Baptiste, Henry Lancaster, and C. C. Lo

Accelerator and Fusion Research Division  
Lawrence Berkeley Laboratory  
1 Cyclotron Road  
Berkeley, California 94720

Paper presented at the 1989 Particle Accelerator Conference in Chicago, Illinois,  
March 20 to 23, 1989

# ADVANCED LIGHT SOURCE STORAGE RING RF SYSTEM\*

B. Taylor, K. Baptiste, H. Lancaster and C. C. Lo

Lawrence Berkeley Laboratory  
University of California  
Berkeley, California 94720

## Introduction

The short electron bunch length (30ps design target) of the Advanced Light Source(ALS) stored beam is capable of exciting a wide spectrum of higher order mode(HOM) frequencies. Further, the small aperture and low cut off frequency of the beam enveloping components does not allow for transmission and consequent attenuation of the lower frequency HOM components.

The small cross section and divergence of the high brightness electron beam will allow for more sophisticated high resolution experiments by synchrotron radiation users. A more stringent requirement on beam position stability results however. In this area transmitted mechanical vibration becomes a problem.

The ALS RF system splits 300kW of CW 500MHz power between two single cell cavities. Compared to past practice this power rating is high. The use of only two cavities however has some advantages, it simplifies the waveguide feed system and releases room in straight sections for insertion devices, more important it reduces HOM and beam impedance problems.

## General Arrangement of the RF System

Figure 1 shows the basic RF system in diagrammatic form. Table 1 lists the important parameters. Apart from the cavities and the special waveguide components, associated with HOM countermeasures, all components are conventional catalog items. Conventional cavity tuning servos and amplitude feedback systems will be fitted.

Beam Energy(GeV)	1.5	1.9
Frequency(MHz)	499.654	499.654
Beam Current(mA)	400.0	400.0
Two Cavity System Totals		
Transit Time Factor(T)	0.683	0.683
Peak Effective Volts, $V_p T$ (MV)	1.5	1.5
Shunt Impedance, $2ZT^2 L$ (Mohms)	16.0	16.0
Dissipation(kW)	140.0	140.0
Power Through Windows(kW)	210.0	286.0
Waveguide Losses(dB)	0.3	0.3
Circulator Loss(dB)	0.1	0.1
Radiated Power		
Bending Magnets(kW)	37.0	94.0
8 Undulators, 2 Wigglers(kW)	30.0	50.0
Parasitic Mode Loss(kW)	2.0	2.0
Required Amplifier Power(kW)	221.0	302.0

Table 1, Storage Ring RF Parameters

As yet the 300kW amplifier tube has not been specified in detail, these items are available from a number of sources. The klystron solutions to this need would employ a tube basically designed for higher power, 600-800kW. These tubes could therefore be supplied to operate at a higher beam voltage than is strictly necessary to produce 300kW. An exercise will be undertaken to weigh the higher conversion efficiency, and consequent lower running costs, of operating at higher voltage, against tube and power supply costs.

## The RF Cavities and Windows

Four identical single cell RF cavities are in process of construction for the ALS. One cavity for the booster synchrotron, two for the storage ring and one spare cavity. Prior to the final assembly of the storage ring cavities the design will

be tested with a power source capable of 40kW CW or 60kW long pulse (500ms at 50 percent duty cycle).

The single cell toroidal cavities [1] will be fabricated from components precision machined from solid copper and joined by vacuum brazing. Cooling passages, needed to remove the dissipated 70kW of power without generation of significant mechanical vibration will employ electroformed profiles.

An aperture type waveguide to cavity power input feed has been chosen for the cavity rather than the more usual loop coupler. The large unobstructed aperture of 15cm diameter provides beneficial wideband coupling out of the cavity for HOM energy.

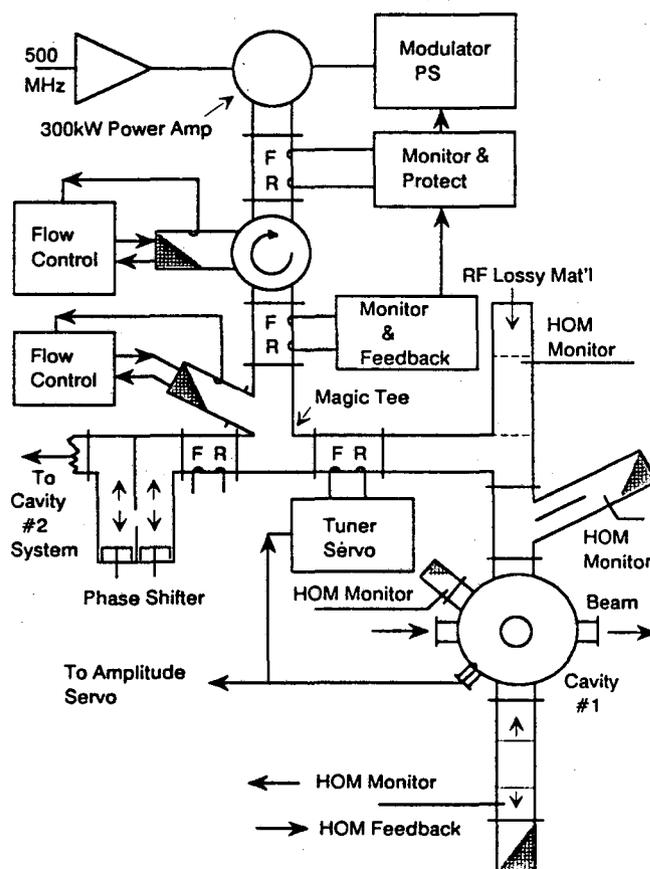


Figure 1, ALS Storage Ring RF System

In order to reduce the electric field in the ceramic due to the cavity contribution, a cylindrical window will be used; this arrangement also has the merit of placing the ceramic largely out of line of sight of the electron beam.

Initially a titanium coated window will be tested, provision has been made, however, to provide a metal blacked window [2].

## 500Mhz Water Load for Circulator and Magic Tee

For the majority of time when a storage ring is functioning correctly the power dissipated in the waveguide circulator or

\*This work was supported by the Director, Office of Energy Research, Office of Basic Energy Sciences, Material Sciences Division, of the U.S. Department of Energy under Contract No. DE-AC03-76SF00098.

isolator and the magic tee balance loads is very small. The loads are required to protect the system against high VSWR under fault or test conditions.

It is normal practice to employ coaxial type loads and to continually circulate a high volume of water at high pressure, irrespective of the actual RF input to these loads. During normal stored beam conditions the mechanical vibration noise from these systems can be a nuisance to experimenters. Running large pumps continually is expensive in terms of power and maintenance costs.

The ALS water load systems are being designed to operate on a demand cooling system in which circulation or full circulation is triggered by detection of a significant power input or water temperature rise. A demand for increased load dissipation will almost certainly coincide with a "no beam" or "beam lost" situation, experimenters will thus not be inconvenienced. The preliminary design is based on the use of water wedge WR1800 waveguide loads.

Due to the substantial volume of water held in the load under static condition ample time is available to establish the flow. Indications are that the waveguide load system is cheaper than the coaxial equivalent, this price difference may, however, be neutralized by more complex waveguide connections to the loads which have limitations on orientation.

### Higher Order Mode Countermeasures

The philosophy of the ALS RF system HOM countermeasures is initially to provide:

1. Good comprehensive diagnostic facilities.
2. Effective wideband HOM absorptive systems on each cavity.
3. Effective HOM absorptive filters in the waveguide connections between cavities.
4. An overall system of waveguide assembly which facilitates experiment and change, once HOM problems and solutions are determined, by beaming the systems. Such modification could include tuned HOM damping devices and the injection of active feedback.

The system for one cavity is shown in figure 2, the basic system was pioneered at the Daresbury SRS [3]. The absorber arms of the H plane and E plane tee filters and the HOM transparent cavity matcher bucket all employ the same principle. A standard section of WR1800 waveguide has a central bifurcating conducting sheet, this short circuits the normal waveguide E field, and transforms the single waveguide into two 9 inch by 9 inch guides.

This arrangement looks to the connecting WR1800 waveguide like a short circuit at 500Mhz. Higher frequencies, not beyond cutoff are, however, transmitted.

In the system of figure 1 it will be noted that the coupling path between the two cavities is attenuated by two sets of E plane and H plane filters.

A volume arranged behind the two 9 inch by 9 inch waveguides remote from the point of 500Mhz reflection provides an ideal HOM monitoring, absorbing, or controlled reflection point. Isolation from the 500Mhz power at this point will also allow rf power to be injected to excite cavity higher order resonances for feedback purposes. (e.g. (c) in Figure 2)

The volume behind the bifurcated bucket of the cavity matcher is of particular convenience, and in the ALS design bolt-on variations of terminating devices will be facilitated.

Figure 2 illustrates some possible variations of these attachments.

- (a) Is the normal resistive absorbing termination.

(b) Allows for the controlled reflection of all components and therefore optimization of power transfer from the cavity of a single selected HOM component or band of components.

(c) Allows optimization of the coupling out from the cavity of two components of differing frequencies.

(d) Is designed to sweep the resonant frequencies of the waveguide termination, thereby "pulling" the coupled cavity resonances to "spoil" the buildup of instabilities.

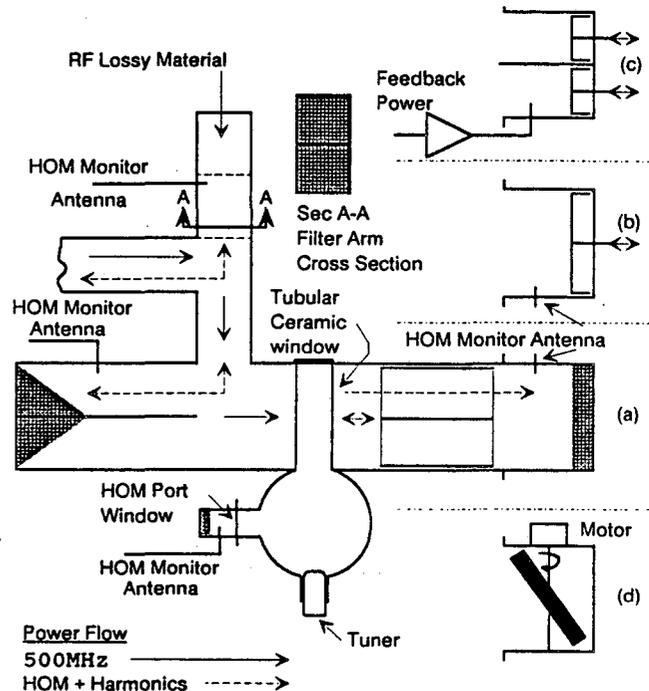


Figure 2, ALS Cavities HOM Approach

### References

- [1] C.C. Lo and B. Taylor, "Computer Aided Studies of the ALS 500Mhz StorageRing Cavity", this conference
- [2] D.M. Dykes, T. Garvey, D.G. Poole and B. Taylor, "SRS RF Cavity Windows", IEEE Trans. Nuclear Science Vol. 32, 1988, Page 2800
- [3] D.M. Dykes and B. Taylor, "Further Development of the SRS RF System", Proc. IEEE Accelerator Conference, Washington, 1987, Page 1940

LAWRENCE BERKELEY LABORATORY  
TECHNICAL INFORMATION DEPARTMENT  
1 CYCLOTRON ROAD  
BERKELEY, CALIFORNIA 94720