

Lawrence Berkeley National Laboratory

Recent Work

Title

A simple model for fault-charged hydrothermal systems

Permalink

<https://escholarship.org/uc/item/5rz1q6b8>

Journal

Transactions - Geothermal Resources Council, 5

Authors

Bodvarsson, Gudmundur S.

Miller, Constance W.

Benson, Sally

Publication Date

1981



Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

EARTH SCIENCES DIVISION

LAWRENCE
BERKELEY
LABORATORY

OCT 9 1981

To be presented at the Annual Meeting of the
Geothermal Resources Council, Houston, TX
October 5-8, 1981

RECEIVED
OCT 9 1981


A SIMPLE MODEL FOR FAULT-CHARGED HYDROTHERMAL SYSTEMS

Gudmundur S. Bodvarsson, Constance W. Miller,
and Sally M. Benson

June 1981

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 6782.*

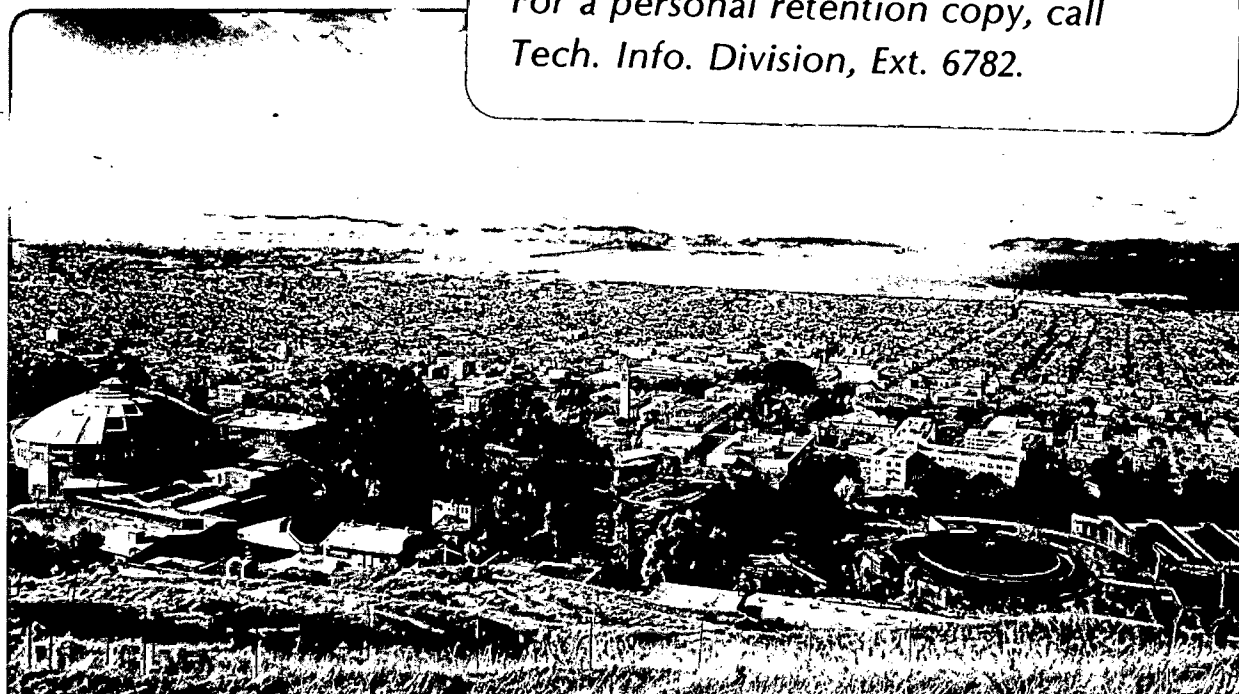

LBL-12869
c.2

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

A SIMPLE MODEL FOR FAULT-CHARGED HYDROTHERMAL SYSTEMS

Gudmundur S. Bodvarsson,
Constance W. Miller, and Sally M. Benson
Earth Sciences Division
Lawrence Berkeley Laboratory
University of California
Berkeley, California 94720

ABSTRACT

A two-dimensional transient model of fault-charged hydrothermal systems has been developed. The model can be used to analyze temperature data from fault-charged hydrothermal systems, estimate the recharge rate from the fault, and determine how long the system has been under natural development. The model can also be used for theoretical studies of the development of fault-controlled hydrothermal systems. The model has been tentatively applied to the low-temperature hydrothermal system at Susanville, California. A reasonable match was obtained with the observed temperature data, and a hot water recharge rate of $9 \times 10^{-6} \text{ m}^3/\text{s} \cdot \text{m}$ was calculated.

INTRODUCTION

One of the most important tasks in geothermal reservoir engineering is to predict the useful lifetime of the resource for a given exploitation scheme. In order to make these predictions, reliable estimates must be available on the amount of hot water in place, the rate at which it can be extracted (transmissivity of the reservoir), and the rate and extent of hot water recharge into the system. The first two estimates can often be readily obtained from simple volumetric calculations and well-test analysis, respectively; reliable estimates of the recharge are often harder to get. This paper describes a simple model for calculating the rate of recharge into a fault-charged hydrothermal reservoir.

In many fault-charged reservoirs a single fault or the intersection of two or more faults provides the hot water recharge (for example East Mesa, Susanville California; Klamath Falls, Oregon). Temperature profiles from wells penetrating such systems often display anomalous behavior. One such profile, shown in Figure 1, was obtained from a well in the "steamer district" of the Klamath Falls KGRA (O'Brien et al., 1981). The profile shows the typical linear characteristics associated with conductive heat transfer in the top 200 ft, then a typical convective type profile down to 250 ft. At a depth of 250 ft the profile displays a definite reversal, (below that the temperature profile reflects downflow in the well). One possible explanation for the behavior shown in Figure 1 is that a fault recharges an

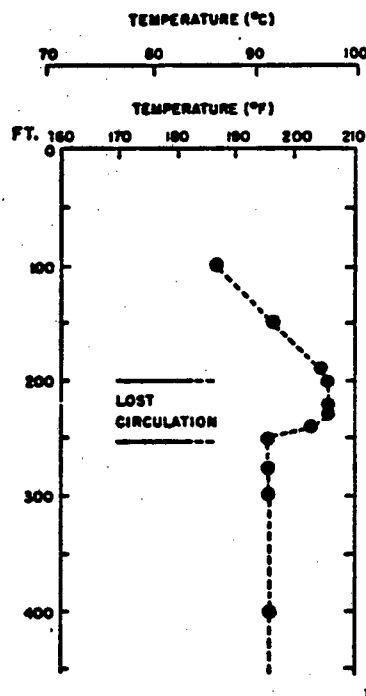


Figure 1: Temperature profile from a well at Klamath Falls, Oregon

aquifer located at a depth of 200-250 ft below the ground surface. The relatively hot water travels up the fault until it intersects the permeable aquifer; it is then transported laterally in the aquifer. As the hot water moves through the aquifer, heat is lost mainly via conduction to the overlying and underlying strata. Variations in the temperature profiles between wells at different distances from the recharging fault can be used to estimate the recharge rate.

Various mathematical models have been applied to fault-charged hydrothermal systems (Sorey, 1976; Kilty et al., 1978; Riney et al., 1979 and Goyal and Kassoy, 1981). In contrast to these models, the model presented here does not consider vertical temperature variations within the aquifer, but calculates the transient heat losses to the caprock

and the bedrock. The model may therefore be quite useful in analyzing relatively young fault-charged hydrothermal systems, as well as in theoretical studies of the development of such systems.

MATHEMATICAL MODEL

Figure 2 shows the reservoir system on which the mathematical model is based. Hot water flows up the fault and feeds a shallow aquifer. The fault is shown by broken lines to illustrate that no heat losses are considered when the fluid is flowing up the fault.

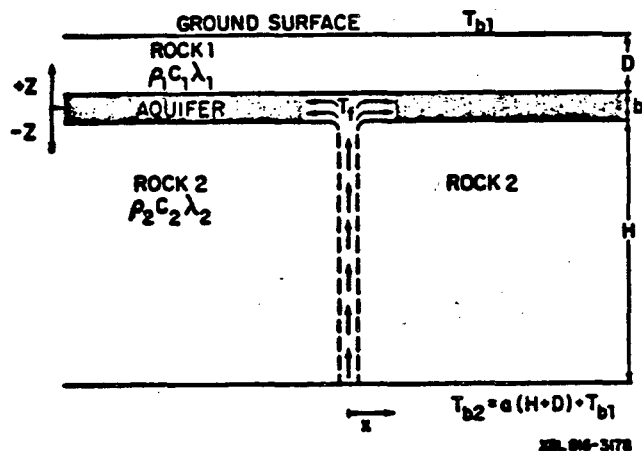


Figure 2: The mathematical model considered

Initially the temperature in the system is linear with depth (normal geothermal gradient) as controlled by the constant-temperature boundaries at $z = D$ (ground surface) and $z = -H$. At time $t = 0$ hot water starts to flow into the reservoir at a temperature T_f . The primary assumptions employed are listed below:

1. The mass flow is steady in the aquifer; horizontal conduction is neglected, and temperature is uniform in the vertical direction (thin aquifer). Equilibrium between the fluid and the solids is instantaneous.
2. The rock matrix above and below the aquifer is impermeable. Horizontal conduction in the rock matrix is neglected.
3. The energy resistance at the contact between the aquifer and the rock matrix is negligible (infinite heat transfer coefficient).
4. The thermal properties of the formations above and below the aquifer may be different, but all thermal parameters for the liquid and the rocks are constant.

The governing equations and the solutions for the temperature field in the Laplace domain are given by Bodvarsson (1981). A numerical inverter developed by Stehfest (1979) was used in the calculations discussed below.

THEORETICAL STUDIES

The model has been employed to study the evolution of fault-charged hydrothermal systems.

Figure 3 shows a plot of dimensionless temperature T_D versus depth at a given location for several different values of dimensionless time τ . All of the dimensionless parameters are defined in the nomenclature. The figure shows that initially ($\tau = 0$) the system is in equilibrium with a linear geothermal gradient. At $\tau = 0$ the hot water starts to flow into the permeable aquifer; in the early stages of development, only the aquifer is being heated. Later on, however, the conductive heat transfer between the aquifer and the adjacent rocks increases, causing the surrounding rock to be heated and the temperature in the aquifer to stabilize.

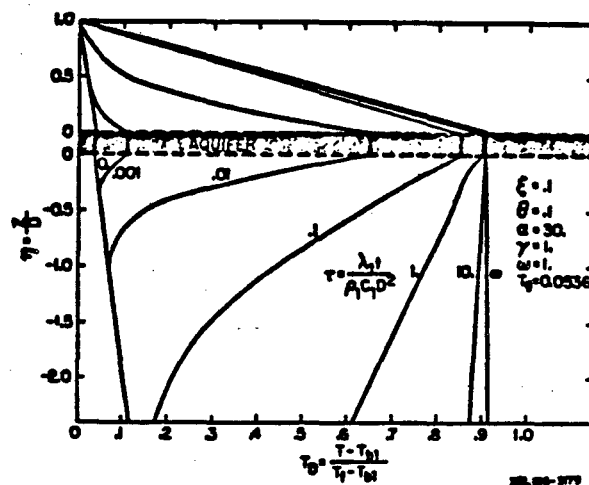


Figure 3: Evolution of a fault-charged hydrothermal system

The temperature in the aquifer and the caprock reaches steady state at dimensionless time of $\tau = 1-10$. At this time the temperature in the rock formation below the aquifer is nowhere near a steady-state condition. The high value of $\alpha = 30$ shows that the constant-temperature boundary at the ground surface is much closer to the aquifer than the deep boundary and should therefore control the thermal response. In the example shown in Figure 3, the steady-state temperature of the aquifer at the location in question is approximately $T_D = 0.91$.

The temperature distribution along the aquifer is shown in Figure 4 for the same parameters as were used in Figure 3. The figure shows that close to the fault (small ξ) the temperature rises almost immediately to the temperature of the recharging water. The figure also shows that a steady-state temperature distribution is reached at a dimensionless time $\tau = 1-10$. Our preliminary results indicate that the steady state temperature distribution is independent of θ .

The limited space here does not allow for further elaboration of this work. The effects of other parameters on the development of a fault-charged hydrothermal system are given by Bodvarsson (1981).

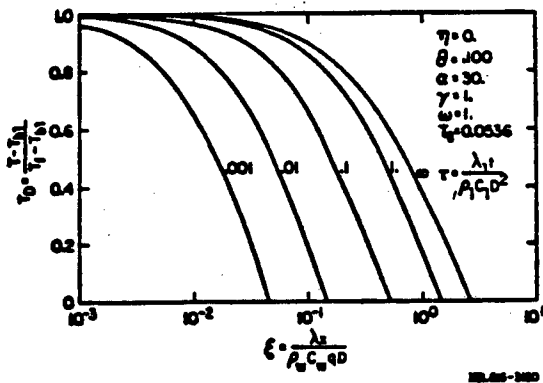


Figure 4: Dimensionless temperature profiles away from the fault at different dimensionless times

APPLICATIONS

As a first attempt to verify the usefulness of this model for fault-charged hydrothermal systems, it was applied using data from the geothermal system at Susanville, California. The more than 20 exploration wells in Susanville have located a low-temperature (< 80°C) shallow geothermal aquifer of limited areal extent (Benson et al., 1981).

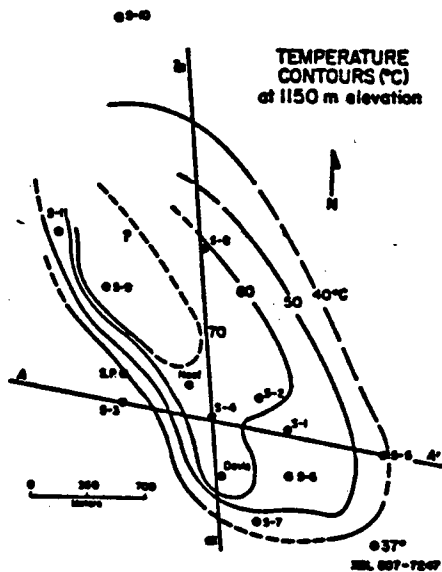


Figure 5: Temperature contours at 1150 m elevation at Susanville

Figure 5 shows the location of the wells and the temperature contours at an elevation of 1150 m, which corresponds to a depth of 125 m, where the primary aquifer is found. The temperature contours shown in Figure 5 suggest that the reservoir is charged by a fault with a strike to the NW. The

steep temperature gradients to the southwest illustrate that the fault is recharging the aquifer only to the northeast. Temperature contour maps at different depths show fault-related characteristics similar to those shown in Figure 5. Furthermore, many of the wells at Susanville show a reversal with depth similar to that shown in Figure 1 for the Klamath Falls well.

One potential use for the hydrothermal energy at Susanville is space heating. However, the limited areal extent of the hydrothermal system (Figure 5), indicates that the mass of hot water (the limiting temperature taken as 60°C) amounts to only $1-3 \times 10^7 \text{ m}^3$ (depending upon the aquifer thickness selected). Current plans (Department of Energy, 1980) call for an extraction rate of approximately 0.035 m^3/s (550 gpm) for space heating of 14 public buildings. If recharge is neglected, this corresponds to a lifetime of 9-27 years. If the project is intended for 20 years, its success will depend greatly upon the recharge rate. A reliable estimate of the recharge into the Susanville hydrothermal system is therefore greatly needed. Application of our model to the Susanville anomaly will give the first estimate of the recharge rate.

TABLE 1: Parameters used for the Susanville model.

Aquifer thickness, b	35 m
Depth to aquifer, D	125 m
Aquifer porosity, ϕ	0.2
Thermal conductivity of rock, λ_1	1.5 $\text{J/m} \cdot \text{s} \cdot ^\circ\text{C}$
Rock heat capacity, c_1	1000 ($\text{J/kg} \cdot ^\circ\text{C}$)
Rock density, ρ_1	2700 (kg/m^3)

Table 1 shows the parameters selected from the well data. The maximum temperature measured in the field is approximately 80°C in well S-9a, which is located very close to the proposed fault (see Figure 5). The temperature of the water recharging the aquifer is therefore fixed at 80°C. Picking 60°C as the average aquifer temperature, the fluid parameters can be obtained, $\rho_w = 983 \text{ kg/m}^3$, $C_w = 4179 \text{ J/kg} \cdot ^\circ\text{C}$. It is now possible to calculate the appropriate value of θ , $\theta = 0.31$ (Equation 5c).

The objective of this exercise is to use the model to match the temperature contour data shown in Figure 5 with the temperature profiles from individual wells in an attempt to estimate the hot water recharge. After a number of computer runs, the match shown in Figures 6 and 7 was obtained. As Figure 6 shows, the calculated temperature contours compare very well with the observed ones in the hottest region of the field, close to the proposed fault. Further away, however, there are large differences between the calculated and the observed temperatures. There are many possible reasons for the discrepancy. First, only limited data are available away from the fault (only wells S-5 and S-10), so that temperature contours are not accurately known. Second, evidence shows that there is a high regional flow of ground-water to the southeast and that mixing of the colder shallow groundwater with

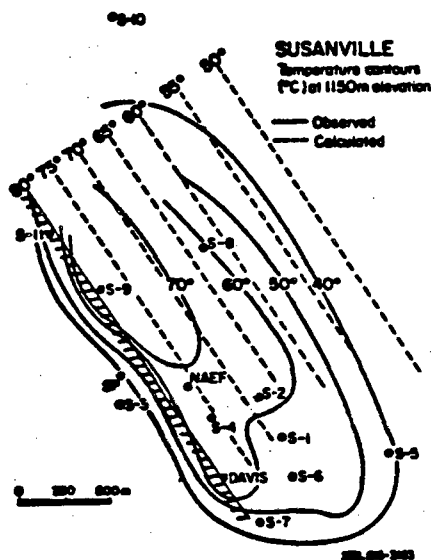


Figure 6: Comparison between observed and calculated temperature contour data

the hot fluids is taking place. Third, the subsurface geology is considerably more complex than can be accounted for by the simple model we have used here. In any case, the model matches the temperature profiles of wells close to the proposed fault very well, as shown in Figure 7.

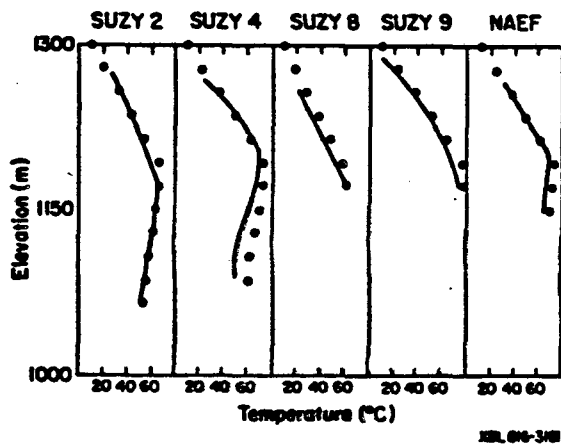


Figure 7: Comparison between calculated and observed temperature profiles in wells

The match shown in Figures 6 and 7 was obtained using two different sets of parameters. First, if the lower constant temperature boundary is placed very deep ($H \gg D$), the parameters obtained indicate that the hydrothermal system has been under development approximately 2000 years and that the fault charges the system at a rate of $9 \times 10^{-6} \text{ m}^3/\text{s}\cdot\text{m}$. Second, a very similar match is obtained if the constant temperature boundary is placed at a depth of about 400

meters ($\alpha = 2.0$); in this case the parameters obtained show that steady state temperature conditions are reached (consequently the evolution time cannot be determined except that it exceeds 10000 yrs) but the calculated recharge rate is the same as in the first case ($q = 9 \times 10^{-6} \text{ m}^3/\text{s}\cdot\text{m}$). If one considers the age of the subsurface formations at Susanville the second case seems more likely. Also it is not unlikely that a deeper permeable aquifer with circulation of colder water is present at the site, and this would act as a constant temperature boundary.

In any case, the accuracy of the calculated recharge rate is of more concern to the developers of the Susanville hydrothermal system than the time of evolution. If the heat losses from the aquifer are controlled by heat conduction as we have assumed in the present model, the calculated recharge rate should be reasonably accurate. However, in the model horizontal conduction is neglected, and this may make the actual recharge rate greater than what we have calculated.

If we assume that the calculated flow rate is correct and that the fault recharges over a distance of 2500 m, the total rate of recharge is approximately $0.0225 \text{ m}^3/\text{s}$. This recharge rate corresponds to approximately 70% of the proposed extraction rate; consequently a project lifetime of 15-45 years could be expected. It should be emphasized, however, that the simplicity of the present model does not warrant conclusive interpretations. The results presented here should be considered as rough first estimates.

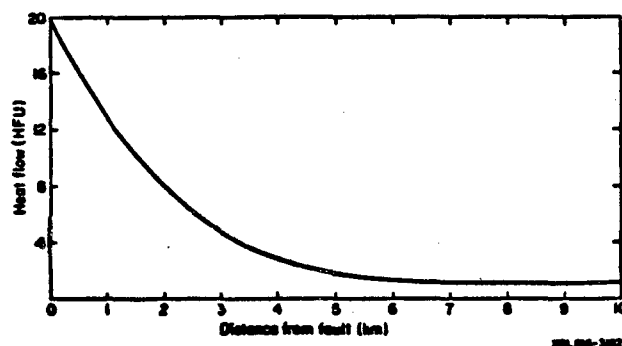


Figure 8: Calculated heat flows at Susanville

Unfortunately, detailed heat flow data over the Susanville anomaly are not available at present; such data would have been useful in confirming the accuracy of the model. Figure 8 shows the calculated heat flow values plotted against distance from the proposed fault.

SUMMARY

A simple two-dimensional model has been developed for fault-charged hydrothermal systems. The model has been used for some theoretical studies on the development of such systems. Furthermore, the model has been tentatively applied to the hydrothermal system at Susanville, California.

A reasonable match with temperature data from the field allowed approximate calculations of the recharge rate from the fault into the hydrothermal system.

ACKNOWLEDGMENTS

Valuable discussions with C. Goranson during the course of this study are most appreciated. The financial support of this work through the Low Temperature Project of the Department of Energy is also acknowledged. This work was supported by the Assistant Secretary for Conservation and Renewable Energy, Office of Renewable Technology, Division of Geothermal and Hydropower Technologies of the U.S. Department of Energy under Contract No. W-7405-ENG-48.

REFERENCES

- Benson, S.M., Goranson, G.B., Noble, J., Schroeder, R., Corrigan, D., and Wollenberg, H., 1981, Evaluation of the Susanville, California geothermal resource. Berkeley, Lawrence Berkeley Laboratory, LBL-11187.
- Bodvarsson, G.S., 1981, A transient semi-analytical model for calculation of heat losses from shallow geothermal aquifers; In preparation.
- Goyal, K.P., and Kassoy, D.R., 1981, A plausible two-dimensional vertical model of the East Mesa geothermal field, California, U.S.A.; to appear in the Journal of Geophysical Res.
- Kilty, K., Chapman, D.S., and Mase, C., 1978, Aspects of forced convective heat transfer in geothermal systems; Topical Report 78-1701.a.6.4.1, University of Utah, 61 pp.
- O'Brien, M., Benson, S.M., and Goranson, C.B., 1981, Subsurface geology of three geothermal wells, Klamath Falls, Oregon, Berkeley, Lawrence Berkeley Laboratory, LBL-11240.
- Riney, T.D., Pritchett, J.W., Rice, L.F., and Garg, S.K., 1979, A preliminary model of the East Mesa hydrothermal system; In Proceedings, Fifth Workshop Geothermal Reservoir Engineering, SGP-TR-40, Stanford University, pp. 211-214.
- Sorey, M.L., 1976, A model of the hydrothermal system of Long Valley Caldera, California, In Proceedings, Second Workshop in Geothermal Reservoir Engineering, Stanford University.
- Stehfest, H., 1979, Numerical inversion of Laplace transforms; Communications of ACM, v. 13, pp. 44-49.
- U.S. Department of Energy, 1980. Geothermal, direct heat applications, program summary. Report of the Semi-annual Review Meeting, Las Vegas, Nevada. U.S. Department of Energy, Geothermal Energy Division, p. 87.

NOMENCLATURE

- a: geothermal gradient ($^{\circ}\text{C}/\text{m}$)
b: aquifer thickness (m)
D: Thickness of caprock (m)
E: Thickness of bedrock (m)
p: Laplace parameter
 ϕ : Porosity
q: The recharge rate ($\text{m}^3/\text{s}\cdot\text{m}$)
t: Time (sec)
T: Temperature ($^{\circ}\text{C}$)
 T_{b1} : Temperature at ground surface ($^{\circ}\text{C}$)
 T_f : Temperature of recharged water ($^{\circ}\text{C}$)
x: Lateral coordinate (m)
z: Vertical coordinate (m)
 λ : Thermal conductivity ($\text{J}/\text{m}\cdot\text{s}\cdot^{\circ}\text{C}$)
 ρc : Volumetric heat capacity ($\text{J}/\text{m}^3\cdot^{\circ}\text{C}$)

Subscripts

- a: aquifer
1: Rock matrix above aquifer
2: Rock matrix below aquifer
w: Liquid water

Dimensionless parameters

$$\alpha = \frac{H}{D} \quad \tau = \frac{\lambda_1 t}{\rho_1 c_1 D^2}$$

$$\gamma = \frac{\rho_2 c_2}{\rho_1 c_1} \quad \omega = \frac{\lambda_2}{\lambda_1}$$

$$\eta = \frac{z}{D} \quad T_D = \frac{T - T_{b1}}{T_f - T_{b1}}$$

$$\theta = \frac{b}{D} \frac{\rho_a c_a}{\rho_1 c_1} \quad T_g = \frac{aD}{T_f - T_{b1}}$$

$$\xi = \frac{\lambda_1 x}{\rho_w c_w q D}$$

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DEPARTMENT
LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720