

# Lawrence Berkeley National Laboratory

## Recent Work

### **Title**

SCALING FOR TORMAC FUSION REACTORS

### **Permalink**

<https://escholarship.org/uc/item/5wr2c6s9>

### **Author**

Levine, M.A.

### **Publication Date**

1976-04-01

0 0 7 0 4 4 0 5 5 1 6

Presented at the Technology of Controlled  
Nuclear Fusion Conference, Richland, WA,  
September 21 - 23, 1976

LBL-4491

c.1

### SCALING FOR TORMAC FUSION REACTORS


M. A. Levine, I. G. Brown, and W. B. Kunkel

April 1976

Prepared for the U. S. Energy Research and  
Development Administration under Contract W-7405-ENG-48

**For Reference**

Not to be taken from this room

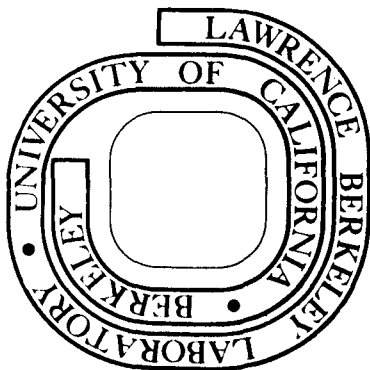

LBL-4491

c.1

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

## SCALING FOR TORMAC FUSION REACTORS\*

M. A. Levine, I. G. Brown, and W. B. Kunkel

LAWRENCE BERKELEY LABORATORY

In this paper a set of parameters for a Tormac reactor is developed. The scaling indicates that a Tormac reactor could be constructed with a modest energy output of about 500 megawatts with magnetic fields averaging 20 kG, peak fields of 40 kG, and a plasma radius of about two meters. Wall loading under these conditions can be kept modest. It is further noted that Tormac can be run in a steady state mode. Thus, Tormac makes an economically attractive alternative to tokamak.

Tormac is a stuffed, toroidal, line cusp,<sup>(1,2)</sup> i.e., its plasma is contained in two distinct regions, an outside sheath region where the magnetic field lines are open and a central or internal high- $\beta$  region where the field lines are closed within the plasma. The Tormac sheath, which is predicted to be only a few ion gyroradii thick,<sup>(3)</sup> is made up of toroidal and poloidal magnetic field components. Particles in this sheath are kept from flowing out the open field lines in a mirror-like fashion by magnetic field constrictions some distance beyond the cusp lines.<sup>(4)</sup>

In the quasi-stationary state, plasma from the interior enters the sheath at the same rate at which it is lost. Since the internal region can be made much larger than the sheath, containment by the combination of the two regions is expected to be much improved over that in ordinary mirrors alone. The resulting favorable reactor scaling has made Tormac an important alternate concept in fusion research. This paper summarizes the results of an analysis and survey of the characteristics

of a fusion reactor whose plasma is confined in a Tormac configuration.

Current experimental work on Tormac is centered on the toroidal bicusps<sup>(5)</sup> shown in Figure 1. At first glance the bicusps does not look like a cusp. However, it does satisfy the basic cusp condition; i.e., all magnetic field lines on the plasma surface have a radius vector which points into the plasma. This is accomplished by having the magnetic field on the inside of the torus dominated by the toroidal component and the magnetic field on the out-

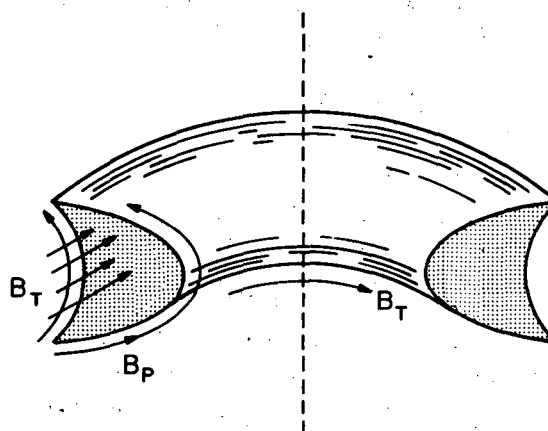


FIGURE 1. Cross section of a Tormac bicusps. The shaded area represents the plasma.

\*Work done under the joint auspices of the Electric Power Research Institute and the U.S. ERDA.

side dominated by the poloidal component. This then insures that the plasma is confined within a region of absolute minimum-B and its surface is stable to all so-called magneto-hydrodynamic wave modes.

The interior region in Tormac, with its closed magnetic field lines, is also expected to be well-behaved. Unlike other devices, and characteristic of cusp confinement, the central region is a region with only minor pressure gradients. This then insures the MHD stability of the central region and at the same time requires that the entire plasma pressure be supported in the sheath. A pressure profile of the plasma is shown in Figure 2.

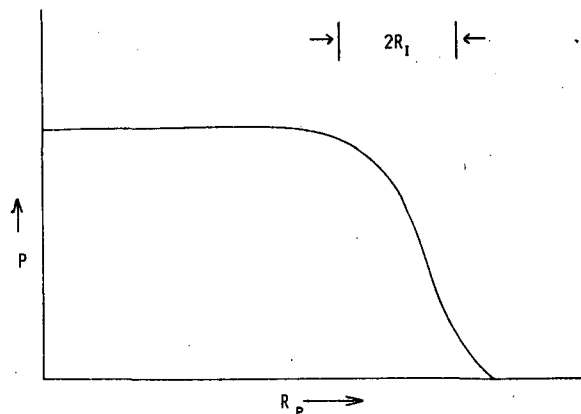


FIGURE 2. Schematic representation of plasma pressure as a function of plasma radius,  $R_p$ .

The sheath where the pressure gradient is supported is a region of open field lines. Plasma is held in the sheath in a mirror-like fashion. Thus the ions have a loss-cone distribution, and interparticle collisions lead to the scattering of particles into the loss cone and out of the device. (The mirror problem has been analyzed in detail by the Livermore Group and their results are used in these calculations.) This scattering of particles into the loss cone and along the open field lines is the primary loss mechanism in Tormac, and cross field diffusion to the

walls is completely negligible. Thus, the rate of loss of particles from Tormac is determined by the density of particles in the sheath,  $N_S$ , the volume of the sheath,  $V_S$ , and the mirror containment of a particle in the sheath,  $\tau_M$ . The Tormac time constant,  $t_T$ , is then simply given by  $\tau_M V_p / V_S$ , where  $V_p$  is the plasma volume. It can be shown that  $V_p / V_S \approx R_p / 2r_i$  where  $r_i$  is an ion gyroradius and  $R_p$  is the plasma minor radius. Thus,

$$N t_T \approx 5 \times 10^{10} R_p(m) T_i(\text{keV}) B(\text{kG}) \text{cm}^{-3} \text{sec.}$$

The time constant,  $t_T$ , derived above assumed that the only particles entering the sheath from the central region arrive by cross-field diffusion. An expected complication is caused by the drifts in the toroidal field that can carry particles into the sheath. This flow of guiding centers will carry particles whose velocity vector lies in the loss cone, so that the rate of loss of particles would be increased beyond the value discussed above. To prevent this flow it is necessary to have a rotational transform. Fortunately, the requirement for such a transform is not nearly as stringent as is required by average minimum-B devices such as tokamaks.

One method of preventing toroidal drifts in Tormac is with a mechanical rotation of the plasma around the minor axis of the toroid. Thus, if a particle rotates around the plasma its drift is averaged and its orbit will be confined to a flow surface. The condition that the particle be confined within a gyroradius is that its flow velocity,  $v_b$ , be given by  $v_b \geq v_i / A$  where  $v_i$  is the ion thermal velocity and  $A$  is the aspect ratio of the flow surface.

There is reason to believe that the flow required for a rotational transform might be generated by the plasma. This flow

would be the result of an  $EXB/B^2$  drift where the E-field represents the omnipresent ambipolar field of the plasma. Indeed, preliminary experimental measurements in Tormac have indicated a plasma rotation sufficient to prevent toroidal drifts.

A feeling for the magnitude of the rotational transform required for Tormac can be arrived at by comparing it to the tokamak problem. If a tokamak-like poloidal field were introduced into the central region of Tormac it would confine drifting particles to flux surfaces and would serve the same function as mechanical rotation. The intensity of the poloidal field,  $B_p$ , required for this function would be related to the toroidal magnetic field,  $B_T$ , by  $B_p = B_T/2A$ . However, the magnitude of  $B_T$  in Tormac is already less than  $B_p$  in tokamak so that in Tormac the energy density in a poloidal magnetic field, if it were used, would be about 5% of the energy density required for tokamak. Thus, while there is a drift problem and the need for a rotational transform in Tormac, it does not appear that this problem will be of major concern in designing a reactor.

Before evaluating quantitatively what is required for a Tormac reactor there are several qualitative features of such a

device that should be noted. These include the probability that Tormac can operate in a continuous or steady state mode, that impurities will not be accumulated in the plasma, and that the cusp or open field lines form a natural diverter system which might at some time serve as a direct energy converting system. These are some of the positive features of a Tormac system. On the negative side must be considered the fact that the magnetic field intensity at the coil structure will probably be twice that required at the plasma surface. It should also be pointed out that Tormac is basically a high-beta device. This leads to certain advantages as well as disadvantages when compared to a low beta system. The advantage is that bremsstrahlung and cyclotron radiation losses in Tormac are negligible and that generally magnetic field intensities are much lower than in the low beta case. On the other hand, as will be seen in what follows, wall loading limitations can be troublesome and relatively high operating temperatures are required.

In order to develop a more quantitative description of Tormac the scheme outlined in Figure 3 is used. In this diagram a portion of the gross power developed is

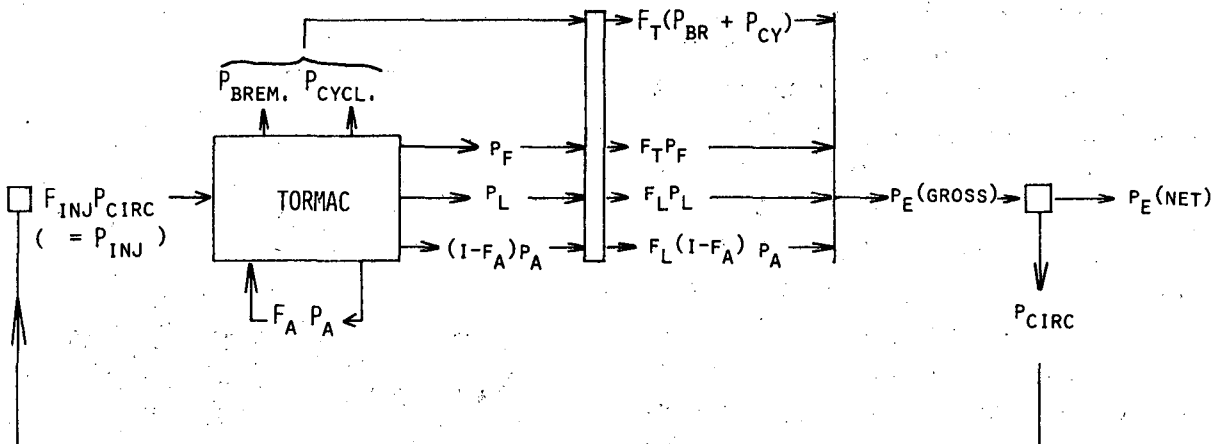


FIGURE 3. Schematic layout of the power flow for Tormac reactor calculations.

reinjecting into the plasma using neutral beams with an efficiency,  $F_{inj}$ , to help heat the plasma. The plasma is also heated by a partial conversion of the power released in the form of alpha particles,  $F_A P_A$ , within the plasma. The rest of this energy is converted with efficiency  $F_L$  into electrical power,  $F_L(1 - F_A)P_A$ . Other constituents of the energy coming out of the plasma are the power in neutrons,  $P_F$ , power in lost particles,  $P_L$ , and power in radiation,  $P_{BR} + P_{CY}$ . Using this scheme the gross electrical power  $P_E$  is given by,

$$P_E(\text{GROSS}) = F_T(P_{BR} + P_{CY}) + F_L(P_L + [1 - F_A]P_A) + F_T P_F$$

where  $F_T$  denotes the efficiency of conversion from thermal to electrical power.

A quality factor for the efficiency with which the system generates electricity,  $Q_E$ , can now be defined as,

$$Q_E = \frac{P_E(\text{GROSS})}{P_{CIRC}}$$

Breakeven is given when  $Q_E = 1$  and ignition when  $Q_E = \infty$ .

In Figure 4 a plot of the  $R_p B$  product necessary for a breakeven reactor is shown as a function of the plasma ion temperature. It is interesting to note that the most favorable region for operation is above 40 keV. It is also noteworthy that breakeven can be reached with  $R_p B$  products as low as 2 or 3 meter-tesla. In this plot, as in what follows, the electron temperature has been taken as 1/2 the ion temperature. This assumption is arbitrary; however; results will not vary dramatically with electron temperature, and an examina-

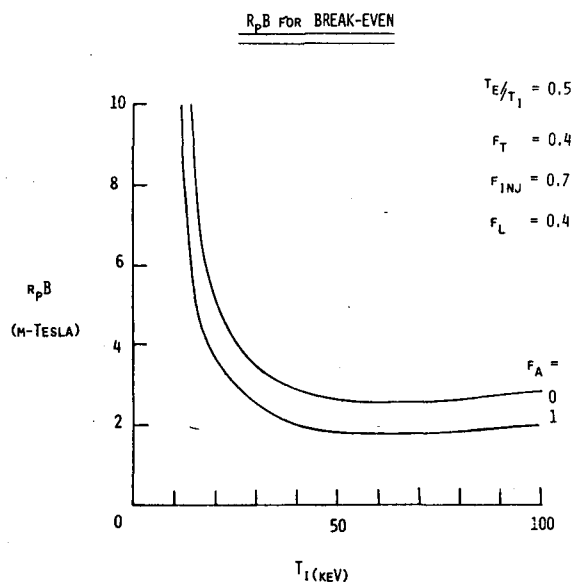


FIGURE 4. Plot of the product of plasma radius times magnetic field intensity as a function of ion temperature for break-even.

tion of the electron power balance term does not make this seem too unreasonable. The thermal efficiency,  $F_T$ , has been set at 0.4 and the efficiency of generating

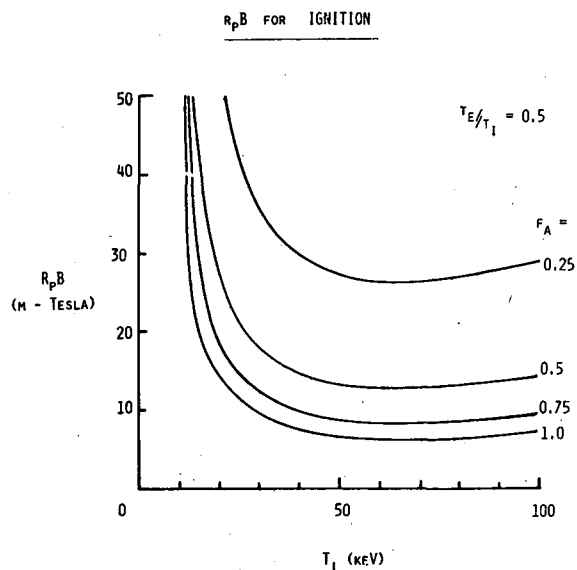


FIGURE 5. Plot of plasma radius times magnetic field intensity for ignition as a function of ion temperature. Curves are given for several fractions of alpha-particle energy absorbed by the plasma.

beams at 0.7. No provision for direct energy conversion is provided. In Figure 5 conditions for ignition are set forth. As might be expected, these conditions are a dramatic function of the fraction of the alpha particle energy deposited in the plasma.

From Figure 4 and Figure 5 it can be seen that reactor parameters of very reasonable size are required for a Tormac system. The problem becomes a little more difficult when a limit is imposed on wall loading.

In Figure 6 and Figure 7 a set of parameters is set out for reactor conditions. These curves are drawn with the limitation that the total power developed is less than 2000 MW and that the wall loading be limited to  $4 \text{ MW/m}^2$ . For these plots an aspect ratio of 3 is used. The wall loading limit on the inner and outer walls is shown. Because of the small aspect ratio chosen here loading on the inner wall is much larger than that on the outer wall. The magnetic field intensities given are those on the plasma boundary so that the field at some coil surfaces will be about double the indicated field; even so, magnetic field requirements are quite modest.

In conclusion, it can be stated that Tormac as a reactor has a unique operating range. As can be seen from a comparison of Figures 6 and 7, Tormac uses much lower magnetic fields and much higher temperatures than other systems. The low magnetic field intensities tend to lead to large sizes. The higher temperatures could make neutral beam injection difficult. However, as the curves in Figure 6 show, a Tormac reactor could be built with a set of parameters which can easily be met with available technology. Thus, the low magnetic

fields, the steady state operation, and the relatively small size make Tormac an economically attractive alternative to tokamak as a reactor.

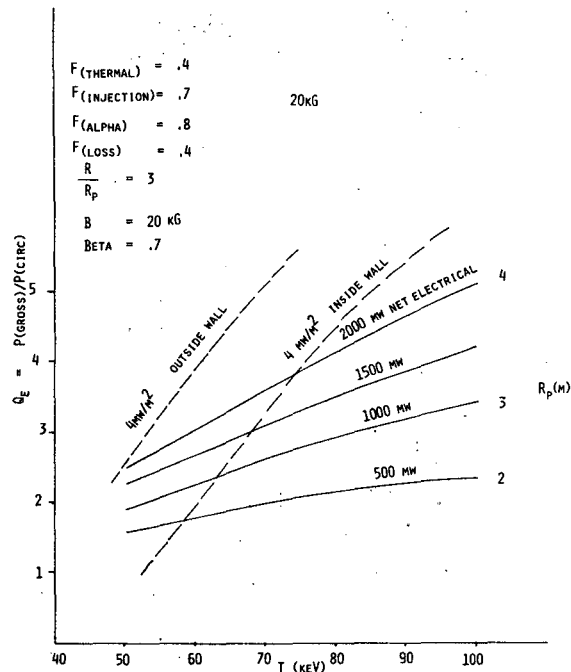


FIGURE 6. Curves for several reactor sizes showing  $Q_E$  and size,  $R_p$ , as a function of ion temperature. The magnetic field at the plasma boundary is 20 kG.

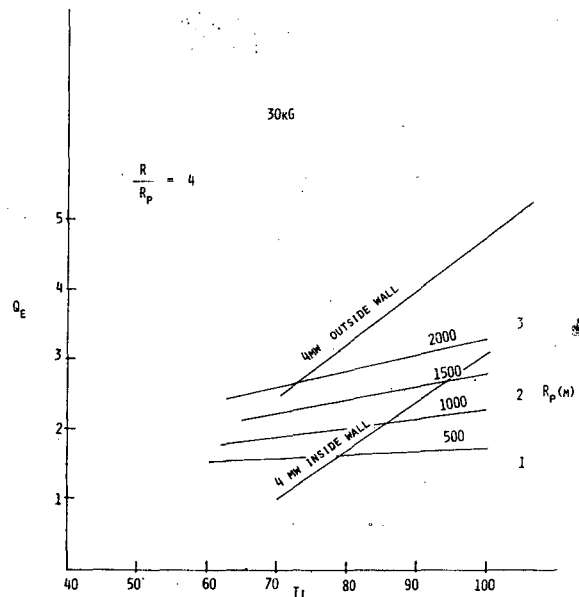


FIGURE 7.  $Q$  vs  $T(\text{keV})$  for a 30 kG field.



REFERENCES

1. J. Berkowitz et al., 2nd Int. Conf. Peaceful Uses At. Energy (Proc. Conf. Geneva, 1958) 31, 171 (1958) UN, New York.
2. L. S. Combes, C. C. Gallagher, and M. A. Levine, Phys. Fluids 5, 1070 (1962).
3. A. H. Boozer and M. A. Levine, Phys. Rev. Lett. 31, 1287 (1973).
4. M. A. Levine et al., Phys. Rev. Lett. 20, 1323 (1972).
5. M. A. Levine, Bull. Am. Phys. Soc. 17, 1040 (1972).
6. See for instance, D. E. Baldwin, Lawrence Livermore Laboratory Rept. UCRL-78406 (1976).

This report was done with support from the United States Energy Research and Development Administration. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the United States Energy Research and Development Administration.

TECHNICAL INFORMATION DIVISION  
LAWRENCE BERKELEY LABORATORY  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720

11