

Lawrence Berkeley National Laboratory

Lawrence Berkeley National Laboratory

Title

Corner Rounding in Photoresists for Extreme Ultraviolet Lithography

Permalink

<https://escholarship.org/uc/item/6z0777kf>

Author

Anderson, Christopher N.

Publication Date

2009-03-13

Corner rounding in photoresists for extreme ultraviolet lithography

Christopher N. Anderson, Patrick P. Naulleau, Yunfei Deng, Thomas I. Wallow

University of California, Berkeley
Center for X-ray Optics, Lawrence Berkeley National Laboratory
AMD

Completed June 2008

This work was supported by the Director, Office of Science, Office of Basic Energy Sciences, of the U.S. Department of Energy under Contract No. DE-AC02-05CH11231

1. Title:	Corner rounding in photoresists for extreme ultraviolet lithography
2. Full names of all authors:	Christopher N. Anderson ¹ , Patrick P. Naulleau ² , Yunfei Deng, ³ and Thomas I. Wallow ³
3. For all authors: Company affiliation, e-mail, phone number, fax number, mailing address	<p>(1) University of California, Berkeley <u>cnanderson@berkeley.edu</u> 1-510-486-588 1-510-486-4550 (fax) 1 Cyclotron Rd, Berkeley CA 94720</p> <p>(2) Lawrence Berkeley National Laboratory <u>pnaulleau@lbl.gov</u> 1-510-486-4394 1-510-486-4550 (fax) 1 Cyclotron Rd, Berkeley, CA 94720</p> <p>3) AMD <u>tom.wallow@amd.com</u> 408-749-4000 One AMD Place P.O. Box 3453 Sunnyvale, CA 94088</p>

6. Presentation preference: <input checked="" type="checkbox"/> oral	<input checked="" type="checkbox"/> poster
--	--

7. Abstract body:

Deprotection blur in EUV resists fundamentally limits the smallest sized dense features that can be patterned in a single exposure and development step. Several metrics have recently been developed to explore the ways that different resist and process parameters affect the deprotection blur in EUV resists [1-3]. One of these metrics is based on the imaging fidelity of a sharp corner on a large feature [4]. As this metric has involved the close inspection of printing fidelity of corner features, it has brought attention to an interesting phenomena: corners print differently whether or

not the remaining resist edge contains 270 degrees of resist or 90 degrees of resist (see Figure 1). Here we present experimental data across a wide sampling of leading resists to show this effect is real and reproducible. We provide aerial image modeling results assuming thin and realistic mask models that show no corner bias between the aerial images in the 90-degree and 270-degree configurations. We also compare modeled patterning results assuming several resist models including the single blur, dual blur, and Prolith models, none of which reproduce the corner biasing that is observed experimentally.

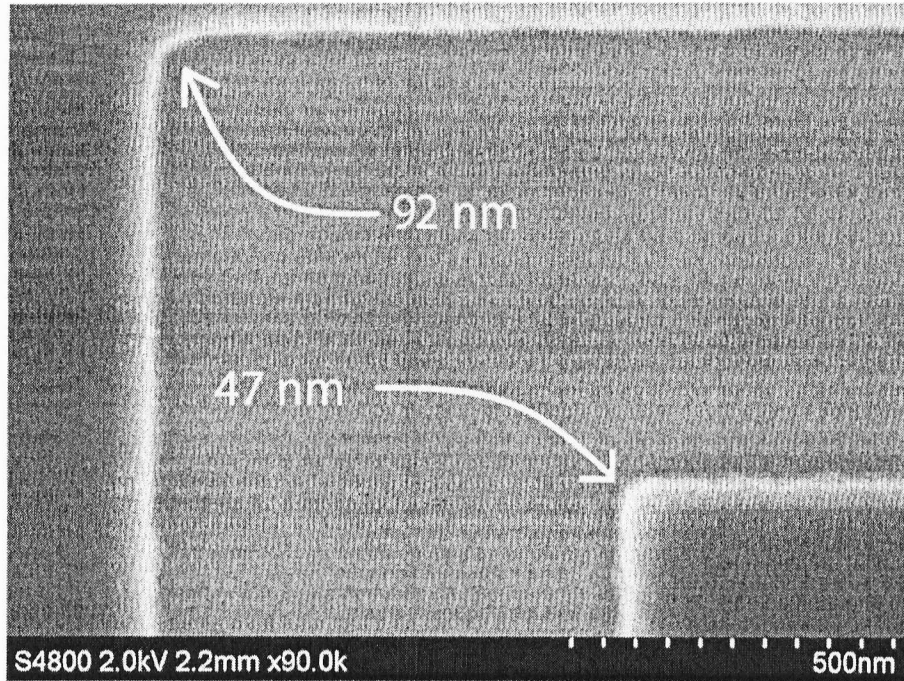


Figure 1: Measured radii of curvature of corners of a 700 nm elbow with 270 degrees of remaining resist (92 nm) and 90 degrees of remaining resist (47 nm).

- [1] G. M. Schmid, M. D. Stewart, C. Wang, B. D. Vogt, M. Vivek, E. K. Lin, C G Willson, "Resolution limitations in chemically amplified photoresist systems," Proc. SPIE 5376, 333-342 (2004).
- [2] G. F. Lorusso, P. Leunissen, M. Ercken, C Delvaux, F.V. Roey, N. Vandebroek, "Spectral analysis of line width roughness and its applications to immersion lithography," J. Microlith., Microfab., Microsyst., 5(2) (2006).
- [3] J. Hoffnagle, W. D. Hinsberg, F. A. Houle, and M. I. Sanchez, "Characterization of photoresist spatial resolution by interferometric lithography", Proc. SPIE 5038, 464-472 (2003).
- [4] C. Anderson and P. Naulleau, "Sensitivity study of two high-throughput resolution metrics for photoresists," Appl. Opt. Vol 47, No. 1 (2008).