

Lawrence Berkeley National Laboratory

Recent Work

Title

VARIATION WITH ENERGY OF NUCLEAR COLLISION CROSS SECTIONS FOR HIGH ENERGY NEUTRONS

Permalink

<https://escholarship.org/uc/item/6zh9w9dd>

Authors

DeJuren, J.
Moyer, B.J.

Publication Date

1950-08-30

UCRL 887

cy. 9A -

UNIVERSITY OF
CALIFORNIA

*Radiation
Laboratory*

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 5545*

BERKELEY, CALIFORNIA

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

~~FOR OFFICIAL USE ONLY~~

UCRL-887

Physics-General Distribution

UNIVERSITY OF CALIFORNIA

DECLASSIFIED

Radiation Laboratory

Contract No. W-7405-eng-48

Variation with Energy of Nuclear Collision

Cross Sections for High Energy Neutrons

J. DeJuren and B. J. Moyer

August 30, 1950

Berkeley, California

~~FOR OFFICIAL USE ONLY~~

Standard Distribution

DECLASSIFIED

Copy Nos.

Argonne National Laboratory	1-12
Armed Forces Special Weapons Project	13
Atomic Energy Commission, Washington	14-19
Battelle Memorial Institute	20
Brookhaven National Laboratory	21-24
Bureau of Ships	25
Carbide and Carbon Chemicals Division (K-25 Plant)	26-27
Carbide and Carbon Chemicals Division (Y-12 Plant)	28-31
Columbia University (Dunning)	32
General Electric Company, Richland	33-36
Hanford Operations Office	37
Idaho Operations Office	38-39
Iowa State College	40
Kellex Corporation	41
Knolls Atomic Power Laboratory	42-45
Los Alamos	46-48
Mallinckrodt Chemical Works	49
Mound Laboratory	50-52
National Advisory Committee for Aeronautics	53
National Bureau of Standards	54
Naval Medical Research Institute	55
Naval Radiological Defense Laboratory	56
NEPA Project	57-59
New Brunswick Laboratory	60
New York Operations Office	61-62
North American Aviation, Inc.	63
Oak Ridge National Laboratory	64-71
Patent Branch, Washington	72
Sandia Corporation	73
Technical Information Division, ORE	74-88
USAF - Office of Assistant for Atomic Energy	89
UCLA Medical Research Laboratory (Warren)	90
University of California Radiation Laboratory	91-95
University of Rochester	96-97
Westinghouse Electric Corporation	98-101

Total

101

Information Division
Radiation Laboratory
University of California
Berkeley, California

Variation with Energy of Nuclear Collision

Cross Sections for High Energy Neutrons

J. DeJuren and B. J. Moyer

Radiation Laboratory, Department of Physics
University of California, Berkeley, California

August 30, 1950

Abstract

Nuclear total cross sections for high energy neutrons have been measured for approximately known neutron energies in the range 90-270 Mev. It is observed that cross sections in every case drop rather rapidly between 100 Mev and 180 Mev to a level which continues with little further variation up to the highest neutron energies available in the experiment. Comparisons are made with nuclear attenuation data for cosmic rays.

Variation with Energy of Nuclear Collision

Cross Sections for High Energy Neutrons

J. DeJuren and B. J. Moyer

Radiation Laboratory, Department of Physics
University of California, Berkeley, California

August 30, 1950

I Introduction

Nuclear collision cross sections for high energy neutrons have been measured at three different energy regions for neutrons produced by the University of California 184-inch cyclotron. Stripping of 90 and 190 Mev deuterons by beryllium targets produced neutrons of mean energies 40 and 90 Mev^{1,2} respectively. Measurements utilizing the $C^{12}(n,2n)C^{11}$ reaction for detection provided total nuclear cross sections at estimated mean neutron detection energies of 42 and 84 Mev^{3,4} respectively. Bismuth fission, which has a threshold at about 50 Mev, was used for detection of the 90 Mev neutrons and both inelastic and total cross sections of nuclei were measured⁵ at an estimated mean detection energy of 95 Mev.

The bombardment of a 2-inch Be target with 345 Mev protons produces high energy neutrons with a broad energy distribution possessing a maximum at about 270 Mev. Total cross sections were measured for various nuclei using both bismuth fission⁶ detection and a scintillation counter recoil proton

¹ A. C. Helmholtz, E. McMillan, and D. Sewell, Phys. Rev. 72, 1003 (1947)

² R. Serber, Phys. Rev. 72, 1008 (1947)

³ R. Hildebrand and C. Leith, in preparation for publication.

⁴ L. Cook, E. McMillan, J. Peterson, and D. Sewell, Phys. Rev. 75, 7 (1949)

⁵ J. DeJuren and N. Knable, Phys. Rev. 77, 606 (1950)

⁶ J. DeJuren, Phys. Rev., October 1, 1950.

telescope⁷ possessing an equivalent neutron threshold of 250 Mev. The two methods gave values that agreed well with each other.

However, the model of the transparent nucleus developed by Fernbach, Serber and Taylor,⁸ which adequately described the inelastic and total cross section measurements in the region of 90 Mev, could not fit the 270 Mev data if expected values independent of the atomic number were employed for the two parameters of their theory. The two parameters are k_1 , the change in propagation vector of the neutron upon entering nuclear matter; and K , the absorption coefficient for the neutron wave in nuclear matter.

Indeed the 270 Mev data would require that an impinging neutron experience no change in potential upon entering a nucleus, if this theory were to be retained.

As the energy interval between the 95 and 270 Mev measurements was wide, it was felt necessary to investigate the variation of neutron total cross sections of a representative number of nuclei within this energy region.

II. Particle Energies and Effective Detection Energies

In connection with various experimental programs here at the 184-inch cyclotron the energy distribution of the neutrons knocked out of a 2-inch Be target by the 345 Mev protons has been measured by Cladis and Hadley, by Fox, et al.,⁷ and by Kelly, Wiegand and Segrè. All three measurements show a broad distribution peaked around 270 Mev, a composite result of which is shown in Fig. 1 as $N(E)$.

In order to obtain information concerning the variation with neutron energy of the bismuth fission counter, the ratio of Bi fission to the

⁷ R. Fox, C. Leith, L. Wouters, and K. MacKenzie, Phys. Rev., October 1, 1950

⁸ S. Fernbach, R. Serber, and T. B. Taylor, Phys. Rev. 75, 1352 (1949)

$C^{12}(n,2n)C^{11}$ reaction was studied for neutrons with mean energies at 90 Mev, at 270 Mev, and for several intermediate values. This ratio increased uniformly by a factor of 3.56 ± 0.11 as the mean neutron energy changed from 90 Mev to 270 Mev. According to theoretical calculations by Baumhoff at this laboratory the $(n,2n)$ reaction yield in carbon should decrease slowly over this region to a value of about 0.8 of the 90 Mev yield. Similar theoretical calculations for the (p,pn) reaction⁹ in carbon have proved to be quite valid. It may be presumed therefore that the efficiency of the Bi fission reaction increases uniformly by a factor of about three in the neutron energy interval in question.

The selection of neutrons with different mean energies was accomplished by the use of a 1/2-inch Be target at various radii in the cyclotron, with appropriate adjustments of the counters for each target position. It is necessary then to estimate the neutron spectra produced by the various proton energies employed. The following data are pertinent:

1. The neutron spectra from 1/2-inch and 2-inch Be targets are not appreciably different at these energies, because of multiple passage of the circulating beam through targets.
2. The neutron spectrum from a Be target bombarded by 180 Mev protons has been observed by Fox and Wouters¹⁰ to have its maximum in the vicinity of 110 Mev.
3. The neutron spectrum from a Be target bombarded by 345 Mev protons has its maximum at about 270 Mev.
4. The ratio of Bi fission cross section to the $C^{12}(n,2n)C^{11}$ cross section for neutrons from 165 Mev protons was equal to that for the

⁹ W. Heckrotte and P. Wolff, Phys. Rev. 73, 264-5 (1948)

¹⁰ R. Fox and L. Wouters, private communication.

neutrons of 90 Mev mean energy from the stripping of 190 Mev deuterons.

In the light of these observations it will be assumed that the mean energy of the neutron spectrum falls 70 Mev lower than the energy of the bombarding protons.

The comparison of Bi fission with the $C^{12}(n,2n)C^{11}$ reaction was accomplished by exposing a fission counter and a polystyrene foil simultaneously in the proper location relative to the proton target. Measurements were made at 40 Mev intervals of proton energy ranging from 150 Mev to 345 Mev. Sufficient absorber was placed before the detectors to stop protons scattered out through the tank wall from the target.

The effective neutron detection energy is estimated by plotting the product of the neutron energy distribution and the Bi fission cross section vs. energy. In Fig. 1 this is illustrated for the case of neutrons from the 345 Mev protons. The effective detection energy is not significantly different from the mean energy of the neutrons.

III Experimental Arrangement

The neutrons produced by the bombardment of the 2-inch Be target by 345 Mev protons have a wide angular distribution with a half-width at half maximum of 25° (as measured with bismuth fission). Since only two collimators are present in the concrete shielding, corresponding to proton energies of 180 and 345 Mev, the detector must be placed inside the shielding for intermediate energies (Fig. 2). Most of the neutron flux passes through an inch of steel tank wall as well as other tank fixtures; so the elastically scattered flux from these could constitute a background of perhaps 10 to 20 percent of the undeviated flux in the absence of any collimation. To reduce the detector background the chamber was placed behind a 7-foot thick concrete block with an adjustable collimating arrangement through its central region

admitting a neutron beam slightly less than 2 inches in diameter. As the target position was varied from 81 inches to 54 inches to obtain the desired proton energy settings, the collimating apparatus was swiveled into alignment for the various target positions. The detector was placed six feet to the rear of the concrete block and the attenuating materials were aligned immediately in front of the block on a wooden holder as shown in Fig. 2. The distance from absorbers to detector was about 13 feet, so the geometry was "good" with only small angular scattering corrections necessary.

To monitor the neutron beam a bismuth fission chamber was placed to one side of the concrete block at a position where the contribution of neutrons scattered from the absorbers to its counting rate was negligible. Background was determined by placing approximately seven mean free paths of absorbers on the holder. For most measurements the background was of the order of 5 percent of the detector counting rate with no absorbers present. The geometry was tested by comparing the attenuation of the 270 Mev neutrons using the above geometry with the previous⁶ setup in which the detector was placed outside the 10-foot concrete shielding in the collimated neutron beam. With the detector outside the shielding the background was completely negligible and the angular scattering correction less by a factor of two than in the present case.

To test the new geometry the length of copper absorber was increased by 3-inch steps to 12 inches, and the resulting attenuation when corrected for background was found to be linear as a function of absorber length when plotted on semi-logarithmic paper.

If N_0 is the number of neutrons per second reaching the detector with no absorber present and N is the number when absorber of length L is present

$$\frac{N - b}{N_0 - b} = e^{-n\sigma_t L} \quad (1)$$

where b is the background counting rate when an absorber that absorbs essentially all the neutrons is placed in position, n is the number of nuclei per cubic centimeter, and σ_t is the total nuclear cross section. A value of $1.14 \pm 0.02 \times 10^{-24}$ cm² was obtained with the present arrangement as compared with the result outside the shielding of $1.15 \pm 0.02 \times 10^{-24}$ cm² for the copper total cross section.⁶ Linear semi-log plots were obtained at other probe positions to check the geometry. Most of the measurements were made with between one and two mean free paths of absorber present in order to obtain optimum statistics for a minimum time of cyclotron operation.

IV Attenuator Materials

The metals used in the experiments were usually machined cylinders, three or four inches in diameter with negligible chemical impurities. Densities were obtained from measurements of the physical volumes with micrometer and vernier calipers and accurate weights of the cylinders.

The total cross section of hydrogen was measured using pentane-carbon differences. A brass cylindrical holder 48 inches long with 1/32-inch thick walls and bases held the pentane. An array of seven machined, 3-inch diameter graphite cylinders, with total mass per unit area equal to that of the carbon in the 48-inch length of pentane, plus a 1/16-inch thick brass disc, were alternately used with the pentane to attenuate the neutron beam. The decrease in the detector counting rate when the graphite was replaced by pentane is from the attenuation of the neutrons due to the hydrogen alone. Since only 0.3 to 0.4 mean free path of hydrogen is present (depending on the neutron energy) repeated cycles were made at a given probe setting to obtain good statistics. The percent statistical error of the cross section measurement is equal to the percent statistical error in counting divided by the number of mean free paths of hydrogen present. Short blank cycles were taken with

an empty holder to obtain the carbon cross section.

V Results

The data obtained are given in Table I. Pertinent results from the previous study⁶ at 270 Mev are given in Table II. Copper, tin, lead, and uranium have small diffraction scattering corrections (<one percent) incorporated into their cross section values. The variations of the cross sections with energy are shown in graphical form for carbon, aluminum, copper, and lead in Fig. 3. Variation of the hydrogen cross section is illustrated in Fig. 4. Data from previous studies^{3,4,5,6} are included in these curves, and in Fig. 3, published results at 14 Mev¹¹ and 25 Mev¹² have been also plotted. The errors given are the statistical fluctuations from counting alone expressed in standard deviations.

¹¹ Amaldi, Bocciarelli, Cacciapuoti, and Trabachi, *Nuovo Cimento* 3, 203 (1946)

¹² R. Sherr, *Phys. Rev.* 68, 240 (1945)

Table I

Total Cross Sections of Nuclei for High Energy Neutrons
Measured with Bismuth Fission Chambers

Proton Energy	Target	Estimated Neutron Energy	Element	$\sigma_t \times 10^{24} \text{ cm}^2$
310 Mev	0.5" Be	240 Mev	Al Cu Pb	0.576 \pm 0.012 1.15 \pm 0.02 2.88 \pm 0.05
290 Mev	0.5" Be	220 Mev	H C Al Cu Pb	1) 0.0410 \pm 0.0041 2) 0.0410 \pm 0.0029 0.041 \pm 0.0024 (ave.) 1) 0.288 \pm 0.10 2) 0.283 \pm 0.08 0.285 \pm 0.06 (ave.) 0.576 \pm 0.021 1.15 \pm 0.035 2.99 \pm 0.14
270 Mev	2" Be	190 Mev	C Al Cu Sn Pb U	0.291 \pm 0.009 0.540 \pm 0.028 1.15 \pm 0.04 1.90 \pm 0.07 2.85 \pm 0.10 3.28 \pm 0.13
250 Mev	0.5" Be	180 Mev	Al Cu Pb	0.575 \pm 0.013 1.25 \pm 0.03 3.06 \pm 0.06
230 Mev	0.5" Be	160 Mev	H C	1) 0.0548 \pm 0.0060 2) 0.0504 \pm 0.0029 0.0512 \pm 0.0026 (ave.) 1) 0.298 \pm 0.012 2) 0.295 \pm 0.0075 0.296 \pm 0.006 (ave.)
225 Mev	2" Be 0.5" Be	145 Mev 155 Mev	Cu Cu	1.31 \pm 0.04 1.30 \pm 0.04
185 Mev	0.5" Be	115 Mev	Cu	1.52 \pm 0.06
180-190*	0.5" Be	110-120 Mev	Al Cu Pb	0.733 \pm 0.012 1.49 \pm 0.02 3.71 \pm 0.06

* Probe position not accurately known

Table II
Total Cross Sections for 95 and 270 Mev Neutrons Measured
Previously⁶ with Bismuth Fission Chambers

Element	σ_t (95 Mev) x 10^{24} cm ²	σ_t (270 Mev) x 10^{24} cm ²
Hydrogen	0.073 ± 0.0015	0.038 ± 0.0015
Carbon	0.498 ± 0.003	0.288 ± 0.003
Aluminum	0.993 ± 0.011	0.555 ± 0.008
Copper	2.00 ± 0.02	1.15 ± 0.02
Lead	4.48 ± 0.03	2.84 ± 0.03

VI Discussion of Results

Carbon, aluminum, copper and lead all exhibit little variation in their total cross section values from about 180 Mev to 270 Mev mean neutron energy, as Fig. 3 indicates. The neutron energy distribution detected by the fission chambers is rather broad for the measurements undertaken and the resulting cross sections may not correspond exactly to the true cross section at the mean detected energy of the unattenuated distribution. If the detected energy distribution is given by $f(E)$ where $f(E)$ is normalized so that

$\int_{E_{\min.}}^{E_{\max.}} f(E) dE = 1$ the measured value of the cross section is from (1):

$$nL\sigma_m = \ln \frac{N_0 - b}{N - b} = - \ln \int_{E_{\min.}}^{E_{\max.}} f(E) e^{-n\sigma_t(E)L} dE$$

or

$$\sigma_m = \frac{-1}{nL} \ln \int_{E_{\min.}}^{E_{\max.}} f(E) e^{-n\sigma_t(E)L} dE \quad (2)$$

If σ_m is examined for the energy intervals where measurements were made the following statements may be made for the four nuclei above:

1. For mean energies of 240 Mev or above, the variation of $\sigma_t(E)$ over the distribution is slight and σ_m agrees with $\sigma(\bar{E})$ at the mean energy

$$\bar{E} = \int_{E_{\min.}}^{E_{\max.}} Ef(E)dE$$

2. As the mean energy of the distribution is lowered to 160 Mev, $\sigma_t(E)$ begins to increase on the low energy side of the distribution from its level value, and the measured value σ_m will be higher than $\sigma(\bar{E})$.

In general the broad neutron distribution tends to round off the shape of the curves of Fig. 3. The plateaus are possibly slightly flatter and longer in extent than shown.

No attempt has been made to correct the present data for the spread in the neutron energies since the detected neutron distribution is hardly known with sufficient accuracy. A measurement of cross sections for a small neutron energy interval centered about 140 Mev would define the cross section variations in this region more precisely. Faster electronic circuits under development in connection with scintillation counters may make this measurement feasible.

The theoretical predictions of Christian and Hart¹³ for a Yukawa potential with tensor interaction are also shown in Fig. 4. Experimentally the cross section deviates more markedly from an $1/E$ variation than it does theoretically.

VII Comparison with Cross Sections Observed in Cosmic Ray Attenuation

Estimates of the attenuation in the atmosphere of the components of cosmic radiation giving rise to penetrating showers, bursts in thin-walled

¹³ R. Christian and E. Hart, Phys. Rev. 77, 441 (1950)

chambers, nuclear stars, and slow neutrons have been given by Rossi.^{14,15}

It is shown that these events are almost certainly due to the high energy nucleon components of the cosmic radiation, consisting of both primary nucleons and energetic secondary nucleons formed in the atmosphere.

A summary of the data in references 14 and 15 is given in Table III. The attenuation lengths listed apply to integrated intensities, i.e., intensities measured without close angular or energy definition.

Table III

Attenuation Lengths for Reduction of Integrated Intensity
by Factor of $1/e$

Type of Event	Attenuation Length in Atmosphere	Attenuation Length in Pb
Penetrating Showers	110-125 gm/cm ²	
Bursts	120-140 gm/cm ²	250-450 gm/cm ²
Stars	135-150 gm/cm ²	~250 gm/cm ²
Slow Neutrons	160-190 gm/cm ²	

In some previous measurements by DeJuren⁶ of poor geometry attenuation of the 270 Mev neutrons it was found that the cross sections for inelastic collision were at least one-half the total collision cross sections. For 90 Mev neutrons the inelastic cross section is slightly less than $1/2 \sigma_t$.^{5,16}

If, for comparison with the cosmic-ray data, absorption cross sections of one-half the total cross sections measured for 270 Mev neutrons⁶ are used, the calculated attenuation lengths are 138 gm/cm² in air, and 250 gm/cm²

¹⁴ B. Rossi, Rev. Mod. Phys. 20, 537-583 (1948)

¹⁵ B. Rossi, ONR Technical Report No. 26 (Massachusetts Institute of Technology) April 4, 1949; AEC Index No. NP-891

¹⁶ Bratenahl, Fernbach, Hildebrand, Leith, and Moyer, Phys. Rev. 77, 597-605 (1950)

in Pb. Rossi¹⁵ quotes an attenuation length for "neutral N-rays" (supposedly high energy neutrons) in air of 130 gm/cm^2 .

It appears that cross sections for high energy neutron absorption fall rather abruptly to a broad, slowly-varying or flat region at approximately the minimum level demonstrated in cosmic rays, and that this flat region is entered at energies as low as approximately 200 Mev.

This work was performed under the auspices of the Atomic Energy Commission.

Figure Captions

Fig. 1. Estimation of detection efficiency vs. neutron energy in the case of 345 Mev protons.

$N(E)$ is the neutron energy spectrum from a two-inch Be target bombarded by 345 Mev protons. $\sigma_f(E)$ is the approximate excitation function for Bi fission by neutrons. The dashed curve is then the detection efficiency vs. energy.


Fig. 2. Plan view of experimental arrangement.

Fig. 3. Total cross sections vs. neutron energy.

The region between dashed lines contains the data from the present experiment. On either side of this region are data from earlier experiments by the same authors and by others mentioned in text.

Fig. 4. Total n-p cross section vs. neutron energy.

Triangles represent theoretical predictions of Christian and Hart.¹³

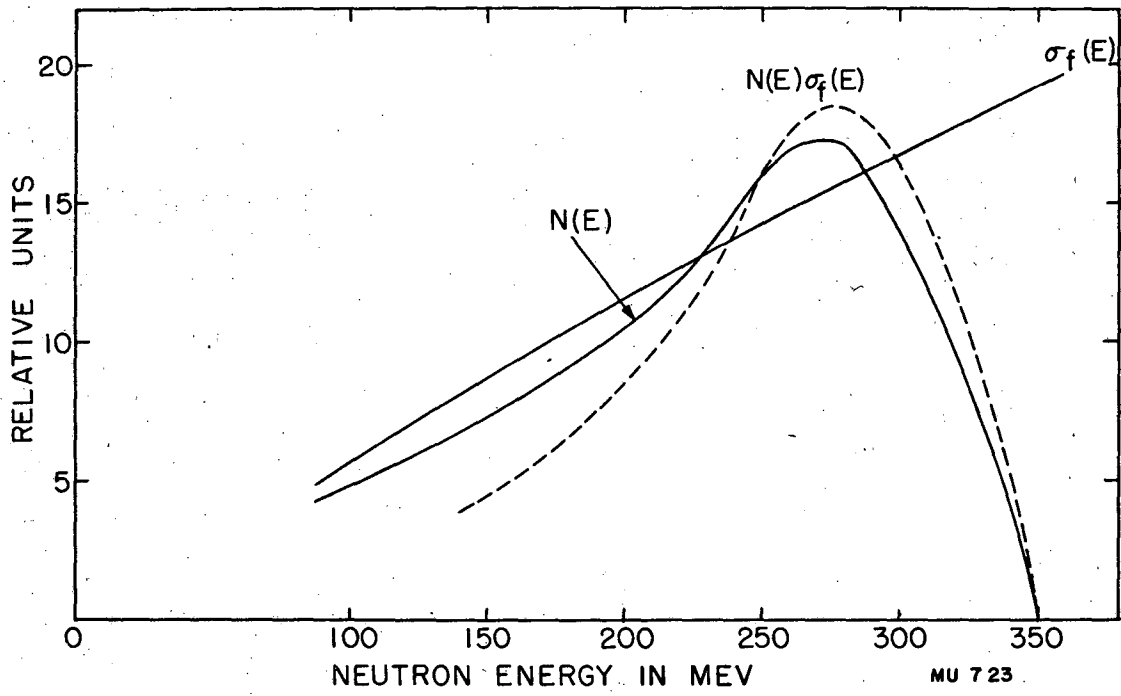

162921

Fig. 1

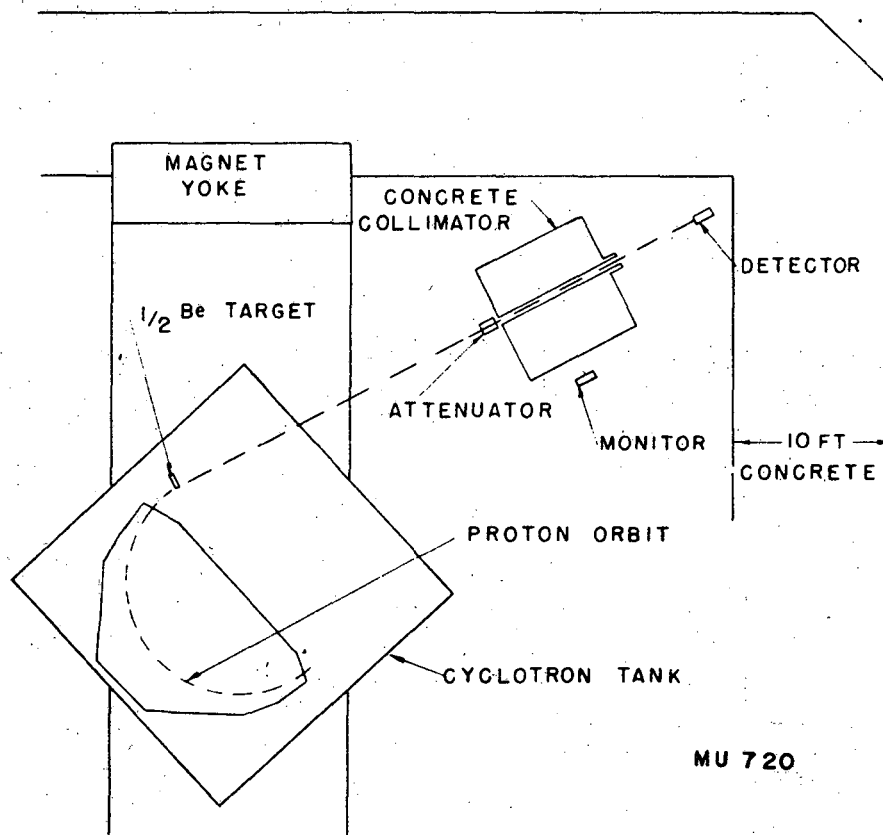


Fig. 2

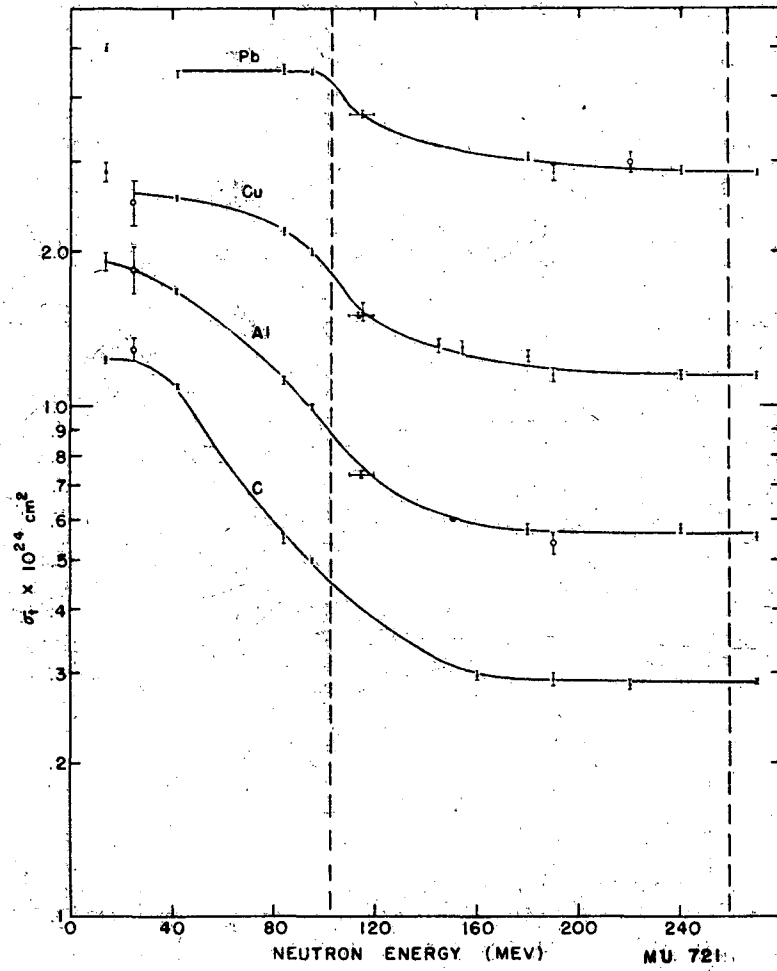


Fig. 3

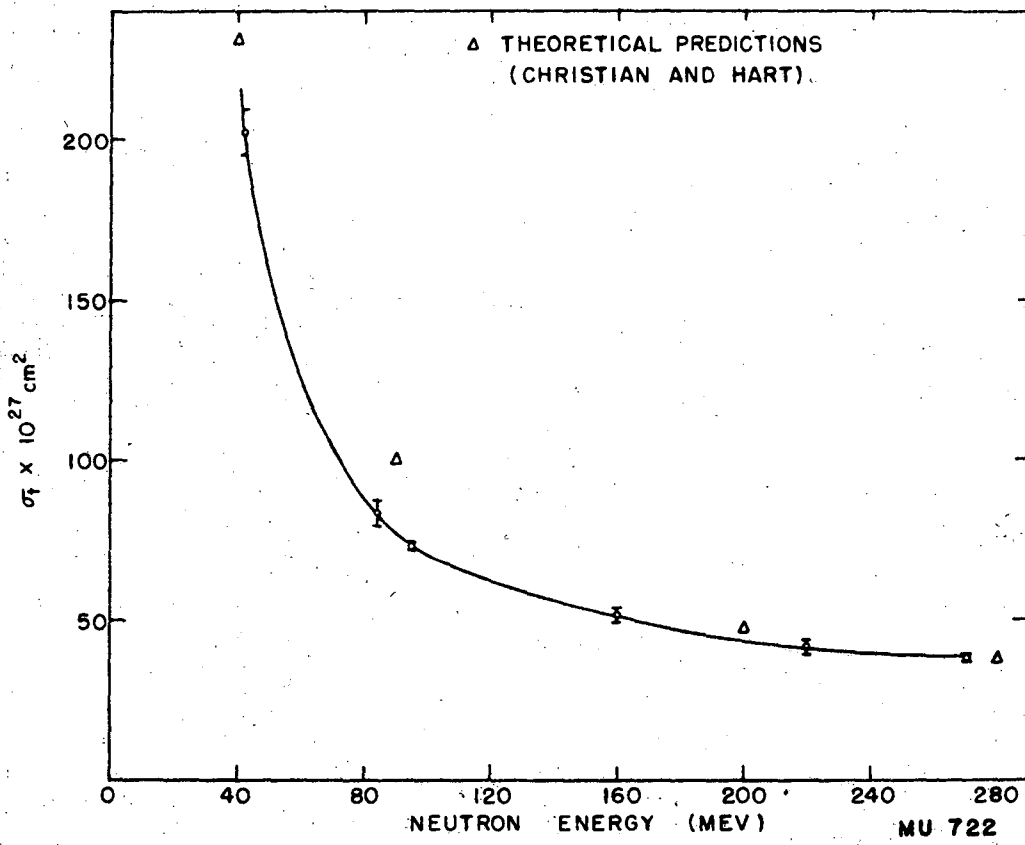


Fig. 4

FOR OFFICIAL USE ONLY

