

Lawrence Berkeley National Laboratory

Recent Work

Title

DOE-2 User News, Volume 14, Number 1

Permalink

<https://escholarship.org/uc/item/7zn3s4nb>

Author

Lawrence Berkeley National Laboratory

Publication Date

1993-04-01

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

RECEIVED

OCT 21 1983

PUB FILE
LBL LIBRARY

Lawrence Berkeley Laboratory
University of California
Berkeley, California 94720

DOE-2 USER NEWS

PUB-439

: A COMPUTER PROGRAM FOR BUILDING ENERGY USE ANALYSIS

Vol. 4 No. 3

AUGUST/SEPTEMBER 1983

Building Energy Simulation Group

Building 90, Room 3147

Telephone: (415) 486-5711

FTS: 451-5711

Table of Contents

The New Metric Option	1
Elevated Supply Air	
Temperatures for VAV Systems	2
Three-Year Index	4

BULLETIN BOARD

Item: DOE-2.1B is now the official, and most current, version of the program. The CDC version is available for purchase from NTIS and, to their registrants, from the National Energy Software Center, Argonne National Laboratory, Argonne, IL (312) 972-7250. The VAX and IBM versions will follow shortly. Purchasers of the new tape will automatically receive one complete set of DOE-2 user documentation, including the 2.1B updates, with their order. Additional copies of the documentation may be obtained from NTIS. Please note that it is now possible to order individual volumes from the basic set of documentation. The back page of this newsletter is a tear-out sheet containing an order form for tapes and documentation.

Item: As announced in the last issue, the DOE-2 Engineers Manual, Version 2.1A, has now been published. This volume will be updated sometime next year, to incorporate both DOE-2.1B and DOE-2.1C material. In anticipation, however, of an immediate interest in the new daylighting routines, we have produced a separate interim report, entitled Daylighting Calculation in DOE-2, LBL-11353 (III.2.9 only). A limited number of copies are available from this office. Please submit your request in writing to the address above.

THE NEW METRIC OPTION

Canadian and overseas users of DOE-2 will especially benefit from the metric option which has been introduced into the new version of the program. American users with foreign clients can also make use of the feature. Due to the flexibility of the code, output units are independent of input. Therefore, input decks employing the English unit system can be used to produce metric output, and vice versa. Additionally, input and output units can be switched back and forth at all levels of the program. Thus one could have, for example, LOADS in English units and SYSTEMS in metric units. Please refer to the DOE-2 Supplement, Version 2.1B, for a full discussion of the metric option.

There are several important guidelines to follow when preparing a metric input/output deck.

- The new keywords that invoke the metric option, INPUT- and OUTPUT-UNITS = METRIC, must be entered under the INPUT command at the beginning of each subprogram. Otherwise, the downstream programs will default back to ENGLISH.
- The use of libraries is subject to certain restrictions. 1) The DOE-2 Preassembled Library of materials and layers cannot be accessed if the LOADS subprogram is input in metric units. 2) User-created libraries may contain only one type of units. And 3) a library created in one unit-system cannot be used, of course, in a production run employing the other system.
- Many experienced users of the scheduling commands may have all but forgotten the existence of the keywords HOURS and VALUES in the DAY-SCHEDULE command. But their presence becomes significant when preparing a schedule that defines a temperature in a metric input deck. Specifically, the VALUES keyword must be replaced by the metric keyword TEMPERATURES (abbreviated, TEMP) to alert BDL to the fact that the value entered is expressed in ° Celsius. For example:

DAY1 = D-SCH HOURS = (1,24) TEMP = (21) ..

The reporting of temperature-related data will be meaningless if this keyword is neglected. Obviously, this requirement

(Continued on back page)

PUB-439

ELEVATED SUPPLY AIR TEMPERATURES FOR VAV SYSTEMS

Over the past few months, we have had a number of inquiries from DOE-2 users concerning the best approach for modelling elevated Supply Air Temperatures (SAT) of 60 to 65°F on VAV systems. The engineers indicate to us that HVAC designers face new problems because of increased air flow-rates and the associated increased fan energy. If we look at the problem closely, we can see that we really need to bring our air flow-rates back up to the levels that we used to consider normal prior to our high efficiency lighting systems, better glazing methods, and high room temperature set-points. These combined energy-saving methods can result in reduced indoor air quality with design air flow-rates of less than .5 CFM/sqft at 55°F supply air temperatures.

Since such low peak flow-rates fall below minimum acceptable levels, the first move is to elevate the supply air temperature. Higher SATs increase the air flow-rate, assuming the room temperature (RMT) remains constant at 78°F, as shown in the following relationship:

$$\text{AIRFLOW} = \frac{\text{SENSIBLE HEAT GAIN}}{1.08 * (\text{RMT} - \text{SAT})}$$

Most VAV supply fans are located downstream of the cooling coils (i.e., FAN-PLACEMENT = DRAW-THROUGH), so that SAT = Coil Leaving Air Temperature + Fan Heat. Therefore, if the user's SAT is not elevated above, say, 60°F and fan heat is 4°F, then the cooling coil leaving air temperature is 56°F DB and 54°F WB. This gives us a Humidity Ratio (W) of .0086 lb moisture/lb dry air which is sufficient to hold an acceptable space relative humidity of 50% RH at peak design loads, even though they may rise to 60% RH under conditions less than peak.

Now, however, if we elevate the SAT to 65°F (and fan heat is 4°F), we have a coil leaving air temperature 61°F DB and 59°F WB. This results in a W = .0104 lb moisture/lb dry air and a space RH of 58% at peak design loads, but exceeds 60% RH under conditions less than peak. Since ASHRAE STD 90 allows humidity control to prevent space relative humidities above 60%, the question is: "What are the DOE-2 options for modelling humidity control when we have elevated supply air temperatures to maintain acceptable air flow-rates?"

For our base case, let's take a VAVS system with just the following inputs:

DESIGN-COOL-T = 78	→	from
		ZONE-CONTROL
COOL-CONTROL = CONSTANT	}	
COOL-SET-T = 65		
MIN-SUPPLY-T = 60		from
MAX-HUMIDITY = 60		SYSTEM-CONTROL

Let's also assume that the building sensible cooling load is 100,000 Btu/hr: therefore DOE-2 will calculate a supply air flow-rate as follows:

$$\text{SCFM} = \frac{100000}{1.08 * (\text{DESIGN-COOL-T} - \text{MIN-SUPPLY-T})}$$

$$\text{SCFM} = \frac{100000}{1.08 * (78 - 60)} = 5144 \text{ CFM}$$

Whereas what we really want is a supply air flow-rate based on COOL-SET-T, so that if the MAX-HUMIDITY exceeds 60%, the supply air temperature will be depressed to MIN-SUPPLY-T for additional moisture removal. To accomplish this, we must force the system supply air flow-rate to the value we desire by first calculating the correct amount by hand and then entering this value using the keyword SUPPLY-CFM.

$$\text{SCFM} = \frac{100000}{1.08 * (78 - 65)} = 7123 \text{ CFM}$$

$$\text{SUPPLY-CFM} = 7123$$

The next consideration is whether we desire reheat to maintain the COOL-SET-T = 65 when the SAT is depressed by the MAX-HUMIDITY = 60 limit. If so, we also need to input HEAT-SET-T = 65 which allows the simulation of reheat by the air handling unit reheat coil.

If a Packaged VAV Unit was selected, with SYSTEM-TYPE = PVAVS, we can energize condenser recovery for reheat by entering under SYSTEM-EQUIPMENT the keyword MAX-COND-RCVRY = .8. Two other keywords, MIN-UNLOAD-RATIO with a value of .5, and MIN-HGB-RATIO with a value of .1, are optional but advisable, since Hot Gas Bypass is the normal set-up whenever condenser heat is recovered.

Two other options for elevated SATs are available to the DOE-2 user. The first is to reset the supply air as a function of outside air temperature. The necessary keywords are as follows:

```
DESIGN-COOL-T = 78
COOL-CONTROL = RESET
MIN-SUPPLY-T = 60
MAX-HUMIDITY = 60
SUPPLY-CFM = 7123
COOL-RESET-SCH = R-SET
```

A schedule that would be appropriate for R-SET might be:

```
R1 = DAY-RESET-SCH
SUPPLY-HI = 70 SUPPLY-LO = 65
OUTSIDE-LO = 70 OUTSIDE-HI = 90 ..
```

```
R-SET = SCHEDULE THRU DEC 31 (ALL) R1 ..
```

Given this input, if MAX-HUMIDITY exceeds 60% RH, the reset schedule would be overridden and the cooling coil leaving air temperature depressed to MIN-SUPPLY-T = 60. However, if HEAT-SET-T = 65 is input, the SAT, as reset by the schedule R-SET, will again be maintained using reheat and the coil leaving air temperature will be $\approx 56^{\circ}\text{F}$.

The second option is to use a "discriminator" control to set the supply air temperature to satisfy the cooling requirements of the "warmest" zone, which by definition would more than satisfy all other zone cooling loads. The correct input in this case is:

```
DESIGN-COOL-T = 78
COOL-CONTROL = WARMEST
MIN-SUPPLY-T = 60
MAX-HUMIDITY = 60
SUPPLY-CFM = 7123
```

Given this input, if MAX-HUMIDITY exceeds 60% RH, the discriminator would be overridden and the cooling coil leaving air temperature depressed to MIN-SUPPLY-T = 60. However, if HEAT-SET-T = 65 is input, the SAT as reset by the discriminator would be maintained using reheat. Notice that in all cases if reheat is locked out either by a HEATING-SCHEDULE or by failure to input the HEAT-SET-T keyword, DOE-2 will simulate subcooling in the space once the VAV box has reached its minimum stop, as input by the keyword MIN-CFM-RATIO.

In the near future, we will be adding, at the DOE-2.1C level, yet another system type, the PIU (for Powered Induction Unit) which the user can employ to increase zone air flow-rates. With this system the SAT to the space is elevated by inducing 1979 CFM from the ceiling plenum, mixing it with 5144 CFM of supply air from the air handler, and thus producing the desired total flow-rate of 7123 CFM used in the previous discussions. However, in this case, the cooling coil leaving air temperature can remain at 56°F and, thus, remove the required moisture so that the space humidity never exceeds the 60% RH limit. In effect, the reheat comes from the ceiling plenum free of charge.

To sophisticated designers, these discussions may appear simplistic. We wish to assure them that we too are cognizant of the many changes in the relationships between temperatures and flow-rates in actual VAV systems operations; DOE-2 simulation of VAV systems and their response to sensible space loads takes into account such real-world complexities. For example,

- 1) The cooling coil leaving air temperature is depressed by the controller as it approaches the bottom of its throttling range which naturally results in increased moisture removal. Just the reverse is true as sensible loads increase.

- 2) As the flow-rate at the cooling coil decreases, the leaving humidity ratio is further depressed since there is better contact of the air with the coil fin surface. DOE-2 simulates this with a linear curve labelled COIL-BF-FCFM.

- 3) Fan heat ΔT decreases as the fan flow-rate decreases; therefore the cooling coil leaving air temperature increases because the controller location is simulated as being downstream of the supply fan.

- 4) As the flow-rate to the space decreases, the space humidity ratio increases if the moisture gain in the space is a constant. Except for auditoriums, etc., most of the latent load on a system comes from the outside air rather than from within the building. Therefore a VAV system often can do a reasonable job of holding the relative humidity without reheat.

- 5) Since the peak latent loads normally coincide with the peak sensible loads, a VAV system often operates quite well without reheat; what little space subcooling that does occur, especially when the SAT is elevated, is not objectionable. Granted, the ASHRAE STD 90 cooling setpoint of 78°F is ignored by many building occupants.

- 6) The other SYSTEM-TYPEs besides VAVS and PAVS to which this entire discussion applies are the Ceiling Bypass-VAV (CBVAV) and the Ceiling Induction (SZCI) systems. CBVAV has a characteristic that should not go unmentioned. The flow-rate at the fan and coil is constant, and if the leaving air temperature is also constant, the leaving humidity ratio is constant. So even though the space temperature is controlled by varying the flow-rate to the space, the plenum air has a moisture level that does not vary. The moisture in the controlled space can easily migrate to the dryer ceiling space and therefore is seldom the problem it is with the straight VAV system. However, this does not remove the requirement to design using higher air flow-rates when the space sensible gains are low.

- 7) The user has the option in DOE-2.1B of setting a minimum zone air flow-rate using the ZONE-AIR keywords CFM/SQFT and AIR-CHANGES. This would eliminate the step outlined above of precalculating SUPPLY-CFM and entering its value as input. Notice that COOLING-CAPACITY will be recalculated by the program and may differ from the procedure followed above.

- 8) With the PIU system, in DOE-2.1C, if the plenum temperature is not higher than the space temperature, there is no free reheat available and the space will be simulated as being subcooled.

See also "Sizing Fans for VAV Systems" in our May 1981 issue.

THREE-YEAR INDEX TO THE DOE-2 USER NEWS

A regular Fall feature is the cumulative subject/title index to all articles published in this newsletter.

Article/Topic	Date	Vol:No.	Page
Bibliography	November 1980	1:2	5
Bibliography-Update	May 1982	3:2	3
BLAST/DOE-2 Comparison	August 1982	3:3	1
Bugs			
2.1 Bug List (1-117)	February 1981	2:1	2
(118-133)	May 1981	2:2	9
(134-139)	August 1981	2:3	5
2.1A Bug List (1-26)	February 1982	3:1	9
(27-32)	May 1982	3:2	5
(33-35)	August 1982	3:3	3
(all)	November 1982	3:4	3
Bug Reporting	August 1980	1:1	2
	February 1983	4:1	1
CERL/DOE-2 Comparison	May 1982	3:2	3
CIRA: Computerized Instrumented Residential Audit	May 1982	3:2	2
Computer Service Bureaus — Update	May 1983	4:2	6
Custom Weighting Factors			
Automatic Custom Weighting Factors	May 1981	2:2	2
Caution and Error Messages	November 1980	1:2	2
Guidelines for Preparing Input	August 1980	1:1	15
Design Process, Using DOE-2 in	May 1982	3:2	4
Direct Cooling in PLANT	February 1982	3:1	2
Documentation Updates			
for DOE-2.1	February 1981	2:1	15
	November 1980	1:2	9
	August 1980	1:1	11
for DOE-2.1A	February 1983	4:1	4
DOE-2.1A			
Availability	February 1982	3:1	1
Engineers Manual	May 1983	4:2	1
Features, general	May 1981	2:2	1
	February 1981	2:1	1
Support of	February 1983	4:1	1
DOE-2.1B			
Documentation Update Package	November 1982	3:4	1
	May 1983	4:2	1
DOE-2.1n and LBL Research	May 1982	3:2	1
Electrical Generation Strategies	May 1983	4:2	1
Features, general	August 1982	3:3	1
Metric Option	August 1983	4:3	1
Release of	August 1983	4:3	1

Article/Topic	Date	Vol:No.	Page
DOE-2.1C			
Electrical Generation Strategies	May 1983	4:2	1
Functional Values	November 1982	3:4	1
Powered Induction Units	February 1983	4:1	2
DOE-2.1N and LBL Research	May 1982	3:2	1
Economic Evaluation Methods	February 1982	3:1	3
Electrical Generation Strategies	May 1983	4:2	1
Elevated Supply Air Temperatures for VAV Systems	August 1983	4:3	2
Functional Values	November 1982	3:4	1
Glazing Optimization Study	August 1982	3:3	4
<u>THE HEAT EXCHANGER</u>			
Capacities in Zonal Systems	November 1980	1:2	13
Cooling Tower	May 1981	2:2	12
DIAGNOSTIC	February 1981	2:1	21
	August 1980	1:1	19
Domestic Hot Water	May 1981	2:2	12
	February 1981	2:1	22
Dual-system Zone Simulation	November 1982	3:4	7
GLASS-TYPE	August 1980	1:1	18
Ground Water Heatpump	May 1982	3:2	6
Hourly Report Variables	February 1983	4:1	5
IBM version	February 1982	3:1	13
Keyword Value Ranges			
Default Values of Zero	November 1980	1:2	13
Limits on Mins. & Maxs.	August 1980	1:1	19
Limits			
Limits on Mins. & Maxs.	August 1980	1:1	19
U-names & Commands	August 1980	1:1	19
	February 1981	2:1	19, 21
Minimum PLANT Input	August 1980	1:1	20
Outside Air	August 1980	1:1	19
Radiant Panel Systems	May 1983	4:2	5
Reports			
BEPS	February 1982	3:1	13
	August 1981	2:3	6
	August 1980	1:1	20
ES-C	May 1981	2:2	13
Hourly Report Variables	February 1983	4:1	5
Loads Passed to PLANT	August 1980	1:1	17
LOADS Verification Reports	August 1980	1:1	18
PV-A	May 1981	2:2	12
SS-F	February 1982	3:1	13
	February 1981	2:1	21
Restaurant Kitchens	May 1983	4:2	5
Schedules			
COOL-TEMP-SCH	February 1982	3:1	13
Defaults in LOADS	November 1980	1:2	14
Supply Air Scheduling	November 1980	1:2	13
System Start-up	November 1982	3:4	7
U-names in Symbol Table	February 1981	2:1	21
School Buildings	May 1983	4:2	5

Article/Topic	Date	Vol:No.	Page
Shading	August 1981	2:3	6
	August 1980	1:1	18
Sizing			
In SYSTEMS	February 1981	2:1	22
In PLANT	May 1981	2:2	12
Steam Heat	November 1980	1:2	13
Steam Radiators	May 1983	4:2	5
Steam Turbine & Chiller	May 1982	3:2	6
Supply and Return Air			
Return Air	November 1980	1:2	13
Return Air Duct Thermostat	November 1980	1:2	14
Sizing of	February 1981	2:1	22
Supply Air Scheduling	November 1980	1:2	13
Weather Tapes			
On-site Data	August 1980	1:1	17
Types and Procurement	August 1980	1:1	17
Intermediate File Structures	February 1982	3:1	6
Metric Option, The New	August 1983	4:3	1
Microcomputers			
CIRA	May 1982	3:2	2
DOE-2	August 1981	2:3	1
MULTIPLIER, Problems with	November 1982	3:4	2
Natural Ventilation	November 1980	1:2	9
NESC Software Package	February 1983	4:1	1
Output Reports	May 1981	2:2	4
Powered Induction Units	February 1983	4:1	2
	August 1983	4:3	2
Radiant Panel Heating System -- RAMSES Group, France	May 1983	4:2	2
Schedules, Preparation of	February 1983	4:1	3
Schedules, Program Use of	May 1983	4:2	4
Sizing of Fans for VAV Systems	May 1981	2:2	7
SIZING-OPTION at ZONE Level	August 1981	2:3	3
Sky Simulator at LBL	May 1983	4:2	3
Stud Wall Construction	August 1981	2:3	4
SUPERLITE	May 1983	4:2	3
WRISC: A Computerized Search Service	November 1980	1:2	4

Information Sheet and Order Form:

DOE-2 Building Energy Use Analysis Program

Version 2.1B

The following may be ordered from NTIS by telephone, (703) 487-4650 or FTS 737-4650, or by mail. Please refer to the order numbers when ordering by telephone. Current costs may be obtained by calling NTIS.

copies CDC DOE-2.1B Program Tapes DE83048782

Character Type:

☐ EBCDIC

☐ ASCII

(The tape will be 9-track, 1600 bpi, unless otherwise specified)

sets Complete DOE-2.1B User Documentation PB83-? (Order Number Not Available)

You may also order by individual title:

* * *

____ copies Vol. I, Part 1, BDL Summary (Version 2.1B) DE83012486

___ copies Vol. I, Part 2, Users Guide (Version 2.1A) PB83-? (Order Number Not Available)

___ copies Vol. II, Sample Run Book (Version 2.1) PB83-? (Order Number Not Available)

____ copies Vol. III, Reference Manual, Parts 1 & 2 (Version 2.1A) PB83-? (Number Not Available)

copies DOE-2 Supplement (Version 2.1B update to the Reference Manual) DE83011814

* * *

_____ sets DOE-2.1B Documentation Update Package (DOE-2 Supplement and BDL Summary only)
PB83-? (Order Number Not Available)

copies DOE-2 Engineers Manual, Version 2.1A, DE83004575 @ \$34.50.

subscriptions to the quarterly DOE-2 USER NEWS PB81-912100

@ \$20 annually, North America (\$10 for each additional copy to same address);

\$40 annually, Foreign (\$20 for each additional copy to the same address).

Back issues are available at the cost of \$5 per copy (\$10, Foreign).

☐ Enclosed is a check or money order payable to NTIS for \$ _____.

☐ Charge to my NTIS Deposit Account No. _____☐ Charge to my American Express Account No.[illegible]☐ Charge to my MasterCard Account No.[illegible]☐ Charge to my Visa Account No.

| | | | |

Name: _____

Affiliation:

Address:

THE NEW METRIC OPTION — Continued

entails the explicit input of the DAY-SCHEDULE; it cannot be nested.

There is also one case, at present, of a schedule which takes intensity of radiation as input. In the new daylighting keywords, the schedule MAX-SOLAR-SCH defines values of direct solar gain transmitted through glass. If the user specifies DAYLIGHTING = YES, and defines this keyword under the WINDOW command, then the associated DAY-SCHEDULE must contain the metric keyword RADIATIONS (in place of TEMPERATURES, or the English VALUES) to indicate to BDL that the units are to be converted into W/m^2 , from the English Btu/ft^2-hr .

The same course of action must be taken when temperatures are being specified in the definition of performance curve. In this case, however, a new keyword has been added to

carry the message. In the CURVE-FIT command, if INPUT-TYPE equals the code-word TEMPERATURES, then the curve will be interpreted as having values in $^{\circ}C$. Otherwise they will default to NON-DIMENSIONAL.

All numerical defaults, minimums, and maximums are calculated from the current English ones. A metric edition of the BDL Summary is presently being prepared by the co-authors of the metrification of the program, the RAMSES Group at the Laboratoire de l'Accélérateur Linéaire, Université Paris-Sud, Orsay, France. Until that is available, interested users can use the conversion chart, LOADS Report LV-M, to determine the metric defaults and ranges. Note that the metric units employed in DOE-2 are those used by the scientific community in Europe; they may differ slightly from those of the S.I. system.

U.S. DEPARTMENT OF COMMERCE
National Technical Information Service
 Springfield, Va. 22161


AN EQUAL OPPORTUNITY EMPLOYER

POSTAGE AND FEES PAID
 U.S. DEPARTMENT OF COMMERCE
 COM-211



OFFICIAL BUSINESS
 Penalty for Private Use, \$300

PRINTED MATTER

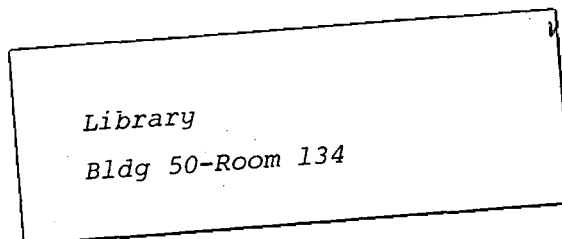

600/8,9-83 This work was supported by the Assistant Secretary for Conservation and Renewable Energy, Office of Building Energy Research and Development, Buildings Systems Division of the U.S. Department of Energy under Contract No. DE-AC03-76SF00098.