

UC Irvine

UC Irvine Previously Published Works

Title

Re-envisioning stormwater infrastructure for ultrahazardous flooding

Permalink

<https://escholarship.org/uc/item/88s5w7q7>

Journal

Wiley Interdisciplinary Reviews Water, 7(2)

ISSN

2049-1948

Authors

Sanders, Brett F
Grant, Stanley B

Publication Date

2020-03-01

DOI

10.1002/wat2.1414

Peer reviewed

OPINION

Re-envisioning stormwater infrastructure for ultrahazardous flooding

Brett F. Sanders^{1,2}  | Stanley B. Grant³

¹Department of Civil and Environmental Engineering, University of California, Irvine, California

²Department of Urban Planning and Public Policy, University of California, Irvine, California

³Charles E. Via, Jr. Department of Civil and Environmental Engineering, Virginia Tech, Blacksburg, Virginia

Correspondence

Brett F. Sanders, Department of Civil and Environmental Engineering, University of California, Irvine, CA.

Email: bsanders@uci.edu

Funding information

National Oceanic and Atmospheric Administration, Grant/Award Number: NA16NOS4780206; University of California Multicampus Research Programs and Initiatives, Grant/Award Number: MRP-17-455083

Abstract

Ultrahazardous flooding (UHF) occurs on low relief topography at the foot of mountain catchments and is characterized by rapid-onset, high-velocity flood flows, large fluxes of sediment and debris, and unpredictable flow paths. 20th century stormwater infrastructure seeks to contain UHF, up to a design level, using combinations of basins, reservoirs and flood control channels. However, these flood control elements may increase the risk of disasters due to: (a) increasingly frequent and intense wildfires that amplify streamflow and debris fluxes beyond infrastructure design capacity; (b) aging and underfunded infrastructure which is susceptible to clogging and failure during extreme events; and (c) expansive urban development where communities are relatively unaware and underprepared for flooding as a consequence of the “levee effect”—the false sense of safety that develops in the presence of flood defenses. 20th century stormwater infrastructure for UHF has also left communities with a legacy of social and environmental challenges including poor water quality, degraded habitats, high maintenance costs, unrealized urban amenities, and altered sediment fluxes. Adopting the Los Angeles Metropolitan Region as a type-locality for UHF, we propose a new paradigm for stormwater infrastructure based on the concept of erodible flood corridors. Our vision aims for greater sustainability and resilience to extreme events based on congruency with natural processes, conservation of resources and associated ecosystem services, minimization of flood exposure and vulnerability, and avoidance of legacy risk and energy intensive practices.

This article is categorized under:

Engineering Water > Sustainable Engineering of Water

Engineering Water > Planning Water

Science of Water > Water Extremes

KEYWORDS

disasters, flooding, hazards, narrow coastal plains, stormwater infrastructure

1 | INTRODUCTION

Developed areas at the foot of mountains are exposed to ultrahazardous flooding (UHF) defined here as rapid-onset, high-velocity, erosive, debris-laden flooding with unpredictable flow paths for which elevation-on-fill cannot be presumed to mitigate damage and public safety risks (National Research Council, 1996). Over the time scale of a single event, UHF flood flows from intense precipitation over mountain catchments may carve new channels, move boulders or large debris, or yield mud flows that pose major damage threats (e.g., Brooks, 1982; Jones, 2018; National Research Council, 1996). Precipitation on developed areas at the foot of mountains further amplifies flood hazards with stormwater runoff. UHF has also been described as *alluvial fan flooding* for regulatory purposes, but it is not limited to alluvial fans; rather, UHF can occur in numerous geologic settings (e.g., marine terraces) below a topographic break (National Research Council, 1996; Pelletier et al., 2005). Examples of areas exposed to UHF include narrow ($\sim <50$ km) coastal plains found along the west coast of North America and South America, the Mediterranean coast, and elsewhere (IB & WMD, 1907), basin and range landscapes such as those found in the southwestern United States, and various mountain regions around the world (National Research Council, 1996). With population growth of metropolitan areas of the United States (Hobbs & Stoops, 2002) and in coastal cities globally (Hinkel et al., 2014), populations exposed to UHF have been increasing.

In a natural state (Figure 1a), flood flows from mountain canyons spread out and disperse the delivery of water, sediment, energy, and debris. However, this renders virtually all low relief topography vulnerable to flooding at any time given the potential for channels (and flood flows) to avulse and change course over the time scale of a single flood event—a significant barrier to economic development. 20th century stormwater infrastructure addresses economic development and safety needs with a minimal spatial footprint that maximizes land for development (Brooks, 1982; Kier, 1984). Four common elements are shown in Figure 1b: (a) basins (or reservoirs) designed to collect coarse sediment and debris from mountain runoff and in some cases attenuate flood peaks; (b) spatially efficient flood control channels designed to rapidly and safely transport flood water and fine sediment downstream away from development; (c) groundwater recharge basins to enhance water supplies; and (d) urban drainage systems that transfer pluvial flood water into drainage channels. Figure 2 presents some of these features in greater detail based on a small system in Riverside County in Southern California. In this case, the basin's outlet works include a low flow culvert and high flow spillway, and the flood control channel has a smooth concrete surface with a rectangular cross section that supports supercritical flow for rapid movement of flood water downstream (Henderson, 1966).

20th century infrastructure designs can be very effective at preventing life-threatening and costly flood losses during storms smaller than the design capacity. However, this approach leaves communities vulnerable to disasters from events larger than the design capacity—events that are likely to be more common in a warming world (Jones, 2018). Indeed, global warming is intensifying cycles of drought, wildfire and rainfall, which collectively increase the potential for mud and debris flows (Dai, 2013; Min, Zhang, Zwiers, & Hegerl, 2011; Ren, Fu, Leslie, & Dickinson, 2011;

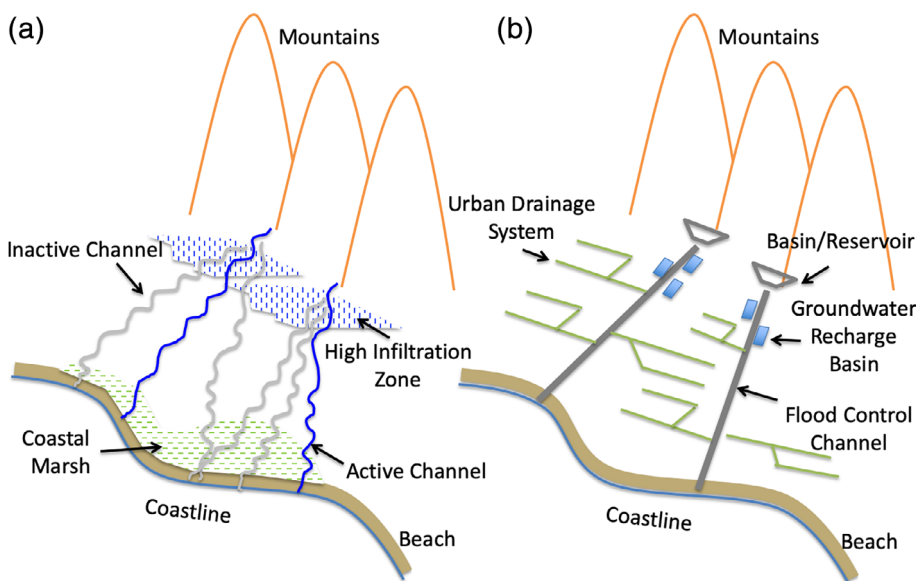


FIGURE 1 Low relief topography at the foot of mountains (a) is exposed to ultrahazardous flooding (UHF) characterized by rapid-onset, high-velocity flood flows, large fluxes of sediment and debris, and unpredictable flow paths. 20th century stormwater infrastructure (b) maximizes land for development with basins/reservoirs, flood control channels, urban drainage systems and groundwater recharge basins. This approach comes at the expense of riparian and stream habitats, stream health, water quality, altered sediment fluxes, increased risks of disasters, negative downstream impacts, and high management costs for water treatment, groundwater recharge, and sediment removal/disposal



FIGURE 2 McVicker debris basin in Riverside County, California. Coarse sediment and debris settle in the collection area, while flood water and suspended fines pass through a culvert into a flood control channel. A spillway is used to accommodate high flows. Image source: Google, 2018

Westerling, Hidalgo, Cayan, & Swetnam, 2006), as tragically played out in the Montecito and Carpinteria debris flows that followed the Thomas Fire in Southern California (Oakley et al., 2018). Infrastructure failure also becomes more likely with unmet needs for infrastructure maintenance funding (Vahedifard, AghaKouchak, Ragno, Shahrokhbabadi, & Mallakpour, 2017), and flood risks are compounded by high vulnerability to low probability events—a result of the “levee effect” whereby engineered flood defenses create a false sense of safety that leaves communities relatively unaware and underprepared to cope with flood-related disasters (Burby, 2006; Cutter, Emrich, Gall, & Reeves, 2017; Di Baldassarre et al., 2015, 2019; Houston et al., 2019; Montz & Tobin, 2008; Myers & White, 1993).

In recent decades, the most prominent flooding disasters in the United States have occurred from hurricanes and tropical storms striking low-gradient settings along the Gulf Coast and East Coast (NOAA National Centers for Environmental Information, 2019); such events are expected to increase in the future (Bilskie et al., 2016, 2019; Kulp & Strauss, 2017). Similarly, when extreme floods occur in high-gradient settings, the damage potential is high. A recent example is the 2013 Colorado Front Range floods which destroyed 1,500 houses, 200 commercial buildings and 30 state highway bridges, damaged nearly 19,000 houses and 800 commercial buildings, 200 miles of roadway, and 20 state highway bridges, and resulted in numerous fatalities (National Weather Service, n.d.; Soden, Sprain, & Palen, 2017). The damage potential of UHF is especially high as a result of unpredictable flow paths, as was the case when Hurricane Liza struck Baja California in 1976 causing a disaster in La Paz, Mexico. As shown in Figure 3, intense rainfall over mountain catchments caused the swollen Arroyo El Cajoncito to break through a protective levee and avulse toward the city’s center. The ensuing flood water, mud and debris killed hundreds to thousands of people (mud and debris made it impossible to count) and tens of thousands of people were displaced (Associated Press, 1976a, 1976b). This disaster draws attention to the destructive power of UHF, and also illustrates how communities may develop in ways that significantly increase their risk to natural disasters (in this case to UHF) under the pretense that the city’s infrastructure (in this case flood control channels) will protect them (Burby, 2006; Cutter et al., 2017; Di Baldassarre et al., 2019).

Beyond increasing disaster risks, 20th century stormwater infrastructure triggers a set of seemingly intractable environmental and social problems (Askarizadeh et al., 2015; Fletcher, Andrieu, & Hamel, 2013; Walsh, Fletcher, & Ladson, 2005), or so-called legacy risk (Di Baldassarre et al., 2019). First, downstream delivery of sediment is disrupted. This can lead to downcutting of soft-bottom channels downstream and a deficit of sediment at the coast (Kondolf et al., 2014); in turn, the loss of sediment supply can worsen the impacts of sea level rise on coastal communities (Hanley et al., 2014). Second, infiltration of floodwater into groundwater aquifers is hindered by the: (a) replacement of soft bottom streams with impermeable surfaces (typically made of concrete) on the channel bottom and (b) inability of flood water to spread

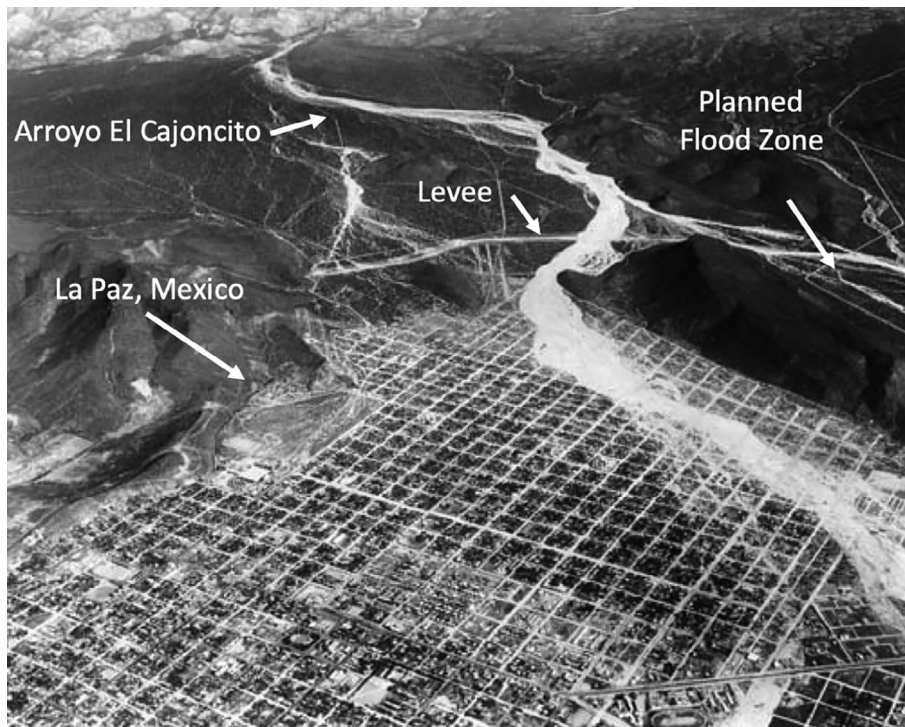


FIGURE 3 Aerial photograph of La Paz, Mexico, in October, 1976 after precipitation and runoff from Hurricane Liza caused the Arroyo El Cajoncito to avulse through a protective levee, sending fast moving flood water, mud and debris through an urban development. This event epitomizes ultrahazardous flooding (Photo by Harry Merrick)

out into areas, for example on alluvial fans, with high infiltration capacity. Third, hardened channels undermine nutrient cycling and associated pollutant removal processes that occur naturally in soft bottom channels, leading to poor water quality within the channels and in downstream receiving waters (Askarizadeh et al., 2015; Grant et al., 2018; Walsh et al., 2005). Fourth, hardened channels and impervious surfaces across developed areas limit green spaces and vegetated areas accessible to urban areas impacting local quality of life, including recreation, tourism, amenities, air quality, and education (Everard & Moggridge, 2012; Kondolf, 2011).

The loss of groundwater recharge is often redressed, as depicted in Figure 1b, with “groundwater recharge basins”. These common features of 20th century stormwater infrastructure are designed to capture and store mountain runoff and treated wastewater for greater water sustainability (Grant et al., 2012), and are sited in areas with high natural permeability. However, without the periodic high-energy flood flows that maintain streambeds in a high permeability state (Stewardson et al., 2016) these groundwater recharge systems quickly clog from the deposition of fine particles (Bouwer, 2002).

Short- and long-term costs are another important consideration, as stormwater infrastructure is expensive. In addition to capital costs for construction, property buyers and public agencies who take ownership of flood infrastructure face maintenance costs that over a few decades can exceed original construction costs (Askarizadeh et al., 2015; Keeler et al., 2019). Also problematic is the situation where smaller (typically “green”) elements of the flood control system, such as curb cut outs, pass into the hands of private individuals with little knowledge of how to maintain these systems, or even why they are there, post construction. As noted by Ambrose and Winfrey (2015), “transferring maintenance responsibility might be attractive to government agencies; however, distributing responsibility among many parties can be problematic because differing levels of maintenance can occur.” For these and other reasons, as noted by Keeler et al. (2019), the long-term durability of stormwater infrastructure is largely determined by “local buy-in and institutional and community capacity.” From a system dynamics perspective (Di Baldassarre et al., 2019; Gohari et al., 2013; Kallis, 2010), the legacy risks described above reflect the interconnectedness of stormwater infrastructure with broader water sustainability challenges, including links and feedbacks among natural, technological, and social sub-systems.

The goal of this study is to reflect on both the dangers of UHF and the legacy risks that have arisen from 20th century infrastructure designs, which have presumed that hardened (gray) designs are the only reliable approach for UHF (National Research Council, 1996), and then consider the possibility of a more sustainable design approach based on a combination of gray and green components, that is, reliance on natural processes. The paper continues as follows: In Section 2, we use the Los Angeles Metropolitan Region as a “type locality” for UHF, with the goal of highlighting how 20th century stormwater infrastructure can exacerbate both natural disasters and water sustainability challenges. In Section 3, we propose and develop an erodible corridor concept for UHF that combines gray (hardened) and green (natural) elements. Erodible corridors offer space for rivers to move and build complexity through natural processes

(Piégay, Darby, Mosselman, & Surian, 2005), and are viewed as the most sustainable approach for river restoration (Kondolf, 2011), but their applicability to UHF is challenging. With continued urban development around the world and calls for greater urban water sustainability (Grant et al., 2012), especially in arid climates, a reimagining of stormwater infrastructure for UHF is needed. Finally, Section 4 presents concluding remarks.

2 | LOS ANGELES AS A TYPE LOCALITY FOR ULTRAHAZARDOUS FLOODING

An exemplar of UHF is the Los Angeles Metropolitan Region (LA Metro) shown in Figure 4, the second largest metropolitan area in the United States, and 30th in the world, with a population of over 13 million people. When measured by gross domestic product (GDP), it ranks third in the world (Hawthornthwaite, Hoehn, & Tiwari, 2009). Population and economic assets blanket low relief topography, which is flanked by mountains rising more than 3,000 m to the north and east and the Pacific Ocean to the south and west. Rainfall of 10 in. (250 mm) or more per day has been recorded on several occasions at mountain gages resulting in flash flooding and widespread inundation, and severe rainfall events in the region have been attributed to atmospheric rivers (Fish, Wilson, & Ralph, 2019). The largest documented event, the Great Flood of 1861–1862, impacted the entire west coast of the United States. In the LA Metro region, rainstorms persisted for 28 days (Brewer, 1930) and one gage reported 66 in. (1,680 mm) of rain (Jones, 2018). At that time, the population of Los Angeles was less than 5,000, land was primarily used for cattle grazing, and small towns were scattered across the coastal plain (Jones, 2018; Tomašových & Kidwell, 2017). Jones (2018) writes,

[Flood water] extended for four miles around the Santa Ana River in Anaheim, creating an inland sea four feet deep that lasted for a month. When the flood finally receded, the mouth of the river had moved six miles. In Los Angeles, the water was described as extending from mountain to mountain, with no dry land in the fifty miles between the Palos Verdes Peninsula and the San Gabriel Mountains, an area now home to almost ten million people.

The flood completely destroyed numerous small towns, including Agua Mansa located on the Santa Ana River as shown in Figure 4, and hundreds of thousands of cattle drowned (Jones, 2018). At the time, Agua Mansa was the second largest town in the region after Los Angeles. By 1938, the population of the region had increased to over 1 million, spurred by agricultural and development opportunities made possible by an abundant supply of alpine water from the



FIGURE 4 The LA Metro region is built on a narrow coastal plain between several mountain ranges and the Pacific Ocean. Image source: Google Earth, 2018, with data from SIO, NOAA, U.S. Navy, NGA, GEBCO, USGS, LDEO-Columbia, and NSF

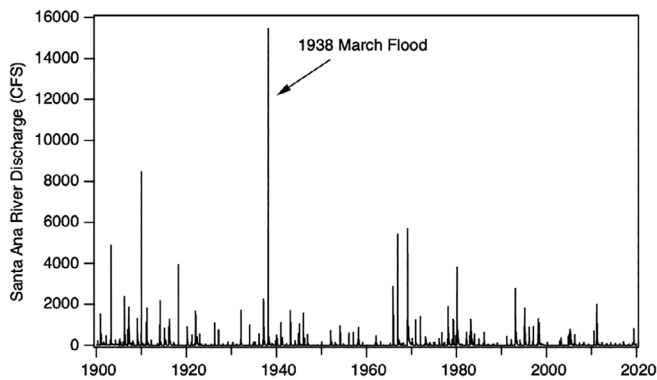


FIGURE 5 One hundred and twenty years (from January 1, 1900 to January 1, 2020) of daily average discharge upstream on the Santa Ana River ($N = 43,784$), in the foothills of the San Bernardino Mountains (USGS Gage 11051500). Over the entire 120-year period of record, the 1938 March flood stands out as an exceptional event

Owens Valley, east of the Sierra Nevada range, after the construction of the 223 mile (359 km) long Los Angeles Aqueduct. In late February of 1938, the first of two major storms dropped 4 in. (10 cm) of rainfall that saturated hillslopes and caused minor flood damage in the mountains. A subsequent storm on March 1 was much more severe, dropping 10 in. (250 mm) of rainfall on the region and 32 in. (810 mm) in the mountains in just one day. The recorded streamflow in the Santa Ana River stands today as the maximum over the 120-year gage record, as shown in Figure 5. The resulting \$78 million in damages (\$1.39 billion in 2018 dollars) included collapsed bridges and broken levees. Five thousand six hundred and one homes were outright destroyed, 1,500 more were rendered uninhabitable (Romo, 1988), and 115 lives were lost (Suburban Emergency Management Project, 2006).

The 1938 floods spurred the passage in the U.S. Congress of the Flood Control Act of 1941, which combined with California flood control policy of 1945, triggered a wave of construction of 20th century stormwater designs across the State of California (Kier, 1984; Kondolf & Lopez-Llompert, 2018). Prior to the 1938 event, this design approach shown in Figure 1b had already been adopted within the Los Angeles River basin and was credited with reducing impacts during the 1938 flood. However, rapid proliferation of these designs across the State stemmed from social factors: the political influence of developers, policy for financing flood control infrastructure, and economic conditions in California after World War II.

As described by Kier (1984), federal funding for planning, design and construction of flood control systems was available to communities on the condition that local sponsors of projects—such as cities, counties, or flood control districts—provided the necessary lands, easements and rights of way. This policy meant that local taxpayers would have a stake in flood control projects—and would need to deliberate over the scope and scale of projects and examine the distribution of benefits and that would be realized versus costs. However, the State of California had an enormous budget surplus in 1945 following World War II, which the California legislature decided to put toward eliminating the local match previously required for all flood control projects. This meant total funding for flood control projects—land acquisition, planning, design, construction—was available to communities from state and federal coffers alone. Kier (1984) describes the impact as follows:

...there was virtually no way that local officials could say no to a local flood control project. It did not cost them a cent and it made developers and other boosters happy. The planning was done—and still is done—by the federal agencies. The California Legislature authorizes each project for state assistance. The local agency proceeds to buy the necessary lands, relocate railroads and pipelines, raise street and highway bridges, periodically billing the [California Department of Water Resources] for reimbursement. When the project is completed, local government planners and developers attack what was once a riparian system and produce residential, commercial, and industrial properties which, in turn, produce the tax revenues necessary to maintain and operate the flood control project.

In the decades that followed, low topography across Southern California would be blanketed by development. High levels of impervious surfaces were made possible by stormwater infrastructure requiring a minimal spatial footprint—thus maximizing developable area. From an economic perspective, it can be argued this approach was a major success: as noted earlier, the region ranks third in the world for GDP. And to be fair, the National Research Council Committee on Natural Disasters review of the 1978 and 1980 floods in the LA Metro region, which were both characterized by a 25-year return period and within the design capacity of major stormwater channels, reported that the flood infrastructure prevented an estimated \$4B (1980 dollars) in damage (Brooks, 1982). Nevertheless, the risk of a disaster or even

catastrophe looms from an event beyond the design capacity of infrastructure that communities are not prepared to manage (Jones, 2018). Furthermore, 20th century stormwater infrastructure decimated riparian ecosystems and created a legacy of high management costs without a secure funding mechanism.

Generally, there is broad recognition that funding for the long-term maintenance of stormwater infrastructure is a major ongoing challenge (Copeland, 2016; Upadhyaya, Biswas, & Tam, 2014). For example, once a debris basin fills, subsequent floods result in the downstream transport of mud and debris leading to clogged channels, increased flow resistance, and increased risk of out-of-bank flows and infrastructure damage. Government agencies responsible for flood control thus remain active throughout the year maintaining channels, basins and other elements of flood control systems. This maintenance is expensive. Los Angeles County Flood Control District alone operates 14 flood control reservoirs and 162 debris basins and estimates that it will need to manage 51.6 million cubic meters of sediment between 2012 and 2032 (County of Los Angeles, 2013). Trucking costs alone are just shy of \$70 million annually (in 2013 dollars, assuming transportation costs \sim \$40/m³). The direct costs of keeping these systems functional easily run into the hundreds of millions of dollars annually, not accounting for the unrealized urban amenities (Everard & Moggridge, 2012; Kondolf, 2011) as well as impacts on coastal infrastructure due to the twin challenges of sea level rise and sediment starvation, as noted earlier (Hinkel et al., 2014; Kondolf et al., 2014).

When maintenance is delayed or postponed, costs can spiral upwards in ways that, from a systems perspective (Di Baldassarre et al., 2019; Gohari et al., 2013), exemplify feedbacks between among natural, technological, and social sub-systems. One particular cycle that has played out many times in the LA Metro region goes like this: hard bottom flood control channels collect sediment and debris during storm events, leading to the seeding and growth of vegetation. As the vegetation grows, riparian ecosystems become established and subject to wetland protection and endangered species regulations. The next cycle of channel cleaning (sediment and vegetation removal) triggers violations of federal and/or state laws, costly mitigation measures, and legal costs. For example, the County of Orange was recently required to purchase land and restore an impaired site to mitigate for cleaning a flood control channel—and destroying the habitat that established itself since the last cycle of cleaning. While this cycle can be broken with more frequent channel cleaning, funding shortfalls often undermine common sense solutions. To better position itself to address the management costs of stormwater infrastructure, Los Angeles County passed a new property tax in 2018 that charges landowners \$0.025 per year per square foot of impermeable area (Agrawal, 2018). The new tax is expected to generate \$300 million per year to address stormwater quality, fund capital investments into green stormwater infrastructure, and improve water recycling.

Across the LA Metro region, river restoration efforts are also underway. For example, a LA River Master Plan is presently under development with leadership from the County of Los Angeles. Its vision is to achieve “connected open space that includes clean water, native habitat, parks, multi-use trails, art, and cultural resources to improve health, equity, access, mobility, and economic opportunity for the diverse communities of LA County, while providing flood risk management” (County of Los Angeles, 2020). Riverside land near downtown Los Angeles has also been acquired and plans for redevelopment of the site are being formulated (City of Los Angeles, 2007). While this vision and specific project proposal appear to offer many realizable *social* benefits (although these have been challenged over equity concerns and their potential contribution to so-called Green Gentrification; Nagami, 2019), the restoration goals are quite modest with respect to overcoming the *hydrologic* shortcomings of stormwater infrastructure discussed herein. Indeed, the need to maintain, and even increase, flood flow capacity of the LA River within a small footprint acts as a major constraint on what can be done with respect to restoring hydrologic and sediment fluxes. Moreover, nowhere in the vision statement is the management of sediment mentioned.

3 | ENVISIONING ERODIBLE CORRIDORS FOR ULTRAHAZARDOUS FLOODING

Perhaps the most sustainable strategy for ecological restoration of rivers is an erodible corridor—a space where channel migration and complexity are enabled through natural fluvial processes (Kline & Cahoon, 2010; Kondolf, 2011; Piégay et al., 2005). The feasibility of erodible corridors is primarily shaped by three factors: (a) stream power; (b) sediment load; and (c) encroachment by development (Kondolf, 2011). Large floods in the LA Metro region are characterized by exceptionally high stream power and sediment loads, and thus fall into a category of restoration where hardened infrastructure is presently considered unavoidable (Kondolf, 2011; National Research Council, 1996). Moreover, once urban development has encroached on the margins of a narrow concrete channel, widening the channel entails acquisition of

parcels adjacent to the channel (on at least one side), which can be both costly (prohibitively so in urban areas with high real estate values) and controversial. Not only is developed land expensive, but channels (and bridges) often need to be widened many-fold to create a soft-bottom riparian corridor within which streams can flood, meander, migrate, erode and deposit. Thus, restoration efforts within the urban core of the LA Metro region have mainly been limited to the delivery of social benefits, such as access to trails and recreational opportunities (Kondolf, 2011). This is consistent with the aims of the LA River Master Plan reported above. Nevertheless, as metropolitan areas like LA continue to expand, and as land at the city's fringes is progressively developed, opportunities to implement erodible corridors may present themselves.

The space allocated for erodible flood corridors is typically based on rules-of-thumb, historical patterns of channel migration, and computer simulations of meanders (Kondolf, 2011; Piégay et al., 2005). However, these existing approaches are not directly applicable to low relief topography at the foot of mountains in areas, like the LA Metro region, where virtually all developable land has been exposed to channel flows at one time or another. Here, hardened features are needed to constrain the limits of channel migration. This Gordian Knot might be cut with a gray-green hybrid approach that uses hardened (gray) elements for the boundaries of the corridor and soft (green elements) in the interior to promote ecosystem services. Sizing such a corridor will require site-specific analyses, but it would likely be at least 10 times wider than standard (20th century) flood control channel designs, to enable meandering and channel complexity, and also to support extreme variability in sediment fluxes and streamflow.


While gray and green urban infrastructure is often framed in the literature as an either this-or-that choice (Keeler et al., 2019), one benefit of incorporating both elements into erodible corridors is their complementary functionality. Green in-corridor elements can be designed to mimic the natural processes that promote sustainability during non-extreme conditions. Gray elements can be designed to provide a high level of reliability against erosion and flood damage during extreme events, effectively constraining the amount of natural variability (and potential damage) that can occur. Further, the human health, equity, ecological, and economic co-benefits, beyond flood protection, associated with such hybrid systems should engender a broad coalition of support for erodible corridors and increase cost-sharing opportunities (Keeler et al., 2019).

This idea—of incorporating green elements into gray civil infrastructure—is not new. Increasingly, green stormwater infrastructure, such as biofilters and bioswales, is embedded within gray urban drainage systems (Askarizadeh et al., 2015). The green elements enhance local infiltration, reduce runoff, and reduce pollutant loads, while the gray elements (e.g., concrete pipe drainage systems) ensure the conveyance of water toward main stem channels and thereby reduce flood risk (Benedict & McMahon, 2002; National Research Council, 2009). Integration of green and gray elements is also gaining interest for coastal protection. “Living shoreline” coastal protection systems combine hardened elements such as sea walls or cobble berms with green elements such as nourished beaches and dunes, artificial reefs, and wetlands and the use of construction materials compatible with ecosystem needs (Gittman, Popowich, Bruno, & Peterson, 2014; Hanley et al., 2014; Morris, Konlechner, Ghisalberti, & Swearer, 2018). For example, erosion and flooding damage from Hurricane Sandy was reduced at Bay Head, NJ, by a buried concrete seawall that helped to dissipate wave energy after the overlying sand was eroded (Smallegan, Irish, Van Dongeren, & Den Bieman, 2016). Note that destruction of green elements is possible, and even likely, during extreme events; indeed, their destruction is part of the planning, design and budgeting process, just as the sand overlying the sea wall at Bay Head, NJ, was swept away by Hurricane Sandy.

What might a hybrid green/gray erodible corridor look like? Figure 6 presents one possible conceptualization that includes: (a) basins/reservoirs for storage and release of water, sediment and debris; (b) an erodible corridor with hardened banks that supports channel complexity, constrains channel migration and provides ample space for groundwater recharge, channel migration and complexity, nutrient processing, natural riparian habitat and coastal wetland and dune habitat; (c) sustainable urban drainage infrastructure with controls for water conservation, reuse and water quality and myriad of co-benefits, including evaporative cooling, opportunities for recreation, education about stormwater and flooding, and improved mental health (Engemann et al., 2019). Compared with existing stormwater designs (Figure 1b), the erodible corridor offers less space for development but greater opportunity for ecosystem services, reduced disaster risks, and reduced legacy risks.

Is this feasible? Dams capable of regulating flows of both water and sediment fluxes are not common, but not for a lack of technology. Kondolf et al. (2014) describe several methods for passing sediment through, or around, reservoirs. These authors also sound the alarm that construction of dams continues worldwide without these important systems. Similarly, soft-bottom channels with hard-banks are not uncommon in UHF settings, but these systems are often challenged by downcutting or aggradation brought on by altered sediment fluxes and stream power (Kondolf, 2011). Hence,

FIGURE 6 Conceptualization of stormwater infrastructure for ultrahazardous flooding including (a) reservoirs at the base of mountains with controls on the storage/release of water, sediment and debris, (b) an erodible corridor with hardened banks and a soft core that provides environmental and social benefits in addition to flood control and (c) urban drainage systems with controls to promote water conservation, reuse and water quality

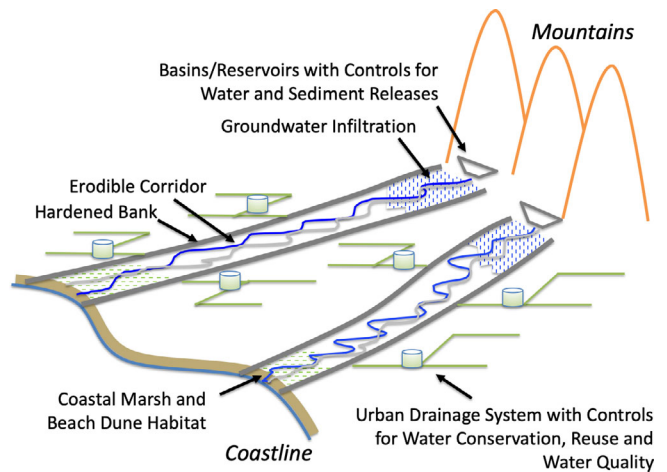

the success of an erodible corridor for UHF will be linked to the ability to constrain sediment fluxes and stream power through possibly real-time and adaptive engineering controls.

Sensing, simulation, and control systems are an emerging (21st century) feature of stormwater infrastructure (Kerkez et al., 2016), and could also play an important role in gray/green erodible corridors. Control on water and sediment fluxes from basins and urban drainage systems (Figure 6) would give managers the ability to respond to sedimentation trends that lead to unacceptable risks. Since sediment loads scale nonlinearly (as a power law) with stream discharge, the vast majority of transport occurs during the largest events (Warrick & Milliman, 2003). Hence, the key to control is regulating peak flows and sediment supplies. For example, observed trends in channel aggradation could be addressed by trapping more sediment upstream (reducing sediment supplies) and increasing peak flows by coordinated releases from basins/reservoirs and urban drainage systems. Conversely, downcutting could be addressed by increasing sediment supplies from upstream and reducing peak flows during major storm events. Indeed, previous research suggests that strategies for controlling flood peaks and managing flood impacts can be managed in real time (Sanders & Katopodes, 1999; Sanders, Pau, & Jaffe, 2006; Sanders & Schubert, 2019).

Sensing and control systems would also contribute to our vision of the erodible corridor. For example, groundwater infiltration can be enhanced by capturing more flood water during small events and timing the release for capture within infiltration areas (Figure 6), while recognizing that downstream delivery of mountain runoff from most events is important for the overall health of the stream corridor; for example, sediment mobility, water quality, vegetation, and wetlands. Such designs will not be free from maintenance costs. But by harnessing natural processes for the downstream delivery of sediment and debris, they should radically reduce the excavation and trucking requirements that currently dominate maintenance budgets, and may very well save money in the long run. Water quality improvement is another area where sensing and control systems might augment the functionality of hybrid green/gray erodible corridors. For example, Mullapudi, Wong, and Kerkez (2017) argue that real-time control of water movement through soft-bottom elements of flood control systems can be manipulated so as to maximize the removal of bioreactive nitrogen (e.g., nitrate) by biologically mediated denitrification.

Advanced flood simulation tools are needed to implement these real-time (cyberinfrastructure enabled) controls, and to manage and communicate risks within the erodible corridor (Luke et al., 2018; Pelletier et al., 2005; Sanders et al., 2020; Sanders & Schubert, 2019). Applications include forecasts for when grade level roadways may become impassable and in-corridor recreational facilities should be closed. They can also be used to assess the risks and benefits of utilizing erodible corridor for seasonal land uses, such as urban agriculture. These systems will also help manage risks of flooding outside the erodible corridor, including pluvial flooding from intense rainfall and excess mountain runoff not contained by the erodible corridor, or from the failure of gray infrastructure. This perspective reflects a shift in design philosophy for civil infrastructure from “fail-safe,” which promotes the false narrative that a hardened system can never fail, to “safe to fail,” which builds-in a level of preparedness and planning for extreme events (Ahern, 2011; Kim et al., 2017). Recent research from the LA Metro region points to the ability of advanced modeling systems to simulate urban flooding in real-time with street-level precision (Sanders & Schubert, 2019), and meet a wide range of end-user needs including planning, preparedness and emergency action plans (Luke et al., 2018; Sanders et al., 2020). The key to success is an iterative process of community engagement, so the decision-points supported by the modeling

system align with decision-making needs among diverse end-users (DeLorme, Kidwell, Hagen, & Stephens, 2016; DeLorme, Stephens, & Hagen, 2018; Sanders et al., 2020). A premium will also need to be placed on improving model skill for predictions of flooding, sediment mobility, and morphologic change within erodible flood corridors.

4 | CONCLUDING REMARKS

The destructive power of UHF is formidable and unpredictable, as tragically evidenced by the impact of Hurricane Liza on La Paz, Mexico, in 1976 (Figure 3), as well as many other events. Across the LA Metro region, where over 13 million people live on a narrow coastal plain exposed to UHF, economic growth following extreme events, such as the 1978 and 1980 floods, underscore the effectiveness of 20th century stormwater infrastructure. On the other hand, the recent Montecito debris flow serves as a vivid reminder that events outside of the design capacity are highly destructive (Oakley et al., 2018), and it is important to anticipate the scale and scope of destruction, and the national and international ripple effects, that would result if a flood comparable to the Great Flood of 1862, or even the March flood of 1938 (Figure 5), occurred in the LA Metro region today (Jones, 2018). Also important is recognition that 20th century stormwater infrastructure resulted in a host of social, equity, and environmental problems that impair sustainability, including negative impacts to water supplies and ecosystems, unrealized ecosystem services for urban communities, and disrupted sediment supplies that hamper responses to sea level rise. How this path of development transpired, in particular the role of governance and financing, points to system complexity (Di Baldassarre et al., 2019; Kier, 1984).

20th century flood control infrastructure aims to maximize the land available for development (Kier, 1984), making restoration of flood control channels into riparian corridors prohibitively expensive, except perhaps for modest measures that address social needs, such as access trails and educational programs (Kondolf, 2011). Globally, as the fringes of urban cores move out to the base of mountains, or as new cities are planned, there will be opportunities for more sustainable design approaches to address UHF. We argue that hybrid erodible corridors are an intriguing alternative to conventional designs that deliver the complementary benefits of green and gray elements, and can be outfitted with advanced sensing, simulation and control systems to manage flood risks and regulate flood peaks, sediment fluxes, and water quality. More research is needed to examine the feasibility of this approach and to develop design guidelines.

The land required to support erodible corridors, as depicted in Figure 6, would be significant and the costs would motivate influential economic arguments for more space-efficient infrastructure designs, as shown in Figure 1b, especially based on the potential for property tax revenue, business activity and political pressures, as we have observed in the past (Burby, 2006; Cutter et al., 2017; Kier, 1984). However, cost-benefit analyses should take into consideration all ecosystem services provided by the hybrid erodible corridor, in comparison to that delivered by 20th century channelized designs (Benedict & McMahon, 2002; Keeler et al., 2019; Morris et al., 2018), as well as the legacy risks and disaster risks associated with catastrophic failure (Burby, 2006; Cutter et al., 2017; Davis, 2007; Di Baldassarre et al., 2019), and the equitable distribution of costs and benefits across stakeholders.

ACKNOWLEDGMENTS

The authors wish to thank Tim Brick from the Arroyo Seco Foundation and Norman Brooks from the California Institute of Technology for drawing the attention of the authors to the difficult challenges of flood and sediment management in the LA Metro region.

CONFLICT OF INTEREST

The authors have declared no conflicts of interest for this article.

AUTHOR CONTRIBUTIONS

Brett F. Sanders: Conceptualization; funding acquisition; writing-original draft, review and editing. **Stanley B. Grant:** Conceptualization; funding acquisition; writing-original draft, review and editing.

ORCID

Brett F. Sanders  <https://orcid.org/0000-0002-1592-5204>

RELATED WIREs ARTICLES

[Natural flood management](#)

[Floods and societies: The spatial distribution of water-related disaster risk and its dynamics](#)
[Critical infrastructure and flood resilience: Cascading effects beyond water](#)
[Testing the impact of at-source stormwater management on urban flooding through a coupling of network and overland flow models](#)

FURTHER READING

- Benito, G., & Hudson, P. F. (2010). Flood hazards: The context of fluvial geomorphology. In I. Alcántara-Ayala & A. S. Goudie (Eds.), *Geomorphological hazards and disaster prevention* (pp. 111–128). Cambridge, England: Cambridge University Press.
- Blainey, J. B., & Pelletier, J. D. (2008). Infiltration on alluvial fans in arid environments: Influence of fan morphology. *Journal of Geophysical Research. Earth Surface*, *113*, F03008. <https://doi.org/10.1029/2007JF000792>.
- McGlashan, H. D. & Ebert, F. C. (1918). Southern California floods of January 1916. Water-supply Paper 426. Washington, DC: United States Geologic Survey.

REFERENCES

- Agrawal, N. (2018). L.A. county stormwater tax officially passes. *Los Angeles Times*. November 30, 2019.
- Ahern, J. (2011). From fail-safe to safe-to-fail: Sustainability and resilience in the new urban world. *Landscape and Urban Planning*, *100*(4), 341–343.
- Ambrose, R. F., & Winfrey, B. K. (2015). Comparison of stormwater biofiltration systems in southeast Australia and southern California. *WIREs Water*, *2*, 131–146.
- Askarizadeh, A., Rippey, M. A., Fletcher, T. D., Feldman, D. L., Peng, J., Bowler, P., ... Jiang, S. C. (2015). From rain tanks to catchments: Use of low-impact development to address hydrologic symptoms of the urban stream syndrome. *Environmental Science & Technology*, *49*(19), 11264–11280.
- Associated Press. (1976a, October 2). ‘Liza’ Lashes Baja California. *The Evening Independent*. <https://news.google.com/newspapers?id=XFlQAAAAIBAJ&sjid=TFgDAAAAIBAJ&pg=3500,244851&dq=hurricane+liza+warnings&hl=en>.
- Associated Press. (1976b, October 4). Mexico count dead after storm. *Bangor Daily News*.
- Benedict, M. A., & McMahon, E. T. (2002). Green infrastructure: Smart conservation for the 21st century. *Renewable Resources Journal*, *20*(3), 12–17.
- Bilskie, M. V., Hagen, S. C., Alizad, K., Medeiros, S. C., Passeri, D. L., Needham, H. F., & Cox, A. (2016). Dynamic simulation and numerical analysis of hurricane storm surge under sea level rise with geomorphologic changes along the northern Gulf of Mexico. *Earth's Future*, *4*(5), 177–193.
- Bilskie, M. V., Hagen, S. C., & Irish, J. L. (2019). Development of return period still water floodplains for the northern Gulf of Mexico under the coastal dynamics of sea level rise. *Journal of Waterway, Port, Coastal, and Ocean Engineering*, *145*(2), 04019001.
- Bouwer, H. (2002). Artificial recharge of groundwater: Hydrogeology and engineering. *Hydrogeology Journal*, *10*, 121–142.
- Brewer, W. H. (1930). *Up and Down California, 1860–1864. The Journal of William Henry Brewer, edited by Francis Farquhar*. New Haven, CT: Yale University Press. Retrieved from http://www.yosemite.ca.us/up_and_down_california/
- Brooks, N. H. (1982). Storms, floods, and debris flows in southern California and Arizona 1978 and 1980: Overview and Summary of a Symposium, September 17–18, 1980. Report No. CSS-CND-019A. National Academy Press, Washington.
- Burby, R. J. (2006). Hurricane Katrina and the paradoxes of government disaster policy: Bringing about wise governmental decisions for hazardous areas. *The Annals of the American Academy of Political and Social Science*, *604*(1), 171–191.
- City of Los Angeles (2007) *Los Angeles River Revitalization Master Plan*. Available online at <http://boe.lacity.org/lariverrmp/>. (Last accessed Jan 28, 2020)
- Copeland, C. (2016). Green Infrastructure and issues in managing urban stormwater. Library of Congress, Congressional Research Service.
- County of Los Angeles. (2013). Sediment management strategic plan, 2012–2032. County of Los Angeles Department of Public Works and the Los Angeles County Flood Control District. Retrieved from <https://dpw.lacounty.gov/lacfd/sediment/files/FullDoc.pdf>
- County of Los Angeles (2020). 2020 LA River Master Plan. Available online at <http://www.larivermasterplan.org/>. (Last accessed Jan 28, 2020).
- Cutter, S. L., Emrich, C. T., Gall, M., & Reeves, R. (2017). Flash flood risk and the paradox of urban development. *Natural Hazards Review*, *19*(1), 05017005.
- Dai, A. (2013). Increasing drought under global warming in observations and models. *Nature Climate Change*, *3*(1), 52–58.
- Davis, D. W. (2007). In harm's way. *Civil Engineering Magazine Archive*, *77*(7), 60–65.
- DeLorme, D. E., Kidwell, D., Hagen, S. C., & Stephens, S. H. (2016). Developing and managing transdisciplinary and transformative research on the coastal dynamics of sea level rise: Experiences and lessons learned. *Earth's Future*, *4*(5), 194–209.
- DeLorme, D. E., Stephens, S. H., & Hagen, S. C. (2018). Transdisciplinary sea level rise risk communication and outreach strategies from stakeholder focus groups. *Journal of Environmental Studies and Sciences*, *8*(1), 13–21.
- Di Baldassarre, G., Sivapalan, M., Rusca, M., Cudennec, C., Garcia, M., Kreibich, H., ... Sanderson, M. R. (2019). Sociohydrology: Scientific challenges in addressing the sustainable development goals. *Water Resources Research*, *55*, 6327–6355. <https://doi.org/10.1029/2018WR023901>

- Di Baldassarre, G., Viglione, A., Carr, G., Kuil, L., Yan, K., Brandimarte, L., & Blöschl, G. (2015). Debates—Perspectives on socio-hydrology: Capturing feedbacks between physical and social processes. *Water Resources Research*, *51*(6), 4770–4781.
- Engemann, K., Pedersen, C. B., Arge, L., Tsirogiannis, C., Mortensen, P. B., & Svenning, J. (2019). Residential green space in childhood is associated with lower risk of psychiatric disorders from adolescence into adulthood. *Proceedings of the National Academy of Sciences of the United States of America*, *116*(11), 5188–5193.
- Everard, M., & Moggridge, H. L. (2012). Rediscovering the value of urban rivers. *Urban Ecosystem*, *15*(2), 293–314.
- Fish, M. A., Wilson, A. M., & Ralph, F. M. (2019). Atmospheric river families: Definition and associated synoptic conditions. *Journal of Hydrometeorology*, *20*(10), 2091–2108.
- Fletcher, T. D., Andrieu, H., & Hamel, P. (2013). Understanding, management and modelling of urban hydrology and its consequences for receiving waters: A state of the art. *Advances in Water Resources*, *51*, 261–279.
- Gittman, R. K., Popowich, A. M., Bruno, J. F., & Peterson, C. H. (2014). Marshes with and without sills protect estuarine shorelines from erosion better than bulkheads during a Category 1 hurricane. *Ocean and Coastal Management*, *102*, 94–102.
- Gohari, A., Eslamian, S., Mirchi, A., Abedi-Koupaei, J., Bavani, A. M., & Madani, K. (2013). Water transfer as a solution to water shortage: a fix that can backfire. *Journal of Hydrology*, *491*, 23–39.
- Grant, S. B., Gomez-Velez, J. D., & Ghisalberti, M. (2018). Modeling the effects of turbulence on hyporheic exchange and local-to-global nutrient processing in streams. *Water Resources Research*, *54*(9), 5883–5889.
- Grant, S. B., Saphores, J.-D., Feldman, D. L., Hamilton, A. J., Fletcher, T. D., Cook, P. L. M., ... Marusic, I. (2012). Taking the “waste” out of “wastewater” for human water security and ecosystem sustainability. *Science*, *337*, 681–686.
- Hanley, M. E., Hoggart, S. P. G., Simmonds, D. J., Bichot, A., Colangelo, M. A., Bozzeda, F., ... Trude, R. (2014). Shifting sands? Coastal protection by sand banks, beaches and dunes. *Coastal Engineering*, *87*, 136–146.
- Hawksworth, J., Hoehn, T., & Tiwari, A. (2009). III—Which are the largest city economies in the world and how might this change by 2025? *PricewaterhouseCoopers UK Economic Outlook*. PricewaterhouseCoopers UK, London, England. Retrieved from <https://pwc.blogs.com/files/global-city-gdp-rankings-2008-2025.pdf>
- Henderson, F. M. (1966). *Open channel flow*. New York, NY: Macmillan.
- Hinkel, J., Lincke, D., Vafeidis, A. T., Perrette, M., Nicholls, R. J., Tol, R. S., ... Levermann, A. (2014). Coastal flood damage and adaptation costs under 21st century sea-level rise. *Proceedings of the National Academy of Sciences*, *111*(9), 3292–3297.
- Hobbs, F., & Stoops, N. (2002). Demographic trends in the 20th century. Census 2000 Special Reports, US Census Bureau. Retrieved from <http://www.census.gov/prod/2002pubs/censr-4.pdf>
- Houston, D., Cheung, W., Basolo, V., Feldman, D., Matthew, R., Sanders, B. F., ... Luke, A. (2019). The influence of hazard maps and trust of flood controls on coastal flood spatial awareness and risk perception. *Environment and Behavior*, *51*(4), 347–375.
- IB & WMD. (1907). Narrow coastal plains. *Science*, *25*(647), 833. <https://science.sciencemag.org/content/25/647/833.1>.
- Jones, L. (2018). *The big ones: How natural disasters have shaped us (and what we can do about them)*. New York, NY: Doubleday.
- Kallis, G. (2010). Coevolution in water resource development: The vicious cycle of water supply and demand in Athens, Greece. *Ecological Economics*, *69*, 796–809.
- Keeler, B. L., Hamel, P., McPhearson, T., Hamann, M. H., Donahue, M. L., Prado, K. A. M., ... Guerry, A. D. (2019). Social-ecological and technological factors moderate the value of urban nature. *Nature Sustainability*, *2*(1), 29–38.
- Kerkez, B., Gruden, C., Lewis, M., Montestruque, L., Quigley, M., Wong, B., ... Poresky, A. (2016). Smarter stormwater systems. *Environmental Science and Technology*, *50*, 7267–7273.
- Kier, W. M. (1984). Diverse interests in riparian systems and the potential for coalition. In R. E. Warner & K. M. Hendrix (Eds.), *California riparian systems* (pp. 231–235). Berkeley, CA: University of California Press.
- Kim, Y., Eisenberg, D. A., Bondank, E. N., Chester, M. V., Mascaro, G., & Underwood, B. S. (2017). Fail-safe and safe-to-fail adaptation: Decision-making for urban flooding under climate change. *Climatic Change*, *145*(3–4), 397–412.
- Kline, M., & Cahoon, B. (2010). Protecting river corridors in Vermont 1. *Journal of the American Water Resources Association*, *46*(2), 227–236.
- Kondolf, G. M. (2011). Setting goals in river restoration: when and where can the river ‘heal itself’? in Simon, A. et al (eds) *Stream Restoration in Dynamic Fluvial Systems: Scientific Approaches, Analyses, and Tools*. Geophysical Monograph Series Vol. 194 pp.29–43. American Geophysical Union, Washington DC. DOI: <https://doi.org/10.1029/2010GM001020>.
- Kondolf, G. M., Gao, Y., Annandale, G. W., Morris, G. L., Jiang, E., Zhang, J., ... Hotchkiss, R. (2014). Sustainable sediment management in reservoirs and regulated rivers: Experiences from five continents. *Earth's Future*, *2*(5), 256–280.
- Kondolf, G. M., & Lopez-Llompert, P. (2018). National-local land-use conflicts in floodways of the Mississippi River system. *AIMS Environmental Science*, *5*, 47–63.
- Kulp, S., & Strauss, B. H. (2017). Rapid escalation of coastal flood exposure in US municipalities from sea level rise. *Climatic Change*, *142*(3–4), 477–489.
- Luke, A., Sanders, B. F., Goodrich, K. A., Feldman, D. L., Boudreau, D., Eguiarte, A., ... Basolo, V. (2018). Going beyond the flood insurance rate map: Insights from flood hazard map co-production. *Natural Hazards and Earth System Sciences*, *18*(4), 1097–1120.
- Min, S. K., Zhang, X., Zwiers, F. W., & Hegerl, G. C. (2011). Human contribution to more-intense precipitation extremes. *Nature*, *470*(7334), 378–381.
- Montz, B., & Tobin, G. (2008). Livin’ large with levees: Lessons learned and lost. *Natural Hazards Review*, *9*(3), 150–157. [https://doi.org/10.1061/\(ASCE\)1527-6988\(2008\)9:3\(150\)](https://doi.org/10.1061/(ASCE)1527-6988(2008)9:3(150))
- Morris, R. L., Konlechner, T. M., Ghisalberti, M., & Swearer, S. E. (2018). From grey to green: Efficacy of eco-engineering solutions for nature-based coastal defence. *Global Change Biology*, *24*(5), 1827–1842.

- Mullapudi, A., Wong, B. P., & Kerkez, B. (2017). Emerging investigators series: Building a theory for smart stormwater systems. *Environmental Science: Water Research & Technology*, 3, 66–77.
- Myers, M. F., & White, G. F. (1993). The challenge of the Mississippi flood. *Environment*, 35(10), 7–35.
- Nagami, D. (2019). Planning for equitable development along the LA River, Natural Resources Defense Council Expert Blog. Retrieved from <https://www.nrdc.org/experts/damon-nagami/planning-equitable-development-along-river>
- National Research Council. (1996). *Alluvial fan flooding*. Washington, DC: National Academies Press.
- National Research Council. (2009). *Urban stormwater management in the United States*. Washington, DC: National Academies Press.
- National Weather Service. (n.d.). Floods in Colorado. Retrieved from <https://www.weather.gov/safety/flood-states-co>
- NOAA National Centers for Environmental Information. (2019). U.S. billion-dollar weather and climate disasters. Retrieved from <https://www.ncdc.noaa.gov/billions/>
- Oakley, N. S., Cannon, F., Munroe, R., Lancaster, J. T., Gomberg, D., & Ralph, F. M. (2018). Brief communication: Meteorological and climatological conditions associated with the 9 January 2018 post-fire debris flows in Montecito and Carpinteria, California, USA. *Natural Hazards Earth Systems Science*, 18, 3037–3043.
- Pelletier, J. D., Mayer, L., Pearthree, P. A., House, P. K., Demsey, K. A., Klawon, J. E., & Vincent, K. R. (2005). An integrated approach to flood hazard assessment on alluvial fans using numerical modeling, field mapping, and remote sensing. *Geological Society of America Bulletin*, 117(9–10), 1167–1180.
- Piégay, H., Darby, S. E., Mosselman, E., & Surian, N. (2005). A review of techniques available for delimiting the erodible river corridor: A sustainable approach to managing bank erosion. *River Research and Applications*, 21(7), 773–789.
- Ren, D., Fu, R., Leslie, L. M., & Dickinson, R. E. (2011). Modeling the mudslide aftermath of the 2007 southern California wildfires. *Natural Hazards*, 57(2), 327–343.
- Romo, R. (1988, February 22). Flood of memories: Longtime valley residents recall, 1938 deluge that took 87 Lives, did \$78 million in damage. *Los Angeles Times*. Retrieved from <https://www.latimes.com/archives/la-xpm-1988-02-22-me-29943-story.html>
- Sanders, B. F., & Katopodes, N. D. (1999). Active flood hazard mitigation. I: Bidirectional wave control. *Journal of Hydraulic Engineering*, 125(10), 1057–1070.
- Sanders, B. F., Pau, J. C., & Jaffe, D. A. (2006). Passive and active control of diversions to an off-line reservoir for flood stage reduction. *Advances in Water Resources*, 29(6), 861–871.
- Sanders, B. F., & Schubert, J. E. (2019). PRIMo: Parallel raster inundation model. *Advances in Water Resources*, 126, 79–95.
- Sanders, B. F., Schubert, J. E., Goodrich, K., Houston, D., Feldman, D. L., Basolo, V., ... Matthew, R. A. (2020). Collaborative modeling with fine-resolution data enhances flood awareness, minimizes differences in flood perception, and produces actionable flood maps. *Earth's Future*, 7, e2019EF001391. <https://doi.org/10.1029/2019EF001391>.
- Smallegan, S. M., Irish, J. L., Van Dongeren, A. R., & Den Bieman, J. P. (2016). Morphological response of a sandy barrier island with a buried seawall during Hurricane Sandy. *Coastal Engineering*, 110, 102–110.
- Soden, R., Sprain, L., & Palen, L. (2017). Thin Grey Lines: Confrontations with Risk on Colorado's Front Range. *Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems* (pp. 2042–2053). ACM.
- Stewardson, M. J., Datry, T., Lamouroux, N., Pella, H., Thommeret, N., Valette, L., & Grant, S. B. (2016). Variation in reach-scale hydraulic conductivity of streambeds. *Geomorphology*, 259, 70–80.
- Suburban Emergency Management Project. (2006). Los Angeles Basin's 1938 Catastrophic Flood Event. Biot Report #369. Retrieved from https://web.archive.org/web/20090509054714/http://www.semp.us/publications/biot_reader.php?BiotID=369
- Tomašových, A., & Kidwell, S. M. (2017). Nineteenth-century collapse of a benthic marine ecosystem on the open continental shelf. *Proceedings of the Royal Society B: Biological Sciences*, 284(1856), 20170328.
- Upadhyaya, J. K., Biswas, N., & Tam, E. (2014). A review of infrastructure challenges: Assessing stormwater system sustainability. *Canadian Journal of Civil Engineering*, 41(6), 483–492.
- Vahedifard, F., AghaKouchak, A., Ragno, E., Shahrokhbadi, S., & Mallakpour, I. (2017). Lessons from the Oroville dam. *Science*, 355(6330), 1139–1140.
- Walsh, C. J., Fletcher, T. D., & Ladson, A. R. (2005). Stream restoration in urban catchments through redesigning stormwater systems: Looking to the catchment to save the stream. *Journal of the North American Benthological Society*, 24(3), 690–705.
- Warrick, J. A., & Milliman, J. D. (2003). Hyperpycnal sediment discharge from semiarid southern California rivers: Implications for coastal sediment budgets. *Geology*, 31, 781–784.
- Westerling, A. L., Hidalgo, H. G., Cayan, D. R., & Swetnam, T. W. (2006). Warming and earlier spring increase western US forest wildfire activity. *Science*, 313(5789), 940–943.

How to cite this article: Sanders BF, Grant SB. Re-envisioning stormwater infrastructure for ultrahazardous flooding. *WIREs Water*. 2020;e1414. <https://doi.org/10.1002/wat2.1414>