

# Lawrence Berkeley National Laboratory

## Lawrence Berkeley National Laboratory

### **Title**

China's energy and emissions outlook to 2050: Perspectives from bottom-up energy end-use model

### **Permalink**


<https://escholarship.org/uc/item/8d06x7hg>

### **Author**

Zhou, Nan

### **Publication Date**

2013-06-03



**ERNEST ORLANDO LAWRENCE**  
**BERKELEY NATIONAL LABORATORY**

---

# **China's energy and emissions outlook to 2050: Perspectives from bottom-up energy end-use model**

**Nan Zhou, David Fridley, Nina Zheng Khanna, Jing Ke, Michael McNeil and Mark Levine**

China Energy Group

Environmental Energy Technologies Division

Lawrence Berkeley National Laboratory

*Reprint version of journal article published in "Energy Policy",  
Volume 53, February 2013*

**March 2013**

This work was supported by China Sustainable Energy Program of the Energy Foundation through the U.S. Department of Energy under Contract No. DE-AC02-05CH11231.

## Disclaimer

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof, or The Regents of the University of California.

Ernest Orlando Lawrence Berkeley National Laboratory is an equal opportunity employer.

*NOTICE: this is the author's version of a work that was accepted for publication in Energy Policy. Changes resulting from the publishing process, such as peer review, editing, corrections, structural formatting, and other quality control mechanisms may not be reflected in this document. Changes may have been made to this work since it was submitted for publication. A definitive version was subsequently published in Energy Policy, Volume 53, February 2013, Pages 51-62.*

---

# China's energy and emissions outlook to 2050: Perspectives from bottom-up energy end-use model

**Nan Zhou, David Fridley, Nina Zheng Khanna, Jing Ke, Michael McNeil and Mark Levine**

China Energy Group

Environmental Energy Technologies Division

Lawrence Berkeley National Laboratory

## Abstract

Although China became the world's largest CO<sub>2</sub> emitter in 2007, the country has also taken serious actions to reduce its energy and carbon intensity. This study uses the bottom-up LBNL China End-Use Energy Model to assess the role of energy efficiency policies in transitioning China to a lower emission trajectory and meeting its 2020 intensity reduction goals. Two scenarios – Continued Improvement and Accelerated Improvement – were developed to assess the impact of actions already taken by the Chinese government as well as planned and potential actions, and to evaluate the potential for China to reduce energy demand and emissions. This scenario analysis presents an important modeling approach based in the diffusion of end-use technologies and physical drivers of energy demand and thereby help illuminate China's complex and dynamic drivers of energy consumption and implications of energy efficiency policies. The findings suggest that China's CO<sub>2</sub> emissions will not likely continue growing throughout this century because of saturation effects in appliances, residential and commercial floor area, roadways, fertilizer use; and population peak around 2030 with slowing urban population growth. The scenarios also underscore the significant role that policy-driven efficiency improvements will play in meeting 2020 carbon mitigation goals along with a decarbonized power supply.

**Keywords:** China; End-use modeling; Energy efficiency

## 1. Introduction

Rising carbon dioxide (CO<sub>2</sub>) and other Greenhouse Gas (GHG) emissions largely resulting from fossil fuel combustion are contributing to significant global climate change. Since China is still in the early stage of industrialization and modernization, the process of economic development will continue to drive China's

energy demand and has already made China the world's largest CO<sub>2</sub> emitter in 2007. In recent years, China has taken serious actions to reduce its energy consumption and carbon emissions. China's 11th Five Year Plan (FYP) goal of reducing energy consumption per unit of gross domestic product (GDP) by 20% between 2006 and 2010 has been followed by extensive programs to support the realization of the goal. In November 2009, China also committed to reduce its carbon intensity (CO<sub>2</sub> per unit of GDP) by 40% to 45% percent below 2005 levels by 2020.

Achieving the 2020 goal will require strengthening and expansion of energy efficiency policies in industry, buildings, appliances, and motor vehicles, as well as further expansion of renewable and nuclear power capacity. Achieving this goal will require continuing and strengthening ongoing actions by government and industry beyond efforts initiated during the 11th FYP period. Given China's crucial role in the expansion of the global economy and because of its high reliance on coal, maximum efforts in improving energy efficiency, reducing energy intensive output of industry and dramatic expansion of carbon control energy technology are needed to address China's energy and climate change issues by 2050.

The past decade has seen the development of various scenarios describing long-term patterns of China's future energy consumption and GHG emissions (Adams and Shachmurove, 2008; Cai et al., 2008; Chen et al., 2007; Dai et al., 2011; de Laquil et al., 2003; Fan et al., 2011; Tu et al., 2007; Van Vuuren et al., 2003; Wei et al., 2008). With the recent growing focus on China's energy use and emission mitigation potential, a range of models of China's energy and emissions outlook have been developed across different institutions. In addition to scientific publications on China energy and emission modeling results, several influential reports have emerged both in the international arena and domestically. One of these reports is the International Energy Agency (IEA)'s World Energy Outlook (WEO) 2009, which set out an aggressive "450 Scenario" under which the long-term concentration of greenhouse gases would be limited to 450 parts per million (ppm) of CO<sub>2</sub> equivalent by 2030 with China-specific policy assumptions and outlook (IEA, 2009). China's Energy Research Institute (ERI) also published a 2050 China Energy and CO<sub>2</sub> Emissions Report in 2009 which described potential energy and emissions scenarios to 2050 based on its own models (CEACER, 2009). In addition, McKinsey & Company published a report examining frozen, baseline and abatement emission scenarios for China out to 2030 (McKinsey, 2009). The UK's Tyndall Centre for Climate Change Research also released a report in May 2009 investigating China's potential trajectories to 2050 to stabilize global atmospheric CO<sub>2</sub> concentration at 450 ppm (Wang and Watson, 2009). Most recently, Chinese Academy of Engineering (CAE) initiated the China Energy Medium and Long-term Development Strategy Research Project in 2008, and published a report in 2011 proposing a scientific, green and low carbon energy strategy, projecting CO<sub>2</sub> emission to peak at around 2030 at 9 billion metric ton a year and decreasing rapidly thereafter (CAE, 2011).

Those models provide interesting discussions and insights on understanding China's medium and long term energy and carbon emission trajectory from the macro-level. Most of the long-term modeling studies use a top-down (i.e., computable general equilibrium model) or hybrid top-down, bottom-up approach with primarily economic-based drivers of industrial activity and energy demand (Zheng et al., 2010). Moreover, a description of sectoral activity variables is missing in most of these models and end-

use sector-level results for buildings, industry, or transportation or analysis of adoption of particular technologies and policies are generally not provided in global energy modeling efforts. This is a serious omission for energy analysts and policymakers, in some cases calling into question the very meaning of the scenarios. Energy consumption is driven by the diffusion of various types of equipment; the performance, saturation, and utilization of the equipment has a profound effect on energy demand. Policy analysts wishing to assess the impacts of efficiency, industry structure and mitigation policies require more detailed description of drivers and end use breakdown.

This study focuses on a China Energy Outlook through 2050 with 2020 and 2030 milestones that assesses the cross-sectoral roles of energy efficiency policies and structural change in industry for transitioning China's economy to a lower emissions trajectory and examines the likelihood of meeting China's 2020 goal. This outlook is based on the Lawrence Berkeley National Laboratory (LBNL) China End-Use Energy Model, a bottom-up model with primarily physical drivers for energy activities for technologies and end-uses. Unlike most of the existing models and medium- to long-term studies on China's energy outlook, this model and study addresses end-use energy demand characteristics including sectoral patterns of energy consumption, change in subsectoral industrial output, trends in saturation and usage of energy-using equipment, technological change including efficiency improvements, and links between economic growth and energy demand. Two scenarios are developed to evaluate the impact of different levels of energy efficiency and power sector policies on controlling energy demand growth and emission mitigation and progress towards meeting its 2020 goal.

## **2. Modeling Methodology**

The LBNL China End-Use Energy Model has been significantly enhanced since its establishment in 2005 and is based on level of diffusion of end use technologies and other drivers of energy demand on a sectoral level and includes both demand and supply-side modules. Built using the LEAP (Long-Range Energy Alternatives Planning) modeling tool developed by Stockholm Environmental Institute, this model enables detailed consideration of technological development—industrial production, equipment efficiency, residential appliance usage, vehicle ownership, power sector efficiency, lighting and heating usage—as a way to evaluate China's energy and emission development path below the level of its macro-relationship to economic development. Within the energy consumption sector, key drivers of energy use include activity drivers (total population growth, urbanization, building and vehicle stock, commodity production), economic drivers (total GDP, income), energy intensity trends (energy intensity of energy-using equipment and appliances). These factors are in turn driven by changes in consumer preferences, energy costs, settlement and infrastructure patterns, technical change, and overall economic conditions. From the supply-side, the energy transformation sector includes a power sector module which can be adapted to reflect changes in generation dispatch algorithms, efficiency levels, fuel-switching, generation mix, installation of carbon capture and sequestration (CCS) technology and demand side management.

## **2.1. Scenarios Examined**

This study uses two scenarios, Continued Improvement Scenario (CIS) and Accelerated Improvement Scenario (AIS), to represent distinct alternatives in long-term pathways given current trends, macroeconomic considerations, currently available and projected efficiency technologies, and policy choices and degree of successful implementation of the policies.

### **2.1.1. Continued Improvement Scenario (CIS)**

The CIS does not assume that current technologies will remain ‘frozen’ in place, but that the Chinese economy will continue on a path of lowering its energy intensity. Efficiency improvements in this scenario are consistent with trends in ‘market-based’ improvement and successful implementation of policies and programs already undertaken, planned or proposed by the Chinese government. Since CIS reflects what is expected to happen in terms of policy implementation and efficiency improvement, it is used as the reference scenario for evaluating energy savings and emission reduction potential.

### **2.1.2. Accelerated Improvement Scenario (AIS)**

The AIS assumes a much more aggressive trajectory toward current best practice and implementation of important alternative energy technologies as a result of more aggressive and far-reaching energy efficiency policies. Efficiency targets are considered at the level of end-use technologies, with Chinese sub-sector intensities being lowered by implementation of the best technically feasible products and processes in the short to medium term, taking into account the time necessary for these technologies to penetrate the stock of energy-consuming equipment.

In addition, sensitivity analysis was conducted to test the impact of key macroeconomic and sectoral variables on China’s total energy consumption through 2050 in order to evaluate uncertainties in the model.

## **2.2. Macroeconomic Drivers of China’s Future Energy Use**

One of the key drivers in this study’s bottom-up modeling methodology and scenario analysis is the urbanization rate and growth of the urban population. China has and will continue to undergo changes in its physical built environment as a result of rapid urbanization. For example, two more mega-cities with populations of 10 million or more and over fifty second-tier cities with smaller populations are expected through 2030. 290 million new urban residents were added from 1990 to 2007, and 380 million new urban residents are expected from 2007 to 2030 with another 92 million to 2050. By 2050, China’s total population is expected to reach 1.41 billion. These new urban residents need to be provided with housing, energy, water, transportation, and other energy services. Urbanization and the related demand for infrastructure and commercial, residential energy services will be important driving forces for future energy consumption in China. To account for the potential effects of urbanization as well as inter- and intra-city transport on energy demand in China, population growth and urbanization, or share of urban population, are included as macro-drivers in both scenarios. The urbanization rate is

projected to increase to 79% in 2050 from 45% in 2007 following the United Nation's population forecasts.

For both CIS and AIS scenarios, macroeconomic parameters such as economic growth, population, and urbanization are assumed to be the same. To account for economic growth in China's near future, different rates of GDP growth were assumed for the period between 2010 and 2020, between 2020 and 2030 and between 2030 and 2050. Rapid GDP growth is expected to continue for the next decade with average annual growth rate of 7.7%, but will gradually slow by 2020 as the Chinese economy matures and shifts away from industrialization. Thus, the model assumes an average GDP growth rate of 5.9% per year for 2020 to 2030, followed by 3.4% from 2030 to 2050.

## 2.3. Sectoral Drivers and Key Assumptions

### 2.3.1. Residential Sector

There are two main related drivers to growth in the residential buildings sector: urbanization and growth in household incomes. Urban households generally consume more energy than rural ones, especially non-biofuels. Second, incomes are rising for both urban and rural households. The main impacts of household income growth is the increase in the size of housing units, which increases heating and cooling loads and lighting, and the increase in ownership and use of energy-consuming appliances. Population increase is not a main driver of energy consumption in China per se as population growth has slowed, and total population is expected to peak between 2020 and 2030.

At the same time, significant opportunity exists to reduce energy consumption in households in two main areas: improvement of equipment efficiency and tightening of the thermal shell of residential buildings. Equipment efficiency increases as the equipment stock turns over. Implementation of labeling and minimum efficiency performance standards (MEPS) in China will drive future efficiency improvements, as seen in Table 1. CIS represents a continuation and possible acceleration of the current Chinese appliance standards and labeling program. By 2020, new residential appliances and heating equipment are generally of an efficiency level matching current international best practice. The current schedule of Chinese standards is taken into account explicitly in the construction of efficiency scenarios. For instance, the Chinese government recently implemented newly revised standards for refrigerators. These efficiency gains are modeled in CIS. In AIS, we assume that Chinese standards will match international best practice, yielding considerably larger energy saving than in CIS.

In addition to equipment efficiency, AIS considers improvements to the thermal insulation of residential buildings. These improvements can be achieved through tightening and enforcement of construction codes, or through retrofits of heating controls and improvement of the efficiency of district heating systems. Under AIS, new residential households are assumed to use half as much heating and 75% of the cooling in today's households. In the CIS case, heating improvement of new buildings is 16.7% for heating and 8.3% for cooling.



**Table 1. Key assumptions of residential sector for CIS and AIS scenarios**

	Policy drivers	Continued Improvement	Accelerated Improvement
Appliance efficiency	Efficiency standards revision, strengthened enforcement of energy label	Moderate efficiency improvement (1/3 improvement relative to high efficiency)	Moderate improvement of new equipment in 2010 – near best practice by 2020
Building shell improvements: Heating	Increase the stringency of residential building codes; expand heating retrofits	Moderate efficiency improvement (1/3 improvement relative to High efficiency)	50% improvement in new buildings by 2010 – 75% improvement in new buildings by 2020.
Building shell improvements: Cooling	Increase the stringency of residential building codes	Moderate efficiency improvement (1/3 improvement relative to high efficiency)	25% improvement in new buildings by 2010 – 37.5% improvement in new buildings by 2020.

### 2.3.2. Commercial Sector

Commercial building energy demand is the product of two factors: building area (floor space) and end use intensity (MJ per m<sup>2</sup>). Forecasting commercial building floor space requires an understanding of the drivers underlying the recent growth of the sector, and where these trends are likely to be heading. In our analysis, commercial floor space is determined by the total number of service sector employees, and the area of built space per employee. This approach differs from the conventional assumption that commercial floor space grows with GDP and presents a more realistic method for modeling commercial floorspace over the long-term. As a general rule, as economies develop, employment shifts away from agriculture and industry toward the service sector, and this trend is expected to continue in China leading to further increases in commercial building floor space. The potential for growth is not unlimited, however, as the Chinese population is expected to peak by about 2030. Furthermore, the population is aging, so that the number of employees will likely peak closer to 2015. By comparing Chinese GDP per capita to that of other countries, we estimate that the tertiary sector share of workers will reach 60% by 2050. Under these assumptions, the total number of tertiary sector employees will increase by only about 33% by 2030 compared to 2005 while floor space per employee still has some room to grow. Overall commercial floor space may likely only double by 2050, and construction in this sector may already be approaching its peak.

Similar to the residential sector, Table 2 illustrates that the differing paces of energy efficiency improvement in the commercial sector between CIS and AIS result from different stringency of equipment efficiency standards and commercial building codes.

**Table 2. Key assumptions of commercial sector for CIS and AIS scenarios**

	Policy drivers	Continued Improvement	Accelerated Improvement
Heating	Strengthening equipment	Moderate efficiency	Current international

efficiency	efficiency standards, incentives for heat pump installation	improvement by 2020	best practice by 2020
Cooling efficiency	Strengthening equipment efficiency standards	Current international best practice by 2050	Current international best practice by 2020
Building shell improvements: Heating	Increase the stringency of commercial building codes; expand heating retrofits	50% improvement in fraction of new buildings growing by 1% per year	50% improvement in all new buildings by 2010, 75% improvement in all new buildings by 2025
Building shell improvements: Cooling	Increase the stringency of commercial building codes	25% improvement in fraction of new buildings growing by 1% per year	25% improvement in all new buildings by 2010, 37.5% improvement in all new buildings by 2025
Lighting and equipment efficiency	New commercial equipment efficiency standards, phase-out of inefficient lighting	18 % improvement relative to frozen efficiency by 2030	48 % improvement relative to frozen efficiency by 2030

### 2.3.3. Industrial Sector

Within industry, the energy consumption of the seven energy-intensive industrial subsectors singled out in China's long-term development plan for substantial energy efficiency improvements are analyzed in-depth in this study, specifically the cement, iron and steel, aluminum, ammonia and ethylene industries. For cement, steel and aluminum, the scenarios were based on floor space construction area and infrastructure construction as a proxy. Ammonia production, in contrast, was modeled as a function of sown area, which is expected to decrease slightly by 2% following current trends, and fertilizer intensity assumed to reach Korea's 2005 level by 2030. Similarly, ethylene production is driven by population growth and rising per capita demand for plastics reaching current Japanese levels by 2030.

For each sub-sector, projections of process efficiency requirements and technology shifts are developed based on existing policies targeting industrial energy efficiency. Industrial energy requirements can be lowered by new processes and efficiency improvement of processes at the sub-sector level. In addition, fuel switching can multiply the energy savings and emission reductions. The Chinese government plan calls for the industry sector to become more efficient, and targets have been set as expressed in a series of government policies and development goals including the 11<sup>th</sup> and 12<sup>th</sup> FYP, Top-1000 Enterprises Program, and programs to close down inefficient processes and plants. As shown in Table 3, the CIS baseline assumption has incorporated these existing and planned policies while the AIS scenario assumes earlier achievement of international best practice levels of intensity.

**Table 3. Key assumptions of industrial sector for CIS and AIS scenarios**

	Policy drivers	Continued Improvement	Accelerated Improvement
Cement	Continuation of Top 1000 Program, setting and enforcement of sector-specific energy intensity target such as the 11th Five Year Plan (FYP) targets.	Current world best practice for Portland cement by ~2025	Current world best practice for Portland cement by ~2020
Iron and steel		25% of production by electric arc furnace by 2050	40% of production by electric arc furnace by 2050
Aluminum		Moderate decline of energy intensity to 2050	Accelerated decline of energy intensity to world best practice levels before 2050
Paper		Moderate weighted average energy intensity reduction	Current world best practice energy intensity by 2030
Ammonia		Moderate energy intensity reductions without achieving all 11th FYP target	Achieve all 11th FYP targets through 2020 with continued decline thereafter
Ethylene		Meets 11th FYP energy intensity targets through 2020 and continuing reduction	Current world best practice by 2025 and continuing reduction through 2050
Glass		Moderate efficiency improvements	National average efficiency reach Shandong Top 1000 Program's best practice level by 2030

### 2.3.4. Transport Sector

Transportation demand is driven by demand for freight and passenger transport. Freight transport is calculated as a function of economic activity measured by value-added GDP while passenger transport is based on average vehicle-kilometers traveled by mode (bus, train, and car) moving people. Freight transport demand is driven by faster economic growth in the years to 2030 as GDP continues its rapid growth but will slow to a linear function as the relative importance of foreign trade in GDP is expected to decline over the longer term.

For passenger transport, growing vehicle-kilometers traveled in different modes is driven by population growth and growing demand for personal transport with rising income levels. For example, air transport activity is driven by demand for both domestic and international travel, which grows with GDP per capita while passenger rail transport activity will rise with growth of high-speed rail and increased use of rail for short distance domestic travel. Road transport is the largest mode of passenger travel, which is driven primarily by the burgeoning ownership of private cars that follows rising per capita income. By 2050, personal car ownership reaches 0.69 per household, which while extremely high compared to current values, is still considerably below current levels in the United States and Europe. Table 4 illustrates the different assumptions about the pace of improvement in vehicle fuel economy as well as electrification between CIS and AIS.

**Table 4. Key assumptions of transport sector for CIS and AIS scenarios**

	Policy drivers	Continued Improvement	Accelerated Improvement
Internal combustion engine (ICE) efficiency improvements	Strengthening existing fuel economy standards for cars and trucks, incentives or rebates for efficient car purchases, gasoline tax	Moderate efficiency improvements in fuel economy of aircrafts, buses, cars, and trucks through 2050	Significant additional efficiency improvements in fuel economy of buses through 2050
Electric vehicle (EV) penetration	EV mandates or targets for government fleet, economic incentives for private EV purchase	Electric vehicle penetration to 30% by 2050	Electric vehicle penetration to 70% by 2050
Rail electrification	Public investment in upgrading and expanding rail network	Continued rail electrification to 70% by 2050	Accelerated rail electrification to 85% by 2050

### 2.3.5. Power Sector

The model takes a bottom-up, physical-based approach to quantifying electricity supply, generation efficiency, dispatch, transmission and distribution, and final demand. In a transformation module linked to but separate from the end-use demand module, the power sector is modeled using generation dispatch algorithms, efficiency levels, and capacity factors that dispatch the capacity required to serve a given level of final demand. Table 5 shows the different assumptions for installed capacity, efficiency of thermal power generation and demand-side management that differentiate the power sector under CIS and AIS. The CIS scenario extrapolates existing policy and market-driven fuel switching and efficiency improvement trends in the power sector to 2050, including meeting the announced 11th FYP capacity targets and the 2020 renewable energy target. The AIS scenario is then based on more aggressive fuel switching and efficiency improvements than the CIS scenario.

In order to focus on fuel switching and efficiency improvements, the model uses environmental dispatch rather than economic or equally-distributed generation dispatch. Under environmental dispatch, nuclear power is given first priority followed by wind, hydro, natural gas, solar, biomass, and finally coal. Because coal power is last in the dispatch order, actual utilized coal capacity factors are lower than 90% when demand can be satisfied with other fuels. The intermittency of renewable electricity generation is reflected in their lower capacity factors.

**Table 5. Key assumptions of power sector for CIS and AIS scenarios**

	Policy drivers	Continued Improvement	Accelerated Improvement
Thermal efficiency improvements	Mandate closure of small inefficient coal generation units, require	Coal heat rate drops from 357 to 290 grams coal equivalent per kilowatt-hour (gce/kWh) in 2050	Coal heat rate drops from 357 to 275 (gce/kWh) in 2050
Renewable generation growth	Renewable portfolio standard or mandatory market share for renewables, feed-in tariff. Environmental dispatch order	Installed capacity of wind, solar, and biomass power grows from 2.3 GW in 2005 to 535 GW in 2050	Installed capacity of wind, solar, and biomass power grows from 2.3 GW in 2005 to 608 GW in 2050
Demand side management	Various demand-side efficiency programs and policies	Total electricity demand reaches 9100 TWh in 2050	Total electricity demand reaches 7,764 TWh in 2050

### 3. Aggregate Energy and Emissions Modeling Results


#### 3.1. Contextualizing China's Energy and Emissions Outlook

By 2050, China's primary energy consumption will rise continuously in both scenarios but approach a plateau starting in 2025 for AIS and 2030 for CIS (Figure 1). Energy demand grows from 2250 million tonnes of coal equivalent (Mtce<sup>1</sup>) to 5500 Mtce (161 EJ) in 2050 under CIS. It is reduced by 900 Mtce to 4600 Mtce in AIS in 2050, a cumulative energy reduction of 26 billion tonnes of coal equivalent from 2005 to 2050. If sufficient CCS capacity to capture and sequester 500 Mt CO<sub>2</sub> by 2050 was implemented under the CIS scenario, total primary energy use would increase to 5520 Mtce in 2050 due to CCS energy requirements for carbon separation, pumping and long-term storage, but carbon emissions would decline by 4% in 2050.

The notable difference between LBNL's scenarios and others is the shape of the energy and emissions trajectories. LBNL's projected energy consumption increases at approximately the same rate as other models, but diverge after 2030 with a slow down or plateau whereas others still exhibit extrapolation of growth all the way out to 2050. This also results in the lower projected primary energy consumption in 2050 under LBNL's scenarios. Most of the alternative scenarios examined have relied on the CCS application to bring down emissions. However, the LBNL CIS with CCS scenario demonstrates that all else equal, there would be a net increase in primary energy demand on the order of 36 Mtce more by

<sup>1</sup> Mtce is the standard energy unit used in China. 1 Mtce is approximately equivalent to 29.3 PJ.

2050 due to CCS energy requirements for pumping, separation and sequestration.

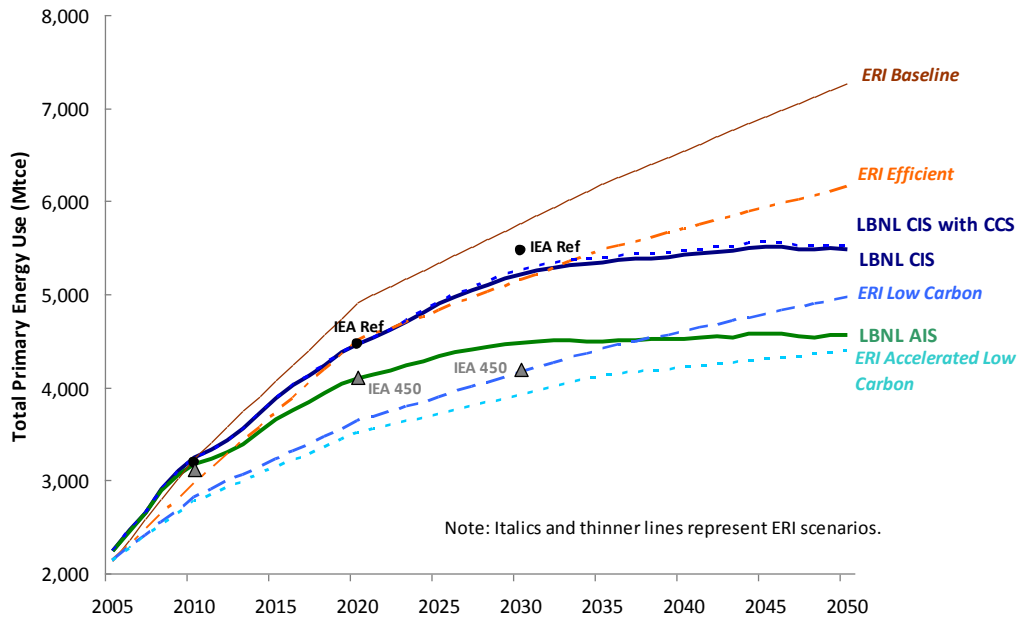

**Figure 1. Primary energy consumption in different scenarios**

Note: AIS is Accelerated Improvement Scenario, CIS is Continued Improvement Scenario, ERI is China Energy Research Institute, whose recent 2009 study results have been converted to IEA-equivalent figures given that ERI follows the convention of using power generation equivalent, rather than IEA and LBNL’s use of calorific equivalent, to convert primary electricity (CEACER, 2009). This conversion of ERI results to the IEA/LBNL convention reduces the gross energy content of electricity generated from renewables and biomass by 66%. IEA results are taken from World Energy Outlook 2009.

As seen in Figure 2, CO<sub>2</sub> emissions under both scenarios approach a plateau or peak in 2025 (AIS) and 2030 (CIS). CIS reaches a plateau between 2030 and 2035 with 12 billion tonnes in 2033, while the more aggressive energy efficiency improvement and faster decarbonisation of the power supply under AIS result in a peak between 2025 and 2030 at 9.7 billion tonnes in 2027. CCS at the current level of efficiency and from integrated system point of view, however, will only have a small net CO<sub>2</sub> mitigation impact of 476 million tonnes in 2050 assuming 500 million tonnes of capacity in place. There is greater range in CO<sub>2</sub> emissions outlook amongst different studies, and CIS and AIS are both notable in being two of the only three scenarios that see emissions peaks before 2050. In fact, emissions peak is the earliest in CIS and AIS and underscore the important role that energy efficiency policies can play in carbon mitigation in the absence of CCS.


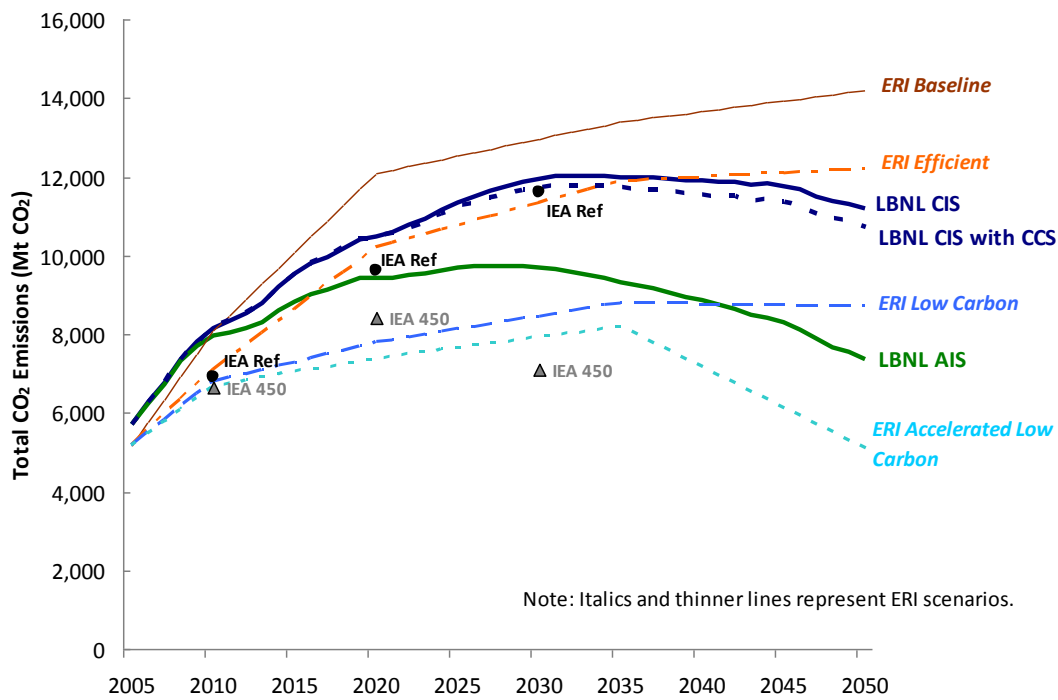


Figure 2. CO<sub>2</sub> emissions in different scenarios

### 3.2. Aggregate Results by Fuel and Sector


The share of coal will be reduced from 74% in 2005 to about 47% by 2050 in CIS, and could be further reduced to 30% in AIS (Figure 3). Instead, more energy demand will be met by primary electricity generated by renewable, hydro and nuclear, which could reach 32% by 2050 with further decarbonisation in power sector under the AIS. Petroleum energy use will grow both in absolute term and the relative share to overall energy consumption, attributing to increase in vehicle ownership as well as freight turnover in transportation sector.

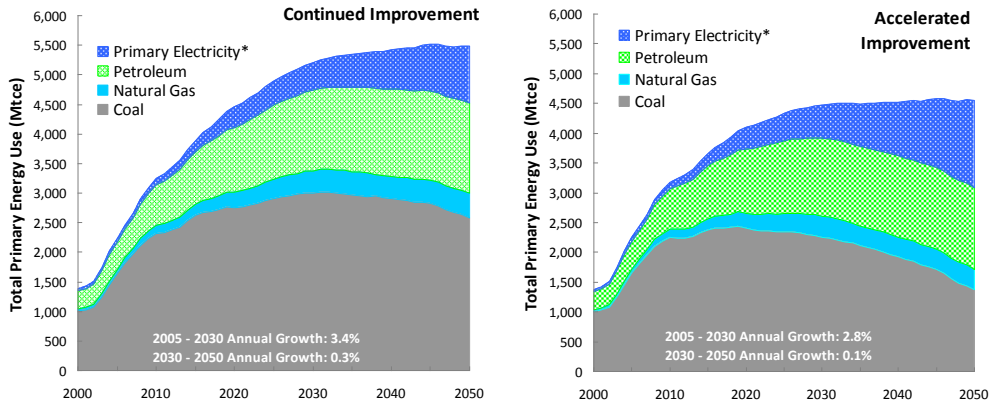

**Figure 3. Total primary energy by fuel type, CIS and AIS**

\*Note: Primary electricity includes hydropower, wind, solar and other renewable at calorific equivalent for conversion.

Sectorwise, the single largest emission reduction potential could be seen in building sector, particularly commercial buildings, followed by the industrial sector, as illustrated in Figure 4. The industrial sector shows early achievement in emission reduction, but in long-run, more reduction could be achieved through more aggressive policies, measures and technology improvement in building sector and lead to more than half of the emission reduction over the 45 year period. Under CIS, the commercial sector will be responsible for nearly one-third of all electricity demand. Under AIS, the transport sector has growing share of electricity demand because of more aggressive rail and road electrification.

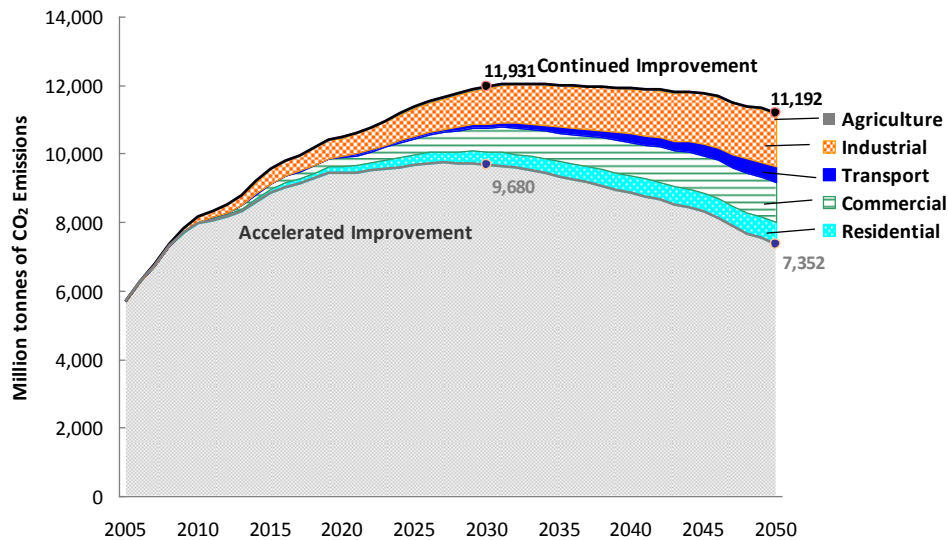


**Figure 4. CO<sub>2</sub> emissions difference between two scenarios by sector**

Overall, the growth of annual energy demand in China could range from 3.4% (CIS) to 2.8% (AIS) between 2005 and 2030 and 0.3% to 0.1% between 2030 and 2050. In contrast, carbon intensity declines over this period, with annual average reductions of 3.7% for CIS and 4.6% for AIS from 2005 to



2050 (Figure 5). More importantly, China will meet and even surpass its 2020 carbon intensity reduction goal of 40% to 45% under CIS and AIS, respectively. It will, however, require strengthening or expansion of energy efficiency policies in industry, buildings, appliances, and motor vehicles, as well as further expansion of renewable and nuclear power capacity. With aggressive implementation of energy efficiency policies and decarbonization of the power sector under AIS, China could reduce its 2005 carbon intensity by as much as 88% by 2050.

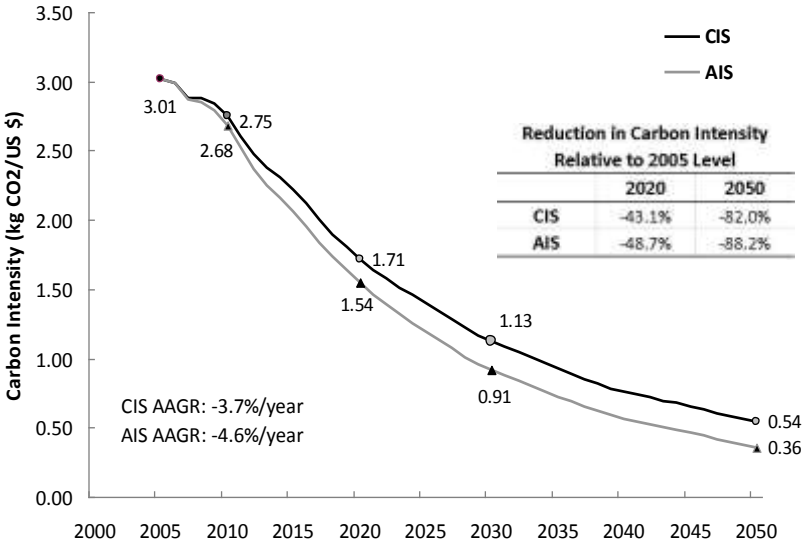

**Figure 5. Carbon intensity reductions by scenario**


Note: AAGR is average annual growth rate.

### 3.3. Residential Sector Findings

The modeling results for the residential sector show that although the ownership of many appliances has saturated in urban areas, new sales remain strong over the period because of the rise in urbanization, with over 470 million additional people expected to become urban residents by 2050. As a result, electricity use from appliances will grow rapidly. Urban fuel consumption from space heating will more than double, due to increases in urban population and heating intensity in both CIS and AIS. Rural electricity consumption will continue to grow in spite of the reduction in rural population due to increases in per household use of lighting and appliances. Biomass consumption will decrease considerably, with substitution of commercial fuels.

Residential primary energy demand will grow rapidly until 2025 or 2030. In CIS, demand rises between 2005 and 2030 at an average annual rate of 2.8%. After 2030, it increases by only 0.6% per year. This slowing of growth is largely due to saturation effects, as the process of urbanization will be largely complete, most households will possess all major appliances by 2030, and efficiency improvements in

heat distribution will be largely complete. Figure 6 shows the energy savings opportunity in the residential sectors distributed across end-uses, with appliances and space heating having the largest savings potential from efficiency policies. From 2005 to 2050, accelerated adoption and implementation of more aggressive efficiency policies such as strengthened appliance standards and expansion of the China Energy Label could lead to total CO<sub>2</sub> emissions reduction of 18.4 billion tonnes under AIS.

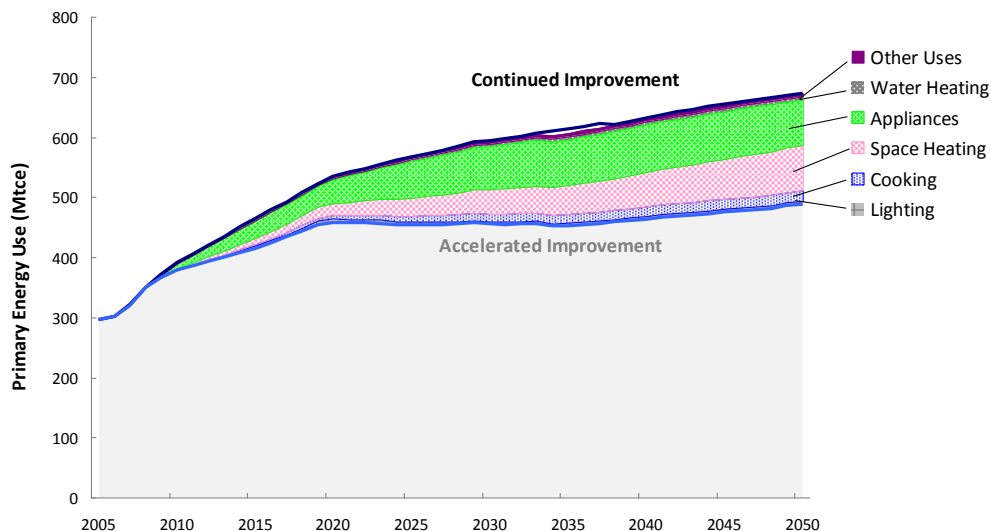


**Figure 6. Residential primary energy use and potential reductions by end-use**

### 3.4. Commercial Sector Findings

Energy demand in the commercial sector is currently growing rapidly, but there will be a slowing of growth in the medium term, reaching a plateau by about 2030. Total commercial building floorspace may saturate in the short term, but end-use intensity continues to have much room to grow before reaching current levels in industrialized countries. In particular, the lighting, office equipment and other plug loads in commercial buildings will grow dramatically through 2030, but then level off thereafter in CIS.

The main dynamic of energy consumption in commercial buildings revealed by this study is that energy growth will be largely dominated by intensity increases, rather than overall increases in commercial floor area. Increases in commercial building space will be limited by the number of workers available to this sector in China's future, while the economic activity in this sector will continue to gain in significance, growth in the physical infrastructure will by no means keep up with growth in value added GDP. With rising commercial end-use energy intensity expected, building efficiency policies will be important in controlling energy demand growth and CO<sub>2</sub> mitigation. Annual carbon mitigation under AIS could reach 1180 million tonnes of CO<sub>2</sub> by 2030, or cumulative reduction of nearly 26 billion tonnes of CO<sub>2</sub> emissions (Figure 7).

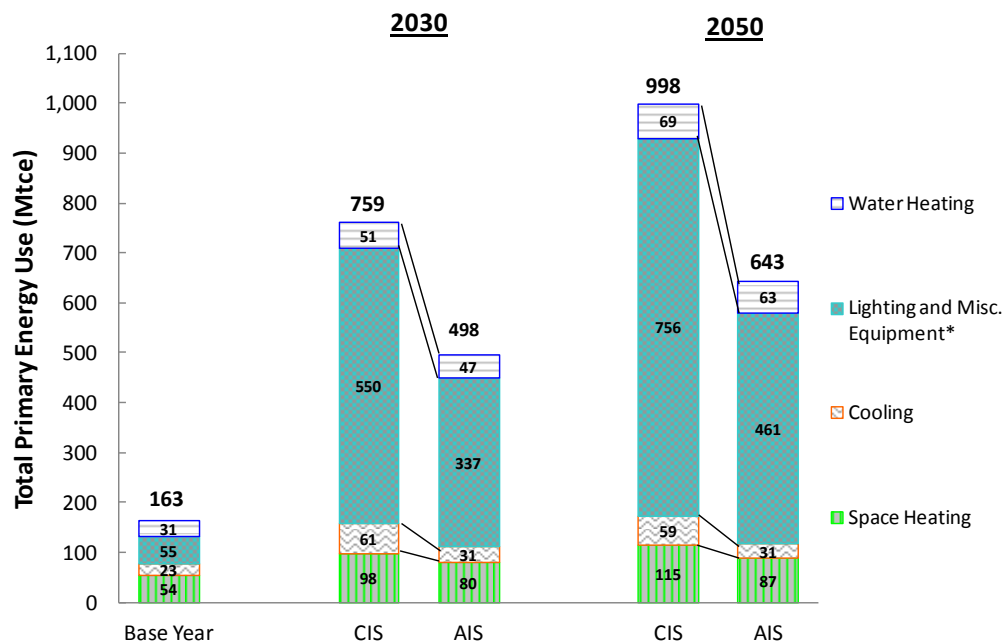

**Figure 7. Commercial primary energy by end-use**


\*Lighting and misc. equipment refers to equipment such as computers, printers, audiovisual equipment, elevators, pumps, etc.

### 3.5. Industrial Sector Findings

Energy consumption of the seven energy-intensive industrial subsectors will gradually decline relative to other end-use sectors, though still account for 47% of total energy consumption in 2050, down from 61% in 2005 in CIS scenario. In the case of iron and steel and cement in particular, China’s expected transition from rapid industrialization and infrastructure development to more intensive growth and expansion in the services sector after 2010 underlies the slowdown and eventual decline in total iron and steel output and in the growth of the cement industry. Among “Other Industry”, steady increases in energy consumption growth are expected from the refining sector, the coal mining and extraction sector, and the oil and gas exploration and production sector as well as from manufacturing. Energy demand in China is currently dominated by a few energy-intensive sectors, particular by the main construction inputs – cement and iron and steel. The recent explosion of construction in China has had a driving role in these industries, and therefore Chinese energy demand as a whole. The slowing of this construction boom will therefore have a major impact as seen by the peaking of industrial primary energy use around 2030.

The energy use of each of these sub-sectors in absolute terms all decline modestly over time. The only exception is in energy use by the ethylene sub-sector, which grows notably from a 4% share of total industrial energy use in 2005 to 11% share in 2030 (Figure 8). The model results for projected CIS and AIS industrial energy use reflect key differences in only efficiency improvements, with a 290 Mtce


reduction in energy use under the AIS scenario in 2030, and 274 Mtce in 2050. This translates into annual CO<sub>2</sub> emission reduction of 1550 million tonnes in 2050, or 40% of all emission reductions, and cumulative reduction of nearly 39 billion tonnes by 2050.

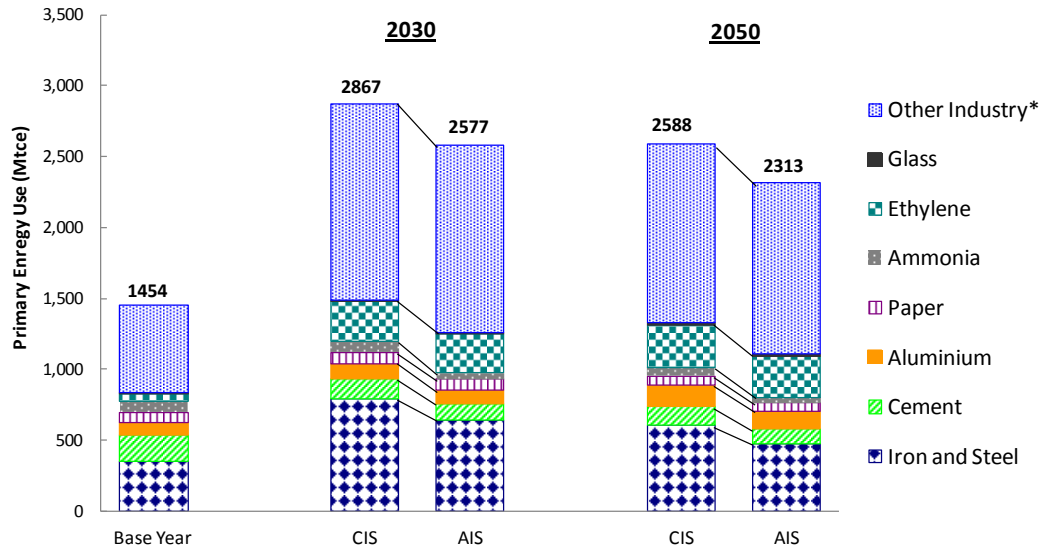

**Figure 8. Industrial primary energy use by subsector**

\*Other Industry includes manufacturing, chemicals, light industry and all other small industrial subsectors.

The more efficient AIS development trajectory has differing impacts on energy reduction in each of the seven industrial sub-sectors (Figure 9). Between 2005 and 2050, the iron and steel, other industry and cement sub-sectors comprise the largest energy reduction potential under both CIS and AIS scenario when compared to other sub-sectors. The ethylene sub-sector stands out as an exception with negligible energy savings under AIS, partly because energy consumption actually grows from 2010 through 2030 under both scenarios.

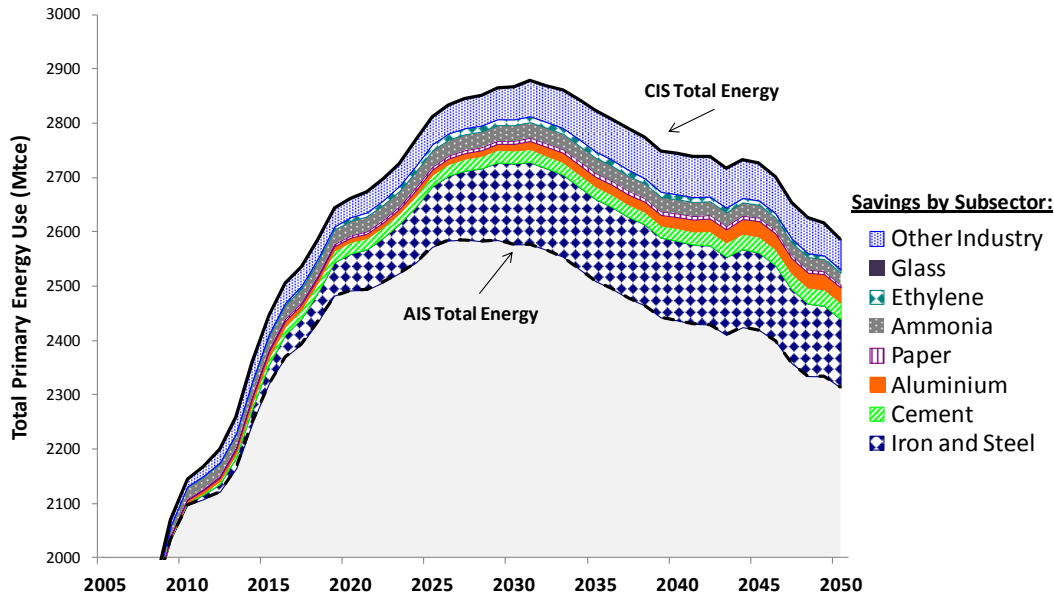


**Figure 9. Industrial energy savings potential by subsector**

Note: Y-scale not set to zero.

### 3.6. Transport Sector Findings

The greatest growth for energy demand in the transport sector will be from passenger road transportation, with urban private car ownership expected to increase to over 356 million vehicles by 2050. In primary energy terms, the impact of improved efficiency in motor vehicles and accelerated electrification of passenger cars and the national rail system lowers total transportation energy use in 2050 by 107 Mtce compared to the CIS (Figure 10). Increasing the 2050 proportion of electric cars from 30% in CIS to 70% in AIS reduces annual gasoline demand by 100 million tonnes of oil equivalent, but increase annual electricity demand by 265 TWh in 2050. This produces the unintended result that China becomes a gasoline exporter, as demand for other oil products is not reduced commensurately.


Energy use for freight transport remains important in both scenarios and has a strong impact on the structure of petroleum demand. Although foreign trade becomes less important to 2050 as China relies more on domestic demand, bunker fuel (heavy oil) demand will continue to rise strongly. Increased fuel efficiency of trucks for road freight, higher levels of electrification of the rail system, and more efficient inland and coastal ships moderate diesel demand growth, but diesel remains the largest share of petroleum product demand.

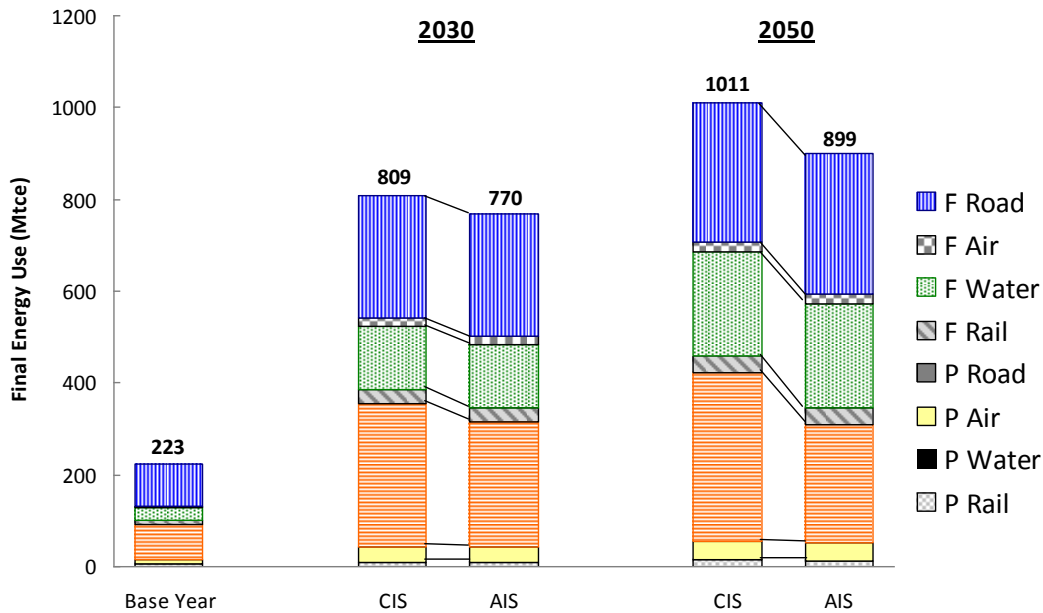

**Figure 10. Transport final energy consumption by mode**

Note: F is freight, P is passenger transport.

Power decarbonization has important effects on the carbon mitigation potential of switching to electric cars technology. Greater transport electricity use under AIS could result in net CO<sub>2</sub> reduction on the order of 5 to 10 Mt CO<sub>2</sub> per year before 2030 and as much as 109 Mt CO<sub>2</sub> by 2050 because AIS power supply is less carbon intensive than CIS power supply (Figure 11). However, in the absence of any decarbonization in the power sector, electric vehicles (EVs) will increase CO<sub>2</sub> emissions.

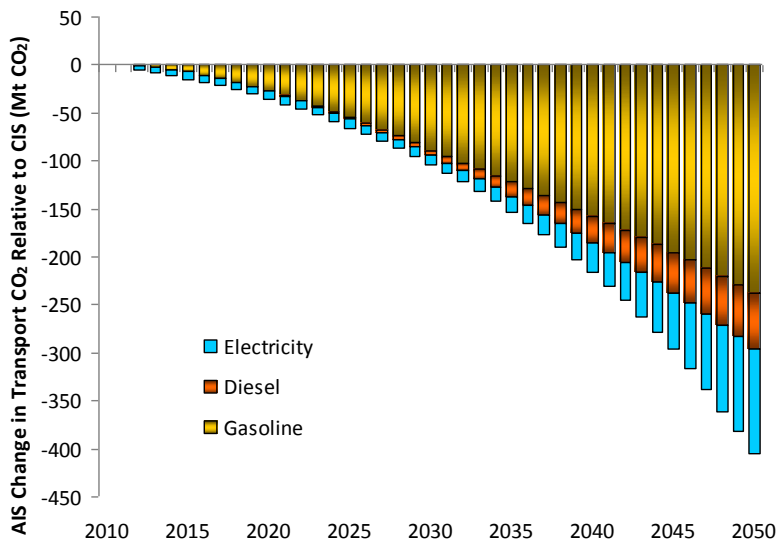

**Figure 11. Transport CO<sub>2</sub> emission reduction under AIS by fuel source**

### 3.7. Power Sector Findings

The electricity sector accounts for a large growing share of China's energy use and related carbon emissions. Table 6 shows the projected power generation shares by technology for CIS and AIS scenarios in 2030 and 2050. On the demand side, AIS results in 15% lower total electricity generation in 2050 than CIS. On the supply side, efficiency improvements and fuel substitutions bring the 2050 coal share of total electricity generation from 49% in the continued improvement scenario to 10% in the accelerated improvement scenario.

**Table 6. Power generation shares by technology for CIS and AIS scenarios**

	2005	CIS		AIS	
		2030	2050	2030	2050
Wind power	0%	6%	13%	10%	16%
Nuclear power	2%	13%	25%	19%	54%
Natural gas combined cycle power plants	1%	2%	2%	4%	2%
Hydropower	15%	12%	12%	17%	16%
Oil fired Units	2%	0%	0%	0%	0%
Biomass and other renewable	0%	1%	1%	1%	1%
Solar	0%	1%	1%	1%	1%
Coal <100MW	21%	0%	0%	0%	0%
Coal 100-200 MW	11%	0%	0%	0%	0%
Coal 200-300 MW subcritical units	9%	0%	0%	0%	0%
Coal 300-600 MW subcritical units	35%	1%	0%	0%	0%
Coal 600-1000 MW supercritical units	2%	22%	8%	19%	0%
Coal >1000MW ultra supercritical units	0%	44%	41%	30%	9%
Total electricity generation (TWh)	2620	7830	9100	6560	7760

Decarbonization also plays a significant role in carbon emission reduction in the power sector and substantially outweighs the potential impact of CCS. Besides the CIS and AIS scenarios of power sector development, an addition scenario was added to represent the implementation of CCS to capture 500 Mt CO<sub>2</sub> by 2050 under the CIS pathway of efficiency improvement and fuel shifting. Of the three scenarios, the AIS scenario requires the least primary energy and produces significantly lower energy-related power sector carbon dioxide emissions than either CIS or the CCS scenario. In fact, AIS power sector emissions peak just below 3 billion tonnes in 2019 with average CO<sub>2</sub> intensity of 0.52 kg CO<sub>2</sub>/kWh and begin declining rapidly thereafter to 0.6 billion tonnes in 2050 with average CO<sub>2</sub> intensity of only 0.10 kg CO<sub>2</sub>/kWh. In comparison, CIS power sector emissions do not peak until 2033 with 4.2 billion tonnes and average CO<sub>2</sub> intensity of 0.52 kg CO<sub>2</sub>/kWh and declines only to 3.4 billion tonnes with average CO<sub>2</sub> intensity of 0.37 kg CO<sub>2</sub>/kWh in 2050. The CCS base scenario results in 476 million tonnes less emissions in 2050 than the CIS scenario with a 1.4% increase in the total primary energy requirement for carbon capture, pumping and sequestration.

Within the power sector, the greatest carbon emissions mitigation potential under AIS is from direct electricity demand reduction as a result of more aggressive policy-driven end-use efficiency improvements in industrial, residential, commercial, and transport sectors. Figure 12 illustrates five wedges that lead to power sector emissions reductions of almost 3.5 billion tonnes of CO<sub>2</sub> per year by 2030, where the solid wedges represent CO<sub>2</sub> savings from various power sector changes and the stripped wedge represents CO<sub>2</sub> savings from electricity demand reduction. One of the largest power sector mitigation potential is from end-use efficiency improvements that lower final electricity demand and the related CO<sub>2</sub> emissions, which is about half of total CO<sub>2</sub> savings before 2030 and then one-third of total CO<sub>2</sub> savings by 2050. Another growing source of carbon mitigation potential is the rapid expansion of nuclear generation, which increases from accounting for only 5% of CO<sub>2</sub> savings in 2030 to almost 40% in 2050. Of the CO<sub>2</sub> savings from power sector technology and fuel switching, greater shifts in coal generation technology (i.e., greater use of supercritical coal generation) and higher renewable and hydropower capacity each contribute similar magnitude of savings by 2050. These results emphasize the significant role that energy efficiency improvements will continue to play in carbon mitigation in the power sector (vis-à-vis lowering electricity demand), as efficiency improvements and can actually outweigh CO<sub>2</sub> savings from decarbonized power supply through greater renewable and non-fossil fuel generation prior to 2030.

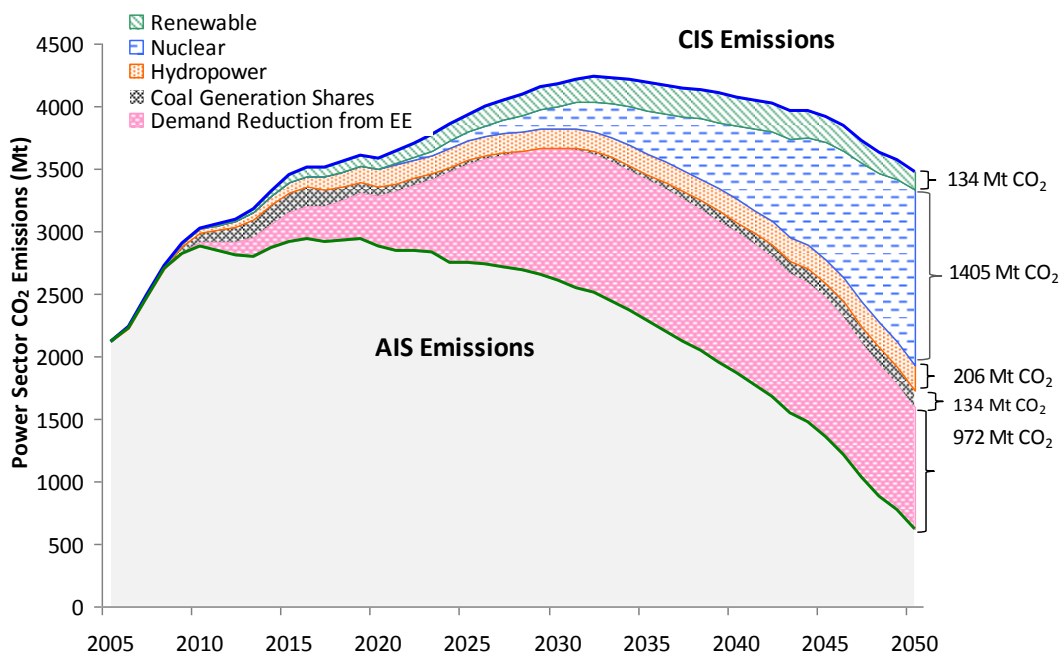



Figure 12. AIS power sector CO<sub>2</sub> emissions reduction by source

### 3.8. Sensitivity Analysis

Sensitivity analysis of drivers in the key economic sectors was conducted to evaluate uncertainties that exist in the model. In each sensitivity analysis scenario, a specific variable such as the urbanization level



was tested for its impact on total primary energy use under the Continued Improvement scenario, ceteris paribus. The results of the sensitivity parameters tested that had the highest level of uncertainties with changes of at least 300 Mtce (or 5% of total primary energy use) in 2050 are presented in Figure 13. Amongst the different sensitivity analysis scenarios tested, variables in the industrial sector had the largest impact on total primary energy use, implying that there is a higher level of uncertainty surrounding these variables. For example, a 25% increase in the growth rate of other industry GDP which directly affects steel production for use in manufacturing can result in an increase of nearly 800 Mtce in total primary energy use by 2050. Likewise, uncertainties in the levels of heavy industrial output and in the energy intensity of “other industry” can result in changes in total primary energy use in the range of 300 to 700 Mtce in 2050.

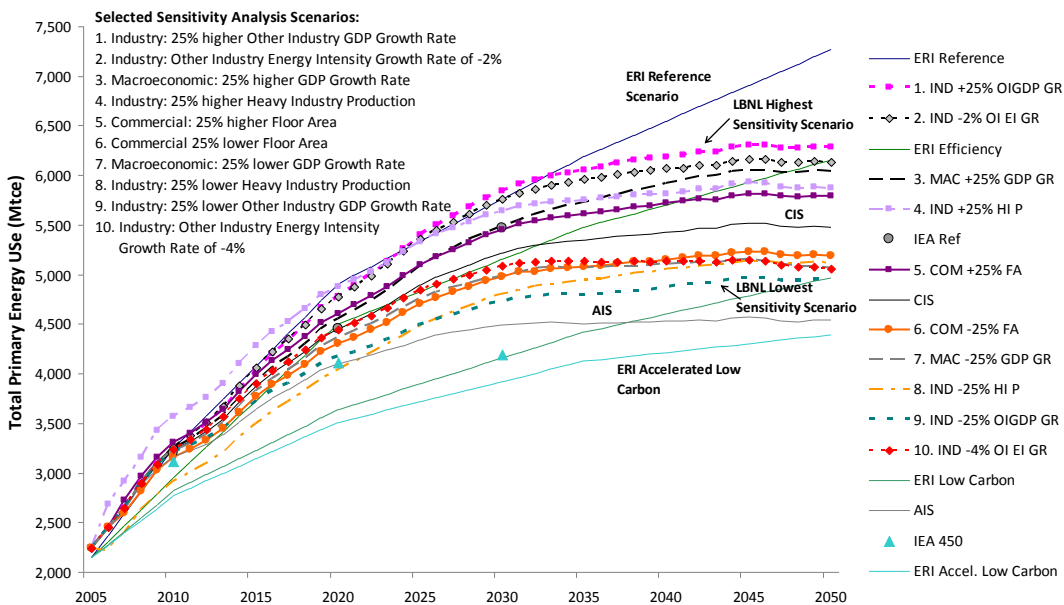

**Figure 13. Sensitivity analysis scenario results with greatest uncertainty**

The other variables included in the sensitivity analysis that resulted in medium (impact of greater than 50 Mtce or 1%) or low (impact of less than 50 Mtce) uncertainties are outlined in Table 7.

**Table 7. Sensitivity scenarios with medium or low impacts**

Sensitivity Scenario Name	Sensitivity Scenario Description	Sensitivity Impact
MAC 67% Urban	Macroeconomic: 67% urbanization by 2050	Medium
RES +25% FA	Residential: 25% more floor area per capita	Medium
COM 25 Life	Commercial: 25 years building lifetime	Medium
COM 50 Life	Commercial: 50 years building lifetime	Medium
COM +25% LOI	Commercial: 25% higher lighting & other end-use intensity	Medium
COM -25% LOI	Commercial: 25% lower lighting & other end-use intensity	Medium
TRA 40% EV AIS*	Transport relative to AIS*: 40% electric vehicle share of cars by 2050	Low
TRA 20% EV CIS	Transport: 20% electric vehicle share of cars by 2050	Low
TRA -25% OFA	Transport: 25% lower ocean freight activity	Low
IND 60% EAF	Industry: 60% EAF furnace penetration in steel production by 2050	Medium
IND 25% EAF	Industry: 25% EAF furnace penetration in steel production by 2050	Low

## 4. Conclusions

As China continues to pursue its social development goals, demand for energy services are set to grow, presenting fundamental challenges as economic growth and projected rapid urbanization will drive up energy demand and CO<sub>2</sub> emissions without changes in energy efficiency and energy supply structure. This study thus evaluated how China can maintain its development trajectory, provide basic wealth to its citizens while being energy sustaining; assessed the role of energy-efficiency as well as structure change in potential GHG emissions abatement policies for transitioning China's economy to a lower-GHG trajectory; and evaluated China's long-term domestic energy supply in order to gauge the potential challenge China may face in meeting long-term demand.

By 2050, primary energy consumption will rise continuously in both scenarios but reach a plateau around 2040, with a cumulative energy reduction of 26 billion tonnes of coal equivalent under the AIS from 2005 to 2050. Future energy demand reduction potential is greatest in the industry sector in the earlier years and from the buildings sector in the long run.

CO<sub>2</sub> emissions under both scenarios could experience a plateau or peak around 2030, with AIS peaking slightly earlier at 9.7 billion tonnes of CO<sub>2</sub> as a result of more aggressive energy efficiency improvement and faster decarbonisation of the power supply. The single largest end-use sector emission reduction potential could be seen in the buildings sector, particularly commercial buildings, followed by industry sector. Further reduction of CO<sub>2</sub> under these scenario assumptions would require even higher levels of non-carbon-emitting electricity. The total national emissions mitigation potential of moving from a CIS to AIS trajectory of development is 3.8 billion tonnes in 2050 with the power sector having the greatest mitigation potential.

Both the CIS and AIS scenario demonstrates that with continuous improvement, the goal of 40% carbon intensity reduction by 2020 announced in 2009 is possible, but will require strengthening or expansion

of energy efficiency policies in industry, buildings, appliances, and motor vehicles, as well as further expansion of renewable and nuclear power capacity. These results emphasize the significant role that energy efficiency policies and subsequent improvements will continue to play in decreasing the growth of energy demand and leading China on a lower carbon development pathway. The crucial impact of energy efficiency improvements on carbon mitigation is most readily apparent in the power sector (vis-à-vis lowering electricity demand), as efficiency improvements can actually outweigh CO<sub>2</sub> savings from decarbonized power supply through greater renewable and non-fossil fuel generation prior to 2030.

## Acknowledgements

This work was supported by the Energy Foundation through the Department of Energy under contract No.DE-AC02-05CH11231.

## References

- Adams, F. G., Shachmurove, Y., 2008. Modeling and forecasting energy consumption in China: Implications for Chinese energy demand and imports in 2020. *Energy Economics* 30 (3): 1263-1278.
- Cai, W., Wang, C., Chen, J., Wang, K., Zhang, Y., Lu, X., 2008. Comparison of CO<sub>2</sub> emission scenarios and mitigation opportunities in China's five sectors in 2020. *Energy Policy* 36 (3): 1181-1194.
- CEACER (2050 China Energy and CO<sub>2</sub> Emissions Research Group), 2009. 2050 China Energy and CO<sub>2</sub> Emissions Report. Beijing: Science Press.
- Chen, W., Wu, Z., He, J., Gao, P., Xu, S., 2007. Carbon emission control strategies for China: A comparative study with partial and general equilibrium versions of the China MARKAL model. *Energy* 32(1): 59-72.
- CAE (Chinese Academy of Engineering), 2011. China Energy Medium and Long-term (2030, 2050) Development Strategy Research. Beijing: Science Press.
- Dai, H., Masui, T., Matsuoka, Y., Fujimori, S., 2011. Assessment of China's climate commitment and non-fossil energy plan towards 2020 using hybrid AIM/CGE model. *Energy Policy* 39 (5): 2875-2887.
- de Laquil, P., Chen, W., Larson, E., 2003. Modeling China's energy future. *Energy for Sustainable Development* 7(4): 40-56.
- Fan, G., L. Stern, N., Edenhofer, O., Xu, S., Eklund, K., Ackerman, F., et al., Eds. 2011. *The Economics of Climate Change in China: Towards a Low-Carbon Economy*. Stockholm: Stockholm Environment Institute.

IEA (International Energy Agency), 2009. World Energy Outlook 2009. Paris: OECD Publishing.

Li, J., Gao, H., Shi, P., Shi, J., Ma, L., Qin, H., , 2007. China Wind Power Report. Beijing: China Environmental Science Press. Available at:

<http://www.greenpeace.org/raw/content/china/en/press/reports/wind-power-report.pdf>

NBS (National Bureau of Statistics), various years. China Statistical Yearbooks. Beijing: China Statistics Press.

NDRC (National Development and Reform Commission), 2007. Medium and Long-Term Development Plan for Renewable Energy in China. Available at: <http://www.chinaenvironmentallaw.com/.../medium-and-long-term-development-plan-for-renewable-energy.pdf>

Tu, J., Jaccard, M., Nyboer, J., 2007. The application of a hybrid energy-economy model to a key developing country – China. Energy for Sustainable Development 11(1): 35-47.

Van Vuuren, D., Zhou, F., de Vriesa, B., Jiang, K., Gravelandb, C., Li, Y., 2003. Energy and emission scenarios for China in the 21st century—exploration of baseline development and mitigation options. Energy Policy 31(4): 369-387.

World Bank. 2010. The World Bank Development Indicators. Available at:

<http://data.worldbank.org/indicator>

Wei, Y., Liu, L., Fan, Y., Wu, G., Eds. 2008. China Energy Report 2008: Carbon Emission Research. Beijing, Science Press.

Zheng, N., Zhou, N. Fridley, D., 2010. Comparative Analysis of Modeling Studies on China's Future Energy and Emissions Outlook. Berkeley, CA: Lawrence Berkeley National Laboratory (LBNL-4032E).