

Lawrence Berkeley National Laboratory

LBL Publications

Title

One-pot ethanol production under optimized pretreatment conditions using agave bagasse at high solids loading with low-cost biocompatible protic ionic liquid

Permalink

<https://escholarship.org/uc/item/8rd5t86x>

Journal

Green Chemistry, 24(1)

ISSN

1463-9262

Authors

Pérez Pimienta, José A
Papa, Gabriella
Sun, Jian
[et al.](#)

Publication Date

2022-01-04

DOI

10.1039/d1gc03774a

Copyright Information

This work is made available under the terms of a Creative Commons Attribution-NonCommercial License, available at <https://creativecommons.org/licenses/by-nc/4.0/>


Peer reviewed

Green Chemistry

Cutting-edge research for a greener sustainable future

Accepted Manuscript

This article can be cited before page numbers have been issued, to do this please use: J. A. Perez-Pimienta, G. Papa, J. Sun, V. Stavila, A. Sanchez, J. Gladden and B. Simmons, *Green Chem.*, 2021, DOI: 10.1039/D1GC03774A.

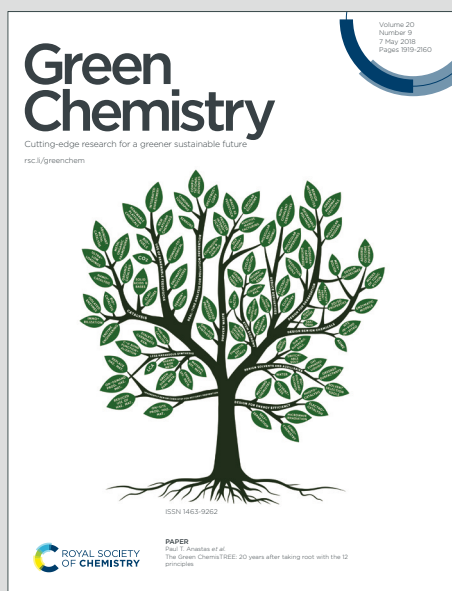

This is an Accepted Manuscript, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about Accepted Manuscripts in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this Accepted Manuscript or any consequences arising from the use of any information it contains.

PAPER

One-pot ethanol production under optimized pretreatment conditions using agave bagasse at high solids loading with low-cost biocompatible protic ionic liquidJosé A. Pérez Pimienta^{a,b,*}, Gabriella Papa^c, Jian Sun^{c,d}, Vitalie Stavila^e, Arturo Sanchez^a, John M. Gladden^{c,d}, and Blake A. Simmons^cReceived 00th January 20xx,
Accepted 00th January 20xx

DOI: 10.1039/x0xx00000x

Agave bagasse (AG) is a potential bioenergy feedstock due to its high biomass productivity, even in semiarid lands. In particular, ionic liquid (IL) pretreatment using aprotic ILs (AILs) has greatly reduced AG recalcitrance towards downstream processing by lowering lignin content and achieving high sugar yields. However, AILs low biocompatibility towards enzymes and bacteria combined with the high initial cost has limited further development of this technology. In a wash-free one-pot (OP) ethanol conversion process, the evaluation of AG pretreatment with a biocompatible low-cost protic IL (PIL), 2-hydroxyethylammonium acetate ([2-HEA][OAc]) was achieved. Where PIL pretreatment was followed by enzymatic saccharification, then ethanol fermentation in a single vessel. The pretreatment conditions were optimized using a central composite design to enable high sugar conversion at low PIL content. Under optimized pretreatment conditions (160 °C, 60% IL loading and 1.5 h), a yield of 132 kg of ethanol per Ton of untreated biomass was estimated using high solids loading (30 % solids loading) under a PIL-OP scheme. High lignin removal (>50 %), a decreased cellulose crystallinity, and high glucan conversion (>85%) were achieved with PIL-pretreated AG comparable to yields obtained in an AIL-AG pretreated sample using 1-ethyl-3-methyl-imidazolium acetate ([C₂C₁Im][OAc]). These results using [2-HEA][OAc] demonstrate the potential of AG in an OP scheme with improved total ethanol yields paving the way towards a more feasible IL-based biorefinery.

Introduction

Agave bagasse (AG) has proven to be an attractive bioenergy feedstock due to its high biomass productivity (up to 44 Ton/ha*year), even in semiarid lands and high-temperature stress.¹ However, biomass recalcitrance hinders the efficient conversion of the lignocellulosic fraction into biofuels and/or value-added products. Therefore, a pretreatment stage must be incorporated for downstream biofuels and/or bioproducts generation to achieve profitable yields.² Different biomass pretreatment methods with their unique mode of action and chemistry have been applied to AG using either alkali³, ammonia fiber expansion (AFEX)⁴, dilute acid⁵, extrusion⁶, hydrothermal⁷, ionic liquid (IL)⁸ and organosolv⁹. Among them, IL pretreatment in AG has demonstrated to be an attractive and promising method to achieve a high glucan to glucose and xylan to xylose conversion (above 90%) during enzymatic saccharifications.^{7,10}

Another feature of IL pretreatment compared to other processes is the non-degradation of the carbohydrates into fermentation inhibitors such as acetic acid or furfural under mild process conditions while enabling solvent recovery and high recyclability.¹¹ Most of IL pretreatment research in AG have been carried out using 1-ethyl-3-methylimidazolium acetate ([C₂C₁Im][OAc]) an aprotic IL (AIL), capable of decreasing cellulose crystallinity and lignin content (up to 48%) while obtaining ~82% ethanol yield with an ethanologenic *Escherichia coli* strain.¹² In the last decade, AILs have been studied in a broad range of feedstocks (grass, agricultural and woody biomass)^{13,14} with encouraging results including high delignification and sugar production either by enzymes or by an acidolysis procedure.¹⁵ The correlation between the hydrogen bond basicity of the anion and the solvation ability of aprotic ILs to swell and/or dissolve biomass promoting cellulose dissolution, lignin depolymerization and sugar yields has been widely studied in the literature.^{16,17} However, specific challenges are associated with using AILs, such as an initial high IL price and toxicity issues in the downstream processing, including multiple water-wash steps. A promising approach to overcome these obstacles is the use of protic ILs (PILs), whose production is easier and less expensive than AILs (\$0.7-1.4/kg vs ~\$50/kg).^{18,19} The main difference between AILs and PILs is the permanency of the positive cation charge after its synthesis in AILs and no equilibrium between neutral and ion species, while for PILs, the charged and neutral species are in equilibrium.²⁰

^a Laboratorio de Futuros en Bioenergía, Unidad Guadalajara de Ingeniería Avanzada, Centro de Investigación y Estudios Avanzados (CINVESTAV), Zapopan, Mexico.

^b Department of Chemical Engineering, Universidad Autónoma de Nayarit, Tepic, Mexico. Email: japerez@uan.edu.mx

^c Joint BioEnergy Institute, Biological Systems and Engineering Division, Lawrence Berkeley National Laboratory, Emeryville, CA, United States.

^d Department of Biomass Science and Conversion Technology, Sandia National Laboratories, Livermore, CA, United States.

^e Energy Nanomaterials Department, Sandia National Laboratories, Livermore, CA, United States

† Electronic Supplementary Information (ESI) available.

Due to the weaker hydrogen-bonding basicity interactions of PILs formed by reversible proton transfer (both proton-donor and proton-acceptor centres in their molecules), the biomass dissolution has not been widely demonstrated in a PIL.²¹ Despite this, in literature, PILs has been extensively discussed as to their ability to dissolve lignin.¹⁸ Some works have shown that PILs produced by acetic acid and amines such as the 2-hydroxyethylammonium acetate ([2-HEA][OAc]) can extract lignin, demonstrating improved biocompatibility with enzymes and yeast.^{18,20,22} Moreover, to exploit protic ionic liquids as amphiphile self-assembly media inducing micelle formation and the solvophobic effect, recent studies highlighted the importance of further studies at the molecular level that considers the solubility of aromatic species in PILs and the interaction with either the polar and apolar phases.²³ The employment of integrated systems approaches such as “one-pot” process configurations that integrate IL pretreatment, saccharification, and fermentation followed by direct extraction of sugar and recovery of lignin is key for future commercialization and scale-up this IL-based process. Within the IL pretreatment technology, the one-pot process can be achieved by either using an IL tolerant cellulases cocktail (such as JTherm)²⁴ or with a PIL that include the benefits of reducing water consumption without the need of a water-wash step as previously required by the AIL which benefits the overall pretreatment costs. Recently, a comparison between PIL vs AIL as pretreatment agents was performed in woody biomass blends for ethanol production, exhibiting the potential of PILs to achieve high sugar streams.²⁵ Another advantage that [2-HEA][OAc] has in a one-pot configuration for biofuel production when compared to per example, cholinium lysinate [Ch][Lys], is that it does not require to adjust the pH before the sequential simultaneous enzymatic saccharification and fermentation (S-SSF) as this step will impact significantly during IL recycle and reuse.^{26,27} A recently demonstrated scalability in 680 L pilot-scale fermentation provides comprehensive data to define the overall efficiency of IL pretreatment as a function of parameters such as biomass tissue type and solid loading at pilot scale level using [Ch][Lys] in a one-pot IL pretreatment and saccharification.²⁸ No reports are found in the scientific literature describing either AG pretreatment using PILs or in a consolidated biofuel production process. This work presents for the first time the use of a biocompatible PIL ([2-HEA][OAc]) in a one-pot process in AG conducting biomass pretreatment, saccharification, and fermentation in a single vessel without any solid/liquid separation and/or pH adjustment at high solids loading. While applying different characterization methods (compositional analysis, FTIR, XRD, Pyrolysis-GC/MS) to evaluate the pretreatment effectiveness. The optimization of the pretreatment conditions was conducted to reduce PIL content while maintaining high sugar generation. A qualitative comparison between the performance of PIL [2-HEA][OAc] and an AIL ([C₂C₁Im][OAc]) was performed by assessing their delignification capacity and sugar generation obtained by enzymatic saccharification. In addition, lignin extracted from AG using the enzymatic mild acidolysis lignin (EMAL) protocol was prepared to compare it with the high lignin sample obtained after the one-pot process.

Experimental

View Article Online

DOI: 10.1039/D1GC03774A

Biomass samples and preparation

Agave bagasse (AG) (*A. tequilana* Weber variety Blue) was donated by Destilería Rubio that employed an autoclave during the cooking process of Tequila production from western Mexico and prepared as described elsewhere.⁷ AG was ground by a Wiley Mill through a 20-mesh screen and separated by a vibratory sieve system. Compositional analyses of untreated, IL pretreated, and one-pot AG were performed using the standard analytical procedures of the National Renewable Energy Laboratory (NREL) by the two-step sulfuric acid hydrolysis method (NREL/TP-510-42618).²⁹ In addition, another agave bagasse sample was subjected to PIL pretreatment named as AG-diffuser coming from Destilería Leyros located in western Mexico that employs a diffuser during the cooking process of Tequila production.

Chemicals

All of the chemicals were reagent grade and purchased from Sigma-Aldrich (St. Louis, MO) if not specified otherwise. The [2-HEA][OAc] used in this study was prepared according to literature^{20,30}, and its structure was compared with research data. The commercial enzyme products cellulase (Cellic CTec2 and Cellic CTec3) and hemicellulase (Cellic HTec 2 and Cellic HTec3) were gifts from Novozymes, North America (Franklinton, NC).

Optimization of IL pretreatment using response surface methodology

Experimental design

A central composite design (CCD) using response surface methodology (RSM) was used to determine the optimal IL pretreatment condition within a one-pot process. Temperature, IL concentration, and residence time were chosen as independent variables, while glucan and xylan conversion were used as a response. The experimental data were fit using the following polynomial quadratic equation:

$$y = \beta_0 + \sum_{i=1}^3 \beta_i X_i + \sum_{i=1}^3 \beta_{ii} X_i^2 + \sum_{i=1}^3 \sum_{j=i+1}^3 \beta_{ij} X_i X_j \quad (1)$$

where y is the response, X_i and X_j are independent variables, β_0 is the constant coefficient, β_i is the i th linear coefficient, β_{ii} is the quadratic coefficient, and β_{ij} is the ij th interaction coefficient. CCD consists of $2k$ factorial points, $2k$ axial points ($\pm\alpha$), and six central points, where k is the number of independent variables. The experimental design comprised 20 runs with six replicate runs at the centre point and six axial points per pretreated biomass (Table 1). The results were analyzed using Design Expert 10.0.1, including ANOVA, to obtain the impact and significance of each term and the interactions between the process variables and response. The fit quality of the polynomial model was expressed via the determination coefficient, R^2 , and its statistical significance was verified with the F-test using the same software.

Table 1. Levels of PIL-OP pretreatment variables evaluated in the CCD.

Variable	Unit	Coded levels*				
		- α^a	-1	0	+1	+ α^a
Temperature	°C	110	120	135	150	160
IL concentration	%	50	60	75	90	100
Time	h	0.5	1.6	3.3	4.9	6.0

α^a (axial distance) = $^4\sqrt{N}$, where N is the number of factorial design experiments. In this case, 1.6818.

*Values were rounded out for simplicity.

One-pot pretreatment and saccharification using PIL

In a typical procedure, AG (300 mg) was mixed with 2.7 g of the corresponding [2-HEA][OAc] concentration at a 10% biomass loading in a 15 mL glass pressure tube (Ace Glass, USA). The tube and the contents were heated in an oil bath at the desired temperature and time with varying conditions. After pretreatment, the pretreated slurry was diluted with water to obtain a final IL concentration of 10 wt% without adjusting pH. Immediately after the enzymatic saccharification step was performed at 50 °C for 48 h with constant agitation on an Enviro Genie SI-1200 rotator platform (Scientific Industries, Inc., Bohemia, NY). The commercial enzymes mixture of 9:1 (v/v) Cellic® Ctec3 (107.7 ± 2.1 mg/mL) and HTec3 (80.4 ± 5.4 mg/mL), respectively, were used at a concentration of 20 mg protein/ g of biomass¹³. Untreated AG was used as a control. After IL pretreatment of some specific runs, the solids were water-wash as described elsewhere³¹, cooled down to room temperature and stored at 4 °C for compositional analysis. The glucan to glucose and xylan to xylose conversion (%) were calculated as previously described.⁷ Point validation at the optimized process conditions obtained from the CCD was performed at 10 and 30% solids loading.

IL pretreatment with AIL in AG

In order to compare the effectiveness of [2-HEA][OAc] in terms of delignification and sugar conversion, a highly efficient and well-studied AIL ([C₂C₁Im][OAc]) in AG was used to pretreat a raw AG sample at 120 °C for 3 h at a 10 % biomass loading and processed as previously described.^{7,8,12} Delignification (%) ability of [2-HEA][OAc] was calculated as follows:

$$\text{Delignification (\%)} = \frac{L_U - L_P}{L_U} * 100 \quad (2)$$

where, L_U is the lignin content in the untreated sample while L_P is the lignin content in the pretreated sample.

One-pot pretreatment and S-SSF for ethanol production

A number of preliminary experiments at lab-scale using three different *Saccharomyces cerevisiae* strains named BY4741, CEN.PK and W303 were carried out in order to test the biocompatibility of [2-HEA][OAc] at three IL concentrations (2.5, 5 and 10 wt%) within the sugar hydrolysate. In order to provide a uniform sugar hydrolysate, a 1 L Parr reactor was employed using pretreated AG at optimized conditions that were saccharified for this purpose.

Upon completing the saccharification reaction, two sequential centrifugation steps at 4000 rpm for 10 min were served to achieve the solid-liquid separation of the resulting slurry. The liquid fraction was placed in serum bottles, diluted to concentrations of 2.5, 5 and 10% IL, and carried out the S-SSF during 24 h as previously described.¹⁸ Ethanol yield was evaluated and taken into consideration along with IL tolerance to select the most appropriate strain for the bench-scale OP scheme.¹² The OP scheme was carried out in a 1 L Parr reactor under the optimal PIL-OP pretreatment variables evaluated in the CCD to achieve high sugar conversion while lowering IL dosage. The reactor loading was 30 g (dry basis) of untreated AG at 30 wt% solids loading with stirring at 60 rpm powered by a Heidolph RZR 2052 mechanical stirrer (Heidolph Instruments GmbH & Co KG, Schwabach, Germany) using a PTFE paddle-type impeller. After pretreatment, a cooling control was activated to maintain standard saccharification parameters for 24 h in order to obtain a sugars rich stream for ethanol fermentation. Then, the previously selected strain with high fermentative performances was evaluated in a PIL-OP scheme without pH adjustment or nutrients additions during 48h. All reactions were monitored by removing 100 μ L of the supernatant filtered through 0.45 μ m membranes and measuring the sugars and ethanol concentration with an HPLC. All assays were performed in duplicate, and the data are reported as the mean ± standard deviation.

One-pot solid residue/lignin-rich residue

After fermentation, the solid lignin-rich residue fraction was washed 6 times with distilled water, collected by centrifugation at 3000 rpm for 10 min, and freeze-dried.

Analysis

Quantification of sugars and ethanol

Glucose, xylose and ethanol concentrations in the supernatants were determined using an Agilent HPLC 1200 Series equipped with a Bio-Rad Aminex HPX-87H column and a refractive index detector. An aqueous solution of H₂SO₄ (4 mM) was used as the mobile phase (0.6 mL/min, column temperature 50 °C). The injection volume was 20 μ L with a run time of 26 min.

All samples were centrifuged and filtered through 0.45 μ m filters and diluted with water before analyses. Theoretical ethanol yield was calculated as previously reported taking into consideration that the *S. cerevisiae* BY4741 consumes only C₆ sugars.¹²

EMAL

Enzymatic mild acid lignin (EMAL) of AG was isolated according to a previously described method³² with slight modifications. Briefly, extensive cellulose hydrolysis of the biomass was performed using commercially available enzymes, Cellic® CTec2 and HTec2 (186.6 ± 2.0 mg/mL, 225 FPU/mL) from Novozymes, at a dosage of 3.7% w/w (g enzyme/g biomass) in 0.05 M sodium citrate buffer pH 5.0 at 50 °C. It is important to notice that the CTec2/HTec2 mixture was employed only for EMAL recovery. The reaction was conducted at 4.7 wt % biomass loading for 72 h and agitated at 120 rpm.

Table 2. Central composite design (CCD) showing both coded and actual values of variables temperature (Temp.), ionic liquid concentration (IL %) and retention time observed and predicted responses on glucan and xylan conversion (%)

Factor 1 Temp. (°C)	Factor 2 IL (%)	Factor 3 Time (h)	Glucan conversion (%)			Xylan conversion (%)		
			Observed ^a	Predicted ^b	Residual ^c	Observed ^a	Predicted ^d	Residual ^c
110	75	3.3	32.9	36.3	-3.4	7.6	8.1	-0.5
120	60	1.6	36.3	29.7	6.6	8.4	5.5	2.9
120	60	4.9	46.6	45.6	1.0	14.5	13.9	0.6
120	90	4.9	49.2	51.3	-2.1	13.3	15.3	-2.0
120	90	1.6	36.1	36.3	-0.2	7.2	8.3	-1.0
135	75	0.5	29.0	33.2	-4.2	5.9	7.5	-1.6
135	50	3.3	46.3	51.9	-5.6	15.7	19.3	-3.6
135	75	3.3	52.1	50.6	1.4	19.4	17.5	1.8
135	75	3.3	50.2	50.6	-0.4	16.7	17.5	-0.8
135	75	3.3	48.3	50.6	-2.4	16.3	17.5	-1.3
135	75	3.3	52.6	50.6	2.0	18.2	17.5	0.6
135	75	3.3	48.6	50.6	-2.1	16.4	17.5	-1.2
135	75	3.3	50.4	50.6	-0.3	17.2	17.5	-0.3
135	75	6	68.2	63.5	4.7	27.5	25.2	2.3
135	100	3.3	69.9	63.8	6.1	25.3	20.5	4.8
150	60	1.6	60.6	58.8	1.7	24.8	23.1	1.6
150	60	4.9	79.8	80.0	-0.2	37.8	37.2	0.6
150	90	1.6	65.9	67.3	-1.4	22.2	23.2	-1.0
150	90	4.9	80.6	87.5	-6.9	32.6	35.9	-3.3
160	75	3.3	95.2	91.3	3.9	41.3	40.2	1.1

^a Glucan and xylan conversion experimentally determined

^b Calculated by using the multiple regression model: Glucan conversion (%) = 365.91173 - 5.04206*Temperature - 1.82364*IL concentration + 0.658486*Time + 0.002135

*Temperature*IL concentration + 0.054046* Temperature* Time - 0.009197*IL concentration*Time + 0.021504*Temperature² + 0.012018*ILconcentration² - 0.26773*Time²

^c Difference between observed and predicted values

^d Xylan conversion (%) = 129.03587 - 2.24613*Temperature - 0.139742*IL concentration - 2.70466*Time - 0.003018*Temperature*IL concentration + 0.057846*Temperature*Time - 0.013698*IL concentration*Time + 0.010842*Temperature² + 0.004111*ILconcentration² - 0.131845*Time²

The operation was repeated three times, discharging the hydrolysate each time, adding fresh enzyme and buffer solution, followed by washing five times with 400 mL/g biomass DI water. The washed unhydrolyzed solid was lyophilized. The obtained lignin from the mild enzymatic treatment was placed in 20 mL plastic vials and ball-milled two times for 5 min to fine powder, using the Tissue Lyser with 10 mm stainless steel balls at speeds of 30 cycles per minute and 5 min intervals between cycles. The solid recovered (i.e. crude lignin) was treated in acidified (HCl) dioxane: water (85:15 v:v) mixture under a hot reflux condenser for 2 h. The mixtures were filtered and washed with dioxane:water (85:15 v:v) and fresh dioxane. The combined filtrates solution was neutralized with sodium bicarbonate, concentrated under vacuum using a rotary evaporator, and then dissolved in acidified DI water (pH 2, HCl) to precipitate lignin. Finally, the precipitated lignin was recovered by centrifugation, washed and freeze-dried. EMAL was chosen as representative of the "native" lignin initially present in the biomass feedstocks studied.

Crystallinity measurement

XRD diffractograms of untreated and pilot-scale pretreated biomass were acquired with a PANalytical Empyrean diffractometer equipped with a PIXcel3D detector with Cu K α radiation.

Samples were scanned in the range of 5–50° (2 θ) with a step size of 0.026° at 45 kV and 40 mA under ambient temperature. The crystallinity index (CrI) was calculated by using the following equation:

$$CrI = \frac{I_{002} - I_{am}}{I_{002}} \quad (3)$$

where I_{002} is the intensity for the crystalline portion of biomass at about $2\theta = 22.4$, and I_{am} is the peak for the amorphous portion.

FTIR-ATR spectroscopy analysis

Fourier transform infrared (FTIR) spectroscopy was conducted using a Bruker Optics Vertex system (Billerica, MA, USA) with a built-in diamond-germanium ATR (attenuated total reflection) single reflection crystal. Untreated, IL pretreated, PIL-OP residue and EMAL samples were pressed uniformly against the diamond surface using a spring-loaded anvil.

Sample spectra were obtained in triplicates using an average of 32 scans in the NIR range (800–2000 cm^{-1}) with a spectral resolution of 4 cm^{-1} . Air and water were used as background for untreated and pretreated biomass samples, respectively. Baseline correction was conducted and vector-normalization using OPUS software from Bruker Optics.

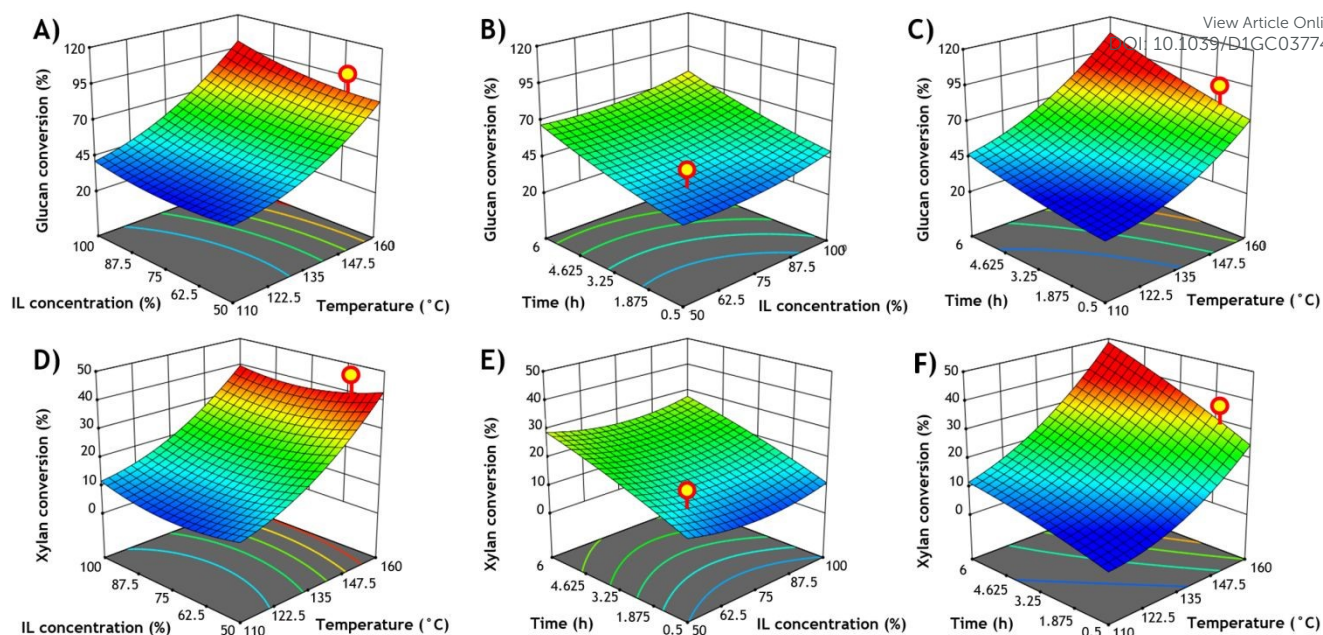


Figure 1. Response surface plots showing the effects of (A and D) IL concentration vs. temperature, (B and E) time vs. IL concentration, and (C and F), time vs. temperature on glucan and xylan conversion (%).

Pyrolysis-GC/MS

The ratio between syringyl and guaiacyl lignin monomers was determined in untreated and pretreated samples by pyrolysis coupled with gas chromatography-mass spectrometry. Samples of 0.5 mg were pyrolyzed at 550 °C using the pyroprobe 5200 (CDS Analytical, Inc., Oxford, PA, USA) connected to a gas chromatography-mass spectrometry (GC/MS) system (Agilent 6890) composed of a Trace GC Ultra and a Polaris-Q MS (Thermo Electron Corporation, Waltham, MA, USA) equipped with a TR-SMS column (60 m 0.25 mm ID 0.25 μ m) and operated in split mode (40 mL min⁻¹) using He as carrier. The chromatograph program was set as follows: 5 min at 50 °C, followed by an increase of 5 °C min⁻¹ to 300 °C, finally maintained at 300 °C for 5 min. Pyrolysis products were identified based on their mass spectra using the NIST08 mass spectrum library. Compounds of syringyl (S), guaiacyl (G) and *p*-hydroxyphenyl (H) origin were quantified from the pyrogram using the peak area. The S/G ratio was calculated as the sum of all peaks of S molecules divided by the sum of all peak areas of G molecules.

Results and discussion

Optimization of IL pretreatment conditions in a PIL-OP scheme

Utilizing a PIL-OP scheme could potentially reduce operation cost within a biorefinery scheme as its specific process design could decrease energy input required while preventing losses during mass transfer between stages in a typical SHF (separate hydrolysis and fermentation) route for biofuels and value-added products generation.^{24,33} Hence, the use of more biocompatible ILs to enzymes and microbes along with the optimization of the pretreatment conditions could determine a viable outcome and possible near-future industrial applications.

Although there are some studies of biomass pretreatment using low-cost PIL among different feedstocks (capable of extracting more than

70% of lignin from corn stover³⁴) and/or using an OP scheme, no data is currently available on AG. Based on previous reports around the response of AIL-pretreated AG with [C₂C₁Im][OAc] on sugar conversion^{10,11}, it was selected a broad range of process conditions temperatures (110–160 °C), [2-HEA][OAc] loadings (60–100 %) and retention times (0.5–6.0 h) for the CCD analysis. Glucan and xylan conversion responses generated from the different CCD conditions are presented in Table 2.

Interestingly, relatively low sugars conversion was achieved at the lower temperatures (below 135 °C). This was unexcepted. When AG was compared alongside switchgrass (SWG) at the same process conditions (120–160 °C, 3h) with [C₂C₁Im][OAc], the higher sugar yields were obtained in AG at 120 °C while SWG resulted in 160 °C. Similarly, when SWG was evaluated with [2-HEA][OAc], the higher sugar yields were achieved at 160 °C.¹⁸ Also, when two different experimental designs (2^k factorial and CCD) were used in AG (from an autoclave cooking process during Tequila production) for the optimization of AIL pretreatment conditions using [C₂C₁Im][OAc] data indicated 119 °C and 142 min as optimal process conditions.¹¹ A clear trend was observed as higher temperatures during IL pretreatment lead to a higher glucan/ xylan conversion. Among the three independent variables in the CCD, the temperature had the most significant impact on glucan conversion, while temperature and time were similarly relevant to xylan conversion (Figure 1). This is in agreement with previously reported results obtained *via* a CCD design series of similar experiments on multiple feedstocks.^{11,35} The highest glucan and xylan conversion yields were 95.2% and 41.3%, respectively achieved at 160 °C, 75 % IL loading and 3.3 h. The responses of the CCD were analyzed using ANOVA and fitted to a response surface quadratic model (ESI Table S1). The coefficients of determination (*R*²) were 0.9553 and 0.9579 for glucan and xylan conversion, respectively.

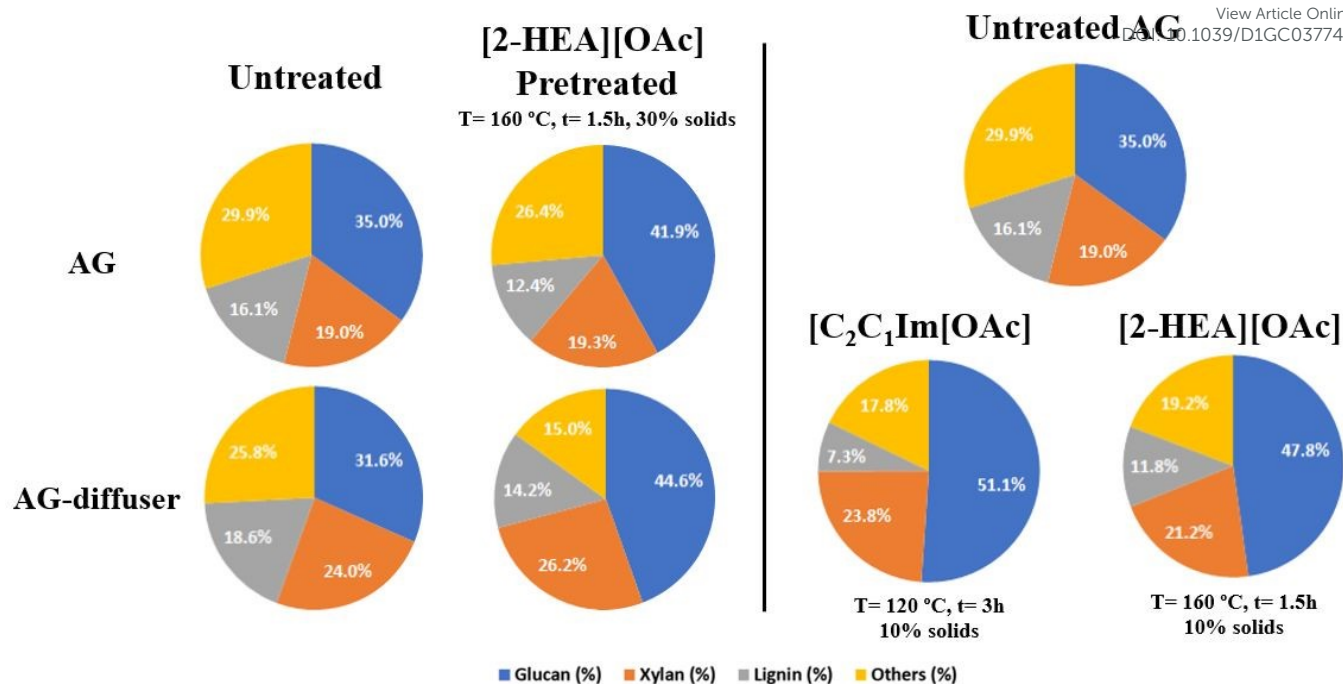


Figure 2. Compositional analysis of the major components of selected untreated and IL pretreated Agave bagasse samples.

Using these data, a new model to calculate % glucan and xylan conversion was developed, and equations have been suggested and reported in Table 2. The model proposed indicates that the pretreatment temperature is the principal responsible for the glucan and xylan conversion. A comparison of the values obtained with the experimental results indicated that the model was satisfactory. Moreover, the adjusted R^2 (0.9150 for glucan conversion and 0.9200 for xylan conversion) confirm the adequacy of the model. In order to improve the biorefinery economics, it is necessary to employ aqueous solutions of ILs or decrease IL usage, hence lowering viscosity and making handling easier besides enhancing mass transfer.^{36,37} For these reasons, the optimal pretreatment parametric combination was directed to achieve the highest sugar conversion while decreasing PIL dosages. Thus, the optimum pretreatment condition was: 160 °C, 60 wt% IL loading and 1.5 h using 10% solids loading. It can be observed that this process conditions decrease IL consumption and time when compared to the 160 °C experimental runs in the CCD (Table 2). The PIL-OP pretreatment variables were verified, and the experimental values at the optimum conditions were 79.1% for glucan conversion and 36.7% for xylan conversion. The observed sugars conversion values were similar, confirming the precision of the model with a variation below 4%. Nevertheless, it is acknowledged the need to operate the pretreatment reactor using a high biomass loading (> 20 wt%) in order to reduce capital cost and operational expenditures while at the same time increasing final sugar concentration and biofuel titer.^{38,39} Hence, the solid loading was increased to 30 wt% during IL pretreatment at the previously defined optimum process conditions. The interactions of pretreatment conditions (temperature, IL loading and residence time) at a high solids loading were able to maintain relatively high glucan and xylan conversions rates (i.e. 72.9% and 36.1%, respectively).

Also, the addition of water diminished viscosity while maintaining a high sugar conversion, as observed. Finally, in the PIL-OP scheme, these pretreatment conditions (160 °C for 1.5 h, using 60 wt% [2-HEA][OAc]/water and 30 wt% solids loading) were applied during the S-SSF stage for ethanol production.

Effects of the type of feedstock and IL in solids composition

To assess the effects of IL pretreatment on different AG samples, the main components of the plant cell wall (glucan, xylan and lignin) were monitored and quantified (Figure 2). Untreated AG presented a typical solids composition similar to previous reports with 35% glucan, 19.0 % xylan and 16.1 % lignin.¹ After IL pretreatment of AG at optimized conditions with [2-HEA][OAc] at both 10 % and 30 % solid loadings, a delignification of 54.7% and 23.0%, respectively, were achieved. While at the same time increasing their relative glucan per gram of biomass.

This extent of delignification (>50%) was also observed in other feedstocks (switchgrass and sugarcane straw) using [2-HEA][OAc] as a pretreatment agent with a solids loading of 6 and 10% w/w%.^{18,37} For comparison purposes, untreated AG pretreated using [C₂C₁Im][OAc] at 120 °C for 3 h at 10 wt% solid loading showed a delignification of 26.7%, which is in the range of previous reports.^{7,8,12} Some notable differences between AG pretreated with [2-HEA][OAc] and [C₂C₁Im][OAc] can be clearly shown in the solid recovery (56.5 % vs 78.4 %) due to pretreatment severity (160 °C vs 120 °C). Unlike other bioenergy feedstocks such as corn stover or sugarcane bagasse, AG is subjected to an industrial transformation process in Tequila production where a cooking stage using primarily either autoclaves or diffusers is employed. However, this thermal process modifies the structure and recalcitrance of AG, as previously shown.⁴⁰

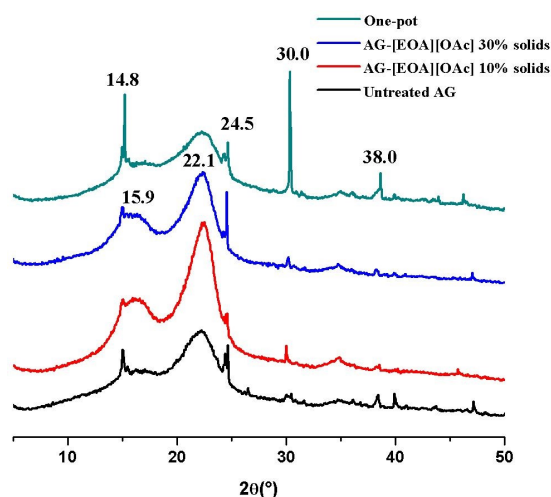


Figure 3. XRD spectra of untreated, IL pretreated at 10 and 30% solids loading at optimized conditions and one-pot agave bagasse.

Therefore, another raw Agave sample (AG-diffuser) was evaluated to compare the effectiveness of the optimized pretreatment conditions using [2-HEA][OAc] in a more recalcitrant sample as previously demonstrated.⁴⁰ When compared to AG, untreated AG-diffuser has lower initial glucan (35.0 % vs 31.6%) and higher lignin (16.1 % vs 18.6%) content. These differences could be attributed to Agave cooking during Tequila manufacturing. More severe process conditions were applied in AG (autoclave with 105 °C and 18 h) than AG-diffuser (70 °C and 6 h). When AG diffuser was pretreated with [2-HEA][OAc] at 30 % solids loading, a similar delignification value was achieved compared to AG (23.7% vs 26.7). Even with its relatively higher lignin content, pretreatment with [2-HEA][OAc] was capable of maintaining its effectiveness. Therefore, no significant differences between substrates in the delignification values were found at optimal conditions to achieve high sugar conversion in AG and AG-diffuser using [2-HEA][OAc] at 160 °C, unlike a previous report where differences in delignification were found using [C₂C₁Im][OAc] at the previous proven conditions at 120 °C.⁴⁰ This lack of difference between delignification values can be attributed to numerous factors specific to the specific environmental conditions from the biomass origin, particle size, extraction, and post-harvest procedures, as well as IL and Agave cooking type

Structural changes on selected Agave samples

After pretreatment, numerous simultaneous changes occurred in biomass recalcitrance, including changes in the lignin and hemicellulose content, lignin-carbohydrate complexes, accessibility, and crystallinity.⁴¹ The cellulose crystalline structure, due to its highly ordered and water-insoluble nature, is challenging for enzymes to achieve an efficient hydrolysis reaction. Thus, decreasing the cellulose crystallinity while simultaneously having a high delignification will increase the availability of active enzymes and rest in an efficient saccharification reaction.⁴²

As in previous findings, untreated AG (Figure 3) presented distinctive and defined peaks at $2\theta = 14.8^\circ$, 24.5° , 30.0° and 38.0° corresponding to monohydrate calcium oxalate (CaOX), which is characteristic of succulent plants that incorporate the crassulacean acid metabolism (per example, *Opuntia ficus indica*).^{12,43,44} Interestingly, the pretreatment performed with [2-HEA][OAc] at two different biomass loadings (10 and 30% wt.) showed two different effects on CrI. In particular, an increase in CrI up to 42.7% was obtained in the [2-HEA][OAc]-pretreated sample at 10% solids loading that includes a sharp peak at 22.1° . In comparison, a decrease of CrI to 32.0% was observed at 30% solids loading during pretreatment compared to the untreated AG (36.9%). These results could be attributed to removing amorphous cell wall components in Agave, including calcium oxalate, lignin and hemicellulose.²⁶ Besides, the intensity of the CaOX peaks was reduced after pretreatment, while a sharp cellulose peak at 22.5° and a lower and broader peak at $\sim 15.9^\circ$ are now more defined. Besides, the solid residue recovered after the PIL-OP process was analyzed to obtain its XRD pattern.

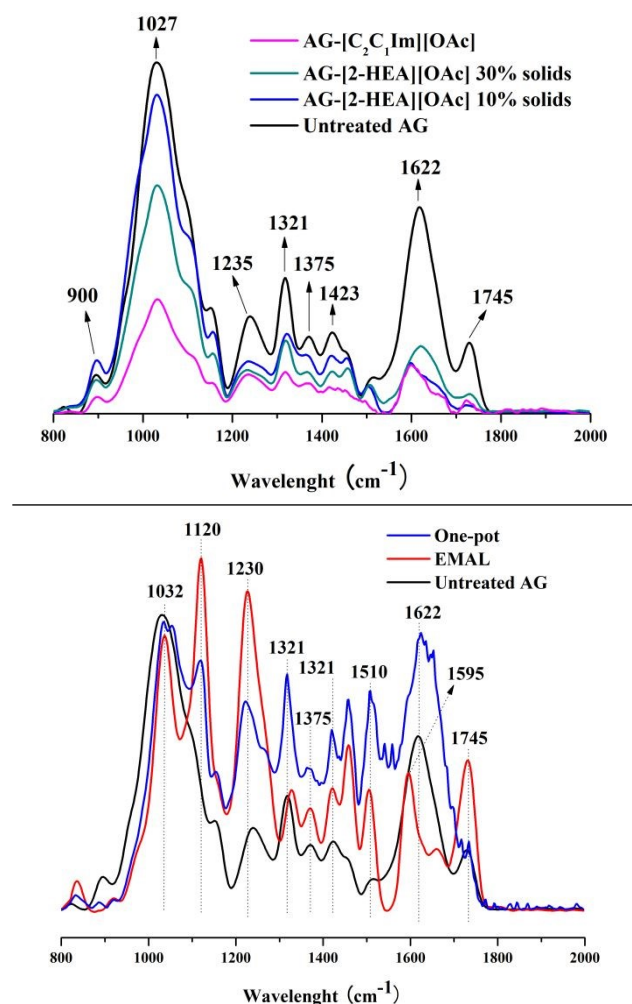


Figure 4. FTIR spectra of agave bagasse solids. Untreated vs. pretreated with [C₂C₁Im][OAc] and [2-HEA][OAc] (top); untreated vs. OP and EMAL samples (bottom).

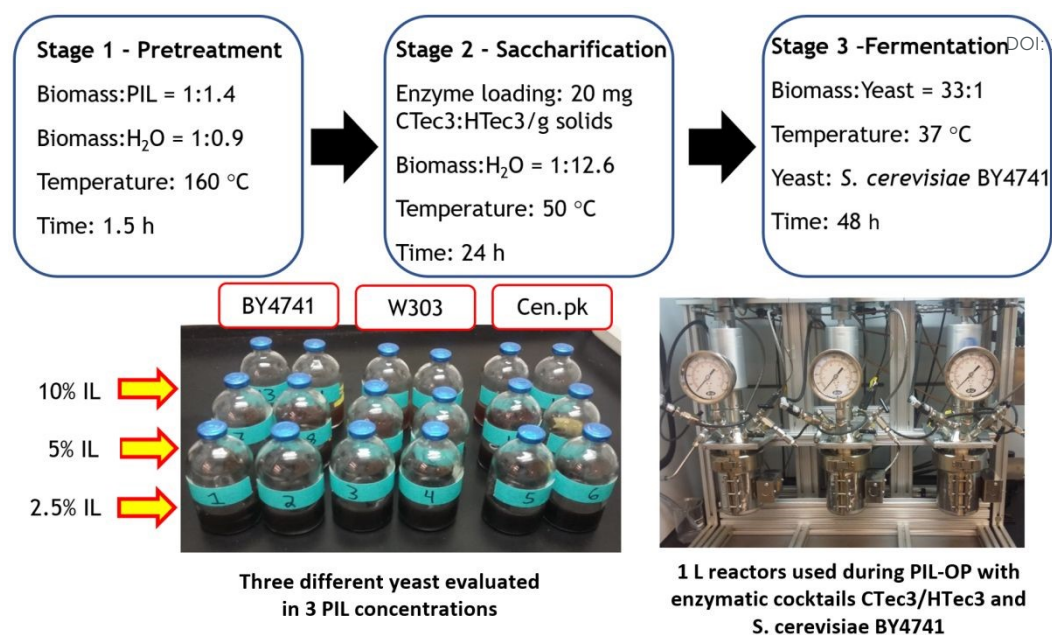


Figure 5. General flow chart of the one-pot scheme constituted from three stages (pretreatment, saccharification and fermentation).

Limited information exists on the crystallinity of PIL pretreated and PIL-OP samples when compared to AIL. After pretreatment with two different PILs (trie-thylammonium hydrogen sulfate [TEA][HSO₄] and 1-butylimidazolium hydrogen sulfate [HBIM][HSO₄]), the cellulose crystallinity increased after pretreatment in the ratio of 2 to 10% when compared to the untreated biomass, hornbeam (*Carpinus betulus L.*).⁴⁵

On the other hand, Sun et al.¹⁸ showed that CrI in switchgrass pretreated with [2-HEA][OAc] decreased when compared to the untreated biomass (68 % vs 49%) while still retaining the cellulose I structure (as in this study). The XRD spectra from the PIL-OP samples indicated a 34.5% CrI with more intense CaOX peaks as a result of the carbohydrates consumption and fermentation to ethanol during S-SSF and a corresponding concentration of the other constituents (CaOX, lignin, non-consumed carbohydrates, and ashes). To further confirm biomass structural changes near FTIR spectra of untreated vs pretreated AG with [C₂C₁Im][OAc] and [2-HEA][OAc] as well as untreated AG vs OP and EMAL samples were recorded using different carbohydrate and lignin bands, including two bands associated to CaOX (Figure 4).

The peak at 900 cm⁻¹ is observed to decrease in both the 30% solids [2-HEA][OAc] and [C₂C₁Im][OAc] pretreated samples while increasing in the 10% solids [2-HEA][OAc] when compared to the untreated sample, which is consistent with the XRD pattern, indicating a modification of cellulose crystallinity. Reduced peaks intensities of the CaOX peaks at 1321 and 1622 cm⁻¹ occurred in all pretreated samples while the opposite was observed in the OP and EMAL samples. In addition, the reduced presence of specific functional groups in the pretreated biomass (more evident on the [C₂C₁Im][OAc] sample) on C-O stretching in cellulose and hemicellulose (1027 cm⁻¹) and C-O stretching in lignin and hemicellulose (1235 cm⁻¹) was ascribed to characteristic IL pretreatment response on cell wall component reconfigurations after lignin removal and cellulose dissolution.⁴⁶

Besides, a C-H deformation/bending at 1375 and 1423 cm⁻¹ associated with condensed syringyl/guaiacyl unit and aromatic ring, respectively, can be observed at similar values for the [2-HEA][OAc] samples.^{47,48} When the untreated is compared against the OP and EMAL samples, the difference between lignin-related peaks intensity on the latter is easily noticeable. The most important functional groups of lignin include carbonyls, phenolic hydroxyls, aromatic rings and methoxyls at 1595 and 1220 cm⁻¹ (CO stretching in aryl ester), including sharp peaks characteristic of aromatic compounds derived from lignin can be easily correlated. These high-intensity peaks can also be found in sugarcane bagasse pretreated with [2-HEA][OAc] for 3.5 h at 150°C; however, they are covered beneath the CaOX peaks in AG.²² Interestingly, the band at 1120 cm⁻¹ associated with the aromatic C-H in-plane deformation typical for syringyl units is observed in high intensity for the EMAL sample.⁴⁸

Py-GC/MS and lignin S/G ratios in AG samples

As shown in ESI Figure S1 and Table S2, syringol, vanillic acid, isoeugenol, 3-tert-butyl-4-hydroxyanisole, and 4-allyl-2,6-dimethoxyphenol were the most predominant aromatic compounds in untreated AG, EMAL and OP samples identified by Py-GC/MS. The most available compounds in terms of relative abundance (>25%) were the 4-allyl-2,6-dimethoxyphenol (S-lignin), representing up to 33% of the detected compounds in the OP sample. The syringol was also detected in a recent report in *Agave tequilana* and also present in other Agave species (*Agave sisalana*).^{49,50} Although S and G lignin-derived monomers were predominantly found in AG, one compound recognized as H-lignin (4-methylphenol) was noticed in the OP samples in a small proportion (>1.5%). Previous studies have also described the lignin S/G ratio as an essential factor to gauge biomass recalcitrance that can influence cross-linking between the cell wall components and modification of the biomass saccharification yields cellulases.^{41,51}

The S/G ratios observed for the untreated AG was 1.07, which is relatively lower than previous reports with *Agave tequilana* bagasse (1.57).⁴⁰ The S/G ratios of EMAL and OP samples were 0.94 and 1.59, respectively.

One-pot ethanol production from AG pretreated at high solids loading using optimized pretreatment conditions

For the first time using in an OP scheme, AG was assessed as a biofuel feedstock using the conditions evaluated in the CCD to achieve high sugar production while lowering IL content during biomass pretreatment resulting in 160 °C, 60 % IL loading and 1.5 h using 30% solids loading. Interestingly, the data obtained from preliminary lab-scale experiments using three different *S. cerevisiae* strains (BY4741, CEN.PK and W303) indicated that [EAO][OAc] did not have an inhibitory effect on either of the yeast strains evaluated. In a PIL-OP, it is preferred to use a higher concentration of IL during the fermentation phase to avoid further dilution of sugars which would prevent the inhibition that would occur at a higher concentration (15%), as shown above.¹⁸ In the presence of [2-HEA][OAc] at 10 %wt, the three employed strains had a similar ethanol yield after 24h of fermentation as follows: BY4741 (99.0±0.6), W303 (96.2±4.7), and Cen.pk (99.4±0.1). However, the relatively faster glucose consumption was achieved by the B4741 strain; therefore, this strain was selected for the experimental runs in the 1 L reactor (bench-scale). One-pot ethanol production in the 1 L Parr reactors was achieved using a single vessel for the three sequential stages (pretreatment, saccharification and fermentation), as presented in Figure 5. No pH adjustment or additional nutrients were used during the fermentation stage of the OP experiments, and no washing step or solids removal were employed in the pretreatment and saccharification stages.

After yeast inoculation with B4741, glucose to ethanol yield of ~97% was obtained after 48 h of fermentation in the 1L reactors. Results showed that 266 kg of glucose and 76 kg of xylose were generated during the enzymatic saccharification stage, taking 1 Ton of untreated biomass as a basis. The solid residue recovered after the PIL-OP process still contains usable carbohydrates, whereas the lignin content was concentrated (~22%). Using a 30 wt% solids loading reduced IL usage as low as 1.4 kg per kg of biomass; this high solid loading is necessary to achieve a higher yield in a simplified OP conversion process. The final ethanol yields of the PIL-OP scheme are a direct consequence of the pretreatment nature. Hence, a total of 132 kg of ethanol was obtained per Ton of untreated biomass. It was demonstrated an ethanol production higher than previous findings that produced 121 kg of ethanol/Ton of untreated biomass using [C₂C₁Im][OAc] pretreated AG than employed an ethanologenic *Escherichia coli* strain that even consumed C₅ and C₆.¹²

These results reaffirm the benefits of biocompatible PIL, enabling biorefinery schemes that can reduce cost bottlenecks that typically diminish IL cost and rheological properties (i.e. high viscosity), solid/liquid separation and pH adjustment. Moreover, different strategies and research need to be integrated to improve ethanol yield and overall process economics.

In this regard, the advances in recent years to identify and synthesize low-cost and biocompatible ILs that avoid pH adjustment and water-wash steps have contributed to its consideration as an economically viable pretreatment technology within a biorefinery. In order to improve essential cost segments that limit further development of the PIL-OP-scheme (i.e., IL cost, enzyme loading and its relatively low final ethanol concentration), further research efforts should be made on developing engineered yeast or bacteria capable to tolerate higher PIL concentrations and/or consuming C₅ and C₆ sugars during S-SSF. Other bioreactor configurations for high solids can be considered to achieve a higher tier ethanol production loading (i.e., peg-mixer). Finally, research intensification to develop cellulases cocktails capable of tolerating high IL loadings (such as the JTherm developed at JBEI), as well as IL tolerant yeast strain capable of achieving a sustained growth at IL loadings above 15 wt% (or higher), could lead to a more cost-efficient IL-based biorefinery scheme.

Conclusions

A low-cost and biocompatible PIL ([2-HEA][OAc]) at 160 °C and 1.5h showed pretreatment performance comparable to a well-known AIL ([C₂C₁Im][OAc]) at 120 °C and 3 h in AG at 30% solids loading, achieving high delignification (> 50% lignin), low cellulose crystallinity and the disruption of important cell wall linkages. No significant difference in delignification between two different AG samples (AG and AG-diffuser) were found after PIL pretreatment. Lowering PIL usage up to 60% while maintaining high glucan conversion was carried out within an OP scheme at high solids loading (30%), which has been estimated to produce 132 kg ethanol per Ton of untreated biomass at optimized conditions (160 °C and 1.5h). Finally, the current PIL-OP scheme in AG presents an attractive approach to eliminate costly process steps (pH adjustment and water-wash) while reducing total processing time and increasing sugars and ethanol yields which could be improved even more with further research.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

This work was supported by the Energy Sustainability Fund from the Mexican Secretary of Energy, Grant no. 249564 (Mexican Bioenergy Innovation Centre, Bioalcohols Cluster). This work was part of the DOE Joint BioEnergy Institute (<http://www.jbei.org>) supported by the U.S. Department of Energy, Office of Science, Office of Biological and Environmental Research, through contract DE-AC02-05CH11231 between Lawrence Berkeley National Laboratory and the U.S. Department of Energy.

References

- 1 J. A. Pérez-Pimienta, M. G. López-Ortega and A. Sanchez, *Biofuels, Bioprod. Biorefining*, 2017, **11**, 732–748.
- 2 S. P. S. Chundawat, G. T. Beckham, M. E. Himmel and B. E. Dale, *Annu. Rev. Chem. Biomol. Eng.*, 2011, **2**, 121–145.

- 3 K. L. Galindo-Hernández, A. Tapia-Rodríguez, F. Alatrístre-Mondrag, L. B. Celis, J. Arreola-Vargas and E. Razo-Flores, *Int. J. Hydrogen Energy*, 2018, **43**, 22116–22125.
- 4 C. A. Flores-gómez, E. M. Escamilla Silva, C. Zhong, B. E. Dale, L. Da, C. Sousa and V. Balan, *Biotechnol. Biofuels*, 2018, **11**, 1–18.
- 5 D. I. Díaz-blanco, J. R. De La, J. C. López-linares, T. K. Morales-martínez, E. Ruiz and L. J. Rios-gonzález, *Ind. Crop. Prod.*, 2018, **114**, 154–163.
- 6 C. Montiel, O. Hernández-Meléndez, E. Vivaldo-Lima, M. Hernández-Luna and E. Bárzana, *BioEnergy Res.*, 2016, 1005–1014.
- 7 J. A. Pérez-Pimienta, C. A. Flores-Gómez, H. A. Ruiz, N. Sathitsuksanoh, V. Balan, L. da Costa Sousa, B. E. Dale, S. Singh and B. A. Simmons, *Bioresour. Technol.*, 2016, **211**, 216–223.
- 8 J. A. Perez-Pimienta, M. G. Lopez-Ortega, P. Varanasi, V. Stavila, G. Cheng, S. Singh and B. A. Simmons, *Bioresour. Technol.*, 2013, **127**, 18–24.
- 9 L. Caspeta, M. a. Caro-Bermúdez, T. Ponce-Noyola and A. Martinez, *Appl. Energy*, 2014, **113**, 277–286.
- 10 J. A. Pérez-Pimienta, N. Sathitsuksanoh, V. S. Thompson, K. Tran, T. Ponce-Noyola, V. Stavila, S. Singh and B. A. Simmons, *Biotechnol. Biofuels*, 2017, **10**, 72.
- 11 J. A. Pérez-Pimienta, J. P. A. Icaza-Herrera, J. A. Méndozapérez, V. González-Álvarez, H. O. Méndez-Acosta and J. Arreola-Vargas, *Bioresour. Technol.*, 2019, **275**, 78–85.
- 12 J. A. Pérez-Pimienta, A. Vargas-Tah, K. M. López-Ortega, Y. N. Medina-López, J. A. Mendoza-Pérez, S. Avila, S. Singh, B. A. Simmons, I. Loaces and A. Martinez, *Bioresour. Technol.*, 2017, **225**, 191–198.
- 13 B. Satari, K. Karimi and R. Kumar, *Cellulose solvent-based pretreatment for enhanced second-generation biofuel production: A review*, Royal Society of Chemistry, 2019, vol. 3.
- 14 S. K. Bhatia, S. S. Jagtap, A. A. Bedekar, R. K. Bhatia, A. K. Patel, D. Pant, J. Rajesh Banu, C. V. Rao, Y. G. Kim and Y. H. Yang, *Bioresour. Technol.*, 2020, **300**, 122724.
- 15 N. Sun, F. Xu, N. Sathitsuksanoh, V. S. Thompson, K. Cafferty, C. Li, D. Tanjore, A. Narani, T. R. Pray, B. A. Simmons and S. Singh, *Bioresour. Technol.*, 2015, **186**, 200–206.
- 16 N. Sun, R. Parthasarathi, A. M. Socha, J. Shi, S. Zhang, V. Stavila, K. L. Sale, B. A. Simmons and S. Singh, *Green Chem.*, 2014, **16**, 2546–2557.
- 17 C. G. Yoo, Y. Pu and A. J. Ragauskas, *Curr. Opin. Green Sustain. Chem.*, 2017, **5**, 5–11.
- 18 J. Sun, N. V. S. N. M. Konda, R. Parthasarathi, T. Dutta, M. Valiev, F. Xu, B. A. Simmons and S. Singh, *Green Chem.*, 2017, **19**, 3152–3163.
- 19 G. Papa, S. Rodriguez, a. George, a. Schievano, V. Orzi, K. L. Sale, S. Singh, F. Adani and B. a. Simmons, *Bioresour. Technol.*, 2015, **183**, 101–110.
- 20 R. M. Dias, F. H. B. Sosa and M. C. da Costa, *Polym. Bull.*, 2020, 3637–3656.
- 21 M. M. Hossain, A. Rawal and L. Aldous, *ACS Sustain. Chem. Eng.*, 2019, **7**, 11928–11936.
- 22 E. G. A. Rocha, T. C. Pin, S. C. Rabelo and A. C. Costa, *Fuel*, 2017, **206**, 145–154. DOI: 10.1039/D1GC03774A
- 23 H. J. Jiang, S. Imberti, B. A. Simmons, R. Atkin and G. G. Warr, *ChemSusChem*, 2019, **12**, 270–274.
- 24 J. Shi, J. M. Gladden, N. Sathitsuksanoh, P. Kambam, L. Sandoval, D. Mitra, S. Zhang, A. George, S. W. Singer, B. A. Simmons and S. Singh, *Green Chem.*, 2013, **15**, 2579–2589.
- 25 L. Das, E. C. Achinivu, C. A. Barcelos, E. Sundstrom, B. Amer, E. E. K. Baidoo, B. A. Simmons, N. Sun and J. M. Gladden, *ACS Sustain. Chem. & Eng.*, 2021, **9**, 4422–4432.
- 26 T. Dutta, G. Papa, E. Wang, J. Sun, N. G. Isern, J. R. Cort, B. A. Simmons and S. Singh, *ACS Sustain. Chem. Eng.*, 2018, **6**, 3079–3090.
- 27 P. Halder, S. Kundu, S. Patel, A. Setiawan, R. Atkin, R. Parthasarthy, J. Paz-Ferreiro, A. Surapaneni and K. Shah, *Renew. Sustain. Energy Rev.*, 2019, **105**, 268–292.
- 28 C. A. Barcelos, A. M. Oka, J. Yan, L. Das, E. C. Achinivu, H. Magurudeniya, J. Dong, S. Akdemir, N. R. Baral, C. Yan, C. D. Scown, D. Tanjore, N. Sun, B. A. Simmons, J. Gladden and E. Sundstrom, *ACS Sustain. Chem. Eng.*, 2021, 4042–4053.
- 29 A. Sluiter, B. Hames, R. Ruiz and C. Scarlata, *Lab. Anal. Proced. Natl. Renew. Energy Lab. Golden, CO, NREL/TP-510-42618*.
- 30 M. Iglesias, R. Gonzalez-olmos, I. Cota and F. Medina, *Chem. Eng. J.*, 2010, **162**, 802–808.
- 31 J. A. Perez-Pimienta, M. G. Lopez-Ortega, J. A. Chavez-Carvayar, P. Varanasi, V. Stavila, G. Cheng, S. Singh and B. A. Simmons, *Biomass and Bioenergy*, 2015, **75**, 180–188.
- 32 S. Wu and D. S. Argyropoulos, *J. Pulp Pap. Sci.*, 2003, 29, 235–240.
- 33 F. Xu, J. Sun, N. V. S. N. M. Konda, J. Shi, T. Dutta, C. D. Scown, B. A. Simmons and S. Singh, *Energy Environ. Sci.*, 2016, **9**.
- 34 E. C. Achinivu, R. M. Howard, G. Li, H. Gracz and W. A. Henderson, *Green Chem.*, 2014, **16**, 1114–1119.
- 35 D. Fu and G. Mazza, *Bioresour. Technol.*, 2011, **102**, 8003–8010.
- 36 J. A. Pérez-Pimienta, N. Sathitsuksanoh, V. S. Thompson, K. Tran, T. P. Noyola, V. Stavila, S. Singh and B. A. Simmons, *Biotechnol. Biofuels*, 2017, 1–15.
- 37 F. A. Ferrari, J. F. B. Pereira, G.-J. Witkamp and M. B. S. Forte, *ACS Sustain. Chem. Eng.*, 2019, **7**, 12779–12788.
- 38 R. Agrawal, B. Bhadana, A. S. Mathur, R. Kumar, R. P. Gupta and A. Satlewal, *Front. Energy Res.*, 2018, **6**, 1–12.
- 39 J. Zhang, W. Hou and J. Bao, *Adv. Biochem. Eng. Biotechnol.*, 2015, 75–90.
- 40 J. A. Pérez-pimienta, R. M. Mojica-álvarez, L. M. Sánchez-herrera and A. Mittal, *BioEnergy Res.*, 2018, **11**, 551–561.
- 41 K. Karimi and M. J. Taherzadeh, *Bioresour. Technol.*, 2016, **203**, 348–356.
- 42 X. Meng, G. Y. C. M. Li and R. Aj, *J. Appl. Biotechnol. Bioeng.*, 2016, **1**, 1–8.
- 43 J. A. Pérez-Pimienta, M. G. Lopez-Ortega, J. A. Chavez-Carvayar, P. Varanasi, V. Stavila, G. Cheng, S. Singh and B. A. Simmons, *Biomass and Bioenergy*, 2015, **75**, 180–188.
- 44 L. Yang, M. Lu, S. Carl, J. a. Mayer, J. C. Cushman, E. Tian

- and H. Lin, *Biomass and Bioenergy*, 2015, **76**, 43–53.
- 45 I. Semerci and G. Ersan, *Ind. Crops Prod.*, 2021, **159**, 113021.
- 46 C. Li, G. Cheng, V. Balan, M. S. Kent, M. Ong, S. P. S. Chundawat, L. daCosta Sousa, Y. B. Melnichenko, B. E. Dale, B. A. Simmons and S. Singh, *Bioresour. Technol.*, 2011, **102**, 6928–6936.
- 47 X. H. Li and S. Bin Wu, *BioResources*, 2014, **9**, 6277–6289.
- 48 A. M. Căpraru, V. I. Popa, T. Mălutan and G. Lisa, *Cellul. Chem. Technol.*, 2009, **43**, 409–418.
- 49 J. A. Pérez Pimienta, G. Papa, A. Rodriguez, C. A. Barcelos, L. Liang, V. Stavila, A. Sanchez, J. M. Gladden and B. A. Simmons, *Green Chem.*, 2019, **21**, 3152–3164.
- 50 J. Rencoret, G. Marques, A. Gutiérrez, L. Nieto, J. I. Santos, J. Jiménez-Barbero, Á. T. Martínez and J. C. del Río, *Holzforschung*, 2009, **63**, 691–698.
- 51 J. S. Lupoi, S. Singh, R. Parthasarathi, B. A. Simmons and R. J. Henry, *Renew. Sustain. Energy Rev.*, 2015, **49**, 871–906.

View Article Online
DOI: 10.1039/D1GC03774A