



Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

RECEIVED
LAWRENCE
BERKELEY LABORATORY

NOV 16 1982

LIBRARY AND
DOCUMENTS SECTION

Accelerator & Fusion Research Division

To be published by Oak Ridge National Laboratory
in Report ORNL/TM8498, 1982, entitled "Considerations
of an Advanced Performance Fusion Engineering Device
(FED-A)."


NEGATIVE-ION-BASED NEUTRAL BEAM SYSTEM FOR FED-A
CURRENT DRIVE

O.A. Anderson, W.S. Cooper, D.A. Goldberg,
L. Ruby, and L. Soroka

August 1982

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.
For a personal retention copy, call
Tech. Info. Division, Ext. 6782.*

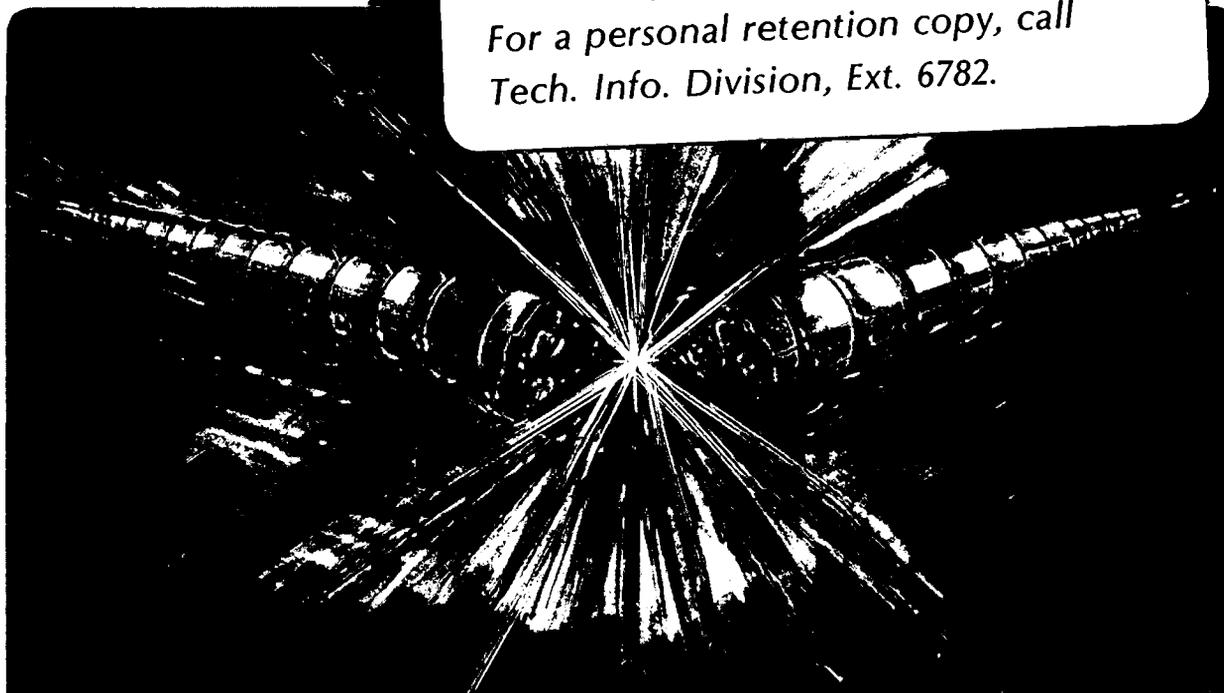

LBL-14880
e

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

NEGATIVE-ION-BASED NEUTRAL BEAM SYSTEM FOR FED-A CURRENT DRIVE

O. A. Anderson, W. S. Cooper, D. A. Goldberg, L. Ruby, L. Soroka

Lawrence Berkeley Laboratory
University of California
Berkeley, CA 94720

In this report we present a preliminary study of the negative-ion based neutral beam system suitable for meeting current drive requirements of the FED-A tokamak.¹ This report will appear in slightly modified form as a subsection of Ref. 1.

Recent advances and new concepts in negative-ion-based neutral beam systems have enhanced the attractiveness of these systems for magnetic fusion applications. These new developments include 1) demonstration of DC H^- ion source operation at over 5 A per meter of source length,² 2) the concept of using strong-focussing electrostatic structures for low-gradient DC acceleration of high-current sheet beams and transport of these beams around corners,^{3,4} and 3) the development of oxygen-iodine chemical lasers, which when combined with a configuring of the laser system in which the D^- beam passes through the laser cavity,⁵ provides the realistic possibility of efficient conversion of negative ions to neutral atoms by photo-detachment of one electron from the negative ion.

We considered two options for the FED-A application: 1) a 400 keV, 50 MW system for periodic drive in the internal transformer mode,¹ and 2) an 800 keV, up to 100 MW DC system for steady state current drive. We have concentrated on the second option, as it was the more demanding.

This system was thought through to the "pre-conceptual" stage, meaning that space and vacuum requirements, electrode shapes and sizes, component feasibility, and overall system performance (e.g., currents, voltages, beam admittance) were considered, but no detailed engineering study was performed.

The proposed beamline is shown in plan view in Figure 1. The beamline design uses electrostatic strong focussing provided by alternating transverse electric fields^{3,6} (the TFF or Transverse Field Focussing concept) in the pumping/transport section, in the main accelerator, and in the neutron shield. The main accelerator raises the D^- beam energy from 200 keV to 800 keV with low gradients (nowhere exceeding 40 kV/cm); the transverse fields can be expected to inhibit total column breakdown by preventing the acceleration of locally-produced electrons and positive ions through more than one stage. TFF sections are also used to transport the beam around two 60-degree bends in the channel through the neutron shielding. These bends, plus the duct configuration in the transport section (shown schematically in the insert in Figure 1) prevent line-of-sight shine-through of neutrons. Each sheet beam is 1.1 m high and 1.5 cm wide in the transport section, and carries 5.5 A. The beams are generated by surface-conversion negative ion sources of the types being developed at LBL and BNL; there are six of these sources per beamline, each 1.1 m high, three per channel. Each source has its own isolation valve. The beams from each set of three sources are aimed to intersect at the target.

Pumping is by cryopumps capable of on-line regeneration, under development at LLNL.⁷ A 200 keV transport section is provided for

beam matching and pumping; additional pumping is provided after acceleration to the final beam energy of 800 keV.

After transport around the final 60-degree bend, the negative ion beam passes through an array of vertically-oriented laser cavities, where approximately 97% of the negative ions are converted to neutral atoms by electron photodetachment. The length of this array in the beam direction is 3 m. Suitable lasers in the 10-kW range are now under development in programs funded by the Air Force. These oxygen-iodine chemical lasers operate at a wavelength of 1.3 microns, which corresponds to a photon energy adequate to remove the electron from a D^- ion, but inadequate to strip the electron from common impurity ions such as O^- and OH^- , or to create D^+ ions. The beam in the neutralizer is about 3 m high, but is very thin (a few cm) in the narrow direction, which permits efficient use of the lasers. This narrow cross section also permits electrostatic deflection of the remaining 3% of the negative ions and any impurities into an ion dump at one side of the beam.

The beamline vacuum vessel is a double-walled chamber constructed of low-activation 5254 aluminum alloy; the volume between the walls is filled with water for neutron moderation and absorption. The shielding thickness shown, 1 m, is probably thicker than is necessary. First estimates indicate that the 1.5 m thick neutron plug at the end of the beamline will attenuate the direct-streaming 14 MeV neutrons by a factor of 10^5 , and that the ducts and bends will attenuate the slow neutrons by a factor of 10^3 to 10^4 . More work is required in this area to obtain better estimates of these numbers and to verify that hands-on maintenance can be performed on the sources.

A single beamline would inject 25 MW of 800 keV deuterium atoms into FED-A; four ports would therefore be required for injection of 100 MW. For current drive, tangential injection would be used, as is shown in Figure 1. Analysis of a similar system⁸ operating at 250 keV indicated an overall system power efficiency of the order of 70%. A higher overall power efficiency can be expected at 800 keV.

The major uncertainties center around the TFF acceleration and transport sections, and the laser photodetachment neutralizer. Transport has been demonstrated in an electron device using a similar principle,⁹ but the first experimental demonstration of acceleration and transport of negative ion beams at relevant current densities by a TFF device will not take place for 2-3 years as presently scheduled. Laser development is proceeding independently of MFE, and is probably a lower-risk item than is the TFF accelerator. This beamline design requires an extrapolation by a factor of about 1.4 in deuterium negative ion current density at the ion source above what has been achieved experimentally at LBL. We expect at least this much progress in negative ion source development at either LBL or BNL or both, given the probable FED-A timescale.

The conclusion of this short study is that the injection of 100 MW of 800 keV deuterium atoms into FED-A is probably feasible, and can be considered as an option for current drive.

Acknowledgment:

This work was supported by the Director, Office of Energy Research, Office of Fusion Energy, Development and Technology Division of the U.S. Department of Energy under Contract No. DE-AC03-76SF-00098.

References

1. "Considerations of an Advanced Performance Fusion Engineering Device (FED-A)", Oak Ridge National Laboratory Report ORNL/TM8498, in preparation.
2. K. W. Ehlers and K. N. Leung, "Self-extraction H⁻ or D⁻ Ion Source", to be reported at the 24th Annual Meeting of the APS Division of Plasma Physics, New Orleans, LA, Nov. 1-5, 1982.
3. O. A. Anderson, "The TFF Accelerator for Fusion Reactor Injection", *ibid.*
4. W. S. Cooper, O. A. Anderson, D. A. Goldberg, and J. Fink, "Improved Negative-Ion Based Neutral Injection System", *ibid.*
5. M. W. McGeoch, Proc. 2nd Int. Symp. on Prod. and Neut. of Neg. Hydrogen Ions and Beams, Brookhaven National Laboratory, Upton, NY (1980), p. 304.
6. P. T. Kirstein, G. S. Kino, and W. E. Waters, Space-Charge Flow, McGraw-Hill Book Co., New York (1967), p. 255.
7. T. H. Batzer, LLNL (private communication).
8. J. H. Fink, "Effective Photo-Neutralization of Negative Hydrogen Ion Beams", to be reported at the 24th Annual Meeting of the APS Division of Plasma Physics, New Orleans, LA, Nov. 1-5, 1982.
9. H. A. C. Hogg, "Periodic Electrostatic Beam Focusing", Proc. IEE, Part B, Suppl. 10-12, p. 1016, 1958.

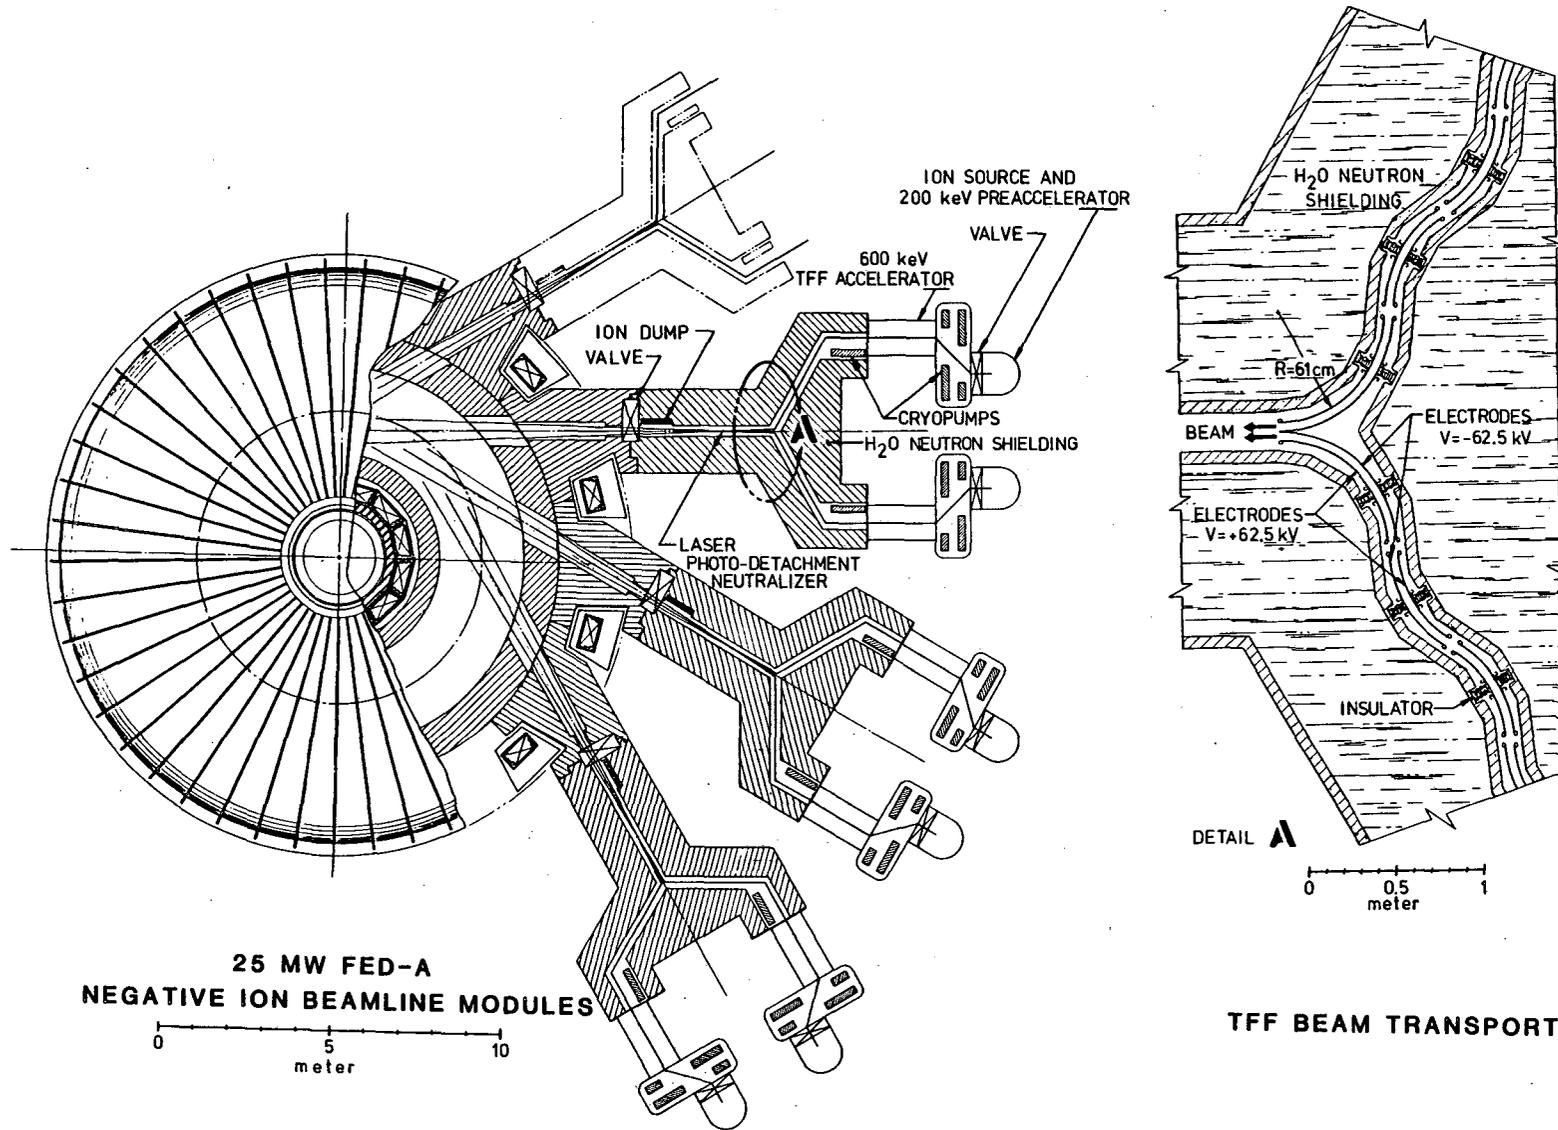


Figure 1

XBL 828-11317

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DEPARTMENT
LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720