

Lawrence Berkeley National Laboratory

LBL Publications

Title

PEP-II Design Update and R&D Results

Permalink

<https://escholarship.org/uc/item/7h2436wx>

Author

Zisman, M S

Publication Date

1993



Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA


Accelerator & Fusion Research Division

Presented at the International Workshop on B-Factories:
Accelerators and Experiments, KEK, Tsukuba, Japan,
November 17-20, 1992, and to be published in the Proceedings

PEP-II Design Update and R&D Results

M.S. Zisman

January 1993

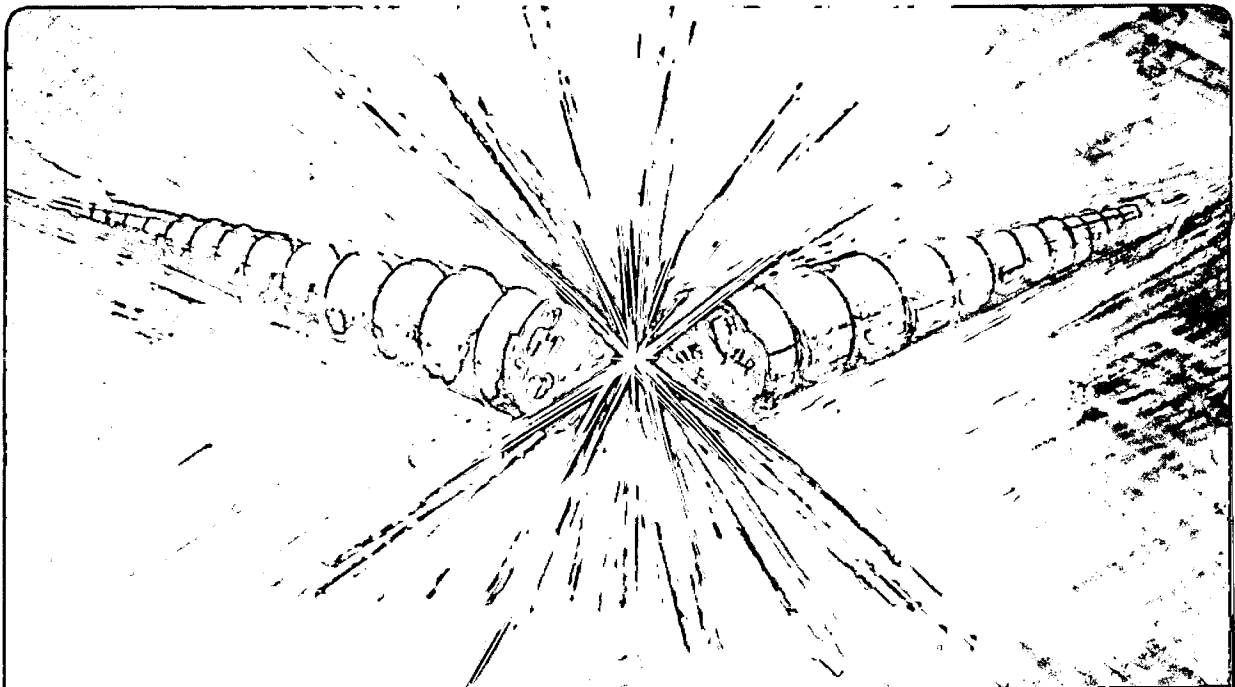

1 LOAN COPY 1
1 Circulates 1
1 for 4 weeks 1

Bldg. 50 Library.
Copy 2

LBL-33417

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

PEP-II Design Update and R&D Results

Michael S. Zisman
Accelerator & Fusion Research Division
Lawrence Berkeley Laboratory, Berkeley, CA 94720 U.S.A.

for the SLAC/LBL/LLNL PEP-II Design Group[†]

ABSTRACT

We describe the present status of the PEP-II asymmetric B factory design undertaken by SLAC, LBL, and LLNL. Design optimization during the past year and changes from the original CDR design are described. R&D activities have focused primarily on the key technology areas of vacuum, RF, and feedback system design. Recent progress in these areas is described. The R&D results have verified our design assumptions and provide further confidence in the design of PEP-II.

1. INTRODUCTION

The conceptual design for the PEP-II asymmetric B factory, carried out as a collaboration of SLAC, LBL, and LLNL, was completed in February, 1991 [1]. The design goal for PEP-II, which comprises a high-energy ring (HER) containing 9 GeV e^- and a low-energy ring (LER) containing 3.1 GeV e^+ , is to provide a luminosity of $\mathcal{L} = 3 \times 10^{33} \text{ cm}^{-2} \text{ s}^{-1}$. Since the conceptual design report (CDR) was completed, the design has continued to evolve. Significant changes have occurred in the areas of the interaction region (IR) design, the LER lattice, and the injection scheme. In addition to the design activities, R&D is being carried out in the technological areas of vacuum, RF, and feedback. The main design changes and recent R&D results are summarized here.

2. DESIGN OVERVIEW

The two-ring PEP-II facility will be located in the 2200-m circumference PEP tunnel, with the new LER mounted atop the HER. The HER reuses most of the components from the existing PEP ring. A mockup of a proposed arrangement for the two rings is shown in Fig. 1. The injection system for the rings makes use of the present SLC injector, which routinely provides

$2.5 \times 10^{10} e^\pm$ per pulse at 120 pps (compared with a PEP-II design requirement of $0.2\text{--}1 \times 10^{10} e^\pm$ per pulse). With this injector, the estimated top-off time for the operating collider is 3 minutes, and the time to fill the rings from zero current is about 6 minutes. No other injector in the world is as powerful as the SLAC linac, which provides a demonstrated capability to fill the PEP-II rings at a suitable rate. Among other things, such a capability is crucial for an optimum commissioning scenario. A summary of the main PEP-II parameters is given in Table 1.

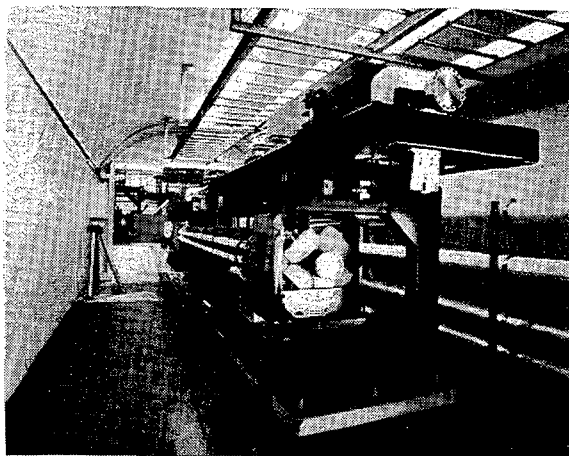


Fig. 1 Mockup of PEP-II magnets and supports.

[†]Work supported by the Director, Office of Energy Research, Office of High Energy and Nuclear Physics, High Energy Physics Division, U.S. Dept. of Energy, under Contract Nos. DE-AC03-76SF00098 (LBL), DE-AC03-76SF00515 (SLAC), and W-7405-Eng-48 (LLNL).

about the IP, as described in Ref. [3]. Finally, we are examining [3] the concept of "local" chromaticity correction in which sextupoles are located in the IR straight section itself to control the chromaticity generated by the IR quadrupoles. This approach appears very promising as a means of reducing the higher-order chromaticity that must otherwise be controlled with the arc sextupoles alone.

Based on beam-beam simulations of the injection process [4], we have now adopted a vertical injection scheme for the rings. This keeps the injected beam well away from the stored beam and minimizes the beam blowup during injection. Horizontal injection is still an acceptable option but leads to more blowup and thus potentially more detector background.

3.3 Injection System

Considerable work has been done in this area since the CDR. The optical and mechanical aspects of the e^+ extraction from the linac have been worked out in detail. In addition, a simple and elegant matching technique has been developed that will permit the existing injection transport lines to remain essentially unchanged. A study of injection optics for the storage rings has been made, leading to a simple two-kicker injection scheme. Injection kickers will be powered in parallel to minimize any mismatch between them [5].

To protect the detector from injection losses, three sets of collimators will be installed in each ring. One set serves to define the momentum, one set selects the betatron amplitude, and the third set is for "cleanup." Each of the three sets is designed with multiple sections, separated by 60° or 90° in betatron phase to ensure complete coverage.

4. APPROACH TO R&D ACTIVITIES

Even in the R&D phase, PEP-II activities are being closely monitored. Major R&D activities—those involving significant expense—are formally reviewed as would be done in the construction project. These reviews, which solicit advice from people both inside and outside the immediate PEP-II R&D group, cover R&D goals, technical approach, costs, and schedule. A written report of each review is sent to the reviewers and maintained on file.

5. R&D PROGRESS AND PLANS

R&D activities permit us to verify design choices and optimize design parameters. The key R&D areas for

PEP-II were identified early in the design phase and include vacuum, RF, and feedback systems. These are the main topics on which PEP-II R&D is focusing.

It is worth noting that the results of the R&D activities are continually folded back into the project design. Examples of this include the down-sampling feature added to the multibunch feedback system [6], the detailed calculations of the higher-order mode (HOM) damping and thermal loading of the RF cavities [7], and the simplified approach to the HER vacuum chamber design [8]. Such modifications produced the beneficial side-effect of reducing overall project costs so, in a certain sense, the R&D effort is "paying for itself."

5.1 Vacuum System

We have carried out extensive photodesorption studies using the VUV ring at BNL [9]. Initial studies used copper bars to choose acceptable materials for the chamber, and subsequently an actual chamber was studied to examine fabrication and cleaning issues. The entire topic of chamber production is being studied in detail to determine optimum fabrication, cleaning, and assembly techniques. We are also preparing a series of tests on the pumping speed of distributed ion pumps (DIPs) to optimize the pumping cell design and verify the pumping speed of our chosen configuration.

The status of this work [8] is that materials choices have been made (OFHC copper for the chamber body and SE-copper for the cooling bar), and the required photodesorption coefficient, $\eta \leq 2 \times 10^{-6}$, has been achieved after an equivalent PEP-II photon dose of only 25 A-hr. A DIP test facility is designed and is being fabricated, with pumping tests scheduled to begin soon. We are also exploring alternative techniques to weld and bend extruded HER chambers, with promising results.

5.2 RF System

The R&D goals of the RF system program have included fabricating a low-power test cavity and measuring its HOM properties. In addition, tests to verify the efficacy of the proposed waveguide damping scheme have been carried out, resulting in damping of the most dangerous longitudinal HOM (TM011) to $Q \approx 30$ (compared with a desired reduction to $Q < 70$). A program of three-dimensional thermal and mechanical stress calculations for the RF cavity is being carried out in collaboration with the AECL Chalk River Laboratory (CRL) to devise a suitable cooling scheme for the high-power cavity [10]. A high-power test stand that can be used for the cavity tests (150 kW

design goal) and window tests (500 kW design goal) is now available, powered by a 500-kW modified PEP klystron retuned to 476 MHz. Considerable emphasis has been placed on the development of an RF feedback system to avoid driving coupled-bunch instabilities with the fundamental mode [11].

The state of the RF work is well advanced. The low-power cavity is completed and measurements of the HOM spectrum have been carried out [7]. We have demonstrated that the waveguides and loads effectively damp the unwanted HOMs. A detailed simulation model of the RF feedback system has been carried out in collaboration with CRL and the results are very promising.

5.3 Feedback System

The feedback system R&D in the past year has concentrated on optimizing the design of the longitudinal system. In addition to carrying out simulations with realistic parameters, we have carried out actual system tests with beam, using the SPEAR ring at SLAC [12]. We are also refining the design of the transverse feedback systems.

Our simulations have shown that the down-sampled design is both simple and effective, and that realistic noise and bunch-to-bunch coupling in pickup and kicker do not degrade system performance. The SPEAR measurements verify that the system performs properly and understandably under "combat" conditions. At the present time a full prototype system is being designed. This will be installed and tested at the LBL Advanced Light Source (ALS) in about one year.

5.4 Magnets and Supports

In the past year we have completed a full-cell hardware mockup of the PEP-II rings (see Fig. 1) and performed mechanical stability and alignment tests. Magnet refurbishment procedures have also been developed and tested, and were shown to be less complicated and less expensive than originally assumed in the CDR. Based on this work, we intend to modify the LER support structure for better alignment line-of-sight.

5.5 Ongoing R&D Program

In the current year, R&D efforts will focus on answering the remaining questions on major issues required for construction. For the vacuum system, we plan to obtain prototype HER extrusions and use them to carry out a realistic fabrication sequence. We will also perform photodesorption measurements on sample

extruded chambers using the higher critical energy photons of the XRAY ring at BNL. DIP tests will be completed and an optimized design determined. The modified PEP-II full-cell mockup will be used as a test bed for installing a full-cell vacuum system mockup with all components and chamber supports. Impedance measurements of the various chamber components will also be performed.

The main RF-related R&D activity will be associated with the final design, fabrication, and testing of a high-power test cavity. This work will include tests of high-power cavity windows and damping loads using the SLAC 500-kW, 476-MHz test stand. Development work on a 1.2-MW, 476-MHz klystron will continue.

Feedback work will concentrate on the production of a prototype PEP-II system suitable for testing on the ALS. This requires both software and hardware development.

Injection-related work will include verifying the design of the linac extraction system and confirming the parameters (emittance, energy spread) of the extracted beam. Design and testing of the required injector feedback algorithms will also be carried out.

In the area of magnets and supports, we plan to modify the full cell mockup to conform to the final configuration adopted. As mentioned, the vacuum system and its supports will be included in this setup. A prototype LER quadrupole will be fabricated and measured to ensure it meets field-quality requirements.

The LER lattice design will be finalized, based on a local chromaticity correction scheme. Tracking calculations to verify dynamic aperture and to determine alignment and field tolerances will be completed. We also plan to begin a study of a low momentum compaction lattice concept to see what benefits this approach might offer.

The IR design R&D program will be aimed at optimizing the vacuum close to the IP. Background studies will be updated to reflect any LER lattice changes that occur.

6. SUMMARY

Major progress has been made on the PEP-II design in the past year. Technical uncertainties have been successfully eliminated and no significant new problems have been uncovered. R&D activities are

also well under way and have resulted in important design improvements. The issues being studied by the PEP-II team are of great interest to the entire new generation of colliders and storage rings, including B , Φ , τ -charm factories, hadron colliders (SSC, LHC) and new generation light sources.

The PEP-II project has a strong design team combined with an excellent site from which to mount it. We are looking forward to receiving soon the go-ahead to begin construction.

7. ACKNOWLEDGMENTS

I would like to thank A. Chan for help with the preparation of the figures.

REFERENCES:

- [1] An Asymmetric B Factory Based on PEP, Conceptual Design Report, LBL PUB-5303, SLAC-372, CALT-68-1715, UCRL-ID-106426, UC-IIRPA-91-01, February, 1991.
- [2] M. K. Sullivan, "Interaction Region Proposal for the PEP-II Upgrade," Proc. of Conference on B Factories: The State of the Art in Accelerators, Detectors and Physics, Stanford, April 6-10, 1992, SLAC-400, November, 1992, p. 255.
- [3] D. Robin *et al.*, "Local Chromaticity Correction Scheme for the PEP-II Low-Energy Ring," these proceedings.
- [4] Y. H. Chin, "Effects of Parasitic Beam-Beam Interaction During the Injection Process at the PEP-II B Factory," Proc. of Conference on B Factories: The State of the Art in Accelerators, Detectors and Physics, Stanford, April 6-10, 1992, SLAC-400, November, 1992, p. 130.
- [5] T. Fieguth, "PEP-II: SLAC-Based Asymmetric B Factory," SLAC-PUB-5936, September, 1992; to be published in Proc. of XXVI Intl. Conf. on High Energy Physics, Dallas, August 6-12, 1992.
- [6] H. A. Hindi *et al.*, "Downsampled Bunch-by-Bunch Feedback for PEP-II," Proc. of Conference on B Factories: The State of the Art in Accelerators, Detectors and Physics, Stanford, April 6-10, 1992, SLAC-400, November, 1992, p. 216.
- [7] R. Rimmer, "RF Cavity Development for the PEP-II B Factory," these proceedings
- [8] C. Perkins, "Research and Development for the PEP-II Vacuum System," these proceedings.
- [9] C. Foerster, *et al.*, "Desorption Measurements of Copper and Copper Alloys for PEP-II," to be published in Proc. of 12th Intl. Vacuum Congress 8th Intl. Conf. on Solid Surfaces, October 12-16, 1992, The Hague.
- [10] M. S. de Jong and T. Tran-Ngoc, "Design of Highly Beam-Loaded, Normal-Conducting RF Cavities," Proc. of Conference on B Factories: The State of the Art in Accelerators, Detectors and Physics, Stanford, April 6-10, 1992, SLAC-400, November, 1992, p. 150.
- [11] F. Pedersen, "RF Cavity Feedback," Proc. of Conference on B Factories: The State of the Art in Accelerators, Detectors and Physics, Stanford, April 6-10, 1992, SLAC-400, November, 1992, p. 192.
- [12] G. Oxoby, *et al.*, "Bunch-by-Bunch Feedback for PEP-II," these proceedings.

LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA
TECHNICAL INFORMATION DEPARTMENT
BERKELEY, CALIFORNIA 94720