

# Lawrence Berkeley National Laboratory

## Recent Work

### Title

RELEASE RATES FROM WASTE PACKAGES IN A SALT REPOSITORY

### Permalink

<https://escholarship.org/uc/item/2x0577mq>

### Author

Chambre, P.L.

### Publication Date

1987-06-01

12



# Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

## EARTH SCIENCES DIVISION

RECEIVED  
LAWRENCE  
BERKELEY LABORATORY

AUG 21 1987

LIBRARY AND  
DOCUMENTS SECTION

To be presented at the American Nuclear Society  
Winter Meeting, Los Angeles, CA, November 15-19, 1987


### RELEASE RATES FROM WASTE PACKAGES IN A SALT REPOSITORY

P.L. Chambré, Y. Hwang, W.W.-L. Lee, and T.H. Pigford

June 1987

### TWO-WEEK LOAN COPY

*This is a Library Circulating Copy  
which may be borrowed for two weeks.*

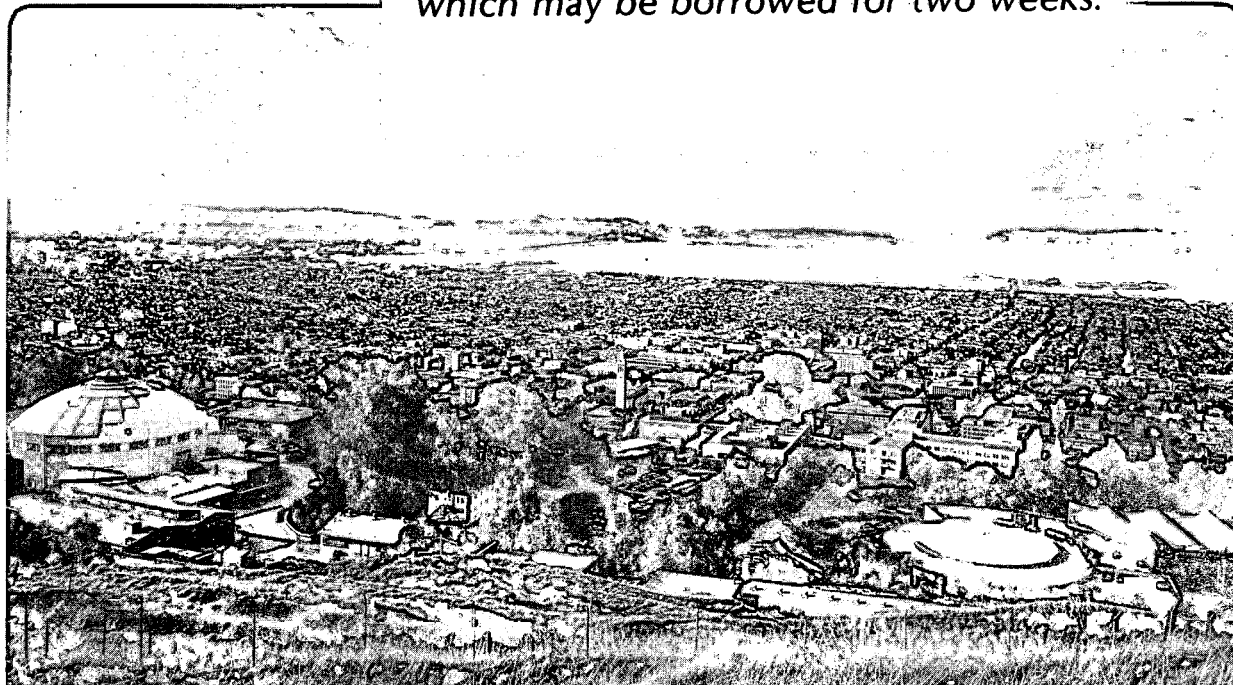

LBL-23638  
12

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

## Release Rates from Waste Packages in a Salt Repository\*

P. L. Chambré, Y. Hwang, W. W.-L. Lee and T. H. Pigford  
Department of Nuclear Engineering & Lawrence Berkeley Laboratory  
University of California, Berkeley, CA 94720

In a companion paper<sup>1</sup>, we predicted very low thermally-induced brine migration in a salt repository after the salt has consolidated against the waste package, so low that radionuclide release into the consolidated salt is expected to occur largely by molecular diffusion. Here we present estimates of radionuclide release rates from waste packages into salt. This conservative and bounding analysis shows that release rates from waste packages in salt are well below the U. S. Nuclear Regulatory Commission's (USNRC) performance objectives for the engineered barrier system.<sup>2</sup>

We assume a spherical-equivalent spent-fuel waste package placed in a salt bed of infinite extent, and consolidation of the borehole annulus has taken place. At  $t = 0$  the container in the waste package is assumed to disappear, and is replaced by a film of stagnant brine. This brine film may result from brine migration due to thermal and pressure gradients. We assumed conservatively that saturation concentrations of the low-solubility species exist at the waste surface. Radionuclides released from the waste form into brine diffuse through brine in grain boundaries in the rock salt. We calculate the time-dependent radionuclide release rate into the salt and compare with the USNRC release-rate criterion.

Time-dependent release rates were calculated from Chambré's analytic solution for diffusional mass transfer. The governing equation considers only diffusion, without advection. Retardation by equilibrium sorption and radioactive decay are both included. The numerical results for  $^{234}\text{U}$  and  $^{237}\text{Np}$  are shown in Figures 1 and 2, expressed as the mass release rate of a species normalized to its inventory. The spherical-equivalent spent-fuel waste package is 0.72 m in radius. In both cases a diffusion coefficient of  $10^{-7}$  cm<sup>2</sup>/s and porosity of 0.001 are used. Assumed retardation coefficients are 50 for neptunium and 20 for uranium. The assumed solubility for uranium is 0.001 g/m<sup>3</sup> and neptunium is assumed to be released congruently. Because both species are of low solubility, solubility-limited dissolution should apply. The figures show that the fractional release rates are below the USNRC limit of  $10^{-5}$ /yr for all times on the graphs. For the shorter half-life

\*Work supported in part by U. S. Department of Energy via Contract DE-AC03-76SF00098

$^{234}\text{U}$  decay further reduces the release rate at large times.

Using methods discussed in the companion paper<sup>1</sup>, time-dependent brine migration velocities resulting from pressure gradients can be obtained and the resultant radionuclide transport compared with diffusional transport. Such a comparison is being published elsewhere.

## References

1. Y. Hwang, P. L. Chambré, W. W.-L. Lee and T. H. Pigford, "Pressure-Induced Brine Migration in Consolidated Salt in a Repository," UCB-NE-4101, LBL-23637, Paper submitted for the 1987 Winter Meeting, American Nuclear Society
2. 10 *Code of Federal Regulations* 60.113(a)(1)(ii)(B).

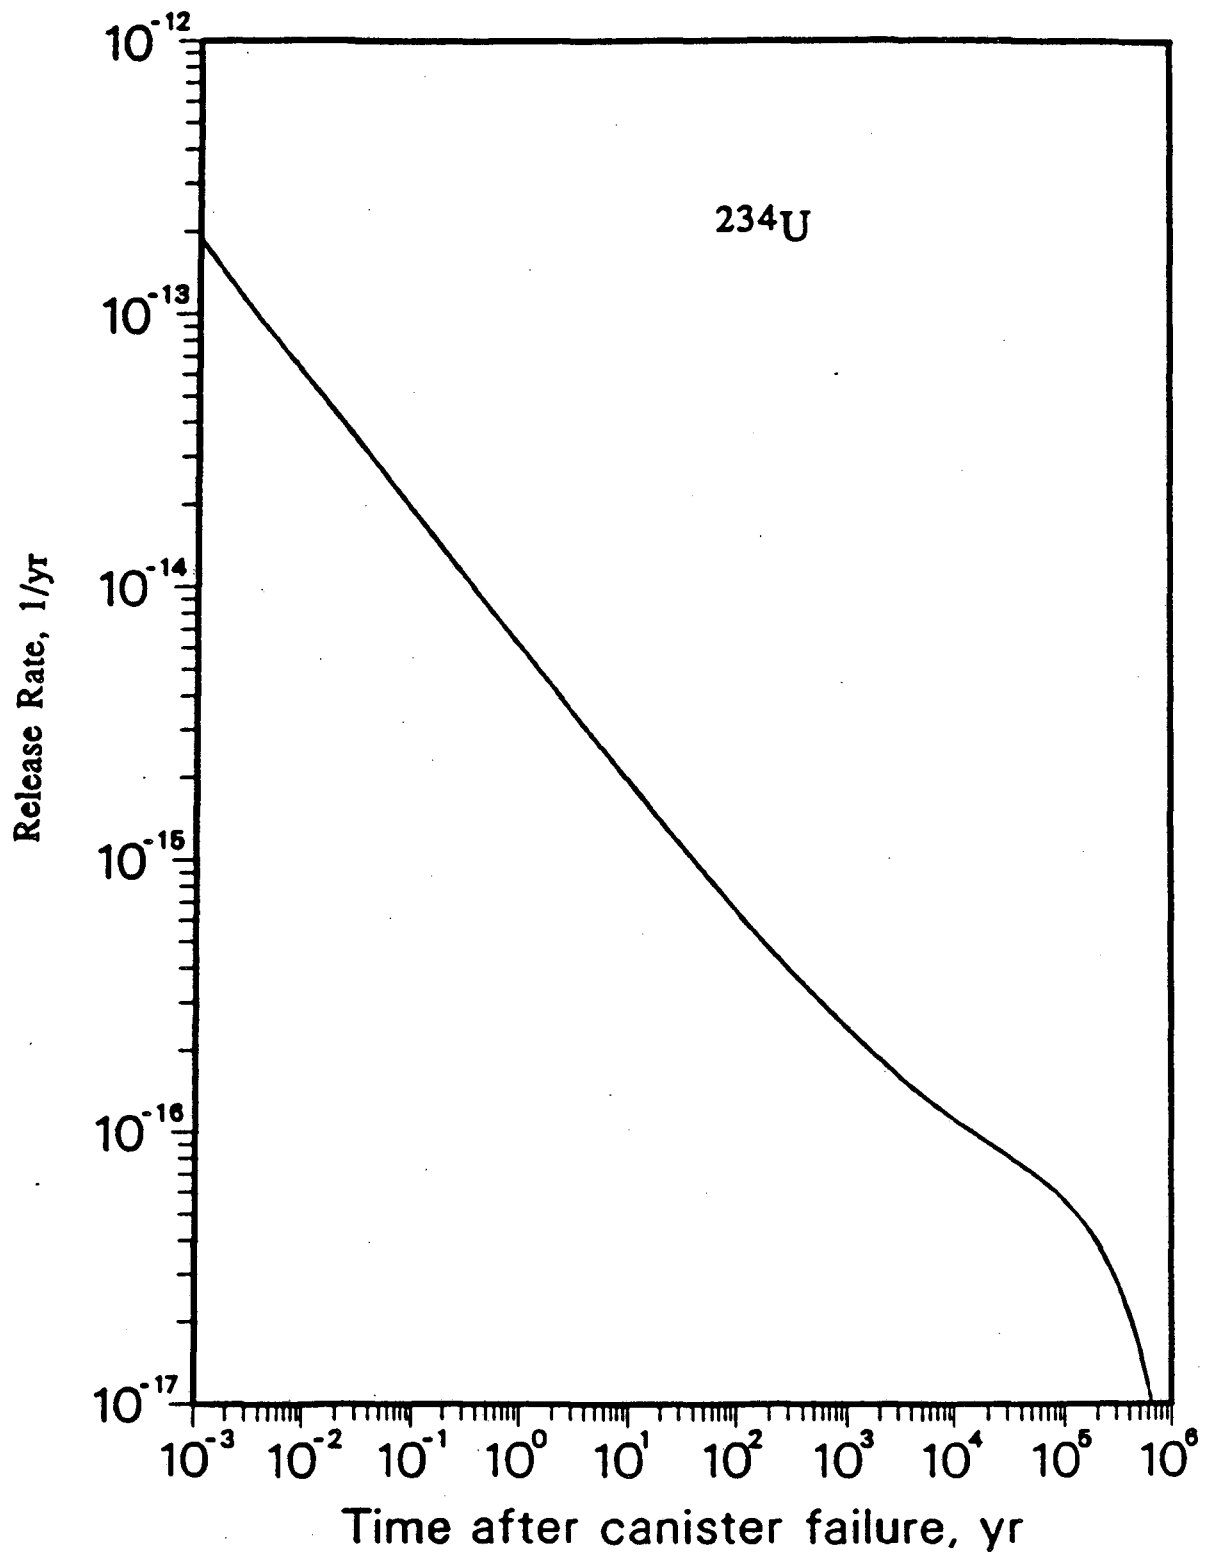


Figure 1. Release Rate of  $^{234}\text{U}$  by Diffusion

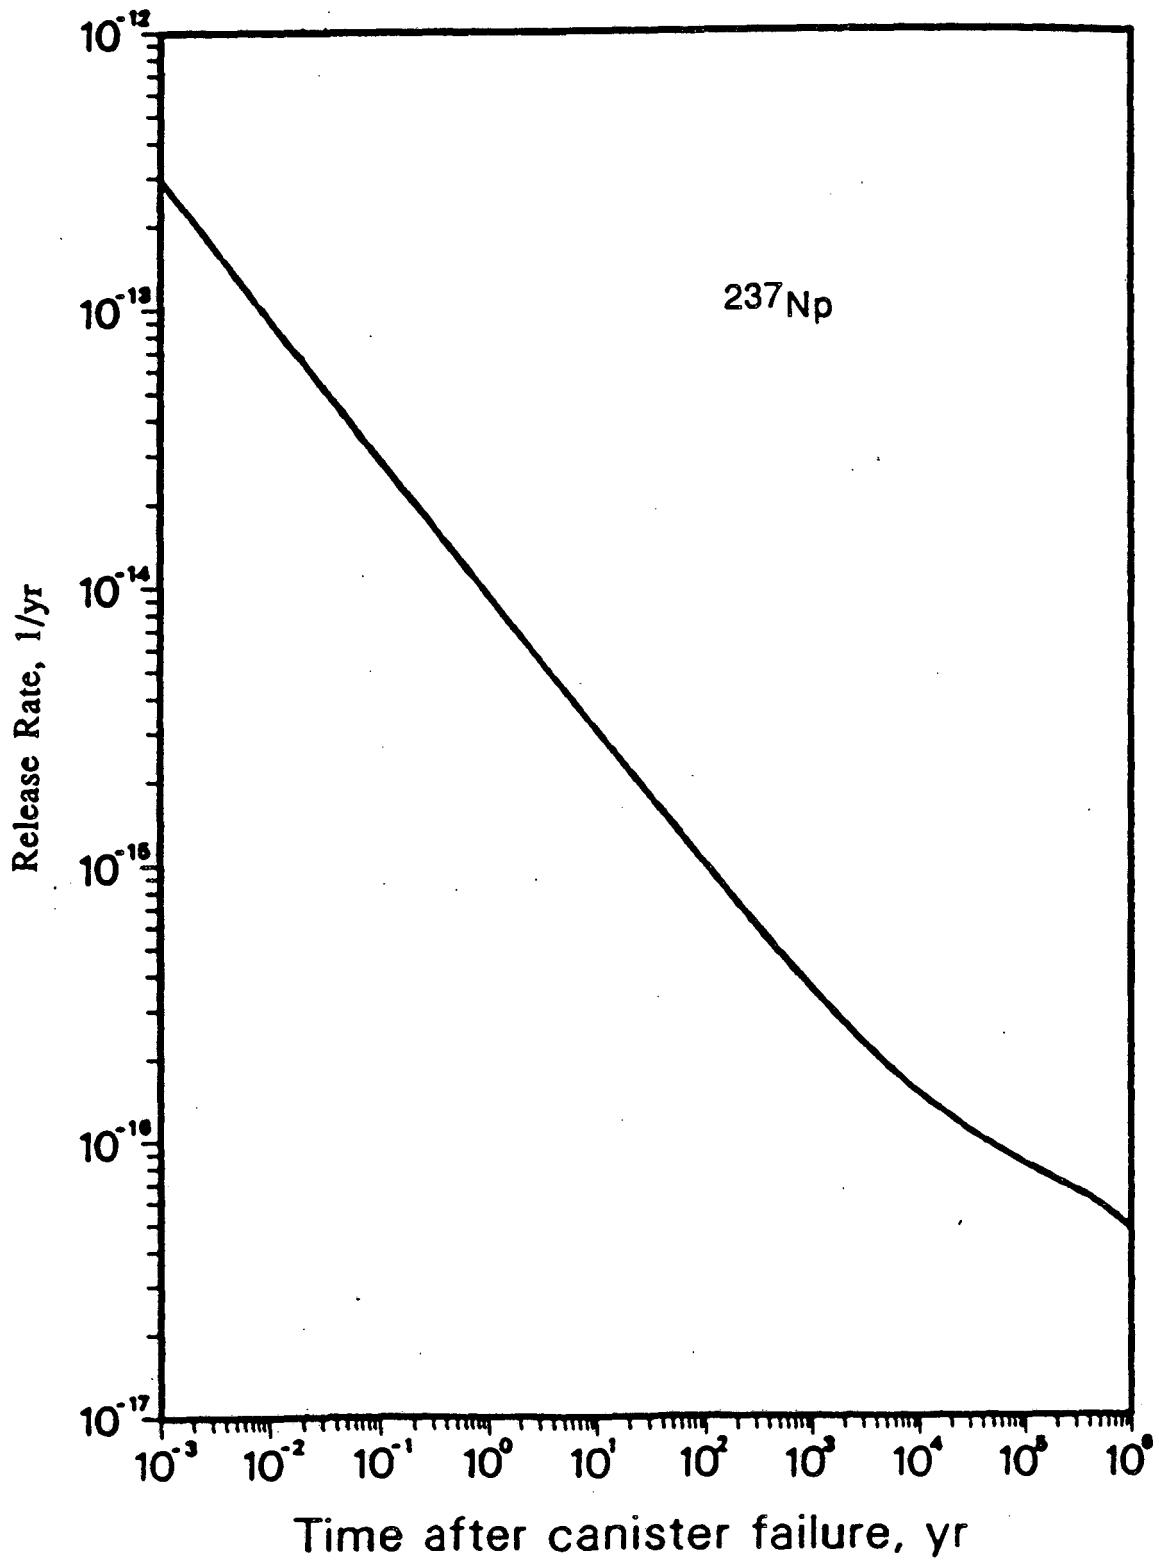


Figure 2. Release Rate of  $^{237}\text{Np}$  by Diffusion

*LAWRENCE BERKELEY LABORATORY  
TECHNICAL INFORMATION DEPARTMENT  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720*