

# Lawrence Berkeley National Laboratory

## Recent Work

### **Title**

Crossed Elliptical Polarization Undulator

### **Permalink**

<https://escholarship.org/uc/item/9w5979zz>

### **Author**

Sasaki, Shigemi

### **Publication Date**

1997




# ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY

## Crossed Elliptical Polarization Undulator

Shigemi Sasaki  
Accelerator and Fusion  
Research Division

May 1997  
Presented at the  
*Particle Accelerator  
Conference*,  
Vancouver, B.C., Canada  
May 12-16, 1997,  
and to be published in  
the Proceedings

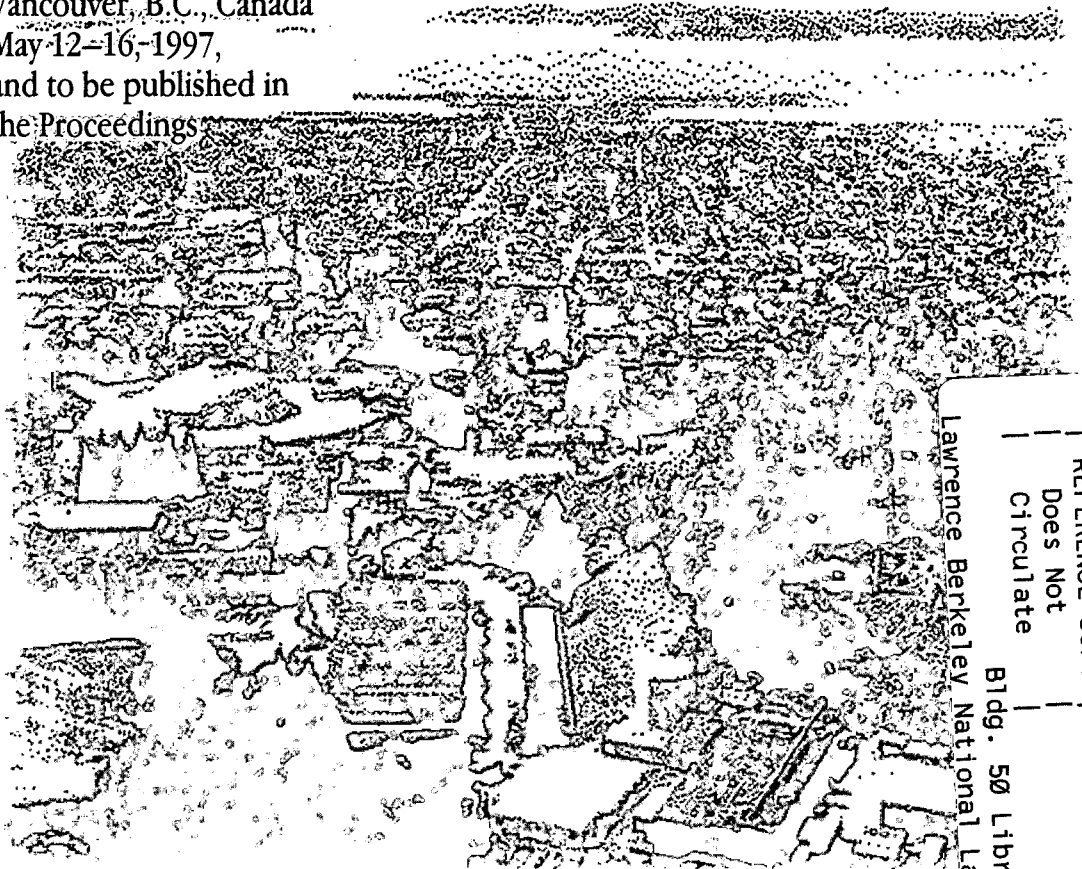

Lawrence Berkeley National Laboratory  
Bldg. 50 Library - Ref.  
| REFERENCE COPY |  
| Does Not |  
| Circulate |  
| Copy 1 |

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

LBL-39828  
UC-410

## **Crossed Elliptical Polarization Undulator**

Shigemi Sasaki

Advanced Light Source  
Accelerator and Fusion Research Division  
Ernest Orlando Lawrence Berkeley National Laboratory  
University of California  
Berkeley, California 94720

May 1997

This work was supported by the Director, Office of Energy Research, Office of Basic Energy Sciences, Materials Sciences Division, of the U.S. Department of Energy under Contract No. DE-AC03-76SF00098.

# Crossed Elliptical Polarization Undulator

Shigemi Sasaki

Lawrence Berkeley National Laboratory

1 Cyclotron Road, Berkeley, CA 94720

## Abstract

The first switching of polarization direction is possible by installing two identical helical undulators in series in a same straight section in a storage ring. By setting each undulator in a circular polarization mode in opposite handedness, one can obtain linealy polarized radiation with any required polarization direction depending on the modulator setting between two undulators. This scheme can be used without any major defradation of polarization degree in any low energy low emittance storage ring.

## 1 INTRODUCTION

There are increasing demands among the synchrotron radiation users for utilizing not only the circularly polarized radiation, but also the linearly polarized radiation with fast switching of polarization directions.

An elliptical polarization undulator (EPU) is planned to be installed in the storage ring of Advance Light Source (ALS) [1]. Similar devices are also planned for other third-generation synchrotron radiation facilities. Those devices have a capability of generating both circularly polarized radiation and linearly polarized radiation by mechanically changing the magnet phases. However, it is very difficult to change the polarity quickly due to the magnet motion mechanism. One possible solution to achieve the fast switching of polarization direction is to install two identical EPUs in series with an electromagnetic modulator in a same straight section of storage ring. The concept of crossed undulator was originated by Kim in order to produce various polarization states including elliptical polarization with two planar undulators [2]. A similar approach is used for analyzing a crossed EPU.

Assume the first EPU is set in a circular polarization mode with right-handedness, and the second is set in the mode with left-handedness. If an electron passes through the system of two EPUs with the setting mentioned above, the polarization vector of radiation is written as :

$$\varepsilon = \frac{1}{\sqrt{2}} (\varepsilon_- + e^{i\phi} \varepsilon_+). \quad (1)$$

Here  $\varepsilon_+$  ( $\varepsilon_-$ ) is the complex orthogonal unit vector of left (right) handed circular polarization [3]. The combination of right hand circular polarization and left hand

polarization with the phase difference  $\phi$  results in a linear polarization. The direction of polarization depends on  $\phi$ . For example, the polarization direction is horizontal (vertical) when  $\phi$  equals to zero ( $\pi$ ).

As described in ref. 2, the phase  $\phi$  can be changed by changing the path length of the electron between the two undulators. An electromagnetic modulator can be used for the rapid change of phase [4].

## 2 ANALYSIS

Figure 1 is a schematic drawing of the proposed system. The system consists of two identical EPUs, one of which is set in a opposite magnet raw phase from the other. For simplicity, the magnetic field of each undulator is assumed to be perfectly helical and the field of a single period ( $\lambda_M$ ) modulator is assumed to be sinusoidal.

Let's assume that the first undulator EPU1 is set in a right hand circular polarization mode, and the second undulator EPU2 is set in the oposite. The wavelength of fundamental radiation peak in the forward direction is

$$\lambda = \frac{\lambda_u}{2\gamma^2} (1 + K^2), \quad (2)$$

where  $\lambda_u$  is the magnetic period length,  $\gamma = E/mc^2$ , and  $K = eB_0\lambda_u/2\pi mc = 93.4B_0[T]\lambda_u[m]$ .

Here,  $B_0$  is the magnetic field,  $e$  and  $m$  are electron charge and mass, respectively.

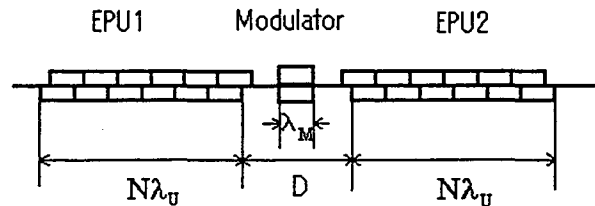


Figure: 1 Schemaetic drawing of the crossed EPU.

In this system the phase  $\phi$  in Eq. 1 is:

$$\phi = \frac{2\pi}{\lambda} \left( N\Delta L + \Delta L_M + \frac{D}{2\gamma^2} \right). \quad (4)$$

#### 4 EXAMPLES

Here,  $\Delta L$  is the path difference between an electron and a photon in the undulator,  $\Delta L_M$  is that in the modulator, and  $D$  is the distance between two undulators, respectively. Since the fields are helical in undulator and sinusoidal in modulator, one can obtain the phase  $\phi$  using the relation in Eq. 2 as follows:

$$\begin{aligned}\phi &= \frac{\pi}{\lambda\gamma^2} \left\{ N\lambda_u(1+K^2) + \lambda_M(1+K_M^2/2) + D \right\} \\ &= 2\pi \left\{ N + \frac{\lambda_M(1+K_M^2/2) + D}{\lambda_u(1+K^2)} \right\}\end{aligned}\quad (5)$$

Here,

$$K_M = 93.4 B_M [T] \lambda_M [m], \quad (6)$$

where  $B_M$  is the peak magnetic field of modulator. In order to change the phase, one has to change the distance  $D$  mechanically or change  $K_M^2$  by changing the magnetic field of modulator.

#### 3 DEGREE OF POLARIZATION

In an actual storage ring, electron beam has a finite emittance so that some electrons in the beam travel with angular divergence and energy deviation. If the angular distribution of electrons is Gaussian, the mean square phase deviation is written as:

$$\begin{aligned}\langle (\Delta\phi)^2 \rangle &= \langle (\phi - \langle \phi \rangle)^2 \rangle \\ &= \left( \phi_0 \frac{\sigma_\lambda}{\lambda} \right)^2 + 2 \left( 2\pi\eta \frac{\gamma^2 \sigma_\theta^2}{1+K^2} \right)^2,\end{aligned}\quad (7)$$

where  $\sigma_\lambda^2 = \langle (\Delta\lambda)^2 \rangle$ ,  $\sigma_\theta^2 = \langle (\theta^2) \rangle$ ,  $\phi_0$  is the ideal phase given by Eq. 5, and

$$\eta = N + \frac{\lambda_M + D}{\lambda_u} \quad (8)$$

By using Eq. 7, the degree of resulting polarization is [2]:

$$\begin{aligned}P &= 1 - \frac{\langle (\Delta\phi)^2 \rangle}{2} \\ &= 1 - \frac{1}{2} \left( \phi_0 \frac{\sigma_\lambda}{\lambda} \right)^2 - \left( 2\pi\eta \frac{\gamma^2 \sigma_\theta^2}{1+K^2} \right)^2\end{aligned}\quad (9)$$

As one can see from Eq. (9), the degree of polarization decreases when  $\sigma_\lambda$  is large due to the large energy spread of electron or large band width of monochromator. However, the degradation is much serious due to the third term in Eq. (9). Therefore, this scheme cannot be used for high energy or high emittance storage ring.

The Advanced Light Source (ALS) is a low emittance, low energy storage ring. It is operated at an electron energy 1.5 GeV, and the natural emittance is 4 nm-rad. The beam divergence in a straight section for insertion device is  $1.9 \times 10^{-5}$  rad. The energy spread of electron beam is smaller than  $1 \times 10^{-3}$ .

An EPU which will be installed in ALS has the period length of 5 cm, and the number of period  $N$  is 37. The achievable maximum  $K$  value is 2.5. If we construct the proposed system with two identical EPUs in a same straight section of ALS,  $\eta$  in Eq. (8) is 40 by assuming  $\lambda_M = \lambda_u$  and  $D = 2\lambda_u$ . In our case, the second term in Eq. (9) is negligibly small. Therefore, the polarization is written as:

$$P \approx 1 - \left( 80\pi \frac{\gamma^2 \sigma_\theta^2}{1+K^2} \right) \quad (10)$$

In table 1, parameters of example system and the resulting polarization are listed.

Table 1  
ALS and EPU parameters

E[GeV]	1.5	
$\sigma_\theta$ [rad]	$1.9 \times 10^{-5}$	
$\sigma_\lambda/\lambda$ [%]	0.08	
N	37	
$\lambda_u$ [cm]	5.0	
$\lambda_M$ [cm]	5.0	
K	1.0	2.5
$\lambda$ [nm]	5.8	10.15
$\epsilon$ [eV]	214	122
P[%]	84.7	98.8

The degree of polarization is 98.8% at assumed maximum K value of this system.

#### 5 DISCUSSIONS AND CONCLUSIONS

A proposed crossed EPU system can be used in photon energy ranges below 200 eV with reasonably high polarization degree. Although this system can be used above 200 eV by selecting a K value smaller than 1, the degree of polarization decreased rapidly when K approaches to zero. For the purpose of higher polarization degree in lower photon energy range, a longer magnetic period length and smaller number of period are recommended. It can be achieved with the cost of reduction of peak brightness.

An advantage of the proposed device is that one can obtain a purely monochromatic radiation with no higher harmonics on axis. The reason is that the radiation from each undulator is a circularly polarized radiation with no higher harmonics.

A fast switching of polarization direction can be achieved by using an electromagnetic modulator. Alternating switching between horizontal and vertical

polarization may be useful for investigating the property of surface or interface of material. One can also use a circularly polarized radiation by setting both EPUs in the same helicity mechanically.

Utilization of two EPUs with a modulator as a crossed EPU is proposed for generating a linearly polarized radiation with the fast switching capability and no higher harmonic contamination in the spectrum. This scheme is useful in any third generation low energy (< 2 GeV) storage ring.

#### ACKNOWLEDGEMENTS

I thank R. Schlueter and K.-J. Kim for their helpful discussions. This work was supported by the Director,

Office of Energy Research, Office of Basic Energy Science, Material Science Division, U. S. Department of Energy, under Contract No. DE-AC03-76SF00098.

#### REFERENCES

- [1] S. Marks, C. Cortopassi, J. DeVries, E. Hoyer, R. Leinbach, Y. Minamihara, H. Padmore, P. Pipersky, D. Plate, R. Schlueter, A. Young, these Proceedings.
- [2] K. J. Kim, Nucl. Instrum. Meth. **219** (1984) 425.
- [3] J. D. Jackson, Classical Electromagnetics, Second Edition (John Wiley and Sons, Inc., New York, 1975, p275).
- [4] R. Savoy, K. Halbach, in Proc. of the 1991 IEEE Particle Accelerator Conference, page 2718.

**ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY  
ONE CYCLOTRON ROAD | BERKELEY, CALIFORNIA 94720**