

Lawrence Berkeley National Laboratory

Recent Work

Title

An optimal time algorithm for shape from shading

Permalink

<https://escholarship.org/uc/item/7r2129tm>

Author

Kimmel, Ron

Publication Date

1998-04-01




ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY

An Optimal Time Algorithm for Shape from Shading

R. Kimmel and J.A. Sethian
Computing Sciences Directorate
Mathematics Department

April 1998

To be submitted
for publication

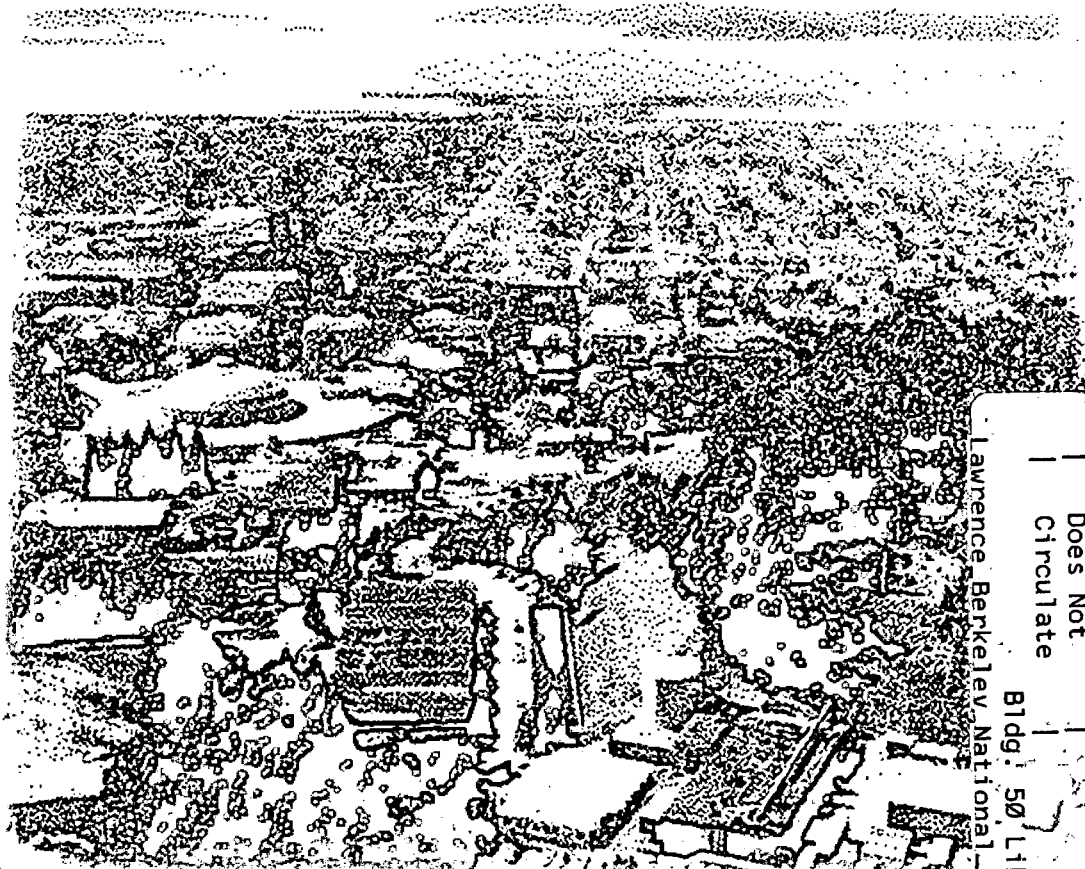

Lawrence Berkeley National Laboratory

REFERENCE COPY	_____
Does Not Circulate	_____
Bldg: 50 Library - Ref.	_____
Copy 1	_____

LBNL-41660

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

AN OPTIMAL TIME ALGORITHM FOR SHAPE FROM SHADING¹

R. Kimmel^{||} and J.A. Sethian²

Mathematics Department
Computing Sciences Directorate
Lawrence Berkeley National Laboratory
Berkeley, CA 94720

April 1998

¹This work was supported in part by the Office of Energy Research, Office of Computational and Technology Research, Mathematical, Information, and Computational Sciences Division, Applied Mathematical Sciences Sub-program, of the U.S. Department of Energy, under Contract No. DE-AC03-76SF00098, and by the Office of Naval Research under grant FDN00014-96-1-0381.

^{||}Computer Science Department, Technion, Haifa 32000, Israel.

²Department of Mathematics, University of California, Berkeley, CA 94720.

An Optimal Time Algorithm for Shape from Shading *

R. Kimmel^{||} and J.A. Sethian^{**}

Abstract

An optimal numerical algorithm for the reconstruction of a surface from its shading image is presented. The algorithm solves the 3D reconstruction from a single shading image problem. The shading image is treated as a penalty function and the height of the reconstructed surface is a weighted distance. A first order numerical scheme based on Sethian's Fast Marching Method [19, 18] is used to compute the reconstructed surface. The surface is a viscosity solution to an Eikonal equation for the vertical light source case. For the oblique light source case, the surface is the viscosity solution to a different partial differential equation. A small modification of the Fast Marching Method yields a numerically consistent fast algorithm for the general shape from shading problem.

1 Introduction

One of the earliest problems in the field of computer vision is the reconstruction of a three dimensional object from its single gray level image. The problem, for the case of a diffusive reflectance model of the surface, also known as Lambertian reflectance, is recognized as the 'shape from shading problem' [7, 8]. Various numerical schemes were proposed over the years, most of these methods were based on variational principles that require an additional smoothness or additional regularization terms that introduce second order derivatives into the minimization process, see [9]. Only two early direct models for the shape from shading did not incorporate extra smoothness terms, the first is the characteristic strips expansion method that Horn used when he first introduced the problem [7], the second is Bruckstein's equal height contours tracking model [2]. Unfortunately, the first numerical implementations of these algorithms suffered from numerical instabilities.

New numerical algorithms based on recent results in curve evolution theory, control theory, and the viscosity framework [4], were applied to the shape from shading problem in [16, 5, 10, 12]. In these advanced numerical algorithms the smoothness assumption is embedded within the scheme without the need for an extra smoothness as a penalty.

Recently, Sethian [19, 18] introduced an $O(N \log N)$ computational steps sequential algorithm for solving the Eikonal equation. This algorithm known as the 'Fast Marching Method'

*This work was supported in part by the Applied Mathematical Science subprogram of the Office of Energy Research, U.S. Department of Energy, under Contract Number DE-AC03-76SF00098, and the Office of Naval Research under under grant FDN00014-96-1-0381.

^{||}Computer Science Department, Technion, Haifa 32000, Israel.

^{**}Department of Mathematics, University of California, Berkeley, CA 94720

relies on a systematic causality relationship based on upwinding, coupled with a heap structure for efficiently ordering the updated points. Using this approach, the computation of weighted distances, edge integration in images [3], volumetric segmentation [15], shape from shading with vertical light source [18], low dimensional path planning [13], simulating photolithography development [17], and many other problems can now be solved in an efficient, accurate, and consistent way.

An important property of the solution that distinguishes it from graph search based methods is its convergence to the continuous physical (viscosity) solution as the rectangular numerical grid is refined. In a related effort, Tsitsiklis [21] was able to solve the Eikonal equation also on a rectangular grid, with the same computational complexity by iteratively solving a ‘cost to go’ optimization problem for the dynamically sorted grid points.

In this note we use Sethian’s Fast Marching Method and slightly modify it to construct a numerical solution for the oblique light source shape from shading problem.

2 Shape from Shading

Let us first review the shading image formation model for a 3D Lambertian object. Assume, that the object we try to reconstruct is given as a function $z(x, y) : R^2 \rightarrow R$, whose surface normal at each point is given by $\vec{n}(x, y) : R^2 \rightarrow S^2$. Next, let the light source direction be given by $\vec{l} \in S^2$. Then, the intensity image $I(x, y) : R^2 \rightarrow R$ of an orthographic projection of the object is given by the inner product of the light source direction and the surface normal,

$$I(x, y) = \vec{l} \cdot \vec{n}(x, y).$$

For the simple vertical light source case $\vec{l} = (0, 0, 1)$, in which the light source is located near the viewer, the shading image is given by

$$I(x, y) = \frac{1}{\sqrt{1 + z_x^2 + z_y^2}}.$$

The problem in hand is the reconstruction of $z(x, y)$ from its gradient magnitude at each point given by

$$|\nabla z(x, y)| \equiv \sqrt{(I(x, y))^{-2} - 1}.$$

This equation is known as the *Eikonal equation*. It was shown in [11] that with a simple smoothness assumption, the reconstruction problem can be solved for surfaces with complicated topologies as long as the surface normals are known to be pointing outwards along the boundaries of a given domain (e.g. the image boundaries). In the following sections we deal with the problem of how to solve the problem in a computationally efficient and numerically consistent way.

3 Sethian’s Fast Marching Method

The Fast Marching Method is an $O(N \log N)$ numerical algorithm for solving the Eikonal equation, e.g. $|\nabla z(x, y)| = f(x, y)$. Obviously, our shading image is usually given on a

rectangular pixels grid. Therefore, the Fast Marching Method can be directly applied to solve the shape from shading problem with a vertical light source. However, for the general oblique light source, the model to be solved, that can be reformulated by the selection of a new coordinate system, reads $|\nabla z(x, y)| = f(x, y, z(x, y))$ as shown in the following section. Observe that now the right hand side depends on $z(x, y)$. We will show how to include this partial differential equation, which is not an Eikonal equation anymore, within the Fast Marching framework. Full details on the Fast Marching Method are given in [19].

4 Shape from Shading: Oblique Light Source

Let us focus on the oblique light source case in which the light source direction is different than that of the viewer. Recall, that the shading image for this Lambertian case is given by

$$I(x, y) = \vec{l} \cdot \vec{n},$$

where $\vec{l} = (l_1, l_2, l_3)$ is the light source direction, and \vec{n} the unit normal to the surface $z(x, y)$ that we want to reconstruct is given by

$$\vec{n} = \frac{(-z_x, -z_y, 1)}{\sqrt{1 + z_x^2 + z_y^2}}. \quad (1)$$

We use our freedom to choose the coordinate system so that $l_2 = 0$, this is done by rotating the (x, y) image plane, so that $\vec{l} \cdot (0, 1, 0) = 0$. The shading image is then given by

$$I(x, y) = (l_1, 0, l_3) \cdot \vec{n}, \quad (2)$$

where $l_1^2 + l_3^2 = 1$. Eq. (2) involves the term z_x . It requires some additional thought to construct a monotonic approximation to this term and an appropriate update rule.

If we would have had the brightness image in the light source coordinates $\tilde{I}(\tilde{x})$, then the problem would have become the vertical light source case, which is given by the Eikonal equation

$$\tilde{z}_{\tilde{x}}^2 + \tilde{z}_y^2 = \frac{1}{\tilde{I}(\tilde{x}, y)^2} - 1, \quad (3)$$

see Figure 1

In the light source coordinate system, the equation to solve looks like the Eikonal equation, yet the right hand side depends on the surface itself via

$$\tilde{I}(\tilde{x}, y) = I(l_3\tilde{x} + l_1\tilde{z}, y). \quad (4)$$

That is, we need to evaluate the value of the surface at a point in order to find the ‘brightness’ and only then plug it in Eq. (4) and use the Fast Marching Method to solve Eq. (3).

In order to overcome this dependence, we use the directional propagation and ‘adopt’ the smallest \tilde{z} value from all the neighbors of the updated grid point. The numerical algorithm in this case is still consistent, one pass (since the smallest \tilde{z} neighbor will never change its value), and is thus within the fast marching framework.

We have thus extended the method to the case of $|\nabla z| = F(z)$ relevant to the oblique light source shape from shading problem. A consistent solution can be computed with $O(N \log N)$.

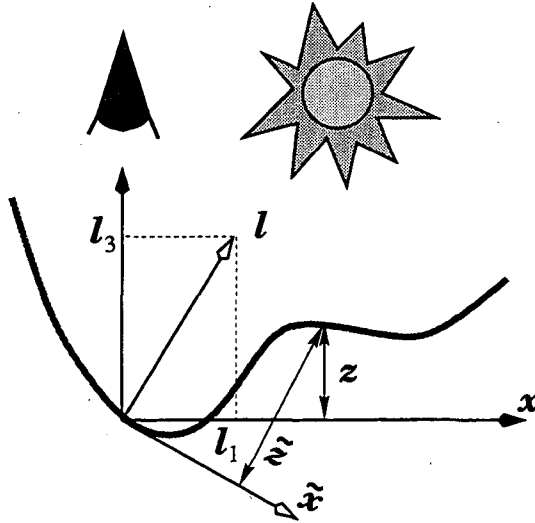


Figure 1: In the oblique light source case, the coordinate system is determined by the light source. The result is a partial differential equation that can be solved by the Fast Marching Method.

5 Experimental Results

We have tested the algorithm on a synthetic shading image of the simplest surface with the three basic types of local extremum points: a maximum, a minimum, and a saddle. The oblique light source is given by $\vec{l} = (0.2, 0, 0.96)$. Observe that we do not deal here with self casting shadows (see [14]), nor with solving the global topological structure (see [11, 20, 6]).

The local extremum points cause singularities at the right hand side of the equation since the intensity at their corresponding image locations is equal to zero. This fact should not cause any problem to our numerical algorithm, since one could set the intensity values that are smaller than $O(\Delta h)$ to some $O(\Delta h)$ without reducing the global order of accuracy. Where Δh is the grid spacing (the distance between two grid points). Figure 2 presents the surface, its shading image, the reconstructed surface, and the error, for the oblique light source case. The surface is the solution to Eq. (3) and (4) with a fixed value at the maximum point (one of the singular points).

6 Conclusion

We have presented an $O(N \log N)$ algorithm for surface reconstruction from its shading image. The computational complexity bound is data independent (unlike other iterative methods [1, 6]). It is the most efficient sequential algorithm for Horn's original formulation of the shape from shading problem and a natural application of the Fast Marching Method.

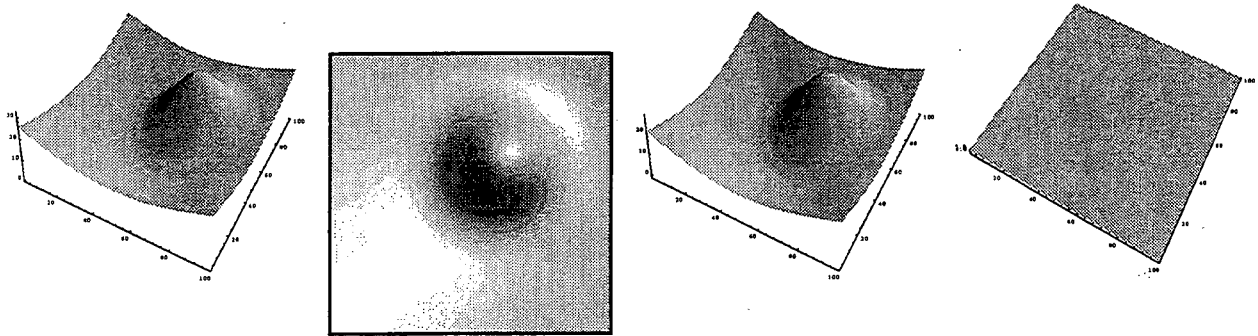


Figure 2: The reconstruction of the surface in the first (left) column, from its shading image in the second column is given in the third column. The fourth (right) column is the difference between the original surface and its reconstruction.

References

- [1] M Bichsel and A P Pentland. A simple algorithm for shape from shading. In *Proceedings IEEE CVPR*, pages 459–465, Champaign, Illinois, May 1992.
- [2] A M Bruckstein. On shape from shading. *Comput. Vision Graphics Image Process.*, 44:139–154, 1988.
- [3] L D Cohen and R Kimmel. Global minimum for active contours models: A minimal path approach. *International Journal of Computer Vision*, 24(1):57–78, 1997.
- [4] M G Crandall, H Ishii, and P L Lions. User’s guide to viscosity solutions of second order partial linear differential equations. *Bulletin of the American Math. Society*, 27:1–67, 1992.
- [5] P Dupuis and J Oliensis. Direct method for reconstructing shape from shading. In *Proceedings IEEE CVPR*, pages 453–458, Champaign, Illinois, May 1992.
- [6] P Dupuis and J Oliensis. An optimal control formulation and related numerical methods for a problem in shape reconstruction. Department of Computer Science COINS TR93-03, University of Massachusetts at Amherst, Amherst MA, 01003, 1993.
- [7] B K P Horn. Obtaining shape from shading information. In P H Winston, editor, *The Psychology of Computer Vision*, pages 115–155. McGraw Hill, New York, 1975.
- [8] B K P Horn. Height and gradient from shading. *International Journal of Computer Vision*, 5:37–75, 1990.
- [9] B K P Horn and M J Brooks, editors. *Shape from Shading*. MIT Press, Cambridge MA, 1989.

- [10] R Kimmel and A M Bruckstein. Shape from shading via level sets. Center for Intelligent Systems Report CIS #9209, Technion-Israel Institute of Technology, Israel, June 1992.
- [11] R Kimmel and A M Bruckstein. Global shape from shading. *CVIU*, 62(3):360-369, November 1995.
- [12] R Kimmel and A M Bruckstein. Tracking level sets by level sets: A method for solving the shape from shading problem. *CVIU*, 62(2):47-58, July 1995.
- [13] R Kimmel and J A Sethian. Applications of fast marching methods to robotic navigation and construction of optimal paths. *submitted*, 1996.
- [14] P L Lions, E Rouy, and A Tourin. Shape-from-shading, viscosity solutions and edges. *Numerische Mathematik*, 64:323-353, 1993.
- [15] R Malladi and J A Sethian. An $O(N \log N)$ algorithm for shape modeling. *Proceedings of National Academy of Sciences, USA*, 93:9389-9392, 1996.
- [16] E Rouy and A Tourin. A viscosity solutions approach to shape-from-shading. *SIAM J. Numer. Anal.*, 29(3):867-884, June 1992.
- [17] J A Sethian. Fast marching level set methods for three-dimensional photolithography development. In *Proceedings SPIE, Optical Microlithography IX*, volume 2726, pages 262-272, 1996.
- [18] J A Sethian. *Level Set Methods: Evolving Interfaces in Geometry, Fluid Mechanics, Computer Vision and Materials Sciences*. Cambridge Univ. Press, 1996.
- [19] J A Sethian. A marching level set method for monotonically advancing fronts. *Proc. Nat. Acad. Sci.*, 93(4), 1996.
- [20] I Shimshoni, R Kimmel, and A M Bruckstein. Dialogue: Global shape from shading. *CVIU*, 64(1):188-189, 1996.
- [21] J N Tsitsiklis. Efficient algorithms for globally optimal trajectories. *IEEE Trans. on Automatic Control*, 40(9):1528-1538, 1995.

ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY
ONE CYCLOTRON ROAD | BERKELEY, CALIFORNIA 94720