

Lawrence Berkeley National Laboratory

LBL Publications

Title

NUMERICAL CALCULATION OF COMPLEX SHOCK REFLECTIONS IN GASES

Permalink

<https://escholarship.org/uc/item/7hk64935>

Authors

Colella, P.
Glaz, H.M.

Publication Date

1984-06-01

c.2



Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

RECEIVED
JUN 28 1984
DOCUMENTS SECTION

Physics Division

Mathematics Department

Presented at the 9th International Conference
on Numerical Methods in Fluid Dynamics,
Saclay, France, June 25-29, 1984


NUMERICAL CALCULATION OF COMPLEX SHOCK
REFLECTIONS IN GASES

P. Colella and H.M. Glaz

June 1984

TWO-WEEK LOAN COPY

*This is a Library Circulating Copy
which may be borrowed for two weeks.*

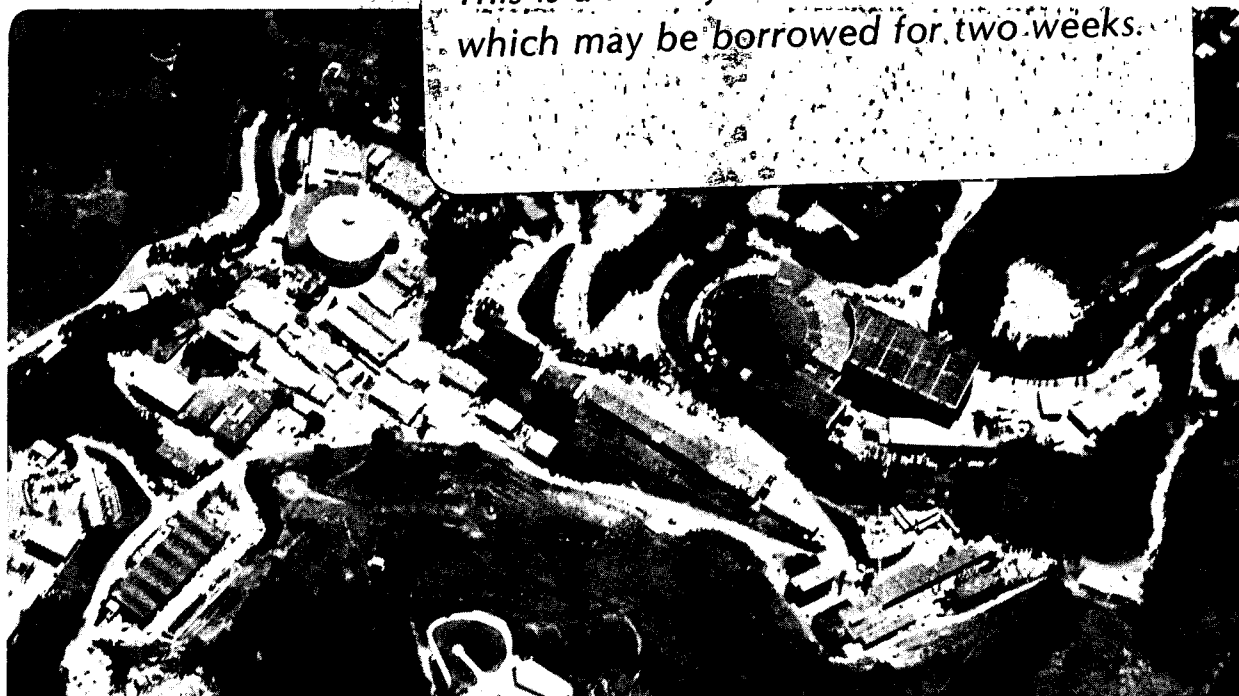

LBL-17947
c.2

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

Numerical Calculation of Complex Shock Reflections in Gases

Phillip Colella
Lawrence Berkeley Laboratory
University of California
Berkeley, California 94720

Harland M. Glaz
Naval Surface Weapons Center
White Oak Laboratory
Silver Spring, Maryland 20910

We present here computational results using second order Godunov methods for time-dependent Eulerian gas dynamics with a general (convex) equation of state. The algorithm used in most of the calculations is described in detail in [3]. An unsplit scheme was used in conjunction with local adaptive mesh refinement for the results in Figure 3; see [1] and the references cited there for the construction of this version of the scheme.

For the well-known problem of planar shock wave diffraction by a wedge, a direct comparison of computational results and the experimental record has been completed for several different cases, [5]. Reproduced in Figure 1 are the results for a shock wave Mach number $M_s = 2.03$ and wedge angle $\theta = 27^\circ$. The experimental flowfield for this case of single Mach reflection is in equilibrium and viscous effects are localized at the wedge corner and the contact surface-boundary layer interaction. The infinite-fringe interferogram is shown in Fig. 1a, the numerical results with the same isopycnics (i.e., constant density lines) in Fig. 1b, and the wall density values are compared in Fig. 1c. It is seen that excellent agreement is obtained in all respects.

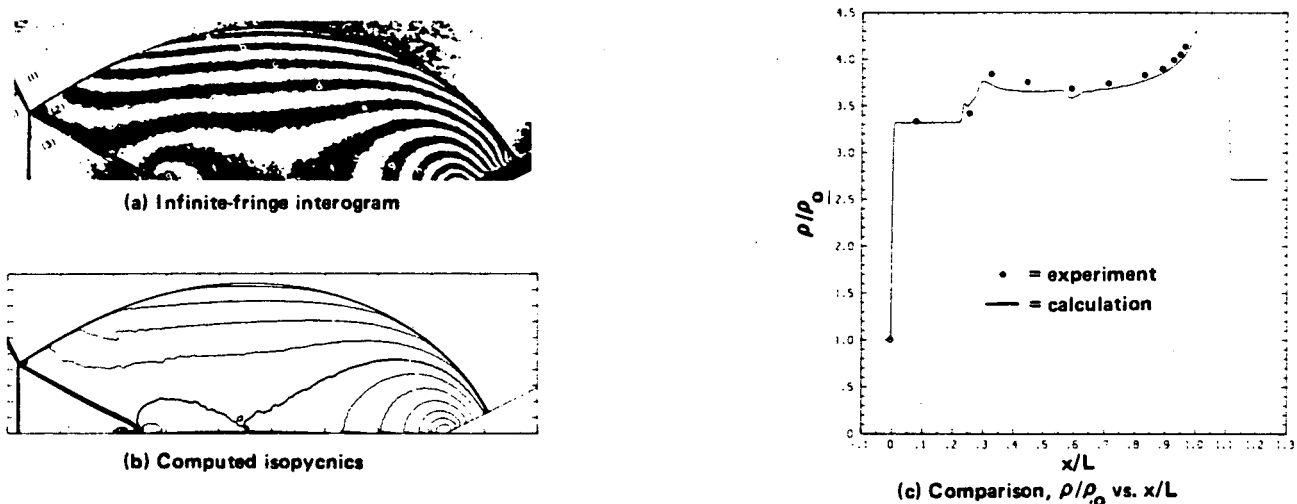


Figure 1. Comparison for planar shock wave diffraction, $M_s = 2.03$, $\theta = 27^\circ$, in air ($\gamma = 1.4$). Here, ρ = density, ρ_0 = ambient density, x = distance along wedge surface, L = distance between wedge corner and Mach stem along wedge surface.


A bifurcation study for planar shock wave diffraction by a wedge is presented in Figure 2. All calculations are for a polytropic gas with $M_s = 8.0$ and $\theta = 35^\circ$. The five sets of results are for (a) $\gamma = 1.40$, (b) $\gamma = 1.35$, (c) $\gamma = 1.30$, (d) $\gamma = 1.25$, and (e) $\gamma = 1.20$. We summarize a few of the phenomena here, see [2] for a fuller discussion of this and related flowfields. As the parameter γ decreases, the following transition phenomena occur in the double Mach stem flowfield: (1) the leading Mach stem "toes out" and then forms a new triple point ((c), T_1); for those values of γ , the flow is supersonic in a coordinate system moving with the self-similar solution, and the slip line from that triple point is swept up in the highly rotational flow brought about by the curvature of the shock below T_1 , (2) the expansion and compression waves in the supersonic region between the main slip surface and the reflected shock ((d), R) become stronger, until the cross-flow becomes supersonic, causing the compression wave to form into a shock ((d), S_R), (3) the flow inside the jet along the wall becomes transonic, and a backwards facing shock forms at the wall ((e), S_w).




(a) $\gamma = 1.40$; (ρ, e, p) whole flowfield; (ρ, \tilde{M}) Mach stem region




(b) $\gamma = 1.35$; (ρ, e, p) whole flowfield; (ρ, \tilde{M}) Mach stem region

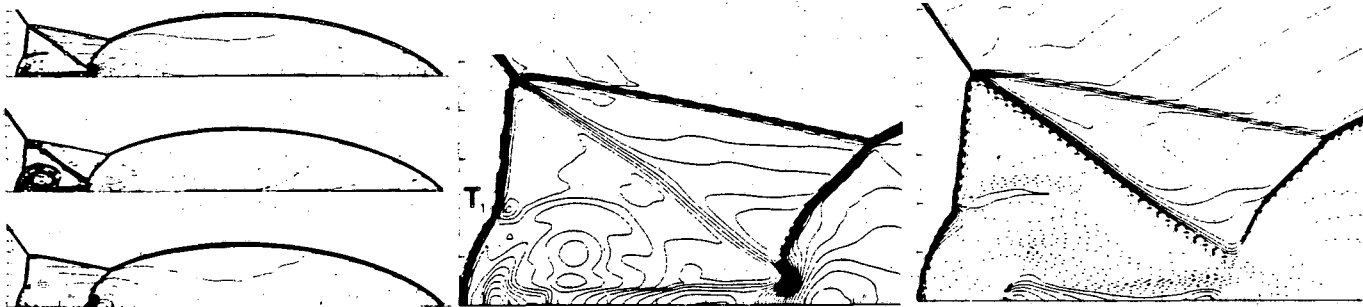

(c) $\gamma = 1.30$; (ρ, e, p) whole flowfield; (ρ, \tilde{M}) Mach stem region

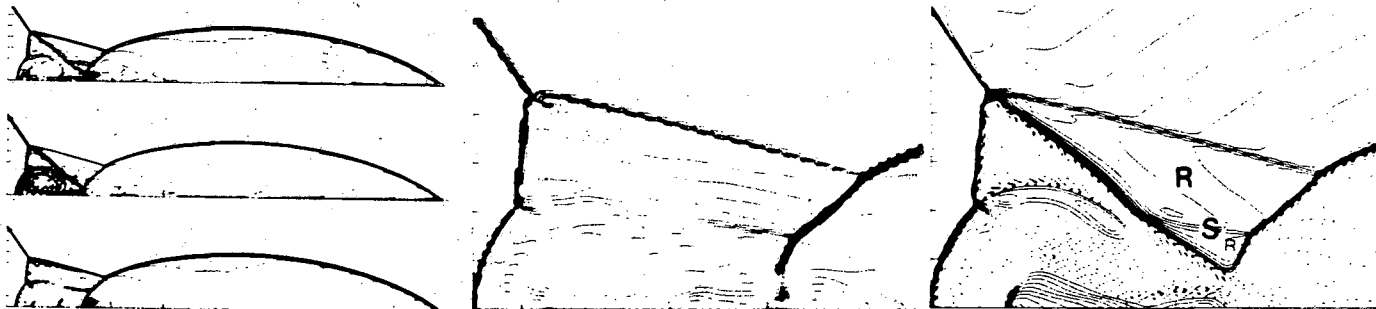

(d) $\gamma = 1.25$; (ρ, e, p) whole flowfield; (ρ, \tilde{M}) Mach stem region

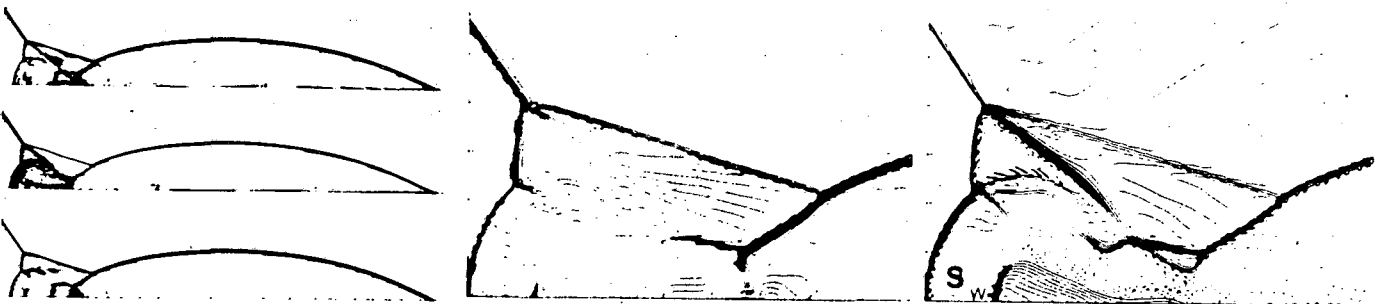

(e) $\gamma = 1.20$; (ρ, e, p) whole flowfield; (ρ, \tilde{M}) Mach stem region

Figure 2. Bifurcation study for planar shock wave diffraction, $M_\infty = 8.0$, $\theta = 35^\circ$. Here, ρ = density, e = internal energy, p = pressure, \tilde{M} = self-similar Mach number, where $\tilde{M}^2 = (\tilde{u}^2 + \tilde{v}^2)/C^2$ and $\tilde{u} = u - \xi$, $\tilde{v} = v - \eta$, $(\xi, \eta) = (x/t, y/t)$ with the origin of coordinates at the wedge corner. In the plots of \tilde{M} , solid (dashed) lines correspond to $\tilde{M} > 1$ ($\tilde{M} < 1$).

Although it would be possible to continue the series of calculations shown in figure 2 to lower values of γ , the problem is well-suited as an application of the mesh refinement algorithm proposed in [1] for use with the second-order Godunov schemes. Results for the case $M_s = 8.0$, $\theta = 35^\circ$, $\gamma = 1.15$ are shown in Figure 3. For this case, the rarefaction fan emanating from the main contact surface impinges on the reflected shock, and creates a differential in the oblique jump conditions across this wave. As the figure indicates, this wave develops a new (but relatively weak) triple point; the overall configuration may be considered a "triple Mach stem".

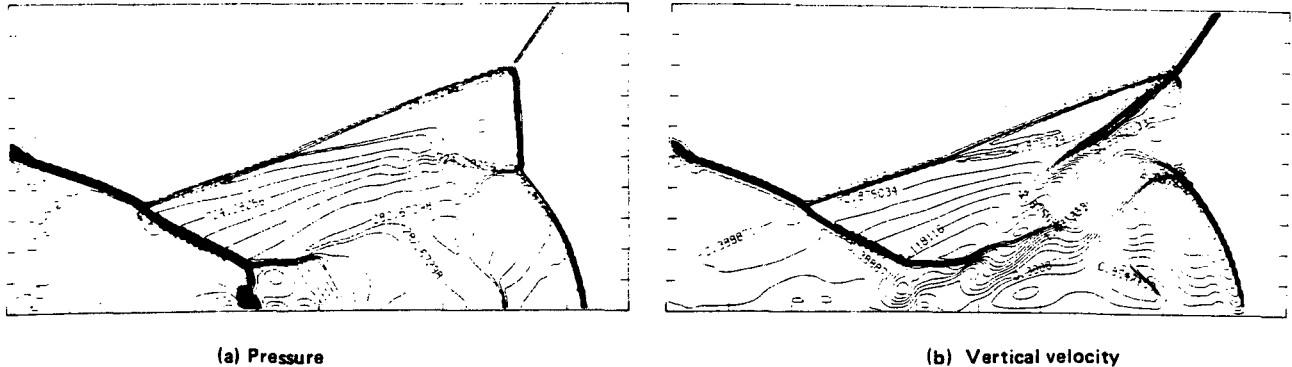


Figure 3. Planar shock wave diffraction, $M_s = 8.0$, $\theta = 35^\circ$, $\gamma = 1.15$. The double Mach stem region is shown and it corresponds to the locally refined (fourfold relative to the coarse mesh) region; the grid shown is 208 x 104 points.

The flowfield resulting from the detonation of an 8 lb. sphere of chemical explosive (PBX-9404) 51.7 cm. above the reflecting surface is presented in Figure 4. Our calculation is hydrodynamic with the initial data provided by a similarity analysis of the detonation process (see [4]). The calculation is performed in cylindrical coordinates using a rectangular moving grid. The entire grid is 100 cm. x 20 cm. and the fine grid is 8 cm. x 4 cm. The fine grid contains the point at which the incident shock wave intersects the surface. The coarse grid to fine grid ratio was 10 for this calculation. Transition from regular to double Mach reflection takes place in the calculation when the incident shock reaches about 57 cm. Since this is infinitesimal phenomenon, we expect a somewhat earlier transition for the grid strategies in [1],[2]. The similarities between the double Mach stem flowfield and the flowfields in Figure 2 may be noted.

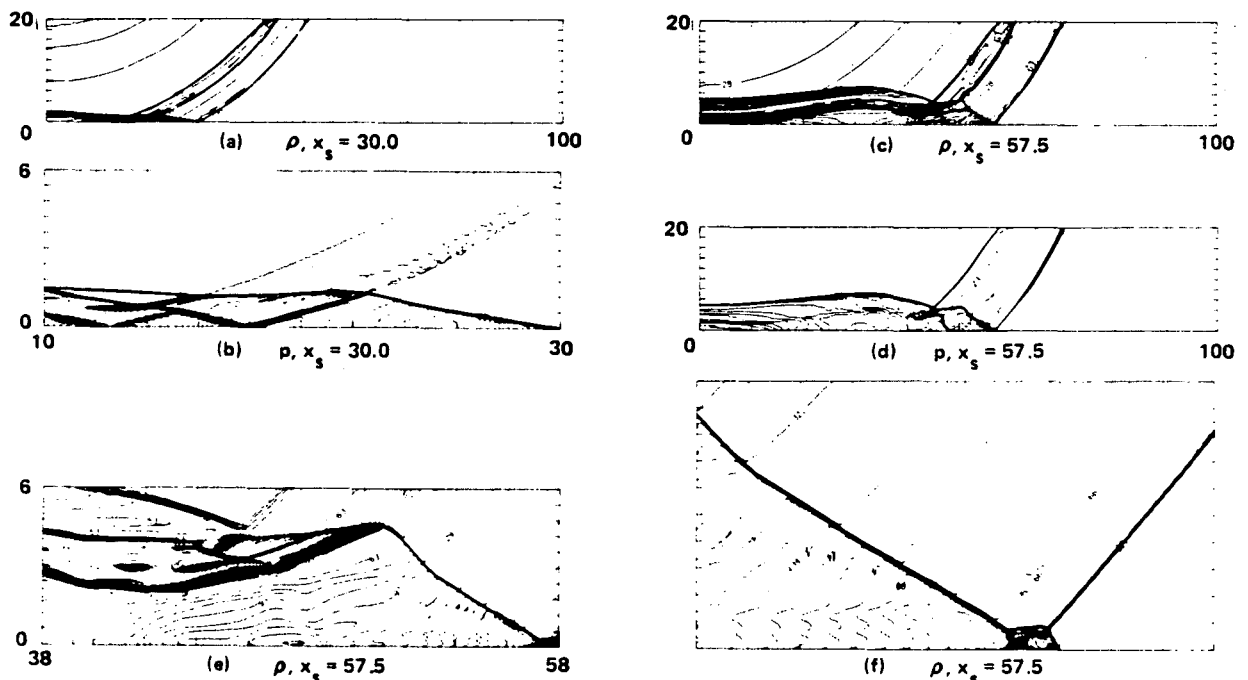


Figure 4. Continued on next page.

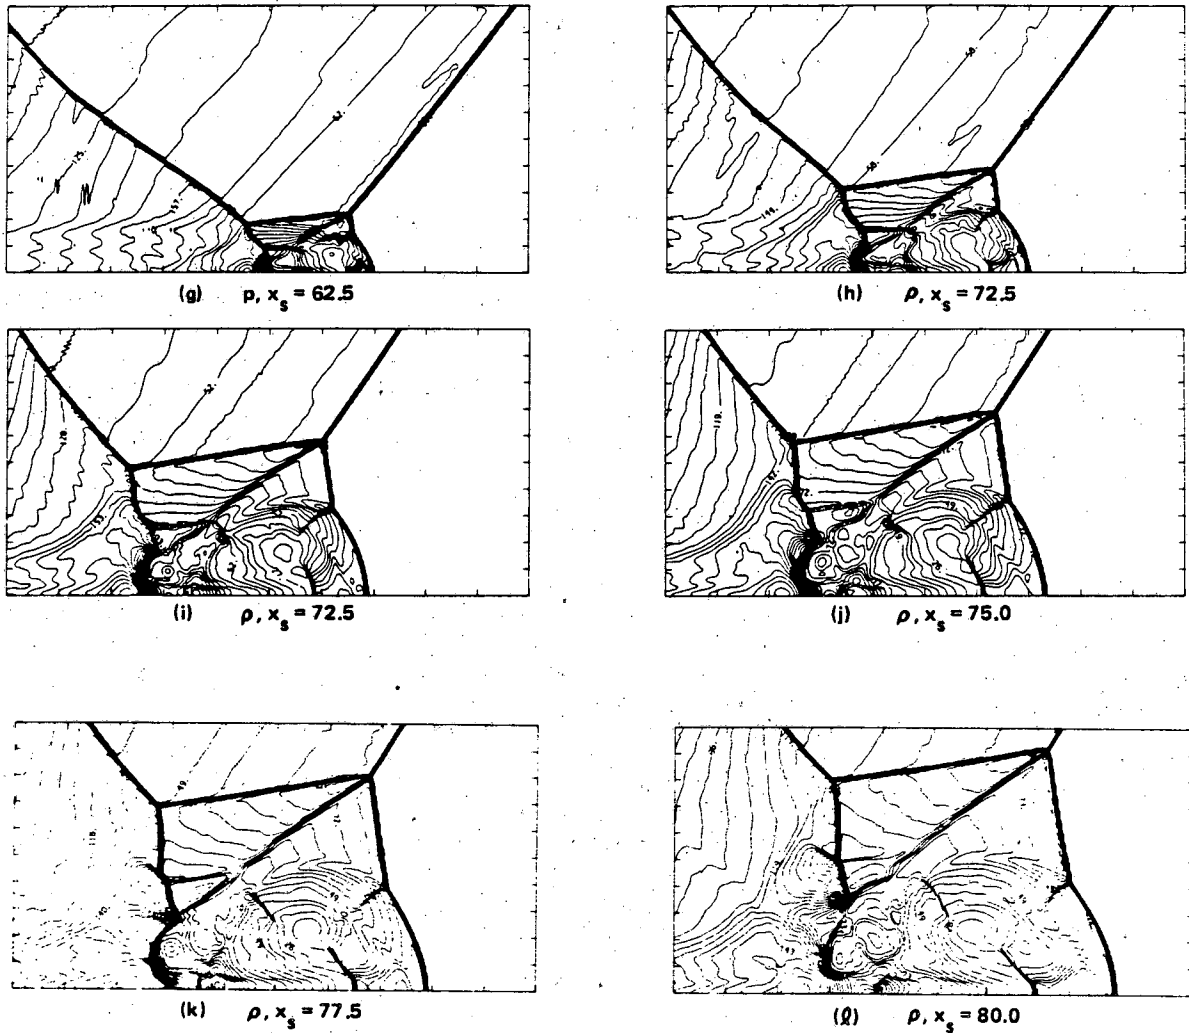


Figure 4. Blast wave flowfield. Plots (a), (c), (d) represent the entire grid; plots (b), (e) are 20 cm x 6 cm blowups; plots (f) - (l) represent the entire 8 cm x 4 cm fine grid. Here, ρ = density, p = pressure, x_s = location of intersection of incident shock and the surface. The grid contains 617 x 214 zones with 266 x 140 zones in the fine grid.

The interaction of a planar shock with a five zone thick layer of heated gas located five zones above a reflecting surface is shown in Figure 5. The gas is assumed polytropic with $\gamma = 1.4$. The solution is symmetric with respect to the centerline of the layer until waves from the lower boundary of the layer reach the surface. The interaction of the resulting reflected waves with the symmetric rollup leads to instabilities and the production of counterrotating vortices at later times.

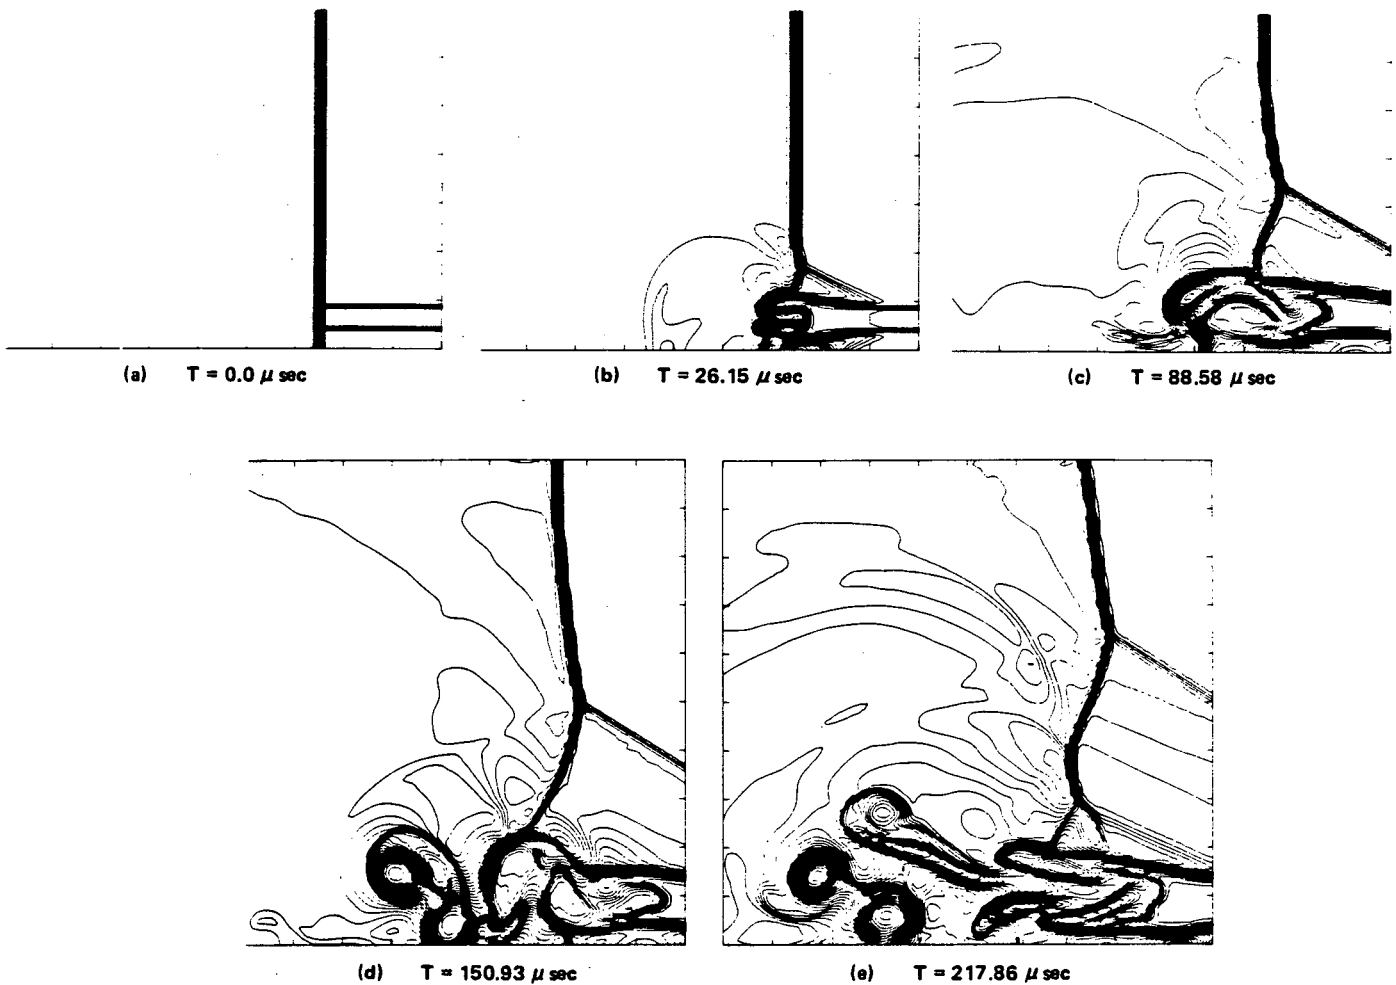


Figure 5. Planar shock wave interaction with a layer of heated gas. The shock faces towards the right, $T = 273^{\circ}\text{K}$ in the ambient gas on the right above and below the heated layer, for which $T = 2124^{\circ}\text{K}$. Pressure is atmospheric everywhere on the right and $\Delta p = 30$ bars across the shock ($P_L/P_R \sim 3$). $\Delta x = \Delta y \approx 0.05$ cm everywhere. Density contours are shown in the vicinity of the incident shock wave.

Acknowledgements. Discussions with M. Berger, I.I. Glass, and A. Kuhl are gratefully acknowledged. Portions of this work have been in collaboration with M. Berger, R. Deschambault, R. Ferguson, I.I. Glass, W. Glowacki, and A. Kuhl. The authors' work was supported by the U.S. Department of Energy at the Lawrence Berkeley Laboratory under contract DE-AC03-765F00098, by the U.S. Defense Nuclear Agency under DNA task code Y99QAXSG, and by the Naval Surface Weapons Center Independent Research Fund.

References

1. Berger, M. and Colella, P. "Local Adaptive Mesh Refinement for Shock Hydrodynamics", forthcoming.
2. Berger, M., Colella, P., and Glaz, H.M., "Wave Bifurcations for Self-Similar Two-Dimensional Shocked Flows", forthcoming.
3. Colella, P. and Glaz, H.M., "Efficient Solution Algorithms for the Riemann Problem for Real Gases", J. Comput. Phys., in press.
4. Colella, P., Ferguson, R., Glaz, H.M., and Kuhl, A., "Reflection of a Spherical, HE Driven Blast Wave from a Plane Surface", forthcoming.
5. Glaz, H.M., Colella, P., Glass, I.I., and Deschambault, R., "A Numerical Study of Oblique Shock Wave Reflections, with Experimental Comparisons", submitted for publication.

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

*LAWRENCE BERKELEY LABORATORY
TECHNICAL INFORMATION DEPARTMENT
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720*