

# Lawrence Berkeley National Laboratory

## Recent Work

### Title

PROPAGATION CHARACTERISTICS IN A HOLLOW PLASMA WAVEGUIDE

### Permalink

<https://escholarship.org/uc/item/567615vx>

### Author

Katz, Joseph E.

### Publication Date

1967-11-02

University of California  
Ernest O. Lawrence  
Radiation Laboratory

PROPAGATION CHARACTERISTICS IN A  
HOLLOW PLASMA WAVEGUIDE

Joseph E. Katz

November 2, 1967

**TWO-WEEK LOAN COPY**

*This is a Library Circulating Copy  
which may be borrowed for two weeks.  
For a personal retention copy, call  
Tech. Info. Division, Ext. 5545*

Berkeley, California

UCRL-17721 Rev.  
c. 2

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

Submitted to J. Applied Physics  
Communications to the Editor

UCRL-17721 Rev.  
Preprint

UNIVERSITY OF CALIFORNIA

Lawrence Radiation Laboratory  
Berkeley, California

AEC Contract No. W-7405-eng-48

PROPAGATION CHARACTERISTICS IN A  
HOLLOW PLASMA WAVEGUIDE

Joseph E. Katz

November 2, 1967

PROPAGATION CHARACTERISTICS IN A  
HOLLOW PLASMA WAVEGUIDE\*

Joseph E. Katz

Lawrence Radiation Laboratory  
University of California  
Berkeley, California

November 2, 1967

It has been previously demonstrated theoretically<sup>1,2</sup> that, if Coulomb collisions are the primary source of energy loss, a hollow plasma waveguide or cavity resonator can have a much lower attenuation or higher Q-factor than a hollow copper waveguide. The ability to construct waveguides that have low losses is of considerable interest to designers of high-energy particle accelerators of the rf linear accelerator type. For particle accelerator applications it is necessary to maintain synchronism between the particle beam and the rf wave supplying energy to the beam. Therefore, any proposed accelerator waveguide must guide waves of electromagnetic energy with a phase velocity no greater than the velocity of light.

The earlier theoretical treatments analyzed only fast-wave plasma waveguides. These earlier analytical demonstrations were made under the simplifying assumptions of infinite static magnetic field and infinite outer radius of the plasma column. The promise of lower-loss structures led to the experimental investigations, which showed that the losses may actually be higher by a factor of 3 to 4 than predicted on theory.<sup>3</sup>

This letter presents a summary of the results obtained from computer solutions of the dispersion relation of a hollow plasma

waveguide of finite transverse dimensions and a finite axial magnetic field.<sup>4</sup> These results show: (a) that it is possible to guide the appropriate slow waves by a smooth hollow plasma waveguide, and (b) that despite the higher values of collision frequency found experimentally, a plasma waveguide can have losses lower than a copper waveguide. The structure considered consisted of an evacuated central cylindrical region of radius  $R_0$ , surrounded by an annular plasma region containing a fully ionized uniformly distributed gas with no time variations of the plasma properties; the plasma region is contained within an outer copper conductor of radius  $R_w$ .

The dispersion relation for finite axial magnetic fields for the structure described above cannot be solved practically except by numerical methods on a large-scale digital computer.

Under the conditions of a finite axial magnetic field, hybrid wave solutions exist. It has been previously shown<sup>5</sup> that it is possible to find solutions that consist of predominantly transverse magnetic waves. It is waves of such type that are desirable for possible particle accelerator applications.

The phase characteristics shown in Fig. 1 were obtained for several values of external axial magnetic field. For each curve shown, the ratio of cyclotron frequency,  $\omega_c$ , to plasma frequency,  $\omega_p$ , was held constant. The cutoff frequency,  $\omega_0$ , of the hollow plasma waveguide is lower than the  $TM_{01}$  mode cutoff frequency of a round copper waveguide of radius  $R_0$  because of penetration of the rf fields into the plasma region. If the ratio of plasma frequency to the rf frequency,  $\omega_p/\omega_0$ , is increased, the penetration of the rf fields into the plasma

region is decreased.  $R_{eq}$  is the radius of an equivalent copper waveguide with the same  $TM_{01}$  mode cutoff frequency as the hollow plasma waveguide.

The important result apparent in the curves shown in Fig. 1 is that the phase velocity of the resulting TM waves may be smoothly adjusted over a wide range from fast to slow with respect to the velocity of light by varying the axial magnetic field of the hollow plasma waveguide. (It should also be restated that the structure considered is uniform in the axial direction.)

The results of the theoretical calculations of the attenuation of a hollow plasma waveguide as compared with that of an equivalent copper waveguide for several ratios of collision frequency,  $\nu$ , to rf frequency,  $\omega$ , are shown in Fig. 2. The losses of such a waveguide may, under certain combinations of plasma properties, be significantly lower than that of conventional copper waveguides, despite the fact that experimentally determined plasma losses are higher than those calculated from classical collision processes.

The work discussed here was submitted in partial satisfaction of the requirements for the Master of Science degree at the University of California, in Berkeley. The assistance and guidance of Professor J. R. Woodyard and Professor A. J. Lichtenberg are gratefully acknowledged.

Footnotes and References

\*Work done under auspices of the U. S. Atomic Energy Commission.

1. A. J. Lichtenberg and J. R. Woodyard, J. Appl. Phys. 33, 1976 (1962).
2. G. August, Electronics Research Laboratory, University of California, Berkeley, Technical Report, Ser. 60, No. 398 (1961).
3. A. J. Lichtenberg, P. Govindan, and J. R. Woodyard, J. Appl. Phys. 38, 382 (1967).
4. J. E. Katz, Propagation Characteristics of a Hollow Plasma Waveguide (M. S. Thesis), Lawrence Radiation Laboratory Report UCRL-17564, May, 1967 (unpublished).
5. V. Bevc and T. E. Everhart, J. Electron. Control 13, 185 (1962).



List of Figures

Fig. 1. Hollow plasma waveguide phase characteristics;

$$R_w/R_0 = 3.0, \omega_p/\omega_0 = 4.0, \nu/\omega = 0.$$

Fig. 2. Ratio of hollow plasma waveguide to equivalent copper guide attenuation;

$$R_w/R_0 = 1.5, \omega_p/\omega_0 = 4.0, \omega_c/\omega_0 = 1.25.$$

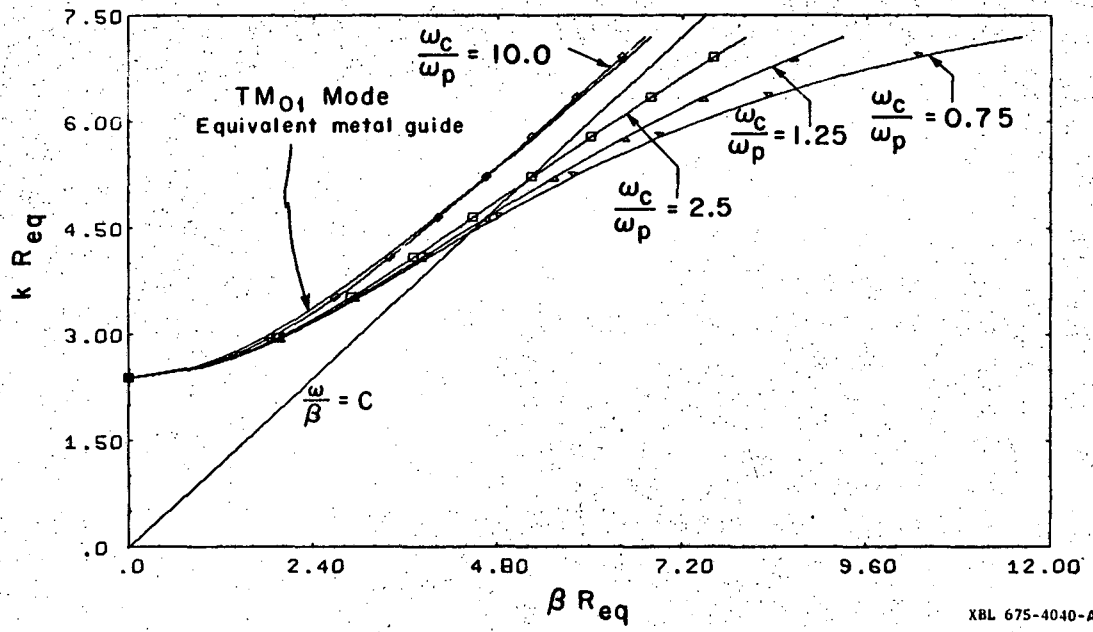


Fig. 1

XBL 675-4040-A

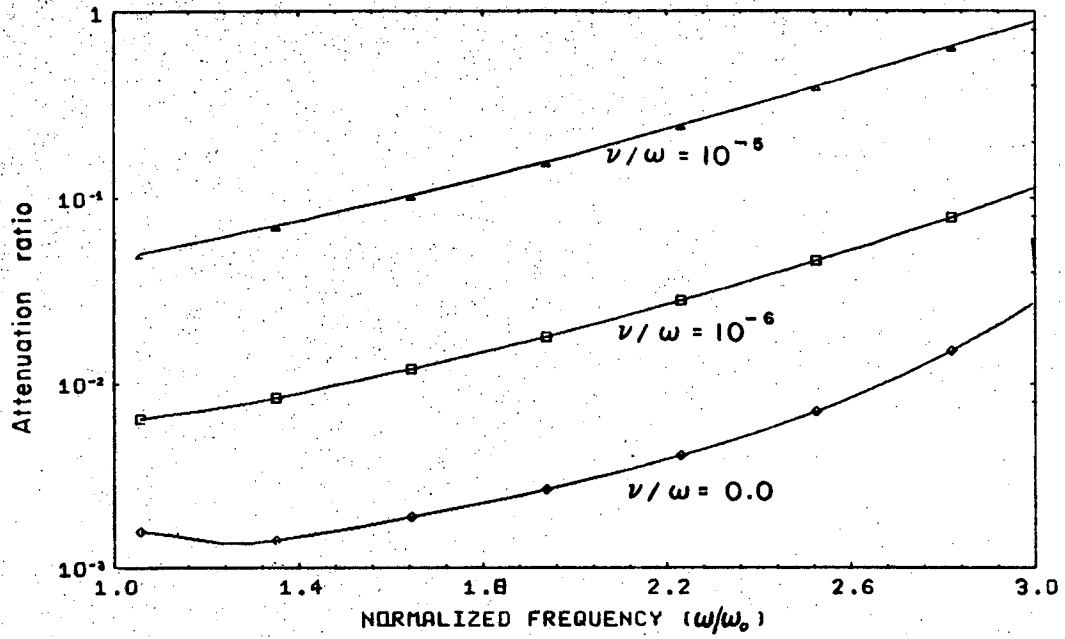


Fig. 2

XBL 675-4047-A

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

- A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or
- B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

[The page contains extremely faint, illegible text that appears to be bleed-through from the reverse side of the document. The text is too light to transcribe accurately.]

